



Oracle® Fusion Middleware Service Registry Guide 11g (11.1.1.6.0) E13665-02

November 2011

Table of Contents

Read This First	1
1. Oracle Service Registry Features Overview	1
2. Release Notes	2
2.1. What's New	2
2.2. Known Issues	3
2.2.1. UDDI Version 3 Specification	3
2.2.2. UDDI Version 2 Specification	3
2.2.3. Database	3
2.2.4. Other	4
2.3. Change Log	5
2.3.1. Oracle® Fusion Middleware Service Registry 11g (11.1.1.6.0)	5
3. Supported Platforms	6
4. Specifications	7
5. Document Conventions	7
6. Legal	8
6.1. Third Party Licenses	8
6.1.1. The Apache XML Security License, Version 1.1	8
6.1.2. The Apache XML License, Version 1.1	9
6.1.3. Apache Jakarta License, Version 1.1	10
6.1.4. CUP Parser Generator	10
6.1.5. Jetty License, Version 3.6	11
6.1.6. W3C Software Notice and License	13
6.1.7. Xalan, Version 2.5.1	13
6.1.8. XML Pull Parser for Java, 1.1.1	14
6.1.9. Unix crypt(3C) utility	15
6.2. Notices	15
6.2.1. Acknowledgements	16
7. Support	16
Installation Guide	17
1. System Requirements	17
1.1. Hardware	17
1.2. Java™ Platform	18
1.3. Relational Database	18
1.4. Application Server	18
2. Installation	18
2.1. Registry Installation Options	19
2.2. Command-line Options	19
2.3. Installation Panels	20
2.3.1. Installation Type	21
2.3.2. SMTP Configuration	23
2.3.3. Setup Administrator Account	24
2.3.4. Database Settings	25
2.3.5. Application Server Settings	28
2.3.6. Confirmation and Installation Process	56
2.4. Clustering Oracle Service Registry	58
2.4.1. Clustering Oracle Service Registry with Oracle WebLogic Server	58
2.5. Installation Summary	59
2.5.1. Directory Structure	59
2.5.2. Registry Endpoints	60
2.5.3. Pre-installed Data	61
2.6. Command-line Scripts	61

2.6.1. Setup	61
2.6.2. Signer	62
2.6.3. SoapSpy	62
2.6.4. PStoreTool	62
2.6.5. env	62
2.7. Reconfiguring After Installation	62
2.8. Server Properties	65
2.9. Logs	66
2.9.1. Using the syslog Daemon with Oracle Service Registry	66
2.9.2. Running Oracle Service Registry as a UNIX Daemon	67
2.10. Troubleshooting	68
3. Server Configuration	69
3.1. SMTP Configuration	71
3.2. Change Server URLs	72
4. Database Installation	73
4.1. Database Creation Method	74
4.2. Select Database Type	76
4.3. Oracle Database Settings	76
4.3.1. Oracle RAC Database Settings	79
4.4. MSSQL	79
4.5. DB2	81
4.6. Oracle Data Source Creation	84
4.7. JDBC Driver	86
4.8. Account Backend	86
4.9. Multilingual Data	87
4.9.1. Oracle	88
4.9.2. MSSQL	88
4.9.3. DB2	88
4.10. JDBC Drivers	89
4.10.1. Alternative JDBC Drivers	89
5. Approval Process Registry Installation	90
5.1. Discovery Registry Installation	92
5.2. Publication Registry Installation	93
5.3. Intermediate Registry Installation	97
6. External Accounts Integration	98
6.1. LDAP	100
6.1.1. LDAP with a Single Search Base	104
6.1.2. LDAP with Multiple Search Bases	109
6.1.3. Multiple LDAP Services	111
6.1.4. LDAP over SSL/TLS	112
6.1.5. LDAP Configuration Examples	114
6.2. Custom (Non-LDAP)	122
7. Cluster Configuration	123
7.1. Cluster operation	123
7.2. Cluster installation	125
7.3. Setting Up Security	126
7.3.1. Sharing Token Key	126
7.4. WebLogic High Availability Configuration	126
7.4.1. Objective	126
7.4.2. Pre-requisites	126
7.4.3. Overview	126
7.4.4. Create the WebLogic Environment: Domain, Servers & Cluster	127
7.4.5. Create Oracle Service Registry (OSR) Application for the Cluster	130
7.4.6. Deploy the OSR Application to the Clustered Nodes	132

7.4.7. Simulate a Load Balancer, using Weblogic's inbuilt HTTPClusterServlet	133
7.4.8. Test the Newly Created OSR HA environment	136
8. Authentication Configuration	137
8.1. HTTP Basic	137
8.2. Netegrity SiteMinder	140
8.3. SSL Client authentication with Embedded HTTP/HTTPS Server	141
8.4. SSL Client Authentication in Oracle WebLogic	144
8.5. J2EE Server Authentication	145
8.6. Internal SSL Client Authentication Mapping in J2EE	146
8.7. Consoles Configuration	147
8.8. Outgoing Connections Protected with SSL Client Authentication	148
9. Migration	149
9.1. Migration using Setup Tool	149
9.2. Migration procedure	151
9.3. Manual migration of replications from older versions of Oracle Registry	153
10. Backup	153
10.1. What data is backed up?	153
10.2. Oracle Service Registry Backup Recommendations	154
10.2.1. Oracle Service Registry Backup and Oracle WebLogic Server	154
10.3. Backup Oracle Service Registry	154
10.4. Restore Oracle Service Registry	156
11. Uninstallation	158
User's Guide	159
1. Introduction to Oracle Service Registry	159
1.1. UDDI's Role in the Web Services World - UDDI Benefits	160
1.2. Typical Application of a UDDI Registry	160
1.3. Basic Concepts of the UDDI Specification	160
1.3.1. UDDI Data Model	161
1.3.2. Taxonomic Classifications	162
1.3.3. Security Considerations	163
1.3.4. Notification and Subscription	163
1.3.5. Replication	163
1.3.6. UDDI APIs	163
1.3.7. Technical Notes	164
1.3.8. Benefits of UDDI Version 3	164
1.4. Subscriptions in Oracle Service Registry	164
1.4.1. Subscription Arguments	164
1.4.2. Subscription Notification	165
1.4.3. XSLT Over Notification	165
1.4.4. Suppressing Empty Notifications	165
1.4.5. Related Links	166
1.5. Approval Process in Oracle Service Registry	166
1.5.1. Requestor's Actions	167
1.5.2. Approver's Actions	169
1.5.3. Synchronization of Data	169
1.5.4. Mail notification in approval process	170
1.5.5. Related Links	171
2. Registry Consoles	171
3. Demo Data	172
3.1. Demo Data for Business Service Control	172
3.2. Demo data for Registry Control and demos	173
4. Business Service Control	174
4.1. Overview	174
4.2. User Account	176

4.2.1. User Profile Fields	178
4.2.2. Predefined User Profiles	179
4.3. Searching	180
4.3.1. Searching Providers	180
4.3.2. Searching Endpoints	182
4.4. Publishing	184
4.4.1. Publishing Providers	185
4.4.2. Publishing Services	187
4.5. Reports	191
4.6. Entities	193
4.6.1. Entity Details	193
4.6.2. Resources	195
4.7. Subscription and Notification	195
4.7.1. Subscription On Selected Entities	196
4.7.2. Subscription from Search Query	197
4.7.3. Manage Subscriptions	199
4.7.4. View Changed Entities	200
4.8. Approval Process	200
4.8.1. Requestor's Actions	201
4.8.2. Approver's Actions	208
5. Advanced Topics	211
5.1. Data Access Control: Principles	211
5.1.1. Explicit Permissions	212
5.1.2. Permission Rules	212
5.1.3. Composite Operations	213
5.1.4. Pre-installed Groups	213
5.1.5. ACL tModels	214
5.1.6. Setting ACLs on UDDI v3 Structures	214
5.1.7. Setting ACLs on UDDI v1/v2 Structures	214
5.2. Publisher-Assigned Keys	215
5.2.1. Generating Keys	215
5.2.2. Affiliations of Registries	216
5.3. Range Queries	217
5.3.1. Examples	218
5.4. Taxonomy: Principles, Creation and Validation	219
5.4.1. What Is a Taxonomy?	219
5.4.2. Taxonomy Types	219
5.4.3. Validation of Values	219
5.4.4. Types of keyValues	220
5.4.5. Taxonomy API	223
5.4.6. Predeployed Taxonomies	225
5.5. Registry Console Reference	234
5.5.1. Register/Create Account	234
5.5.2. Registry Console Overview	236
5.5.3. User Profile	238
5.5.4. Browsing	242
5.5.5. Searching	245
5.5.6. Publishing	256
5.6. Signer Tool	282
5.6.1. Starting the Signer	282
5.6.2. Main Screen	283
5.6.3. Sign	284
5.6.4. Validation	285
5.6.5. Remove Signatures	285

5.6.6. Publish Changes	286
5.6.7. Signer Configuration	286
Integration Guide	287
1. Oracle SOA Suite 11g	287
1.1. Integrating with Oracle JDeveloper	287
1.2. Configuring Oracle Service Registry at Runtime	288
1.2.1. Publishing and Browsing the Oracle Service Registry	289
1.2.2. How to Configure a SOA project to Invoke a Service from the Registry	290
1.2.3. How To Configure the Inquiry URL, UDDI Service Key, and Endpoint Address for Runtime	292
2. Integrating with Oracle Enterprise Repository	294
3. Integrating with Service Bus	294
Administrator's Guide	295
1. Registry Management	296
1.1. Accessing Registry Management	296
1.2. Account Management	298
1.2.1. Create Account	298
1.2.2. Edit Account	302
1.2.3. Delete Account	302
1.3. Group Management	303
1.3.1. Create and Manage Groups	303
1.3.2. Manage Group Membership	305
1.4. Permissions	306
1.4.1. Accessing Permission Management	306
1.4.2. Add Permission	307
1.4.3. Editing and Deleting Permissions	307
1.4.4. Assigning Administrator's Permission	308
1.5. Taxonomy Management	308
1.5.1. Adding Taxonomies	311
1.5.2. Finding Taxonomies	313
1.5.3. Editing Taxonomies	314
1.5.4. Editing a Taxonomy Structure	315
1.5.5. Uploading Taxonomies	319
1.5.6. Downloading Taxonomies	320
1.5.7. Deleting Taxonomies	320
1.6. Replication Management	320
1.6.1. Understanding Replication	321
1.6.2. Master Registry Setup	324
1.6.3. Slave Registry Setup	325
1.7. Approval Process Management	328
1.7.1. Loading the Approval Management Page	329
1.7.2. Create Approver	329
1.7.3. Create Requestor	330
1.8. Replacing UDDI Keys	331
1.8.1. Replacing tModel keys	331
1.8.2. Replacing businessEntity keys	332
1.8.3. Replacing businessService keys	332
1.8.4. Replacing bindingTemplate keys	332
1.9. Replace URLs	332
1.10. Registry Statistics	333
1.11. Management of configuration - User Interface	335
1.11.1. Current configurations and their history	336
1.11.2. Named collections of configuration	339
2. Registry Configuration	342

2.1. Core Config	343
2.2. Database	343
2.3. Security	345
2.4. Account	346
2.5. Group	348
2.6. Subscription	348
2.7. Node	349
3. Configuration in Database	350
4. Business Service Control Configuration	352
4.1. Tabs Displayed	353
4.2. Search Result View	354
4.3. Browsable Taxonomies	355
4.4. Paging Limits	356
4.5. UI Configuration	357
4.6. Customizable Taxonomies	358
4.7. Customizing Individual Pages	361
5. Registry Control Configuration	364
5.1. Web Interface Configuration	364
5.2. Paging Configuration	366
6. Permissions: Principles	366
6.1. Permissions Definitions	367
6.2. Oracle Service Registry Permission Rules	367
6.3. Setting Permissions	368
6.4. Permissions and User Roles	369
6.5. ApiManagerPermission Reference	369
7. Approval Process Principles	374
7.1. Approval Process Roles	375
7.1.1. Requestor	375
7.1.2. Approver	376
7.1.3. autoApprover	376
7.1.4. Administrator	376
7.2. Optional Content Checking Setup	376
8. PStore Tool	377
8.1. Commands Description	377
8.2. PStore Tool - GUI Version	379
8.2.1. Running the GUI PStore Tool	379
8.2.2. Opening and Closing the Protected Store	379
8.2.3. Open Next Protected Store	380
8.2.4. Copy Data Between Protected Stores	380
8.2.5. Key Store	380
8.2.6. User Store	382
9. SSL Tool	383
9.1. SSL Tool Examples	383
9.2. Associating an SSL client identity with a registry client	384
Developer's Guide	387
1. Mapping of Resources	387
1.1. WSDL	387
1.1.1. WSDL PortTypes	388
1.1.2. WSDL Bindings	388
1.1.3. WSDL Service	389
1.1.4. Use Cases	389
1.2. XML	390
1.2.1. Use Cases	390
1.3. XSD	391

1.3.1. Use Cases	392
1.4. XSLT	392
1.4.1. Use Cases	393
2. Client-Side Development	394
2.1. UDDI APIs	394
2.1.1. Principles To Use UDDI API	394
2.1.2. UDDI Version 1	400
2.1.3. UDDI Version 2	401
2.1.4. UDDI Version 3	401
2.1.5. UDDI Version 3 Extension	402
2.2. Advanced APIs	408
2.2.1. Validation	408
2.2.2. Taxonomy	409
2.2.3. Category	418
2.2.4. Approval	424
2.2.5. Administration Utilities	450
2.2.6. Replication	454
2.2.7. Statistics	455
2.2.8. WSDL Publishing	458
2.2.9. XML Publishing	469
2.2.10. XSD Publishing	475
2.2.11. XSLT Publishing	484
2.2.12. Inquiry UI	495
2.2.13. Subscription Ext	501
2.3. Security APIs	502
2.3.1. Account	502
2.3.2. Group	508
2.3.3. Permission	514
2.4. Registry Client	517
2.4.1. Client Package	518
2.4.2. JARs on the Client Classpath	519
2.5. Client Authentication	525
2.5.1. Example Client	525
3. Server-Side Development	528
3.1. Accessing Backend APIs	529
3.2. Custom Registry Modules	532
3.2.1. Accessing Registry APIs	533
3.2.2. Custom Module Sample	534
3.3. Interceptors	536
3.3.1. Creating and Deploying Interceptors	536
3.3.2. Logging Interceptor Sample	537
3.3.3. Request Counter Interceptor Sample	539
3.4. Writing a Custom Validation Service	542
3.4.1. Deploying Validation Service	542
3.4.2. External Validation Service	543
3.4.3. Sample Files	545
3.5. Writing a Subscription Notification Service	545
3.5.1. Sample Files	547
3.6. Writing a Content Checker	548
3.7. Registry Web Framework	551
3.7.1. Architecture Description	551
3.7.2. Directory Structure	556
3.7.3. Framework Configuration	557
3.7.4. syswf JSP tag library	560

3.7.5. Typical Customization Tasks	566
3.8. Business Service Control Framework	567
3.8.1. Business Service Control Localization	567
3.8.2. Directory Structure	570
3.8.3. Business Service Control Configuration	572
3.8.4. Entity Configuration	576
3.8.5. Permission support	590
3.8.6. Components and Tags	591
4. UDDI from Developer Tools	630
4.1. UDDI from Oracle JDeveloper	631
4.1.1. Connecting to Oracle Service Registry from JDeveloper	631
4.1.2. Using the JDeveloper Integration	632
4.2. UDDI from MS Visual Studio	632
5. How to Debug	634
5.1. SOAPSpy Tool	634
5.1.1. Running SOAPSpy	635
5.1.2. Using SOAPSpy	636
5.1.3. SOAP Request Tab	636
5.1.4. How to Run Clients Using SOAPSpy	636
5.2. Logging	637
Demos	639
1. Basic Demos	639
1.1. UDDI v1	639
1.1.1. Inquiry v1	639
1.1.2. Publishing v1	644
1.2. UDDI v2	649
1.2.1. Inquiry v2	649
1.2.2. Publishing v2	653
1.3. UDDI v3	658
1.3.1. Inquiry v3	659
1.3.2. Publishing v3	663
2. Advanced Demos	669
2.1. Advanced Inquiry - Range Queries	669
2.1.1. Prerequisites and Preparatory Steps: Code	669
2.1.2. Presentation and Functional Presentation	670
2.1.3. Building and Running Demos	671
2.2. Custody	673
2.2.1. Prerequisites and Preparatory Steps: Code	674
2.2.2. Presentation and Functional Presentation	674
2.2.3. Building and Running Demos	676
2.3. Subscription	678
2.3.1. Prerequisites and Preparatory Steps: Code	678
2.3.2. Presentation and Functional Presentation	679
2.3.3. Building and Running Demos	680
2.4. Validation	684
2.4.1. Prerequisites and Preparatory Steps: Code	684
2.4.2. Presentation and Functional Presentation	685
2.4.3. Building and Running Demos	686
2.5. Taxonomy	687
2.5.1. Prerequisites and Preparatory Steps: Code	688
2.5.2. Presentation and Functional Presentation	689
2.5.3. Building and Running Demos	691
3. Security Demos	692
3.1. Account	693

3.1.1. Prerequisites and Preparatory Steps: Code	693
3.1.2. Presentation and Functional Presentation	693
3.1.3. Building and Running Demos	695
3.2. Group	696
3.2.1. Prerequisites and Preparatory Steps: Code	697
3.2.2. Presentation and Functional Presentation	697
3.2.3. Building and Running Demos	699
3.3. Permission	701
3.3.1. Prerequisites and Preparatory Steps: Code	701
3.3.2. Presentation and Functional Presentation	701
3.3.3. Building and Running Demos	703
3.4. ACL	704
3.4.1. Prerequisites and Preparatory Steps: Code	705
3.4.2. Presentation and Functional Presentation	705
3.4.3. Building and Running Demos	707
4. Resources Demos	709
4.1. WSDL2UDDI v2	710
4.1.1. Prerequisites and Preparatory Steps: Code	710
4.1.2. Presentation and Functional Presentation	711
4.1.3. Building and Running Demos	713
4.2. WSDL2UDDI v3	715
4.2.1. Prerequisites and Preparatory Steps: Code	715
4.2.2. Presentation and Functional Presentation	716
4.2.3. Building and Running Demos	718
4.3. XML2UDDI	719
4.3.1. Prerequisites and Preparatory Steps: Code	720
4.3.2. Presentation and Functional Presentation	720
4.3.3. Building and Running Demos	721
4.4. XSD2UDDI	723
4.4.1. Prerequisites and Preparatory Steps: Code	723
4.4.2. Presentation and Functional Presentation	724
4.4.3. Building and Running Demos	725
4.5. XSLT2UDDI	727
4.5.1. Prerequisites and Preparatory Steps: Code	727
4.5.2. Presentation and Functional Presentation	728
4.5.3. Building and Running Demos	729
Glossary	733

Read This First

Welcome to Oracle Service Registry!

Oracle Service Registry is the leading business service registry, providing discovery, publishing and approval of SOA business services. With full support for version 3 of the UDDI (Universal Description, Discovery and Integration) standard, Oracle Service Registry is a key component of a Service Oriented Architecture (SOA).

This product documentation contains the following sections:

[Read This First](#) This book is recommended for all readers. It provides a product overview, release notes, product changes, the typographical conventions used throughout this guide.

[Installation and Porting Guide](#) This book guides you through installing Oracle Service Registry, installing and setting up databases, and porting Oracle Service Registry to application servers.

[User's Guide](#) This book describes how to manually maintain Oracle Service Registry contents. All basic functions of the Registry Control are discussed here.

[Integration Guide](#) This book describes how to use the specific integration points between Oracle Service Registry and several other Oracle Fusion Middleware components.

[Administrator's Guide](#) Explains Oracle Service Registry's configuration and management, and introduces the tools and utilities you will need to perform these tasks.

[Developer's Guide](#) Introduces the basics of creating extensions and client programs in Oracle Service Registry. The Developer's Guide also documents the Oracle Service Registry demo suite.

1. Oracle Service Registry Features Overview

Oracle Service Registry 11.1.1 introduces a consolidation of previous BEA ALSR and Oracle Service Registry 10.3 products supporting WLS and standalone Jetty installer deployment options.

Oracle Service Registry is fully V3-compliant implementation of UDDI (Universal Description, Discovery and Integration), and is a key component of a Service Oriented Architecture (SOA). Oracle Service Registry is an easy-to-use, standards-based mechanism for publishing and discovering Web services and related resources like XML Schemas or XSLT transformations.

Oracle Service Registry fully implements the OASIS UDDI V3 standard. Oracle Service Registry can be deployed in almost any Java environment and works with all popular database systems. In addition, the registry has been designed specifically for enterprise deployment and includes many advanced features that make it easy to configure, deploy, manage and secure. Oracle Service Registry is also easy to customize to support different enterprise user communities.

Oracle Service Registry extends the core UDDI V3 standard with unique functionality designed for enterprise applications:

- **Advanced Security** allows for defining granular access control for registered components. Component publisher can specify find, get, modify and delete access permissions for every published object.
- **Data Accuracy & Quality enforcement** mechanisms ensure that component registrations are accurate and up-to-date. Oracle Service Registry clearly defines responsibility for every registered component. It offers component promotion & approval mechanisms for promoting components between development, QA and production environments.
- **Subscription & Notification** for automatically notifying registry users about changes to components that they depend on.

- **Selective Replication** among multiple registries allow for automated propagation between different registries (for e.g. between internal and external registries).
- **Advanced Taxonomy Management** for enforcement of well-defined taxonomies.
- **Powerful Management** for granular control, logging and auditing of the publishing and discovery processes.
- **Performance & Scalability** UDDI provides maximum performance and scalability by efficient implementation of web services stack and database algorithms and by supporting of a load balancing and clustering mechanism.

Oracle Service Registry is a platform-independent solution that can easily be deployed in a wide variety of settings. Crucially, Oracle Service Registry also integrates with LDAP directories, including Oracle Internet Directory and Microsoft ActiveDirectory.

2. Release Notes

2.1. What's New

- Oracle Service Registry can now be deployed on Oracle WebLogic 10.3.6.
- Oracle Service Registry installer performs additional validation when installing into an existing Oracle WebLogic Home.
- The new multi-host deployment configuration feature enables deployment of Oracle Service Registry on a server with multiple hostnames such as a server with multiple network adapters. This allows administrators to easily deploy or re-deploy the registry application to new hosts and ports without having to use the Setup utility.
- Database creation is now supported externally prior to running the installer for better alignment with the Oracle Fusion Middleware platform and increased flexibility during tablespace and user schema configuration.
- Oracle Service Registry has added a new section in the Installer Guide Cluster Configuration section called "WebLogic High Availability Configuration". This helps administrators who need to configure multiple registry deployments for High Availability behind a firewall and share the same database schema.
- Support for Netegrity SiteMinder will be deprecated in an upcoming release.
- The new Database Persistent Configuration feature changes the way configuration information is stored and updated. Previously, configuration data was stored in files only. When the product was redeployed on an application server modifications to configuration files were lost. Now configuration data persists both in files and in the database. Beginning with this release the database becomes the primary store for configuration information. This change has several advantages. Cluster configurations are now easier to configure and no longer need to rely on SOAP messaging between nodes. Configuration Management is now available in the Administration Console. This enables administrators to view current and past configurations; to compare the differences between them; and to reactivate past configurations whenever necessary. Read more in [Section 3, Configuration in Database](#).
- Replications are improved and more reliable. Previously the scheduled time was specified by interval period. However, the exact time when the replication would start was uncertain as this was calculated from the Registry server start time. Now the time is specified in a more flexible way. Replications have been made transactional. Either all replicated entities are transferred successfully or none at all. Replications can optionally preserve the name of the owner of the replicated entity. A replication entry can use several subscriptions at once. The result of a replication invoked by an administrator is presented as a color coded report in the console. This report is available in an HTML file inside the log directory for scheduled replications. Detailed documentation is in [Section 1.6, Replication Management](#)
- Installation on Oracle WebLogic offers a new installation method: Domain Template installation. Using this approach, the Installer produces all the files including a .war file and a WebLogic Domain Template. It then places them into

the Oracle WebLogic Registry Home. Upon completion you can run the Oracle WebLogic Configuration Wizard to deploy to selected clusters and/or managed servers.

- Notable defects that have been corrected since previous release:
 - Probably generating duplicated table's primary keys.
 - Can publish a file from server's file system using URL file://
 - Cross-site scripting problem.
 - Arbitrary readObject code invocation possible with the embedded gzip/base64 serial object in param "carrybag".
 - Subscription: Restoring data is failed when Registry contains existing subscription.
 - Migrating fails when administrator accounts are different.
 - Replication cannot run successfully if target registry configured with MS SQL database.
 - Migrating fails when the registry configured with DB2 database and the previous registry contains subscription.

2.2. Known Issues

2.2.1. UDDI Version 3 Specification

The following parts of the UDDI Version 3 specification are not implemented:

- Inter-Node operation - this part of the specification is not implemented.
- Replication Specification - The Replication Specification describes the data replication process and the programming interface required to achieve complete replication between UDDI Operators in the UBR (Universal Business Registry ~ UDDI operator cloud). This part of the specification is mandatory for members of the UBR and is not implemented.
- Policy - The policy description is not defined.
- [Exclusive XML Canonicalization](http://www.w3.org/2001/10/xml-exc-c14n#) [http://www.w3.org/2001/10/xml-exc-c14n#] is used for canonicalization of digital signatures. Schema-centric XML Canonicalization is not yet implemented.

2.2.2. UDDI Version 2 Specification

The following parts of the UDDI Version 2 specification are not implemented:

- Operator Specification - This part of the specification is mandatory for members of the UBR and is implemented with the exceptions described in this section.
- Custody transfer from version 2 is not implemented.
- Replication Specification - The Replication Specification describes the data replication process and the programming interface required to achieve complete replication between UDDI Operators in the UBR. This part of the specification is mandatory for members of the UBR and is not implemented.

2.2.3. Database

- The Oracle Service Registry cannot be installed with JDK 1.6.0_29 in Microsoft SQL Server. If you want to use Microsoft SQL Server, you have to downgrade JDK to 1.6.0_27 or lower

- There are the following caveats in data migration and backup:
 - Deletion history for subscriptions is not migrated and backed up.
 - Custody transfer requests are not migrated and backed up.
- There are the following issues with creating JDBC Data Source on DB2 database in case of domain configuration.
 - At the Configuration Wizard
 - Information user entered during installation is not filled correctly at the Configure JDBC Data Sources page of the wizard. User must re-enter these values again.
 - However, the JDBC Connection URL will be generated with wrong format **jdbc:db2:<Database Name>** in the Test JDBC Data Sources window. This causes failed on test connection at the Test JDBC Data Sources page.
 - The JDBC Connection URL must be corrected before running Oracle Service Registry via the Administrator Console of WebLogic. The correct format of Connection JDBC URL is **jdbc:db2://<Host Name>:<Port>/<Database Name>**

2.2.4. Other

- Use of SubjectAlternativeName in certificates is not yet supported. This has potential impact wherever SSL is used and the secure host has more than one hostname. See WSDL Publishing below. The result is a `java.net.ssl.SSLException` with a message that hostnames do not match.
- Installation fails if the installation path contains non-ASCII characters;
- Attempting to undeploy Oracle Service Registry from an application server may appear to have been successful but can leave files locked until the application server and its JVM exit. This means that an attempt to redeploy Oracle Service Registry to the application server will fail because these files exist and cannot be overwritten. A workaround is to restart the application server;
- Selective One-way Replication has the following caveats:
 - Checked taxonomies are replicated as unchecked. Taxonomy data replication and change of taxonomy to checked must be done manually.
 - Custody transfer requests are not replicated.
 - Publisher assertions are not replicated.
- Approval process has the following caveats:
 - Promotion of projected services is not supported.
 - Promotion of publisher assertions is not implemented yet.
- LDAP
 - Dynamic groups in LDAP account backends are not processed.

- The approximateMatch find qualifier is not supported in LDAP account backends. There is no wildcard that can represent any single character in the directory (LDAP or AD). % is mapped to *, it is not possible to map _.
- Groups from disabled domains are visible in the Registry Control.
- Intranet identity association is not implemented; the system#intranet group is reserved for future use.
- Password structure and length checking, expiration, checking of repeated failed logins and IP mask restriction are not implemented.
- The Signer tool does not support the refresh operation. If you start the Signer and then modify a UDDI structure, you must restart the Signer Tool.
- The Setup tool throws an exception when you try to configure registry ports on Oracle Service Registry that are not connected to a database. The exception does not affect the port configuration.
- WSDL Publishing:
 - Unable to unpublish unreachable WSDLs in Registry Console.
 - Publishing a WSDL at a URL that has https as its protocol may fail because the server certificate uses SubjectAlternativeName to specify alternative hostnames. This is not yet supported as noted above. The result may be a WSDLException with the fault code INVALID_WSDL but the underlying cause is in fact a java.net.ssl.SSLException with a message that hostnames do not match.

2.3. Change Log

2.3.1. Oracle® Fusion Middleware Service Registry 11g (11.1.1.6.0)

- The multi-host deployment configuration feature enables the export of the Oracle Service Registry to another instance with a different hostname and port. You can deploy Oracle Service Registry on a server with multiple hostnames such as a server with multiple network adapters.
- Removal of online deployment from the deployment method selection step.
- Change database setup options in the installation wizard.
- The Database Persistent Configuration feature enables the simple configuration of cluster deployments. The database can also hold a history of configuration files. The administration console enables you to display the differences between current and past configurations and stored configuration collections.
- Replications are improved and more reliable.
- Asymmetric Cluster Installation for WLS 10.3.1 with Templates - Installer produces files including a .war file and a WebLogic Domain template and places them into the Oracle WebLogic Registry Home. Upon completion, you can run the Oracle WebLogic Configuration Wizard to deploy to the selected clusters and/or managed servers.
- Database deadlock recovery and prevention.
 - User connects to a Registry from multiple threads or computers using any operation (find, get, save, delete). Registry completes all operations even when there is a deadlock in the database.
- Bug fixes. Small improvements.

3. Supported Platforms

For the most current supported platforms list, go to [Oracle Fusion Middleware Supported System Configurations](http://www.oracle.com/technology/software/products/ias/files/fusion_certification.html) [http://www.oracle.com/technology/software/products/ias/files/fusion_certification.html]

Oracle Service Registry 11.1.1 has been tested on the following platforms.

- Operating systems:
 - [RedHat Enterprise Linux](http://www.redhat.com) [http://www.redhat.com]
 - [SUSE Linux Enterprise](http://www.novell.com/products/suselinux/) [http://www.novell.com/products/suselinux/]
 - [Solaris](http://www.sun.com/software/solaris/) [http://www.sun.com/software/solaris/]
 - [Windows Server](http://www.microsoft.com/) [http://www.microsoft.com/]
 - [AIX](http://www-1.ibm.com/servers/aix/) [http://www-1.ibm.com/servers/aix/]
 - [HP-UX](http://www.hp.com/products1/unix/java/index.html) [http://www.hp.com/products1/unix/java/index.html]
- JDKs:
 - [Sun JDK](http://java.sun.com/j2se/) [http://java.sun.com/j2se/]
 - JRockit
- Databases:
 - [Oracle](http://www.oracle.com) [http://www.oracle.com]
 - [Microsoft SQL Server](http://www.microsoft.com/sql/default.asp) [http://www.microsoft.com/sql/default.asp]
 - DB2
- LDAP:
 - [Oracle Internet Directory](http://www.oracle.com) [http://www.oracle.com]
 - [Sun One Directory Server](http://www.sun.com) [http://www.sun.com]
 - [Microsoft Active Directory](http://www.microsoft.com) [http://www.microsoft.com]
- Application Servers:



Note

You can also use Oracle Service Registry without an application server. In this case the embedded Jetty HTTP/HTTPS server is used.

- [Oracle WebLogic Server](http://www.oracle.com) [http://www.oracle.com]
- Browsers:

- Microsoft Internet Explorer
- Firefox

4. Specifications

Oracle Service Registry conforms to the following specifications:

- [UDDI Specifications](http://uddi.org/specification.html) [http://uddi.org/specification.html]
- [UDDI Version 1 Specification](http://www.oasis-open.org/committees/uddi-spec/doc/contribs.htm#udiv1) [http://www.oasis-open.org/committees/uddi-spec/doc/contribs.htm#udiv1]
- [UDDI Version 2 Specification](http://www.oasis-open.org/committees/uddi-spec/doc/tcspecs.htm#udiv2) [http://www.oasis-open.org/committees/uddi-spec/doc/tcspecs.htm#udiv2]
- [UDDI Version 3 Specification](http://www.oasis-open.org/committees/uddi-spec/doc/tcspecs.htm#udiv3) [http://www.oasis-open.org/committees/uddi-spec/doc/tcspecs.htm#udiv3]
- [Technical Note Using WSDL in a UDDI Registry, Version 2.0](http://www.oasis-open.org/committees/uddi-spec/doc/tn/uddi-spec-tc-tn-wsdl-v2.htm) [http://www.oasis-open.org/committees/uddi-spec/doc/tn/uddi-spec-tc-tn-wsdl-v2.htm]

5. Document Conventions

This section describes conventions used in this document.

Command syntax	The syntax of operating system commands. We use square brackets ([]) to indicate optional parameters, a vertical bar () to indicate a choice of parameters, ... to indicate that the parameter is repeatable and { } to indicate that at least one repeatable parameter must be included. For example: Enter this command to start the UserStore tool: <pre>UserStoreTool {[-t target_server] [--file userstore_file]...} [option...]</pre>
Command instances	Operating system commands and other user input that you can type on the command line and press Enter to invoke. These may be contained within text, as in this example: The command java -jar server.jar does not work on some encodings. If you have any problems starting the installer, try running java -classpath server.jar Install --installation_option instead. The command line may be separated, in which case it has a screen background: <pre>java -jar server.jar --help</pre>
Filename	Filenames, directory names, paths and package names. For example: Run the install.bat or install.sh script from the bin directory of the new distribution.
XML tags	XML element and attribute names. For example: use ref="customSerialization"
Code block	Program source code. For example: <pre>package examples.helloWorld; public interface HelloWorldProxy { String hello (String message); }</pre>

Key-Key	A combination of keystrokes. Press the indicated keys simultaneously. For example: Press Ctrl-Alt-Del to reboot your computer.
GUI elements	A label, word or phrase in a GUI window, often clickable. For example: To edit a server's attributes, click on the server's link in the Security Domain Tree or click on Detail in the server's row in the Managed Servers form. GUI buttons have a special icon, for example: Click on the Save Configs button to save your changes after editing any Domain or Server properties.
A menu selection	For example: Select Property->Add property

We use the following formatting elements to draw your attention to certain pieces of information:



Note

A Note indicates information that emphasizes or supplements points within the main text. Typically, a note provides information that may apply only in specific situations.



Tip

A Tip provides a helpful hint concerning procedures described in the text. It may suggest alternative methods or provide useful information about the capabilities of the product.



Important

An Important note provides critical information for the completion of a task. Do not disregard an Important note.



Caution

A Caution describes a situation where failure to take or avoid a specified action could result in a loss of data.

6. Legal

6.1. Third Party Licenses

6.1.1. The Apache XML Security License, Version 1.1

The Apache Software License, Version 1.1

Copyright (c) 1999 The Apache Software Foundation. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

3. The end-user documentation included with the redistribution, if any, must include the following acknowledgment: "This product includes software developed by the Apache Software Foundation (<http://www.apache.org/>).". Alternately, this acknowledgment may appear in the software itself, if and wherever such third-party acknowledgments normally appear.

4. The names "<WebSig>" and "Apache Software Foundation" must not be used to endorse or promote products derived from this software without prior written permission. For written permission, please contact apache@apache.org.

5. Products derived from this software may not be called "Apache", nor may "Apache" appear in their name, without prior written permission of the Apache Software Foundation.

THIS SOFTWARE IS PROVIDED ``AS IS" AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE APACHE SOFTWARE FOUNDATION OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.
=====

This software consists of voluntary contributions made by many individuals on behalf of the Apache Software Foundation and was originally based on software copyright (c) 2001, Institute for Data Communications Systems, <<http://www.nue.et-inf.uni-siegen.de/>>. The development of this software was partly funded by the European Commission in the <WebSig> project in the ISIS Programme. For more information on the Apache Software Foundation, please see <<http://www.apache.org/>>.

6.1.2. The Apache XML License, Version 1.1

The Apache Software License, Version 1.1

Copyright (c) 1999-2000 The Apache Software Foundation. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The end-user documentation included with the redistribution, if any, must include the following acknowledgment: "This product includes software developed by the Apache Software Foundation (<http://www.apache.org/>).". Alternately, this acknowledgment may appear in the software itself, if and wherever such third-party acknowledgments normally appear.
4. The names "Xerces" and "Apache Software Foundation" must not be used to endorse or promote products derived from this software without prior written permission. For written permission, please contact apache@apache.org.
5. Products derived from this software may not be called "Apache", nor may "Apache" appear in their name, without prior written permission of the Apache Software Foundation.

THIS SOFTWARE IS PROVIDED ``AS IS" AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE APACHE SOFTWARE FOUNDATION

OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

This software consists of voluntary contributions made by many individuals on behalf of the Apache Software Foundation and was originally based on software copyright (c) 1999, International Business Machines, Inc., <http://www.ibm.com>. For more information on the Apache Software Foundation, please see <http://www.apache.org/>.

6.1.3. Apache Jakarta License, Version 1.1

=====

The Apache Software License, Version 1.1

Copyright (c) 1999 The Apache Software Foundation. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The end-user documentation included with the redistribution, if any, must include the following acknowledgement: "This product includes software developed by the Apache Software Foundation (<http://www.apache.org/>).". Alternately, this acknowledgement may appear in the software itself, if and wherever such third-party acknowledgements normally appear.
4. The names "The Jakarta Project", "Tomcat", and "Apache Software Foundation" must not be used to endorse or promote products derived from this software without prior written permission. For written permission, please contact apache@apache.org.
5. Products derived from this software may not be called "Apache" nor may "Apache" appear in their names without prior written permission of the Apache Group.

THIS SOFTWARE IS PROVIDED ``AS IS'' AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE APACHE SOFTWARE FOUNDATION OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

=====

This software consists of voluntary contributions made by many individuals on behalf of the Apache Software Foundation. For more information on the Apache Software Foundation, please see <http://www.apache.org/>.

6.1.4. CUP Parser Generator

CUP Parser Generator Copyright Notice, License, and Disclaimer

Copyright 1996-1999 by Scott Hudson, Frank Flannery, C. Scott Ananian

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both the copyright notice and this permission notice and warranty disclaimer appear in supporting documentation, and that the names of the authors or their employers not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

The authors and their employers disclaim all warranties with regard to this software, including all implied warranties of merchantability and fitness. In no event shall the authors or their employers be liable for any special, indirect or consequential damages or any damages whatsoever resulting from loss of use, data or profits, whether in an action of contract, negligence or other tortious action, arising out of or in connection with the use or performance of this software.

6.1.5. Jetty License, Version 3.6

Jetty License

Revision: 3.6

Preamble:

The intent of this document is to state the conditions under which the Jetty Package may be copied, such that the Copyright Holder maintains some semblance of control over the development of the package, while giving the users of the package the right to use, distribute and make reasonable modifications to the Package in accordance with the goals and ideals of the Open Source concept as described at <http://www.opensource.org>.

It is the intent of this license to allow commercial usage of the Jetty package, so long as the source code is distributed or suitable visible credit given or other arrangements made with the copyright holders.

Definitions:

- "Jetty" refers to the collection of Java classes that are distributed as a HTTP server with servlet capabilities and associated utilities.

- "Package" refers to the collection of files distributed by the Copyright Holder, and derivatives of that collection of files created through textual modification.

- "Standard Version" refers to such a Package if it has not been modified, or has been modified in accordance with the wishes of the Copyright Holder.

- "Copyright Holder" is whoever is named in the copyright or copyrights for the package.

Mort Bay Consulting Pty. Ltd. (Australia) is the "Copyright Holder" for the Jetty package.

- "You" is you, if you're thinking about copying or distributing this Package.

- "Reasonable copying fee" is whatever you can justify on the basis of media cost, duplication charges, time of people involved, and so on. (You will not be required to justify it to the Copyright Holder, but only to the computing community at large as a market that must bear the fee.)

- "Freely Available" means that no fee is charged for the item itself, though there may be fees involved in handling the item. It also means that recipients of the item may redistribute it under the same conditions they received it.

0. The Jetty Package is Copyright (c) Mort Bay Consulting Pty. Ltd. (Australia) and others. Individual files in this package may contain additional copyright notices. The javax.servlet packages are copyright Sun Microsystems Inc.

1. The Standard Version of the Jetty package is available from <http://www.mortbay.com>.

2. You may make and distribute verbatim copies of the source form of the Standard Version of this Package without restriction, provided that you include this license and all of the original copyright notices and associated disclaimers.

3. You may make and distribute verbatim copies of the compiled form of the Standard Version of this Package without restriction, provided that you include this license.

4. You may apply bug fixes, portability fixes and other modifications derived from the Public Domain or from the Copyright Holder. A Package modified in such a way shall still be considered the Standard Version.

5. You may otherwise modify your copy of this Package in any way, provided that you insert a prominent notice in each changed file stating how and when you changed that file, and provided that you do at least ONE of the following:

a) Place your modifications in the Public Domain or otherwise make them Freely Available, such as by posting said modifications to Usenet or an equivalent medium, or placing the modifications on a major archive site such as ftp.uu.net, or by allowing the Copyright Holder to include your modifications in the Standard Version of the Package.

b) Use the modified Package only within your corporation or organization.

c) Rename any non-standard classes so the names do not conflict with standard classes, which must also be provided, and provide a separate manual page for each non-standard class that clearly documents how it differs from the Standard Version.

d) Make other arrangements with the Copyright Holder.

6. You may distribute modifications or subsets of this Package in source code or compiled form, provided that you do at least ONE of the following:

a) Distribute this license and all original copyright messages, together with instructions (in the about dialog, manual page or equivalent) on where to get the complete Standard Version.

b) Accompany the distribution with the machine-readable source of the Package with your modifications. The modified package must include this license and all of the original copyright notices and associated disclaimers, together with instructions on where to get the complete Standard Version.

c) Make other arrangements with the Copyright Holder.

7. You may charge a reasonable copying fee for any distribution of this Package. You may charge any fee you choose for support of this Package. You may not charge a fee for this Package itself. However, you may distribute this Package in aggregate with other (possibly commercial) programs as part of a larger (possibly commercial) software distribution provided that you meet the other distribution requirements of this license.

8. Input to or the output produced from the programs of this Package do not automatically fall under the copyright of this Package, but belong to whomever generated them, and may be sold commercially, and may be aggregated with this Package.

9. Any program subroutines supplied by you and linked into this Package shall not be considered part of this Package.

10. The name of the Copyright Holder may not be used to endorse or promote products derived from this software without specific prior written permission.

11. This license may change with each release of a Standard Version of the Package. You may choose to use the license associated with version you are using or the license of the latest Standard Version.

12. THIS PACKAGE IS PROVIDED "AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

13. If any superior law implies a warranty, the sole remedy under such shall be , at the Copyright Holders option either a) return of any price paid or b) use or reasonable endeavours to repair or replace the software.

14. This license shall be read under the laws of Australia.

6.1.6. W3C Software Notice and License

W3C(C) SOFTWARE NOTICE AND LICENSE

Copyright (C) 1994-2002 World Wide Web Consortium, (Massachusetts Institute of Technology, Institut National de Recherche en Informatique et en Automatique, Keio University). All Rights Reserved. <http://www.w3.org/Consortium/Legal/>

This W3C work (including software, documents, or other related items) is being provided by the copyright holders under the following license. By obtaining, using and/or copying this work, you (the licensee) agree that you have read, understood, and will comply with the following terms and conditions:

Permission to use, copy, modify, and distribute this software and its documentation, with or without modification, for any purpose and without fee or royalty is hereby granted, provided that you include the following on ALL copies of the software and documentation or portions thereof, including modifications, that you make:

The full text of this NOTICE in a location viewable to users of the redistributed or derivative work. Any pre-existing intellectual property disclaimers, notices, or terms and conditions. If none exist, a short notice of the following form (hypertext is preferred, text is permitted) should be used within the body of any redistributed or derivative code: "Copyright (C) [\$date-of-software] World Wide Web Consortium, (Massachusetts Institute of Technology, Institut National de Recherche en Informatique et en Automatique, Keio University). All Rights Reserved. <http://www.w3.org/Consortium/Legal/>"

Notice of any changes or modifications to the W3C files, including the date changes were made. (We recommend you provide URIs to the location from which the code is derived.)

THIS SOFTWARE AND DOCUMENTATION IS PROVIDED "AS IS," AND COPYRIGHT HOLDERS MAKE NO REPRESENTATIONS OR WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OR THAT THE USE OF THE SOFTWARE OR DOCUMENTATION WILL NOT INFRINGE ANY THIRD PARTY PATENTS, COPYRIGHTS, TRADEMARKS OR OTHER RIGHTS.

COPYRIGHT HOLDERS WILL NOT BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF ANY USE OF THE SOFTWARE OR DOCUMENTATION.

The name and trademarks of copyright holders may NOT be used in advertising or publicity pertaining to the software without specific, written prior permission. Title to copyright in this software and any associated documentation will at all times remain with copyright holders.

6.1.7. Xalan, Version 2.5.1

The Apache Software License, Version 1.1

Copyright (c) 1999-2003 The Apache Software Foundation. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

3. The end-user documentation included with the redistribution, if any, must include the following acknowledgment: "This product includes software developed by the Apache Software Foundation (<http://www.apache.org/>).". Alternately, this acknowledgment may appear in the software itself, if and wherever such third-party acknowledgments normally appear.

4. The names "Xalan" and "Apache Software Foundation" must not be used to endorse or promote products derived from this software without prior written permission. For written permission, please contact apache@apache.org.

5. Products derived from this software may not be called "Apache", nor may "Apache" appear in their name, without prior written permission of the Apache Software Foundation.

THIS SOFTWARE IS PROVIDED "AS IS" AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE APACHE SOFTWARE FOUNDATION OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.
=====

This software consists of voluntary contributions made by many individuals on behalf of the Apache Software Foundation and was originally based on software copyright (c) 1999, Lotus Development Corporation., <http://www.lotus.com>. For more information on the Apache Software Foundation, please see <http://www.apache.org/>.

6.1.8. XML Pull Parser for Java, 1.1.1

Indiana University Extreme! Lab Software License

Version 1.1.1

Copyright (c) 2002 Extreme! Lab, Indiana University. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The end-user documentation included with the redistribution, if any, must include the following acknowledgment:

"This product includes software developed by the Indiana University Extreme! Lab (<http://www.extreme.indiana.edu/>)."

Alternately, this acknowledgment may appear in the software itself, if and wherever such third-party acknowledgments normally appear.

4. The names "Indiana Univeristy" and "Indiana Univeristy Extreme! Lab" must not be used to endorse or promote products derived from this software without prior written permission. For written permission, please contact <http://www.extreme.indiana.edu/>.

5. Products derived from this software may not use "Indiana Univeristy" name nor may "Indiana Univeristy" appear in their name, without prior written permission of the Indiana University.

THIS SOFTWARE IS PROVIDED "AS IS" AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHORS, COPYRIGHT HOLDERS OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

6.1.9. Unix crypt(3C) utility

Copyright © 1996 Aki Yoshida. All rights reserved.

Permission to use, copy, modify and distribute this software for non-commercial or commercial purposes and without fee is hereby granted provided that this copyright notice appears in all copies.

6.2. Notices

Oracle Fusion Middleware Service Registry Guide, 11g (11.1.1.6.0)

E13665-02

Copyright © 2001, 2011, Oracle and/or its affiliates. All rights reserved.

Primary Author: Oracle Corporation

This software and related documentation are provided under a license agreement containing restrictions on use and disclosure and are protected by intellectual property laws. Except as expressly permitted in your license agreement or allowed by law, you may not use, copy, reproduce, translate, broadcast, modify, license, transmit, distribute, exhibit, perform, publish, or display any part, in any form, or by any means. Reverse engineering, disassembly, or decompilation of this software, unless required by law for interoperability, is prohibited.

The information contained herein is subject to change without notice and is not warranted to be error-free. If you find any errors, please report them to us in writing.

If this is software or related documentation that is delivered to the U.S. Government or anyone licensing it on behalf of the U.S. Government, the following notice is applicable:

U.S. GOVERNMENT RIGHTS Programs, software, databases, and related documentation and technical data delivered to U.S. Government customers are "commercial computer software" or "commercial technical data" pursuant to the applicable Federal Acquisition Regulation and agency-specific supplemental regulations. As such, the use, duplication, disclosure, modification, and adaptation shall be subject to the restrictions and license terms set forth in the applicable Government contract, and, to the extent applicable by the terms of the Government contract, the additional rights set forth in FAR 52.227-19, Commercial Computer Software License (December 2007). Oracle America, Inc., 500 Oracle Parkway, Redwood City, CA 94065.

This software or hardware is developed for general use in a variety of information management applications. It is not developed or intended for use in any inherently dangerous applications, including applications that may create a risk of personal injury. If you use this software or hardware in dangerous applications, then you shall be responsible to take all appropriate fail-safe, backup, redundancy, and other measures to ensure its safe use. Oracle Corporation and its affiliates disclaim any liability for any damages caused by use of this software or hardware in dangerous applications.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Intel and Intel Xeon are trademarks or registered trademarks of Intel Corporation. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. AMD, Opteron, the AMD logo, and the AMD Opteron logo are trademarks or registered trademarks of Advanced Micro Devices. UNIX is a registered trademark of The Open Group.

This software or hardware and documentation may provide access to or information on content, products, and services from third parties. Oracle Corporation and its affiliates are not responsible for and expressly disclaim all warranties of any kind with respect to third-party content, products, and services. Oracle Corporation and its affiliates will not be responsible for any loss, costs, or damages incurred due to your access to or use of third-party content, products, or services.

6.2.1. Acknowledgements

This product includes software developed by the [Apache Software Foundation](http://www.apache.org) [http://www.apache.org].

This product includes code licensed from [RSA Data Security](http://www.rsasecurity.com) [http://www.rsasecurity.com].

This product includes software developed by [jGuru.com \(MageLang Institute\)](http://www.jGuru.com) [http://www.jGuru.com].

This product contains components derived from software developed by the [Indiana University Extreme! Lab](http://www.extreme.indiana.edu) [http://www.extreme.indiana.edu].

7. Support

If you need support for any Oracle product, you can access the [Oracle customer support web site](http://www.oracle.com/support) [http://www.oracle.com/support].

Installation Guide

Oracle Service Registry may be installed using the following scenarios:

Standalone Registry

This is the default installation scenario; under it the Oracle Service Registry server is deployed to the Oracle WebLogic Server and connects to an external registry database. To perform a standalone installation, follow the instructions at [Section 2, Installation](#). For more configuration information, refer to [Section 3, Server Configuration](#) and [Section 4, Database Installation](#).

Approval Process Registry

An installation of Oracle Service Registry may be split into two servers, *publication registry* and *discovery registry*. The *publication registry* is a preliminary server for the publishing, testing, and approval of data. After data is approved, it is promoted to the *discovery registry*. The *discovery registry* is configured for inquiry. To install Oracle Service Registry with the Approval Process Registry, follow the instructions in [Section 5, Approval Process Registry Installation](#).

External Accounts Integration

Oracle Service Registry server may be optionally configured to use external accounts on an LDAP or other account store. It is possible to set up external accounts integration during database installation. For more information, please see [Section 4, Database Installation](#) and [Section 6, External Accounts Integration](#)

Registry cluster

A UDDI cluster is a group of UDDI registries deployed on multiple servers possibly with a clustered database in the back-end. Load balancing is used to distribute requests amongst Oracle Service Registry servers to get the optimal load distribution. Standalone Registry or registry ported to an application server could be configured to cluster with instructions in [Section 7, Cluster Configuration](#)

1. System Requirements

This section explains the requirements which must be met *before* you start installation. [Section 3, Supported Platforms](#) in [Read This First](#) summarizes the software platform options for the current release. So you should:

1. Ensure the installation machine meets the requirements that follow in [Section 1.1, Hardware](#);
2. Decide which combination of [supported platform components](#) will be used;
3. Ensure each component is installed as described in this section.

Then you can proceed with [installation](#).

1.1. Hardware

[Table 1, “Minimum Hardware Specifications”](#) summarizes hardware requirements for the installation machine. The minimum specifications are suitable for experimental use of Oracle Service Registry on a workstation. Although it may be possible to install the product on a machine with lower specifications, performance and reliability may be severely affected. The requirements of servers in a production environment are greater and depend on patterns of use. See [Support](#) in [Read This First](#) if you need assistance.

Table 1. Minimum Hardware Specifications

Specification	Minimum	Notes
CPU	1GHz	Actual requirements depend on the on patterns of use in the target environment.
RAM	1GB	
Disk Space	500MB	This is sufficient if the selected database system is installed on another machine. The database server machine must have sufficient space for the selected database system. The requirements for registry data are quite modest. Each GB typically provides for registration of several thousand additional entities. So disk performance is more significant.

1.2. Java™ Platform

A supported Java *Development Kit* is required on the installation machine. A Java Runtime Environment is not sufficient because it must be possible to compile JSP pages at runtime.

1.3. Relational Database

Setting up a relational database during installation is optional - you can instead set it up after installation using the setup tool. See [Section 4, Database Installation](#).

The installation process allows you to setup a database using one of the other supported database systems, in which case the database server must be installed and running (not necessarily on the same machine). JDBC driver files must generally be available locally.

In this release, Oracle Service Registry supports the following relational databases:

- Oracle
- MSSQL
- DB2

1.4. Application Server

You can install Oracle Service Registry as a stand-alone application or deploy it to an application server.

In this release, Oracle Service Registry supports the following application servers:

- Oracle WebLogic Server 11g (10.3.6+)

2. Installation

This section describes the standalone installation of Oracle Service Registry and all settings.

Installation Checklist:

1. Application Server Install - Download and install the supported Application Server.
2. Database Install - Download and install a supported database or contact a DBA to obtain existing database instance connection information.

3. Database Schema Install - Edit the sample database scripts (please see [Section 4.3, Oracle Database Settings](#)) and execute to create the database tablespace and user schema objects.
4. OSR Install - Run the OSR Installer (please see [Section 2.2, Command-line Options](#)) to unload the product file into the file system and populate the database schema.
5. OSR Deployment - Run the application server deployment (please see [Section Oracle WebLogic deployment details](#)).
6. OSR Console Test - Login (please see [Section 2, Registry Consoles](#)) to the OSR Console and test.

To install the registry, type the following at a command prompt:

```
java -jar oracle-service-registry-11.1.1.6.jar
```

and follow the wizard panels. If you have associated `javaw` with *.jar files on Windows, just double-click the icon for the file `oracle-service-registry-11.1.1.6.jar`.

2.1. Registry Installation Options

Oracle Service Registry can be installed in several different configurations, depending on customer needs.

Standalone Registry Configuration With a standalone registry installation, there is a single instance of the Registry, shared by service publishers and service consumers. This is the simplest configuration, and allows for immediate sharing of service information. It is the most common choice for initial testing and evaluation use of the Registry.

Multi-Registry Configuration A multi-registry deployment is appropriate for environments where organizations want to impose more control over the contents of the registry available to service consumers. This quality control process is enabled by separating the Publication and Discovery Registries, and using an Approval Process to control promotion of services from staging to production. This approval process can be configured to use either manual or automated approval of promoted information.

- Note that each registry requires a unique tablespace and schema within a database to serve as a metadata store. However, both tablespaces and schemas can be created safely within the same database instance.

In addition, one or more Intermediate Registry instances may be installed. An Intermediate Registry sits between one or more Publication Registries and a top-level Discovery Registry.

2.2. Command-line Options

Installation may be launched with following optional arguments:

```
java -jar oracle-service-registry-11.1.1.6.jar [--help] | [-h] | [--gui] | [-g]
[[-u configfile] | [--use-config configfile]]
[[-s configfile] | [--save-config configfile]]
[-a]
[--debug]
```

-g | --gui starts the installation in gui mode (default).

-c | [--console] runs command-line installation

-h | [--help] shows help messages

-s *configfile* | --save-config *configfile* saves the installation settings into the configuration file without actually installing the registry. The configuration file contains all passwords entered in the installer. The passwords are normally encoded. If you want clear-text passwords, specify the option -t | --save-clear-text

-u *configfile* | --use-config *configfile* installs the registry using the settings contained in the configuration file.


-a installs the registry using advanced database options.

--debug the installation produces more information to localize problems or errors.

2.3. Installation Panels

This section discusses the content of the installation wizard. It goes through installation panels using default settings.

Figure 1. Welcome Panel

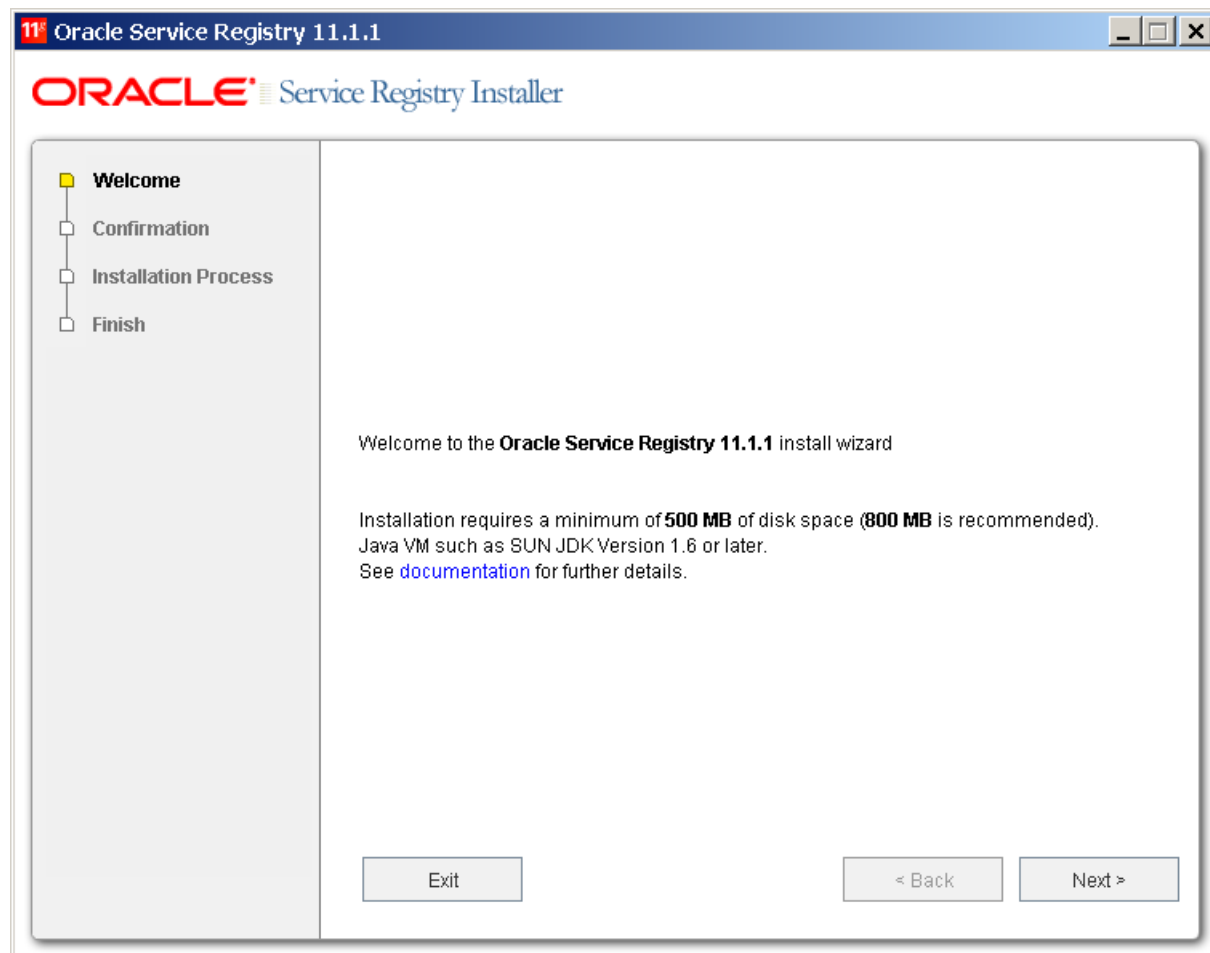

[Figure 1](#) shows the first panel of the installation wizard. The installation wizard helps you to install Oracle Service Registry to the Oracle WebLogic Server. To continue, click **Next**. To stop this installation at any time, click **Exit**. To return to a previous panel, click **Back**.

2.3.1. Installation Type

Figure 2. Installation Type

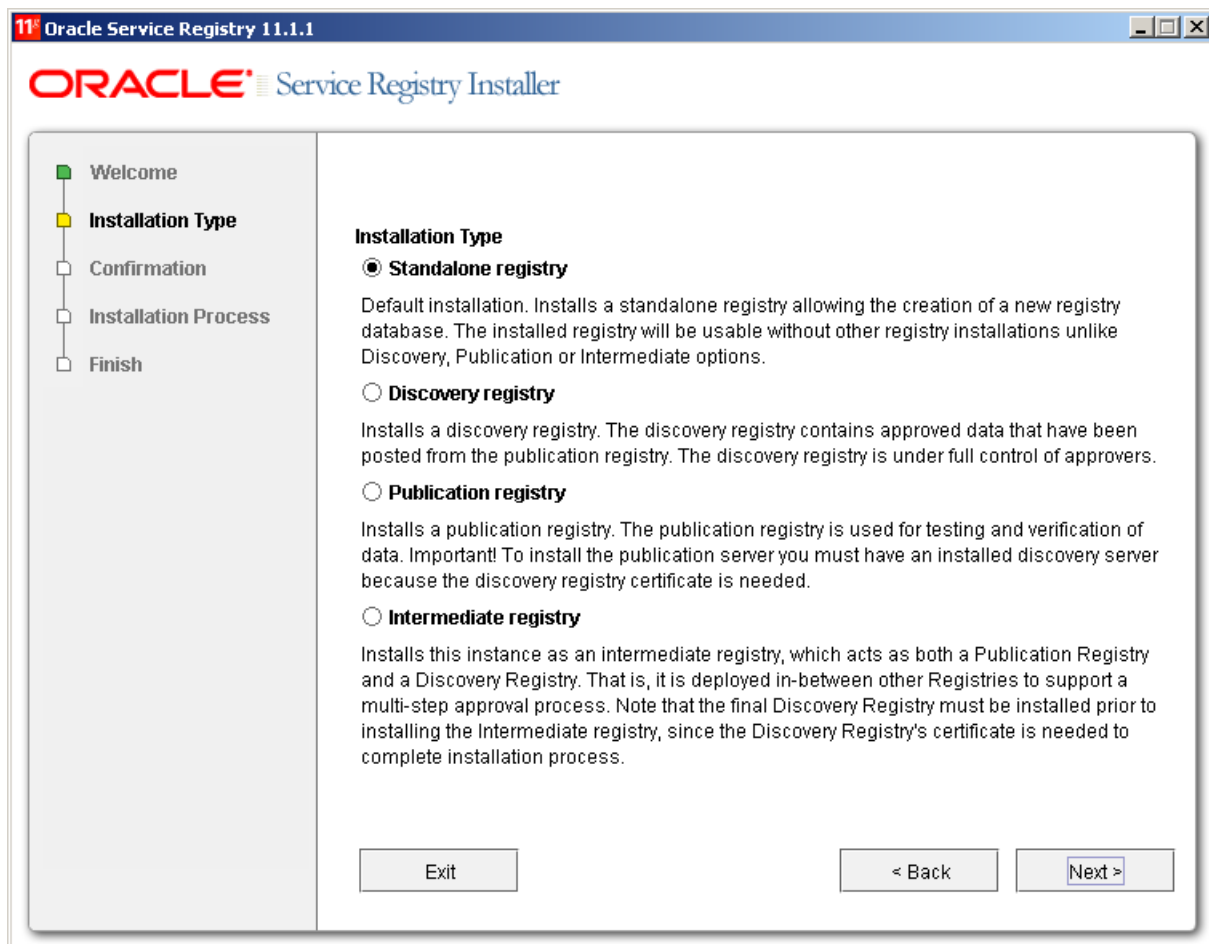


Figure 2 shows several installation scenarios. Select one.

Standalone registry

The default installation installs a standalone registry and enables the creation of a new registry database. The installed registry is usable without other registry installations unlike Discovery, Publication or Intermediate installation options which use several registry installations to define approval processes.

Discovery registry

Installs the discovery registry. This is the second part of the approval process registry installation. The *discovery registry* allows users to query Oracle Service Registry. For more information, please see [Section 5.1, Discovery Registry Installation](#).


Publication registry

Installs the publication registry of the approval process. The *publication registry* is one part of the approval process registry installation. The *publication registry* is a space for users to publish and test data prior to its approval for promotion to the *discovery server*. For more information, please see [Section 5.2, Publication Registry Installation](#).

Intermediate registry

Installs an intermediate registry in a multi-step approval process. The *intermediate registry* is an intermediate step in the process of promoting data from the publication to the discovery registry. For more information, please see [Section 5.3, Intermediate Registry Installation](#).

Figure 3. Installation Directory

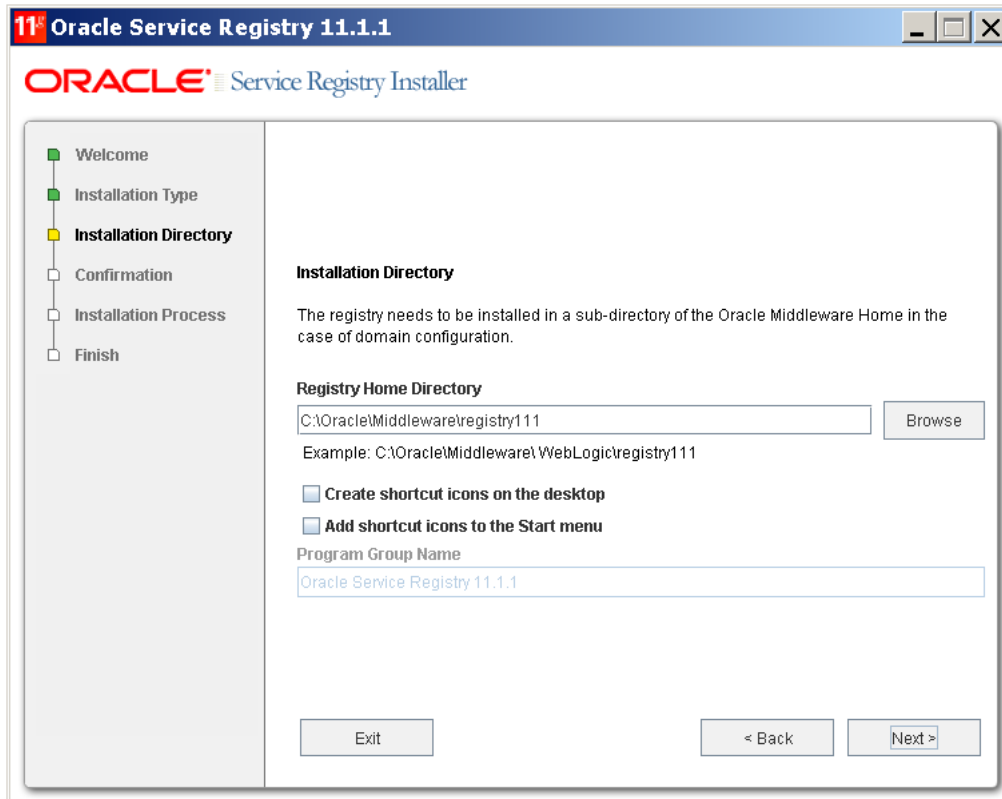

On the panel shown in [Figure 3](#), type the path to the installation directory where the Oracle Service Registry will be installed. The default directory is the current working `c:\oracle\middleware\registry111` on Windows and `/opt/oracle/middleware/registry111` on UNIX systems.

If you are installing on a Windows platform you can selected from the following:

Create shortcut icons on the desktop

If selected, icons for accessing the Registry Control, Business Service Control and the Setup tool will be created on the desktop.

Add shortcut icons to the Start menu

If selected, the icons noted above are added to the **Start** menu.

Program group name

Group name created in the **Start** menu where shortcut icons will be placed.



Note

You must have read and write permissions on the installation directory.

2.3.2. SMTP Configuration

Figure 4. SMTP Configuration

The screenshot shows the 'Oracle Service Registry 11.1.1' window with the 'Service Registry Installer' title. On the left is a navigation pane with steps: Welcome, Installation Type, Installation Directory, **Registry** (highlighted), Confirmation, Installation Process, and Finish. The main area is titled 'Registry Configuration' and contains two sections: 'Registry Configuration' and 'SMTP Configuration'. The 'Registry Configuration' section has a text box for 'Operator Name' with 'Oracle' entered and a note: 'The Operator Name must be unique for each node when using replications.' The 'SMTP Configuration' section has text boxes for 'SMTP Hostname' (placeholder: '[SMTP server hostname]'), 'SMTP Port' (25), 'SMTP Account Name', 'SMTP Password', 'Confirm Password', 'SMTP Default Sender E-mail', and 'SMTP Default Sender Name'. At the bottom are 'Exit', '< Back', and 'Next >' buttons.

[Figure 4](#) shows SMTP configuration. The SMTP configuration is important when users need to receive email notification from subscriptions and from the approval process.

SMTP Host Name

Host name of the SMTP server associated with this installation of Oracle Service Registry

SMTP Port

Port number for this SMTP server

SMTP Password

Self explanatory

Confirm password

Retype the same password. Note that if it is not same as the password in the previous box, you cannot continue.

SMTP Default Sender E-mail, Name

Oracle Service Registry will generate email messages with this identity.

2.3.3. Setup Administrator Account

Figure 5. Administrator Account

Oracle Service Registry 11.1.1

ORACLE Service Registry Installer

☒ Welcome
☒ Installation Type
☒ Installation Directory
☒ Registry
☒ **Administrator**
☐ Confirmation
☐ Installation Process
☐ Finish

Administrator Account Configuration

Specify Oracle Service Registry administrator account.

Administrator Username: admin
 Administrator Password:
 Confirm Password:
 Administrator Email: admin@localhost

Exit < Back Next >

[Figure 5](#) shows Oracle Service Registry Administrator account setup. You need to provide the administrator's account name and password, so you can log in later and adjust the Oracle Service Registry configuration using Oracle Service Registry tools.

Administrator username

The name for the administrator account (default: admin)

Administrator password

The password for the administrator account.

Confirm password

For verification enter again the administrator password.


Administrator Email

E-mail address to reach the Oracle Service Registry administrator. This value will be displayed by the Oracle Service Registry tools as contact information for the product.

2.3.4. Database Settings

The registry requires a that a database user schema be created before installation. During installation you can populate the schema in an existing empty database or connect to an existing database with a previously created schema. You can also drop the database or database schema using the Setup tool. Select your database creation method on the following panel.

Figure 6. Database Creation Method

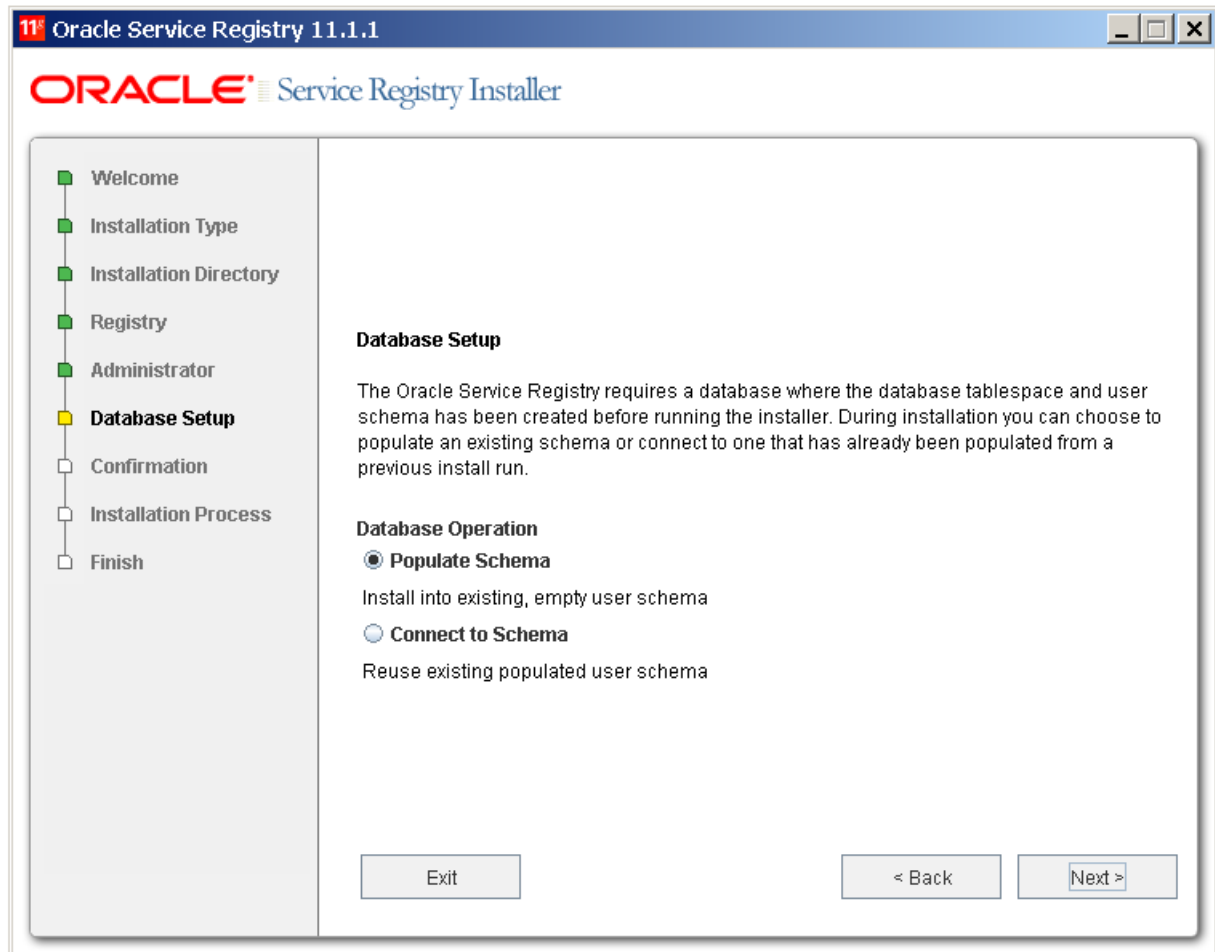

The database user schema creation instructions are in [Section 4.3, Oracle Database Settings](#)

Populate Schema

Create a new schema in an existing database. Use this option if you have access to an existing empty database and the ability to create tables and indexes. This option is suitable when you do not know the administrator's credentials. We assume admin has already created a new database/users/tablespaces for this option.




Note

See [Section 4, Database Installation](#), for more information.

Connect to Schema

Reuse existing populated user schema. Use this option if the registry database already exists (For example, from a previous installation) and fill in only the connection parameters.

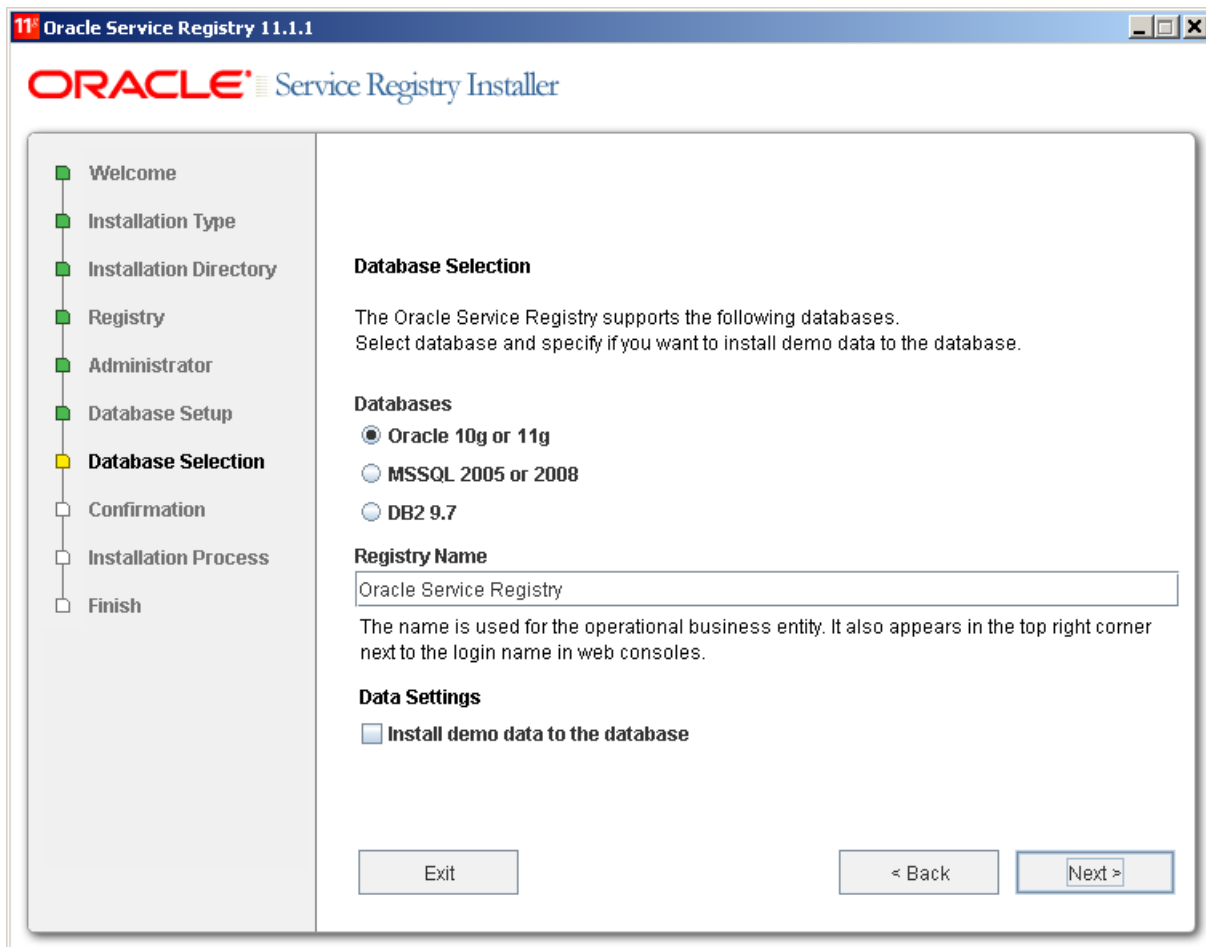Figure 7. Select Database

[Figure 7](#) shows the supported database engines that can be prepared for Oracle Service Registry.


You can specify the name of Oracle Service Registry installation. The name is saved to the operational business entity. The registry name appears in the upper right corner of Registry Control and Business Service Control.

Select **Install demo data** if you want to evaluate the provided Oracle Service Registry demos after installation.

The default database to create is the **Oracle 10g or 11g**.

The following list provides links to more information about specific settings for different Oracle database types.

- [Section 4.3, Oracle Database Settings](#)
- [Section 4.4, MSSQL](#)
- [Section 4.5, DB2](#)

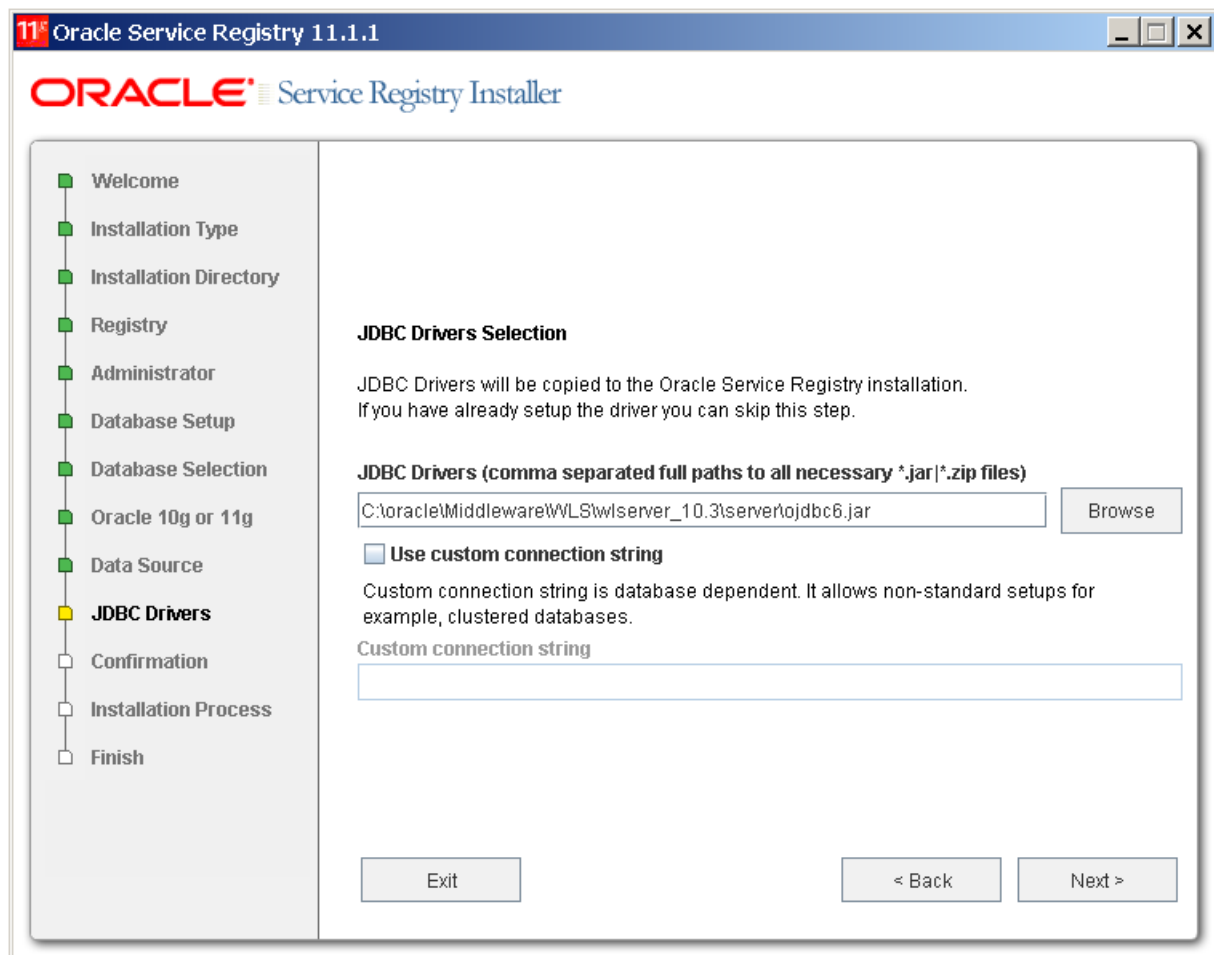Figure 8. The JDBC Driver

Enter path to JDBC Drivers on the panel shown in [Figure 8](#). The Oracle Service Registry needs to use the JDBC driver to access its database.


You can also check **Use custom connection string** and specify connection string instead of letting Oracle Service Registry to construct it.

The Oracle Service Registry supports installation on Oracle Database Real Application Clusters (RAC) using a custom connection string. For example:

```
jdbc:oracle:thin:@(DESCRIPTION=(ADDRESS=(PROTOCOL=TCP) (HOST=host1) (PORT=1521))
(ADDRESS=(PROTOCOL=TCP) (HOST=host2) (PORT=1521)) (LOAD_BALANCE=yes)
(CONNECT_DATA=(SERVER=DEDICATED) (SERVICE_NAME=SID)))
```

Oracle Service Registry supports basic failover functionality (it does not support fast connection failover). When one node fails, the Oracle Service Registry is able to reconnect without a restart. However, in this case, failed requests must be resubmitted.

For more information, see "Configuring JDBC Client Failover" in the Oracle Database 2 Day DBA + Real Application Clusters Guide at http://download.oracle.com/docs/cd/B28359_01/rac.111/b28252/configwlm.htm#BABJDGJD.

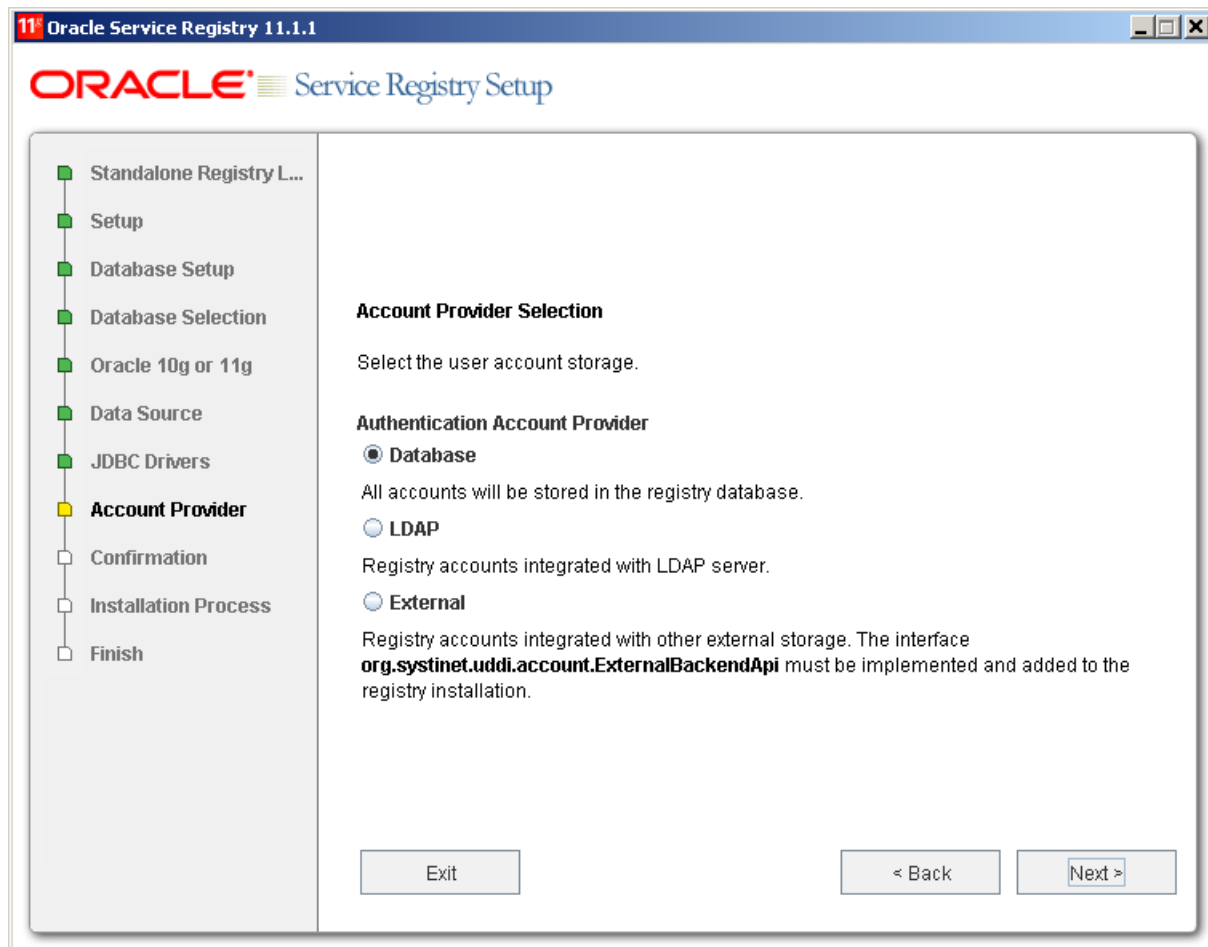Figure 9. Authentication Provider

[Figure 9](#) allows you to select an authentication provider.

Database

All accounts will be stored in the registry database.

LDAP

Registry accounts integrated with LDAP server.

External


Registry accounts integrated with other external storage. The the interface `com.systinet.uddi.account.ExternalBackendApi` must be implemented and added to the registry installation.

2.3.5. Application Server Settings

The Oracle Service Registry is designed to run within several environments:

- The Oracle WebLogic Server.
- Embedded HTTP/HTTPS server.

You can select in which environment you want to run in following installer screen:

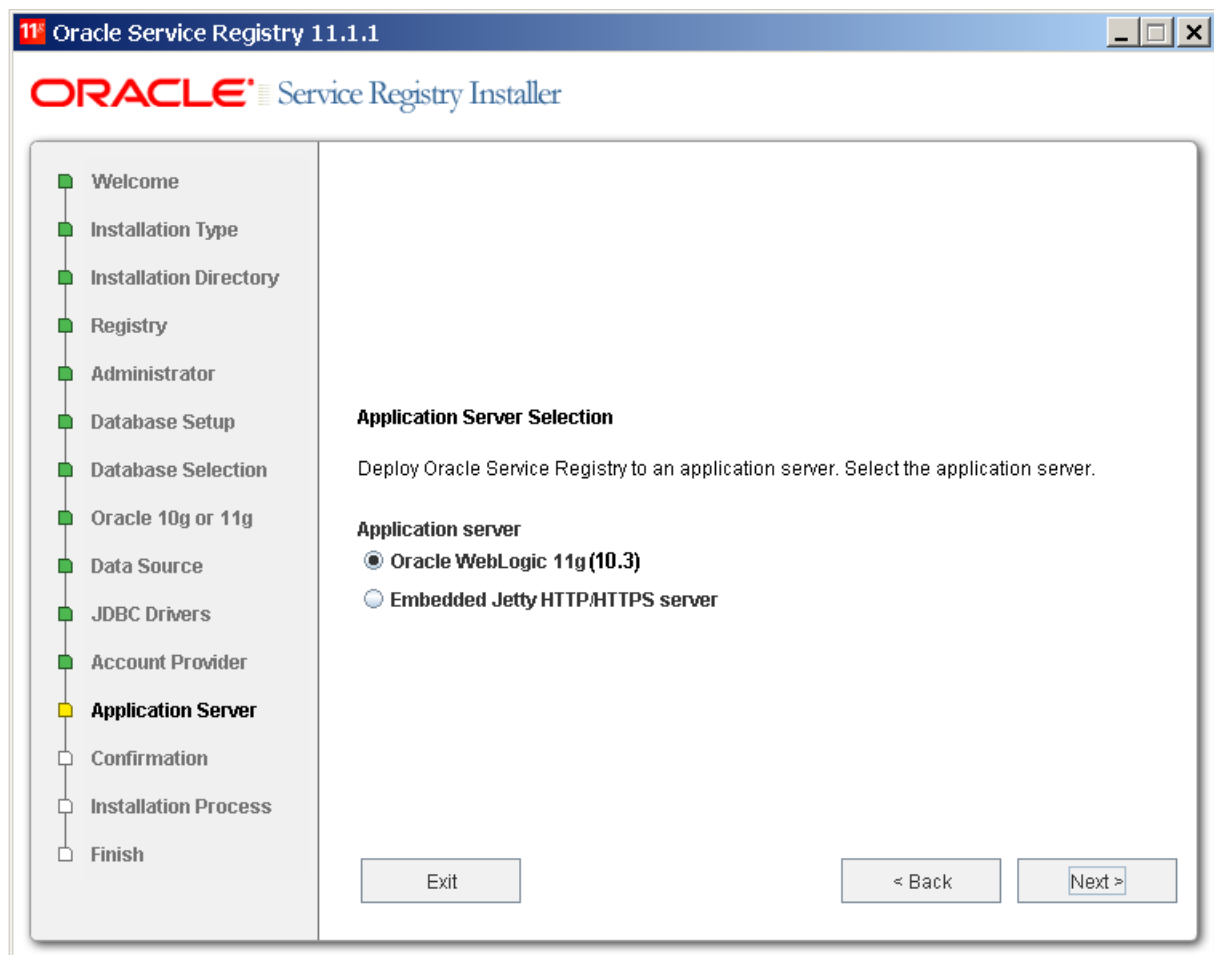
Figure 10. Application Server

Each environment option requires to fill in different sets of details to function properly.

Oracle WebLogic deployment details

This section describes Oracle WebLogic deployment options. Oracle WebLogic 11g is supported.

Invoke Oracle WebLogic installation by selecting WebLogic deployment option in the following installer screen:

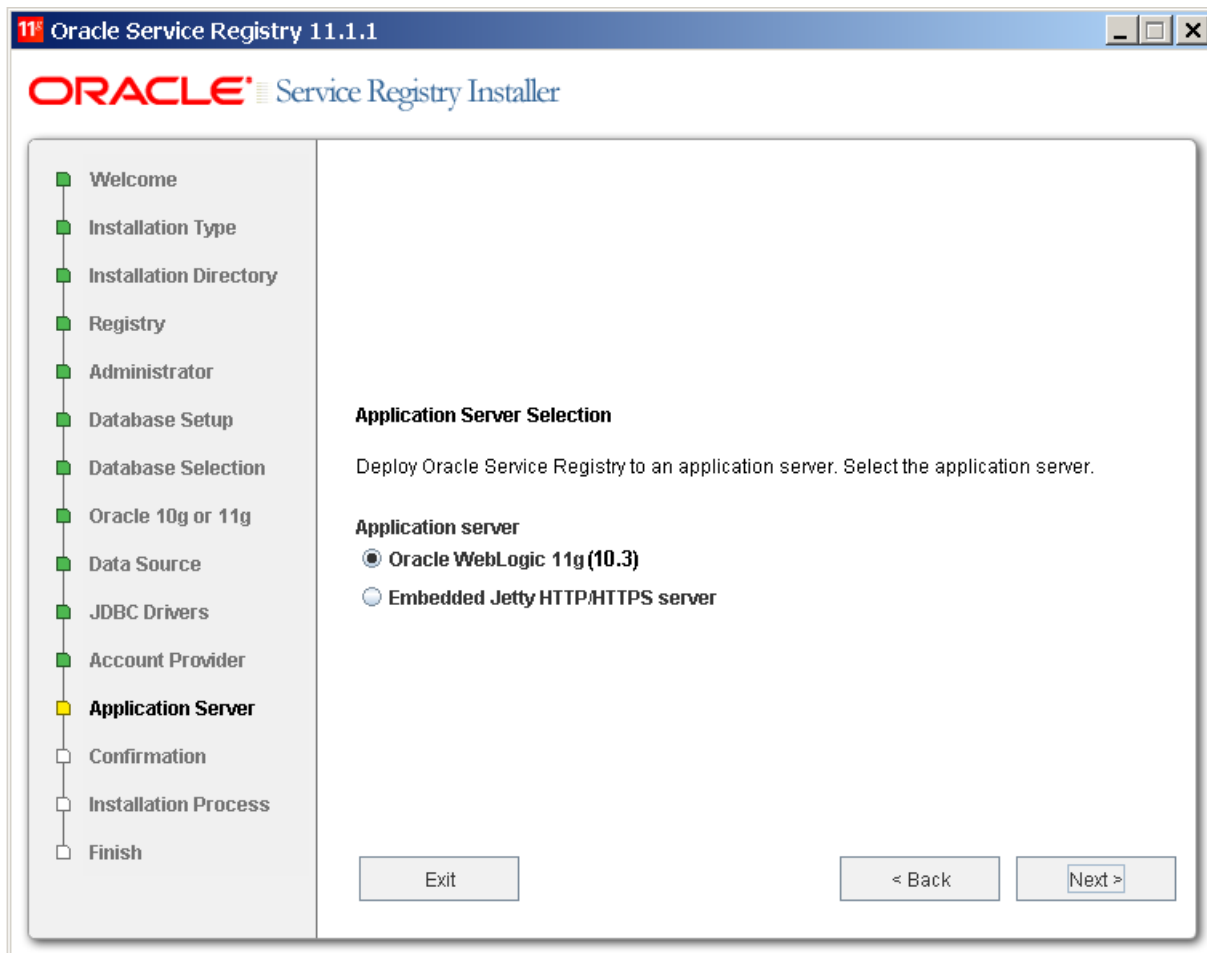Figure 11. Oracle WebLogic Server**Note**


WL_HOME refers to the WebLogic directory or Oracle Middleware Home.

WL_SERVER_HOME refers to the WebLogic server installation directory. The default value is WL_HOME/wlserver_10.3. If you want to use direct deployment from Oracle Service Registry installer, you must provide this path. It is used to locate WebLogic deploy tool JAR files.

REGISTRY_HOME refers to the Oracle Service Registry installation directory. It must be placed under Oracle Middleware Home in case Domain Configuration.


REGISTRY_DEPLOY_DIR refers to the application server directory where the Oracle Service Registry distribution is unpacked. The default path is WL_HOME/user_projects/domains/ DOMAIN_NAME /servers/ SERVER_NAME /tmp/_WL_user/ REGISTRY_CONTEXT / RANDOM_NAME /public on Oracle WebLogic 11g. Oracle Service Registry Setup tool uses this directory to locate registry configuration files.

The next installation screen requests a method deployment.

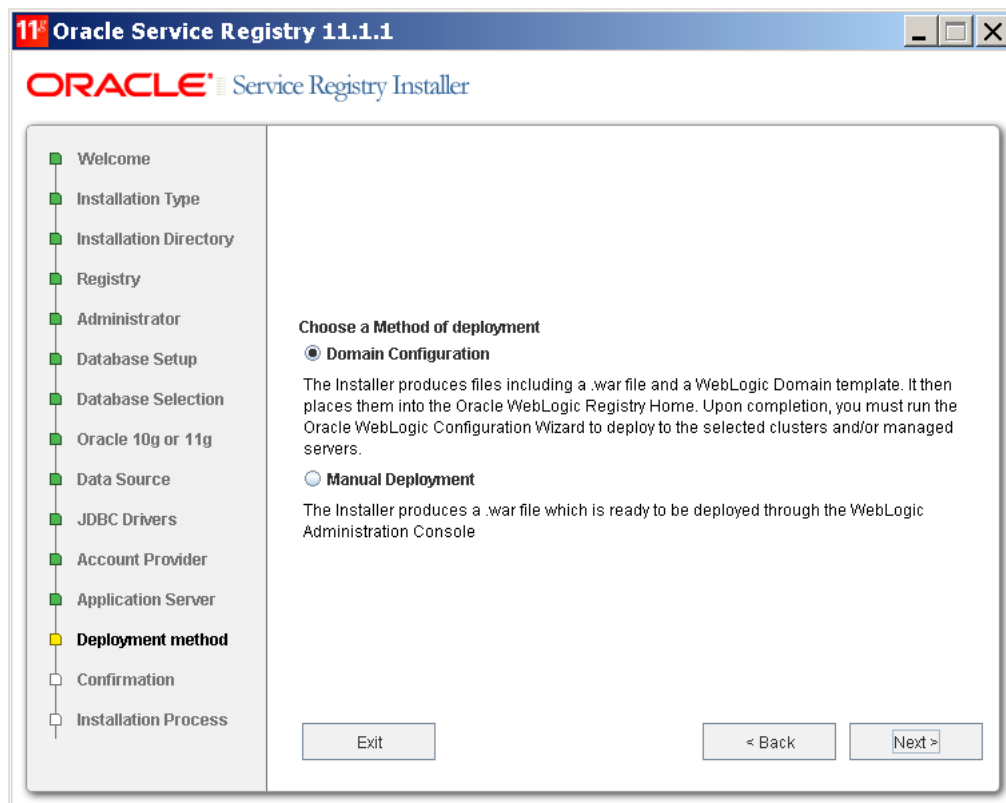Figure 12. Deployment Method

Domain Configuration is supported for Weblogic 11g only. Upon completion, you must run the Oracle WebLogic Configuration Wizard to create WebLogic domains. See more at [Creating WebLogic Domains Using the Configuration Wizard](#).

The next installation screen requests URL components (hostname, port, ssl port, context) that Oracle Service Registry uses in its web user interface. If you use proxy or load-balancer, the URL components should point to it. The registry administrator can change the URL later in Registry Management. If you choose the option **Multiple hostname support, uses hostname and port from request** (default), you can deploy Oracle Service Registry to another instance where the hostname and port are different. If not using the Multiple Host option, then if the URL is incorrect the web UI cannot be accessed until the URL value is corrected in the configuration files. In the case of domain configuration, the hostname and port values in this page must be the same as the values set when running the Configuration tools to create the weblogic domain.

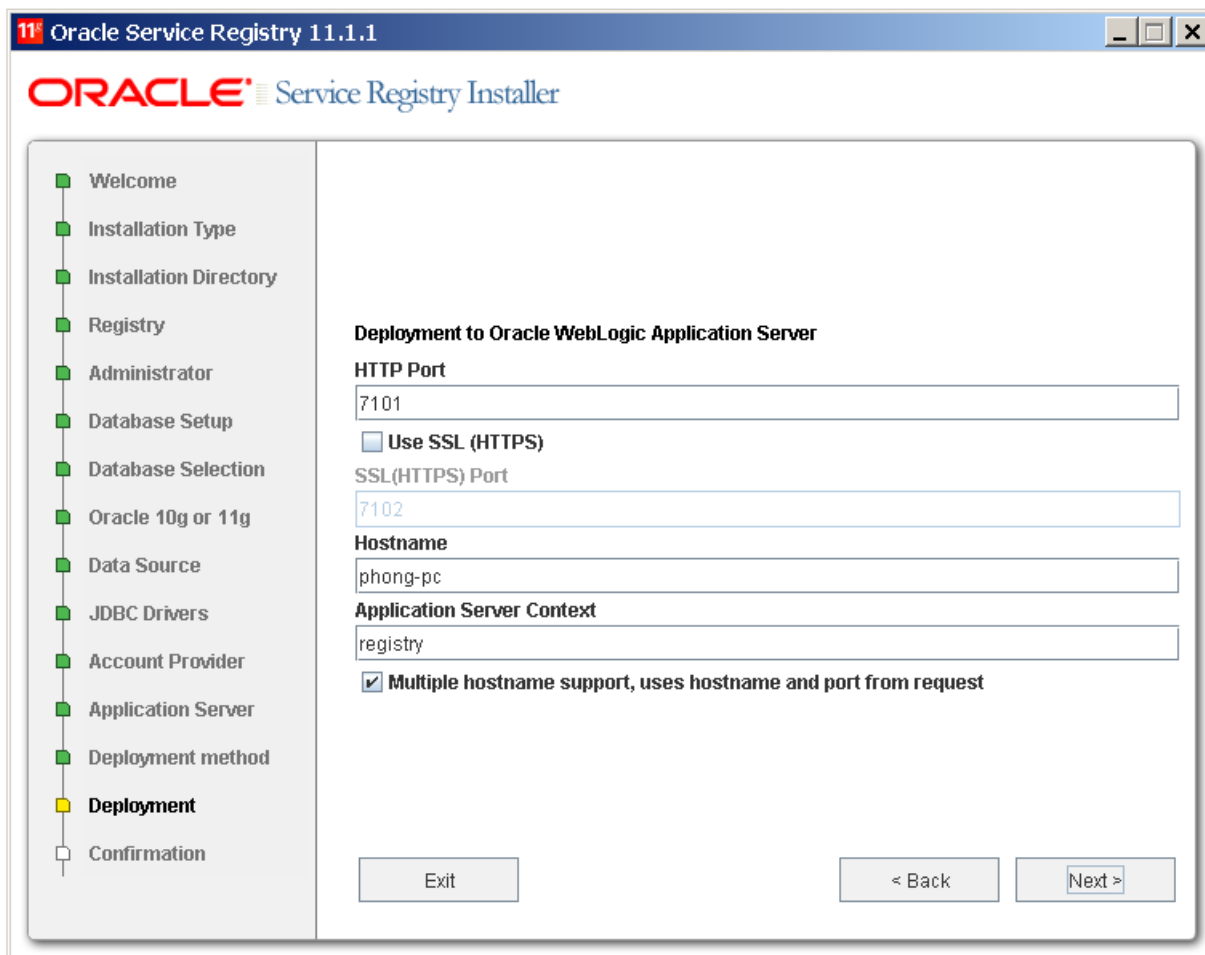Figure 13. Deployment

If you want to deploy manually you must specify the location of the Oracle Service Registry .war file. This file is in `REGISTRY_HOME/conf/porting/weblogic/build/[context_name].war` if installation was successful.

Other required changes to complete the integration:

1. If you selected "Use SSL (HTTPS)" in the installer, import the SSL certificate of the WebLogic server to the Oracle Service Registry configuration.

Use one of the following methods to obtain the WebLogic SSL certificate:

- Use Internet Explorer 6.0 web browser connected to Oracle WebLogic via HTTPS. Select "Properties" in the context menu of the page, click the "Certificates" button, tab "Details", click the "Copy to file" button, and export the certificate in Base 64 encoded X.509 .cer format.
- Use `REGISTRY_HOME/bin/sslTool.sh` or `REGISTRY_HOME\bin\sslTool.bat` to get the certificate. Run the command:

```
sslTool serverInfo --url https://HOST:9043 --certFile weblogic.cer
```

This command connects to the specified host and port using HTTPS and stores the server certificate in the specified file.

To import this certificate use the following command:

PStoreTool located in [registry_home]/bin PStoreTool.sh add -config [registry_home]/conf/clientconf.xml -certFile [weblogic.cer]

2. Enable SSL in WebLogic if not yet enabled and (re)start the Oracle WebLogic server.


Deployment should now be complete. The Oracle Service Registry URL is `http://[hostname]:[http_port]/[context]/uddi/web`

Creating WebLogic Domains Using the Configuration Wizard


This section provides information and examples for some common domain configuration tasks using the Configuration Wizard

Create New Domain with default Managed Server


1. Start the Configuration Wizard in graphical mode.
 - On Windows: **Start—>Programs—>BEA Products—>Tools—>Configuration Wizard** or enter `<WEBLOGIC_HOME>/common/bin/config.cmd`
 - On UNIX: enter `<WEBLOGIC_HOME>/common/bin/config.sh`
2. In the Welcome window select Create a new WebLogic domain

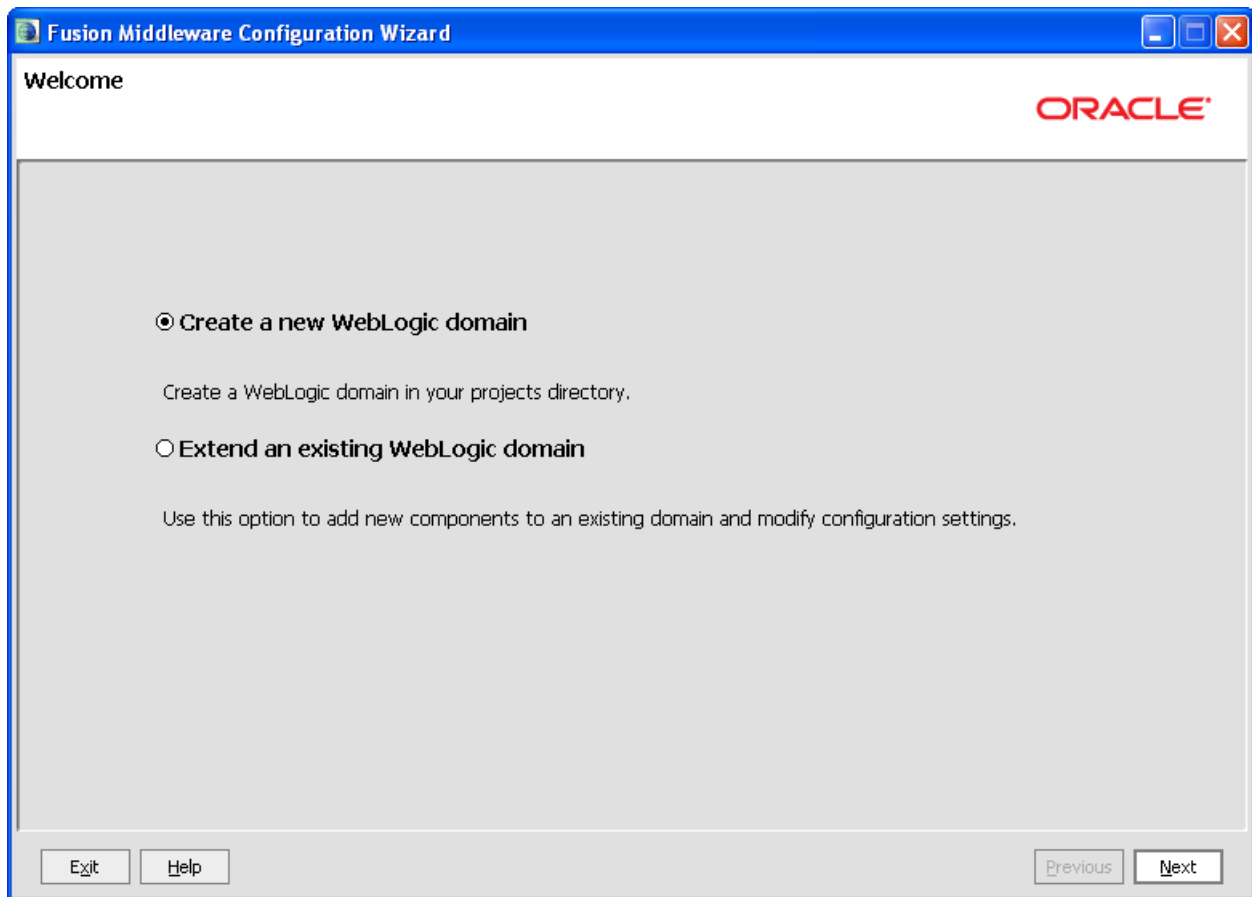Figure 14. Welcome

3. In the **Select a Domain Source** window, select **Generate a domain configured automatically to support the following BEA products** and the **Oracle Service Registry** check box is selected

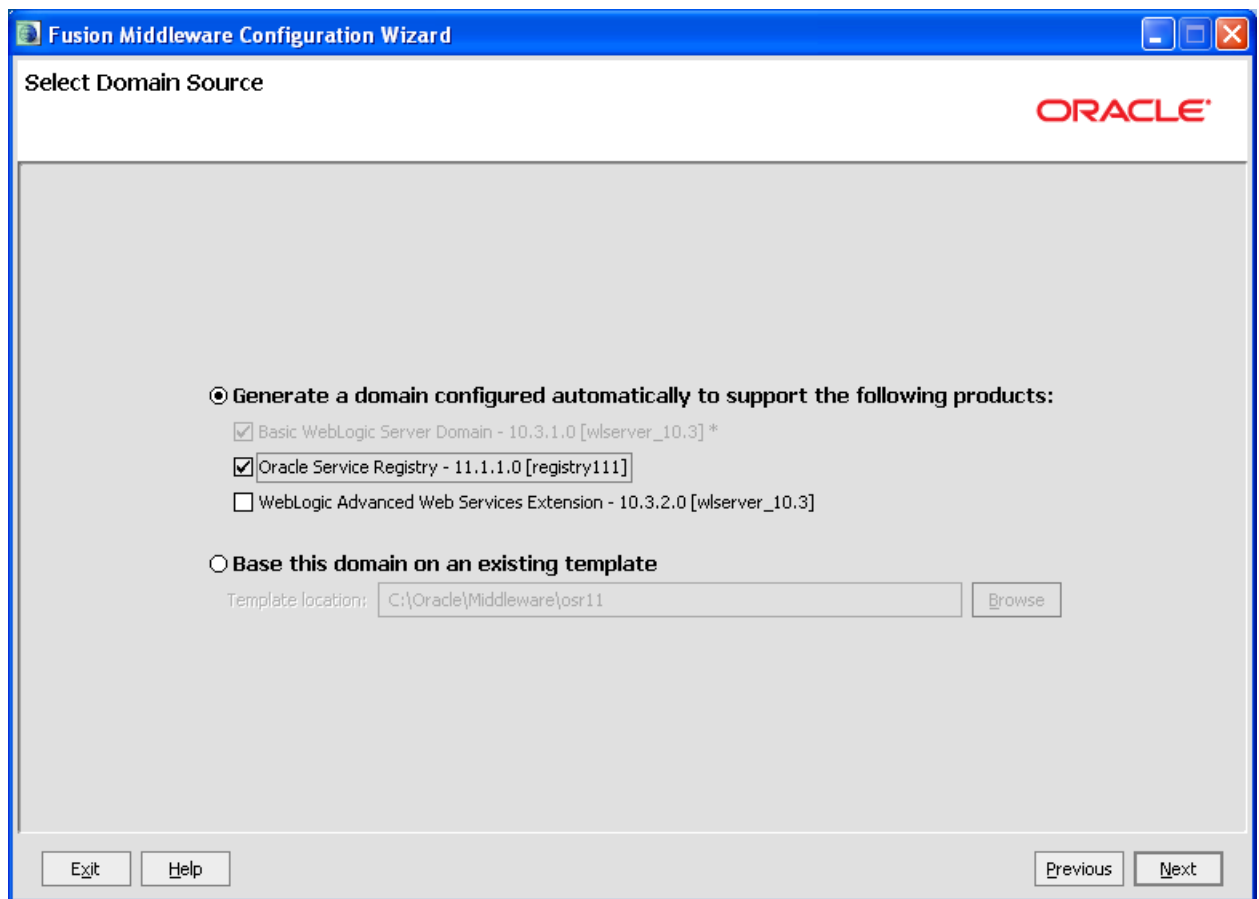Figure 15. Select Domain Source

4. In the **Specify Domain Name and Location** window, enter the name and location for the domain.

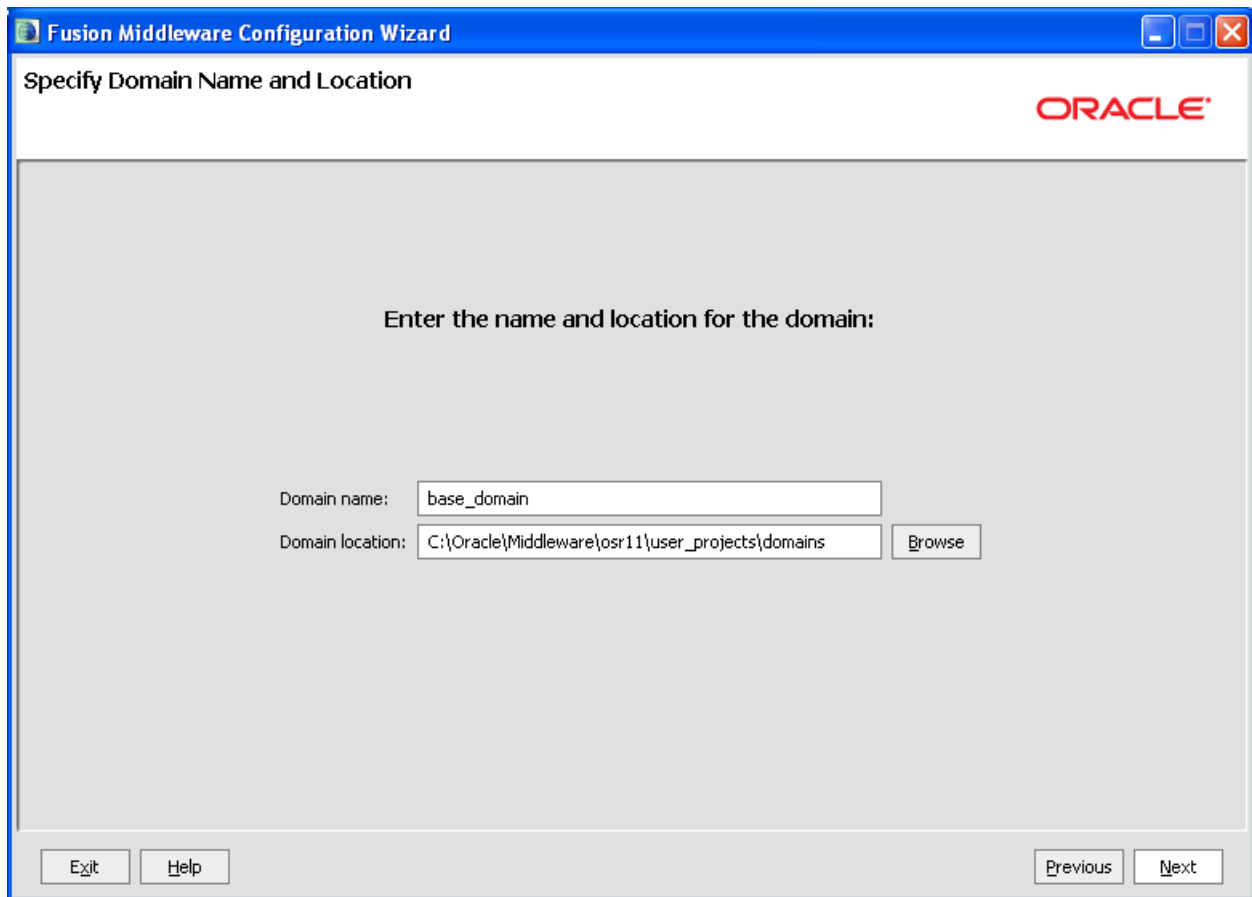Figure 16. Domain Name and Location

Fusion Middleware Configuration Wizard

Specify Domain Name and Location

ORACLE

Enter the name and location for the domain:

Domain name:

Domain location:

5. In the **Configure Administrator Username and Password** window, enter a valid username and password, and click Next. This username is used to boot the Administration Server and connect to it


Figure 17. Configure Administrator Username and Password

The screenshot shows the 'Fusion Middleware Configuration Wizard' window. The title bar reads 'Fusion Middleware Configuration Wizard'. The main title is 'Configure Administrator User Name and Password'. The Oracle logo is in the top right corner. Below the title, there is a 'Discard Changes' button. The main area contains four input fields:


- *User name: weblogic
- *User password: *****
- *Confirm user password: *****
- Description: This user is the default administrator.

At the bottom, there are buttons for 'Exit', 'Help', 'Previous', and 'Next'.

6. In the **Configure Server Start Mode and JDK** window, specify whether to start the server in development mode or production mode, and select which JDK to use

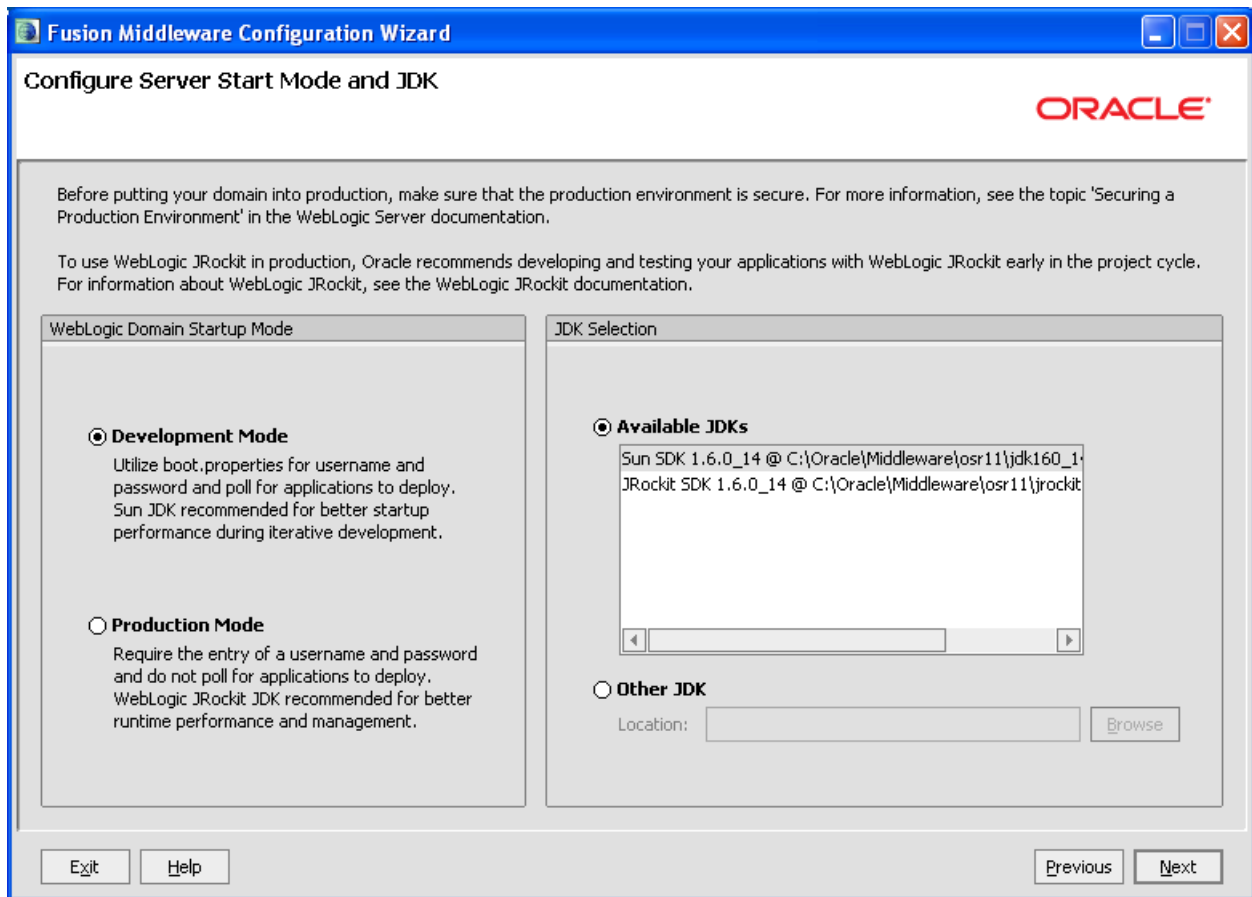Figure 18. Configure Server Start Mode and JDK

7. In the **Configure JDBC Data Sources** window, fill in the empty Password field to connect to the database successfully

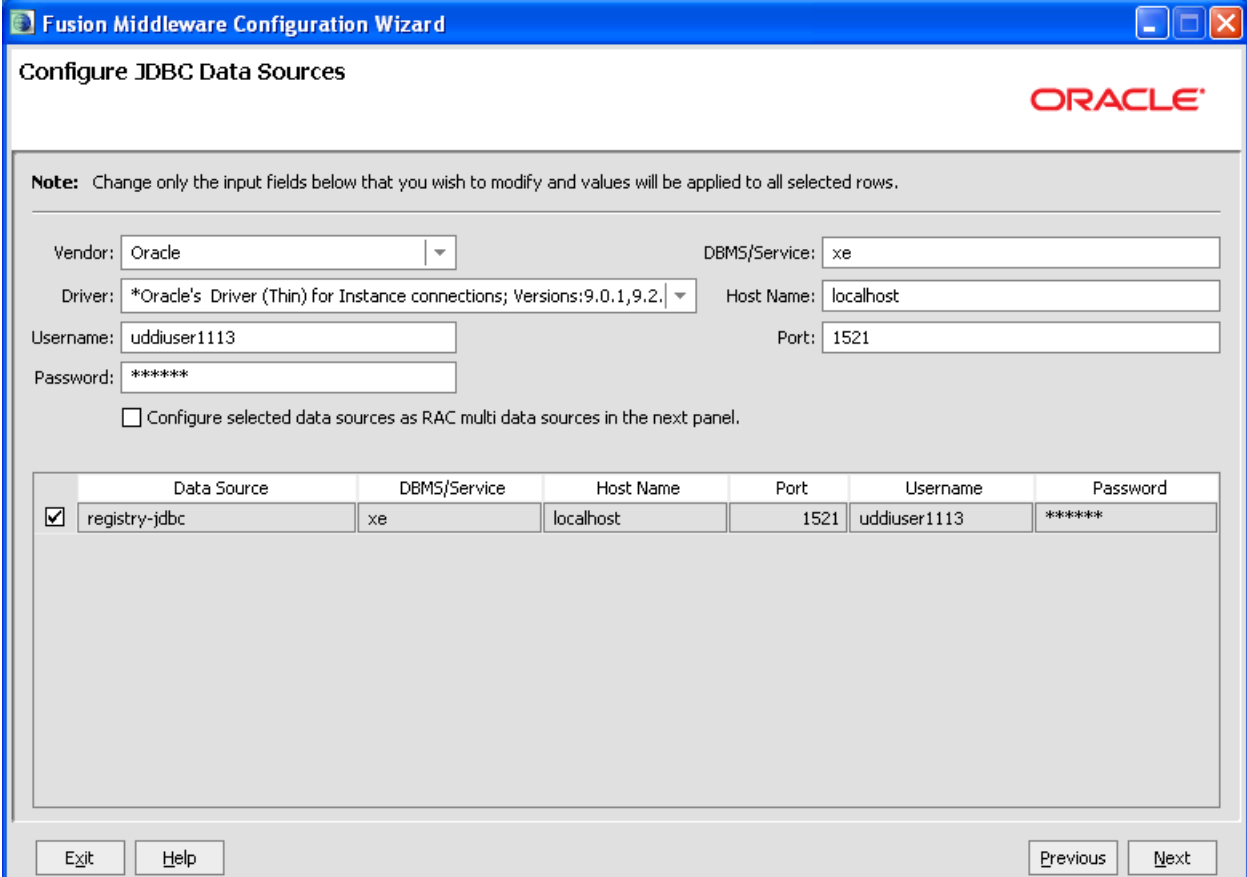Figure 19. Configure JDBC

The screenshot shows the 'Configure JDBC Data Sources' window in the Fusion Middleware Configuration Wizard. The window has a blue title bar and an Oracle logo in the top right. A note at the top states: 'Note: Change only the input fields below that you wish to modify and values will be applied to all selected rows.' Below the note are input fields for Vendor (Oracle), DBMS/Service (xe), Driver (*Oracle's Driver (Thin) for Instance connections; Versions:9.0.1,9.2.), Host Name (localhost), Username (uddiuser1113), and Password (*****). There is a checkbox for 'Configure selected data sources as RAC multi data sources in the next panel.' which is unchecked. Below these fields is a table with columns: Data Source, DBMS/Service, Host Name, Port, Username, and Password. The table contains one row with the following values: registry-jdbc, xe, localhost, 1521, uddiuser1113, and *****. The 'Data Source' column has a checkbox next to it which is checked. At the bottom of the window are buttons for Exit, Help, Previous, and Next.

Vendor: Oracle **DBMS/Service:** xe

Driver: *Oracle's Driver (Thin) for Instance connections; Versions:9.0.1,9.2. **Host Name:** localhost

Username: uddiuser1113 **Port:** 1521


Password: *****

☐ Configure selected data sources as RAC multi data sources in the next panel.


	Data Source	DBMS/Service	Host Name	Port	Username	Password
☒	registry-jdbc	xe	localhost	1521	uddiuser1113	*****

Exit Help Previous Next


8. In the **Test JDBC Data Sources** window, check that the JDBC Data Sources configuration in the previous page is correct.

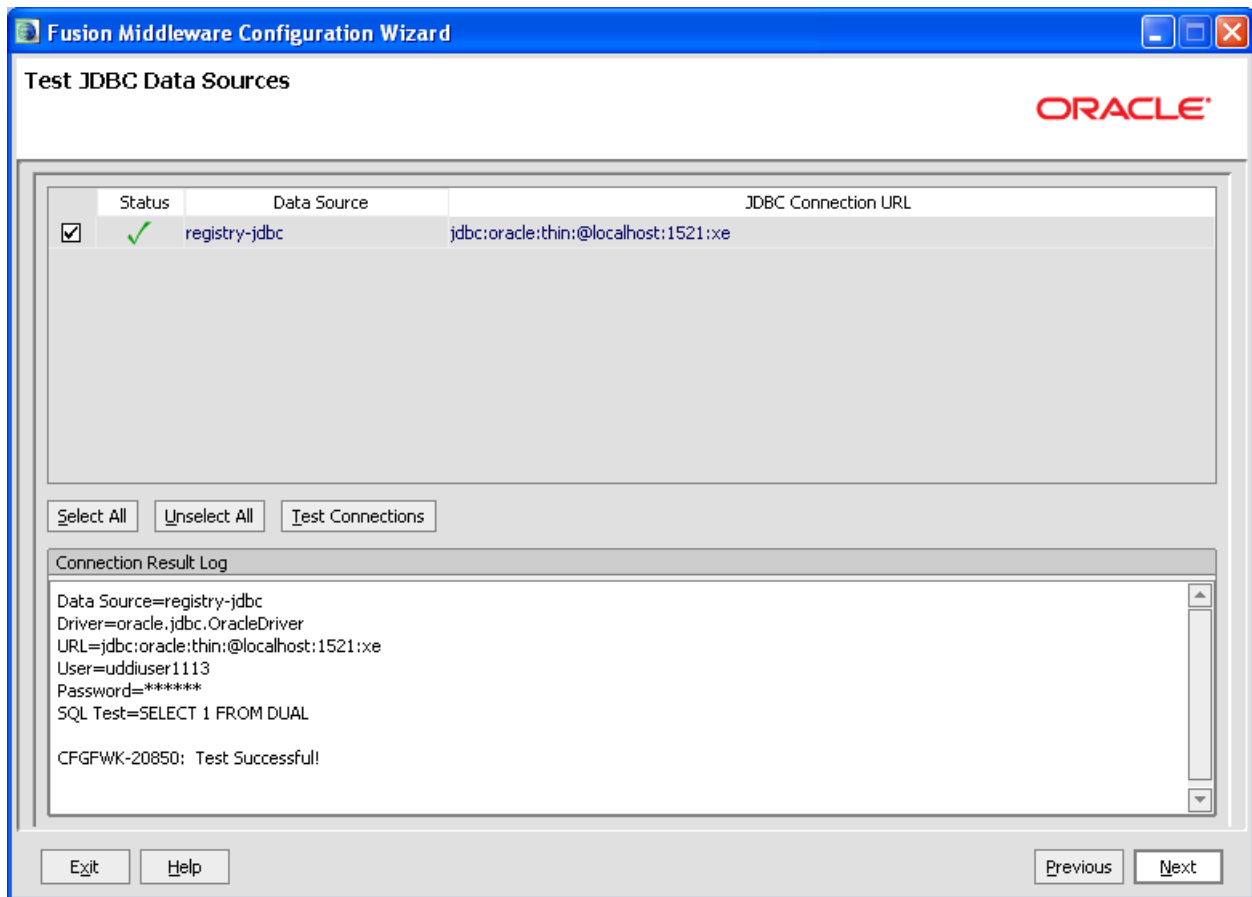Figure 20. Test JDBC Data Sources


9. In **Select Optional Configuration** indicate whether you want to change the distribution of your domain across servers, clusters, and machines

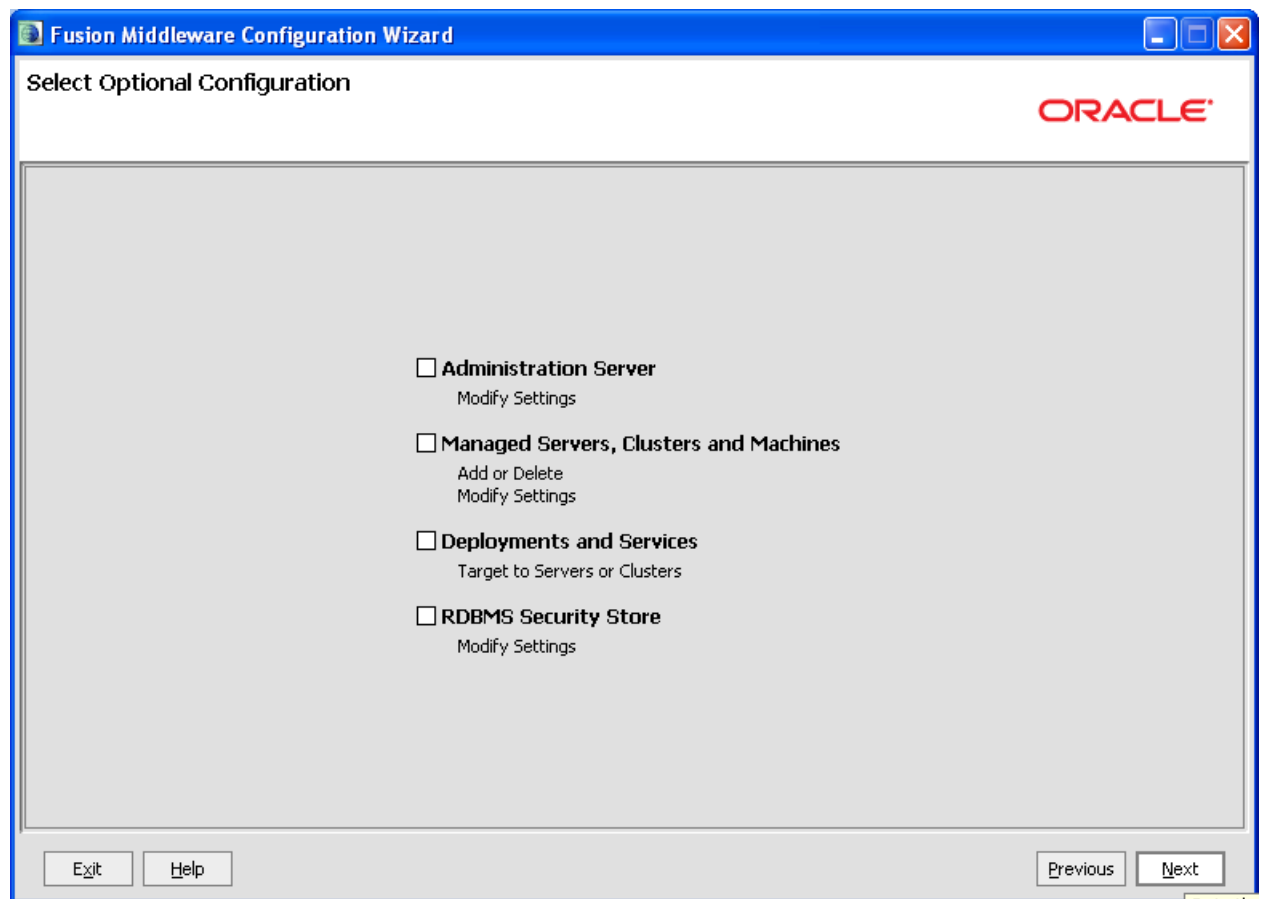Figure 21. Select Optional Configuration


10. In **Configuration Summary**, review the values supplied to the configuration and click Create to create the domain

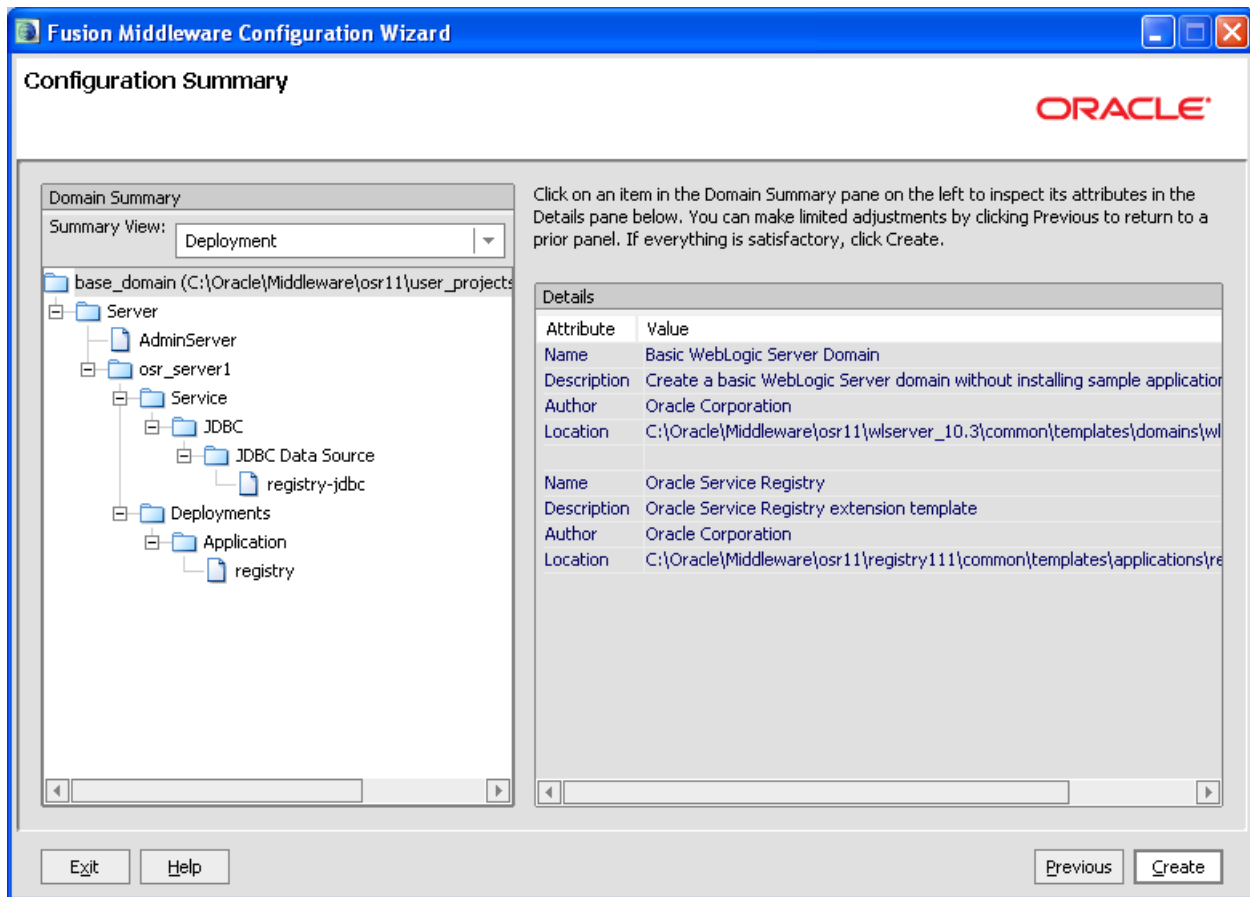Figure 22. Configuration Summary


11. The domain will be created so long as there are no erroneous or conflicting values.

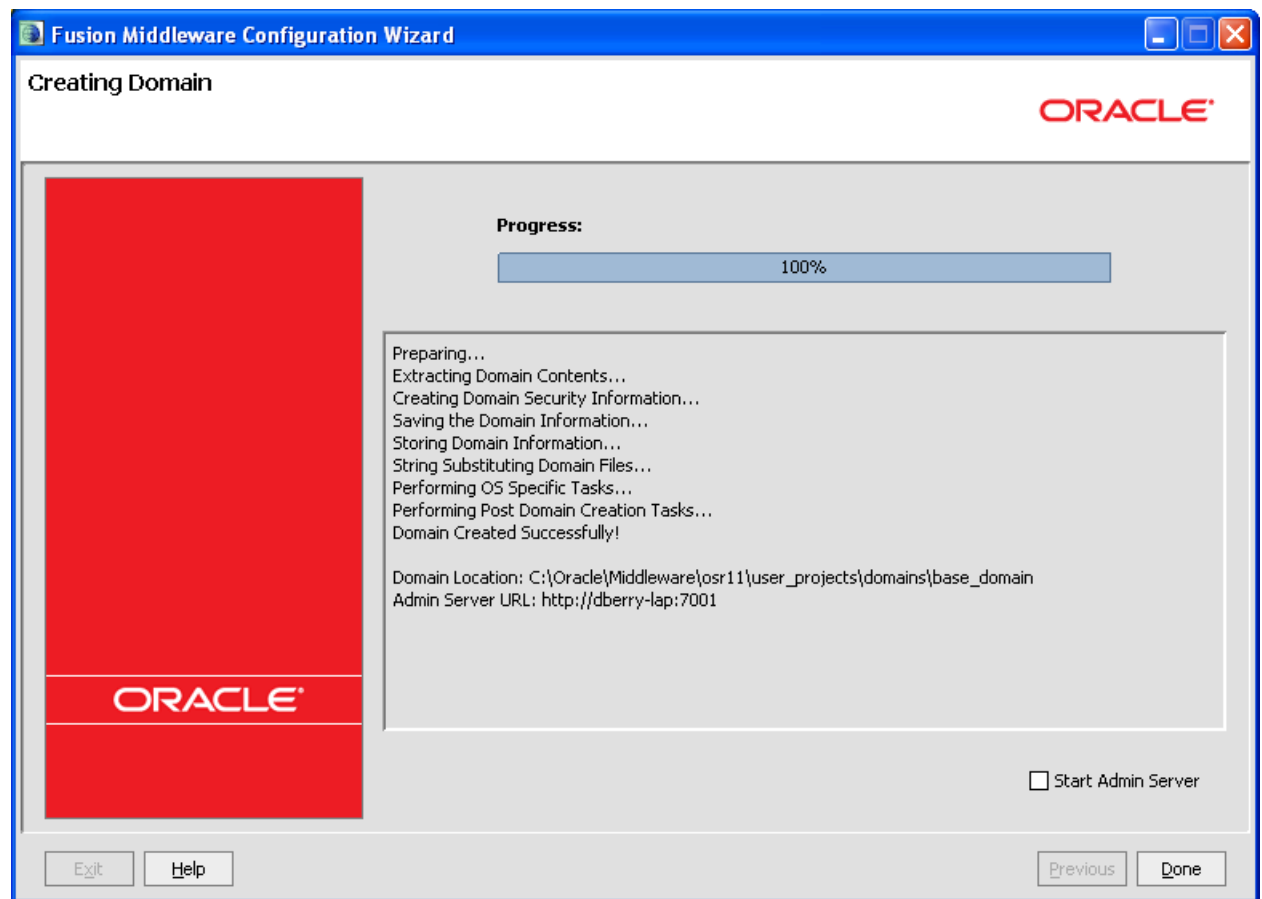Figure 23. Creating Domain**Extend Existing Domain and Target on an existing Managed Server**


1. Start the Configuration Wizard in graphical mode.
 - On Windows: **Start**—>**Programs**—>**BEA Products**—>**Tools**—>**Configuration Wizard** or enter <WEBLOGIC_HOME>/common/bin/config.cmd
 - On UNIX: enter <WEBLOGIC_HOME>/common/bin/config.sh
2. In the **Welcome** window, select Extend an existing WebLogic domain

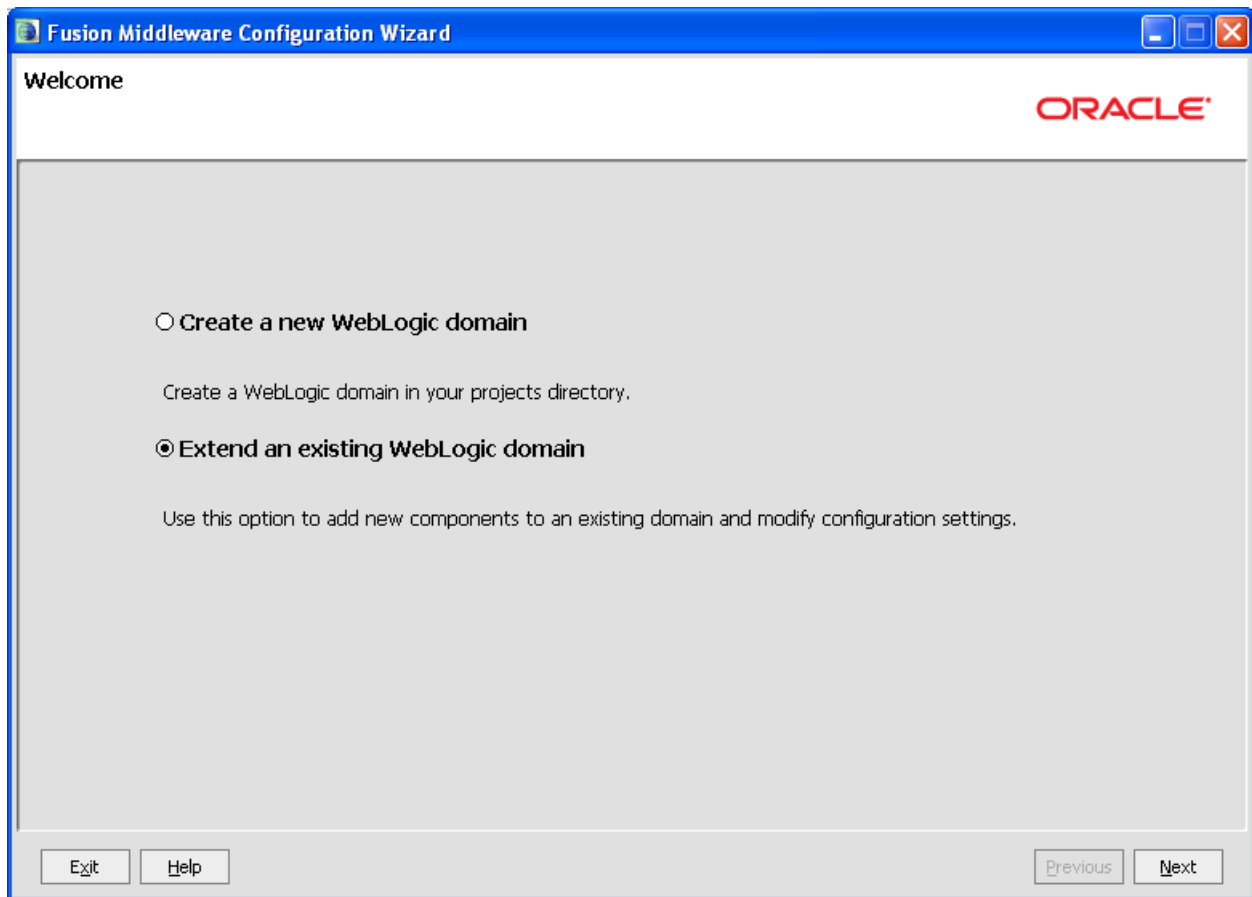Figure 24. Welcome

3. In the **Select a WebLogic Domain Directory** window, navigate to the domain directory that you want to extend

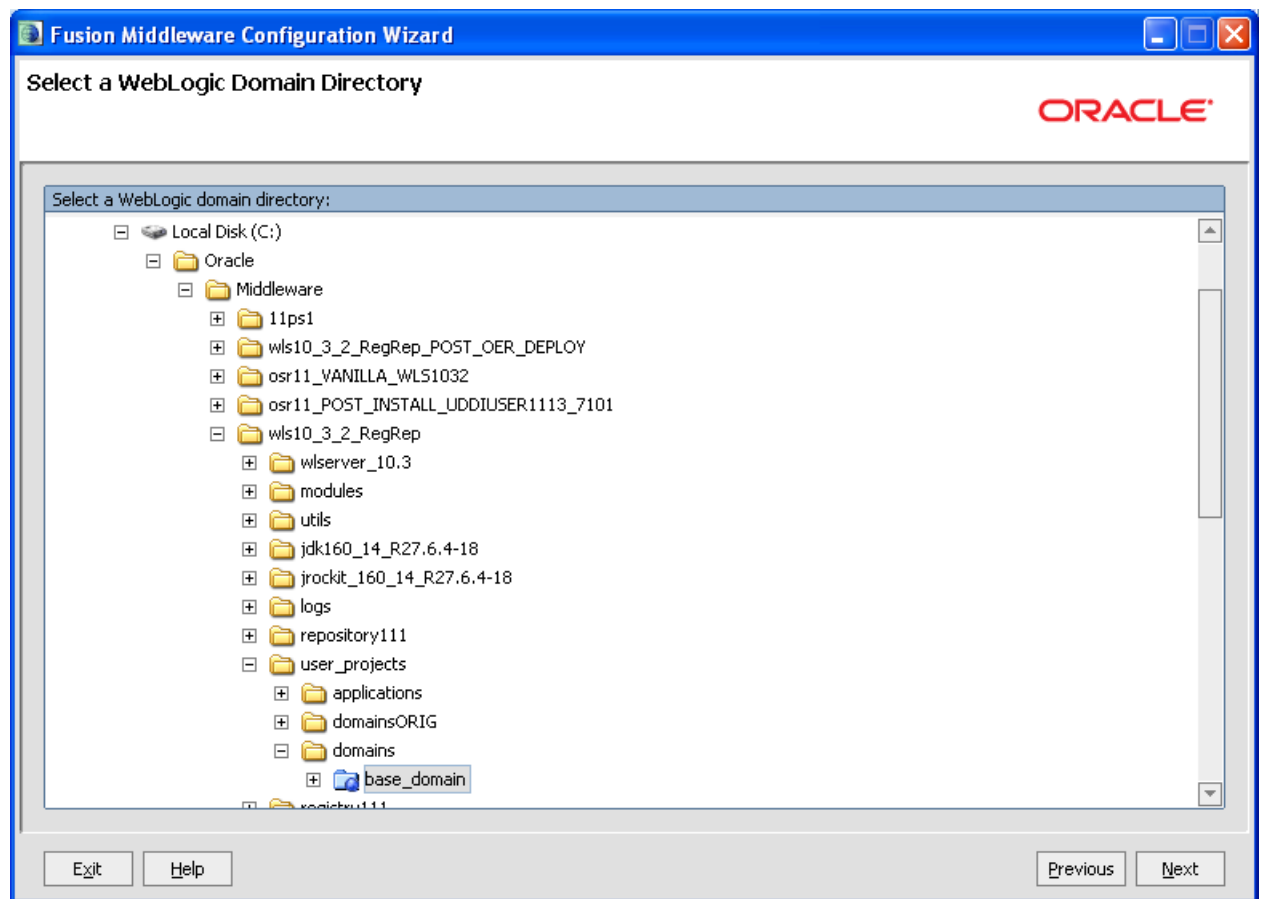Figure 25. Select a WebLogic Domain Directory

4. In the **Select Extension Source** window, you can choose to extend your domain by selecting an Oracle Service Registry

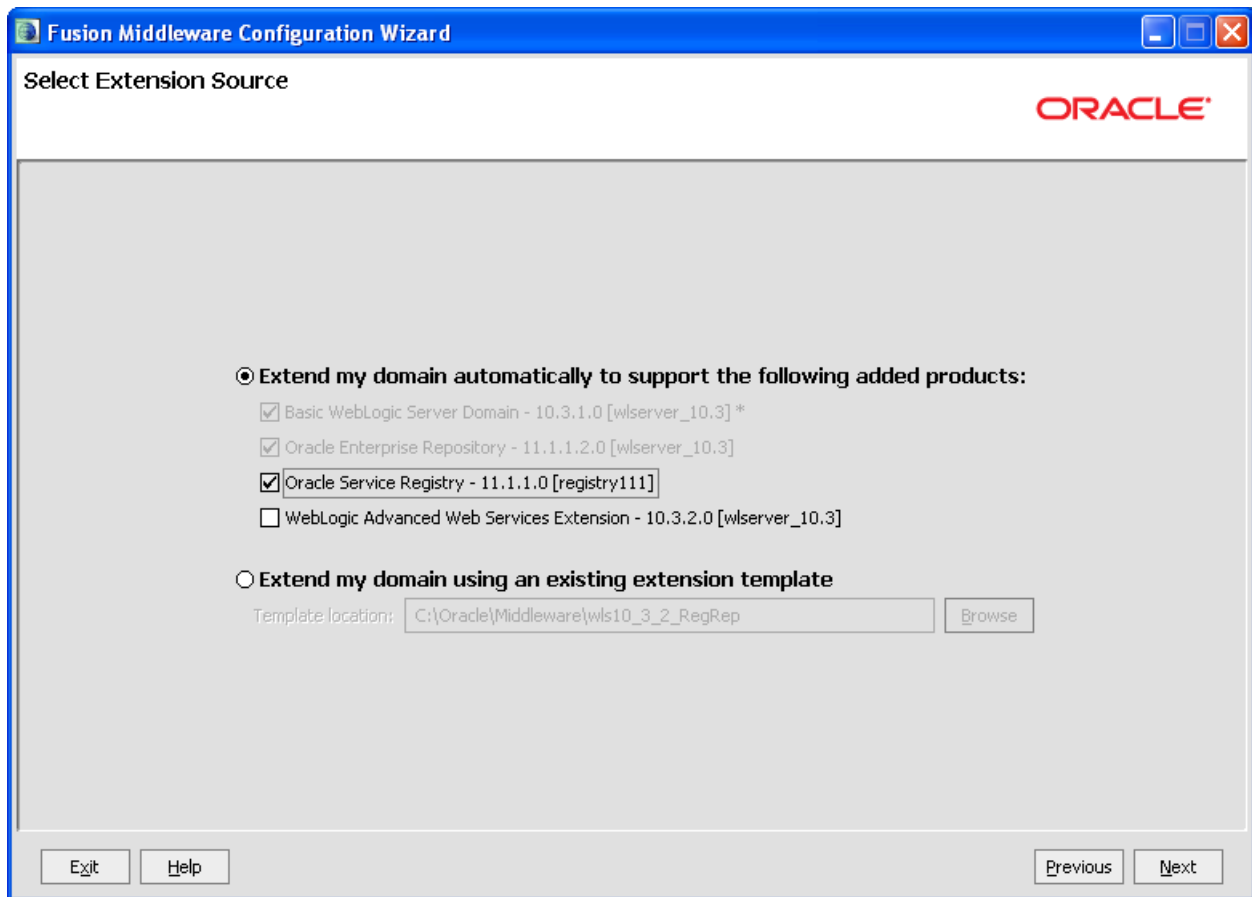Figure 26. Select Extension Source

5. In the **Configure JDBC Data Sources** window, fill in the empty Password field to connect to the database successfully

Figure 27. Configure JDBC Data Sources

Fusion Middleware Configuration Wizard

Configure JDBC Data Sources

Note: Change only the input fields below that you wish to modify and values will be applied to all selected rows.

Vendor: DBMS/Service:

Driver: Host Name:


Username: Port:

Password:

☐ Configure selected data sources as RAC multi data sources in the next panel.


	Data Source	DBMS/Service	Host Name	Port	Username	Password
☒	registry-jdbc	xe	localhost	1521	uddiuser1113	*****

6. In the **Test JDBC Data Sources** window, check that the JDBC Data Sources configuration in the previous page is correct.

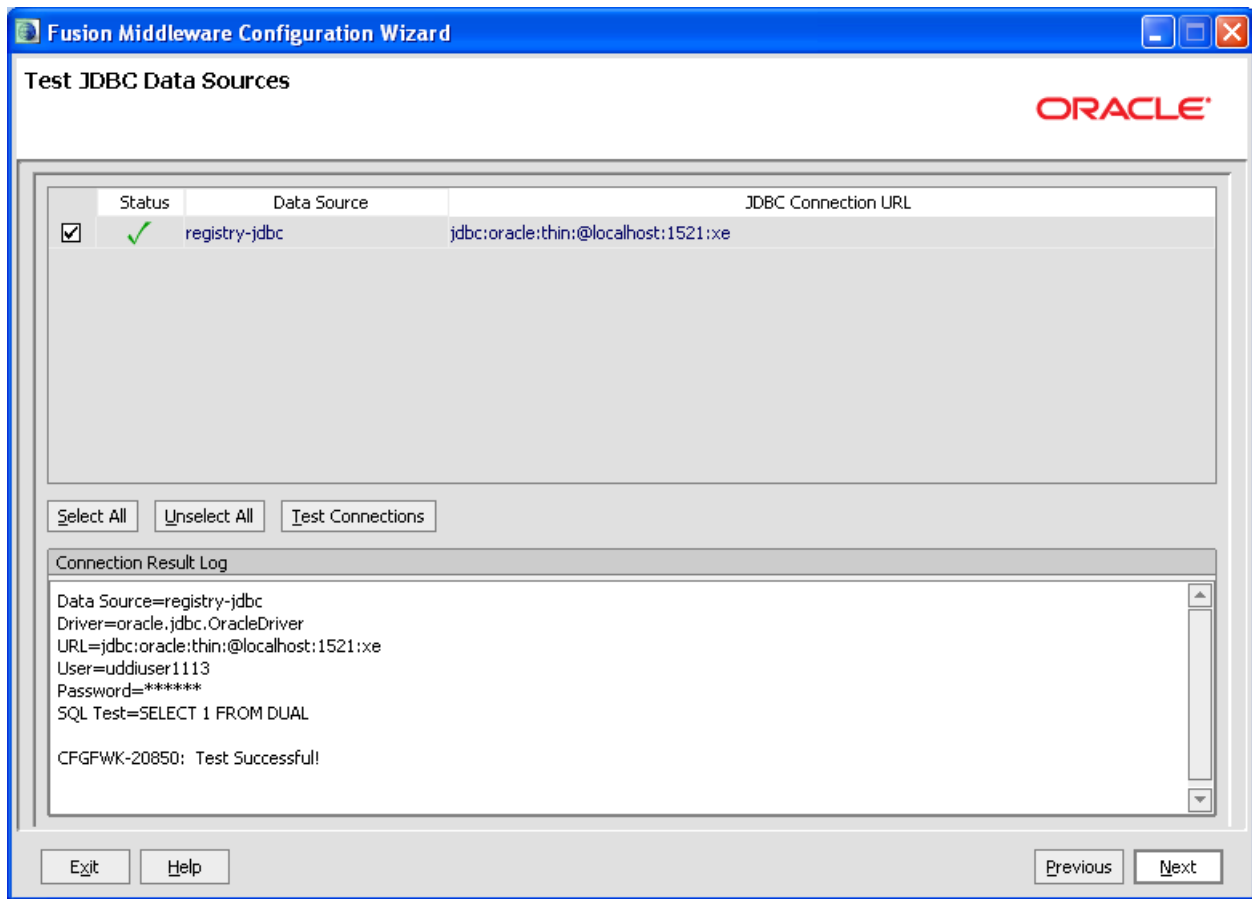
Figure 28. Test JDBC Data Sources

7. In **Select Optional Configuration** window, select these options to configure servers, clusters, and machines


Figure 29. Select Optional Configuration

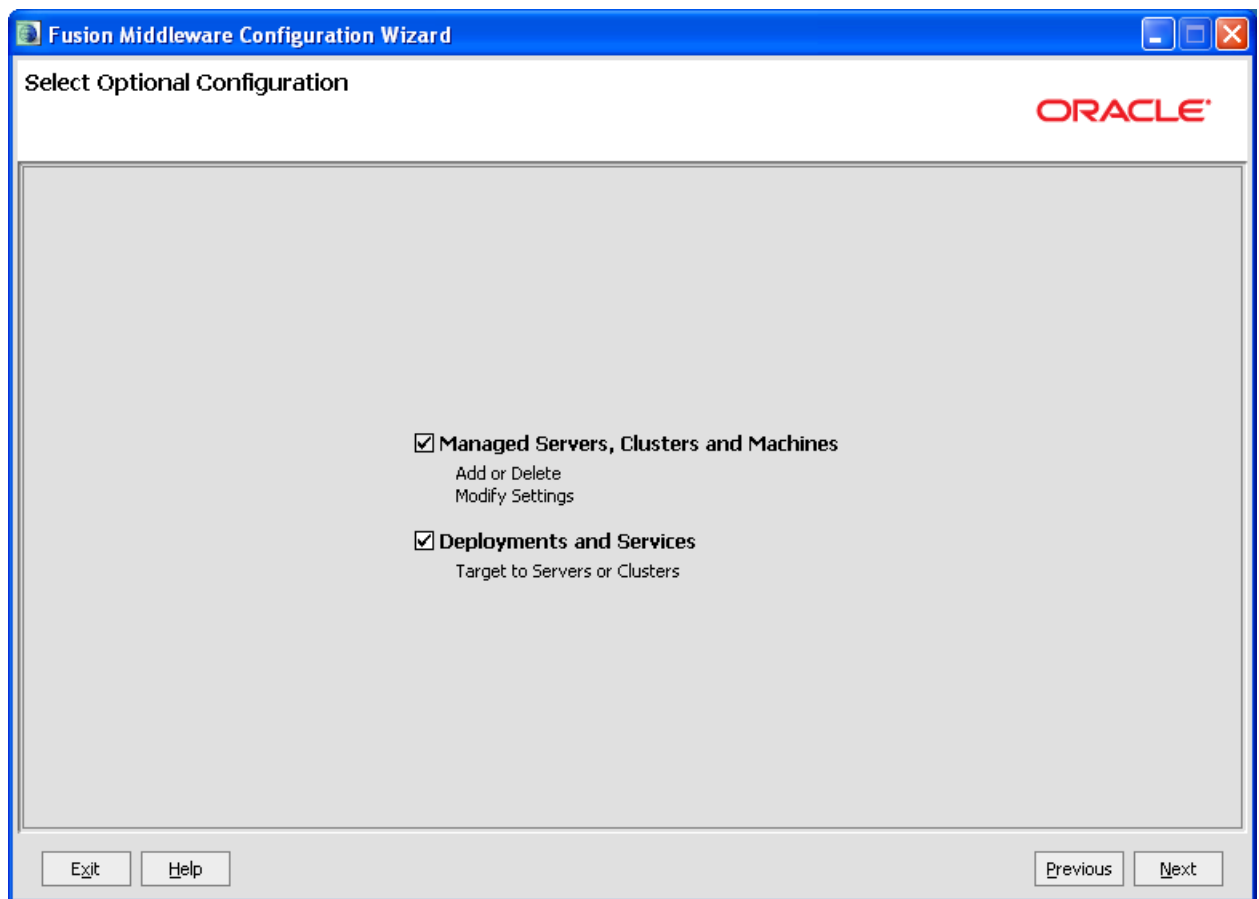


8. In **Configure Managed Servers** window, you can manage servers on this domain.

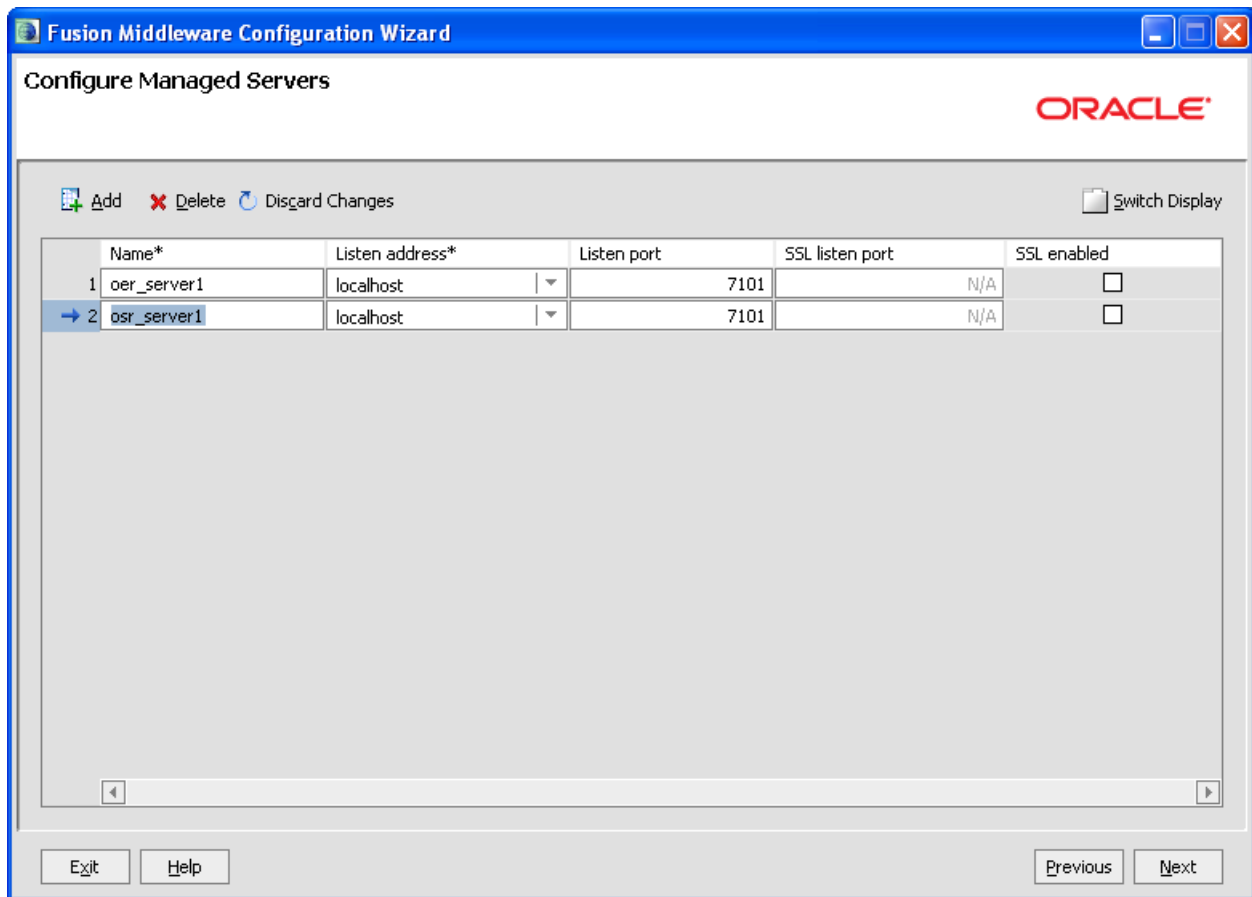Figure 30. Configure Managed Servers


9. In **Configure Clusters** window, you can manage clusters on this domain.

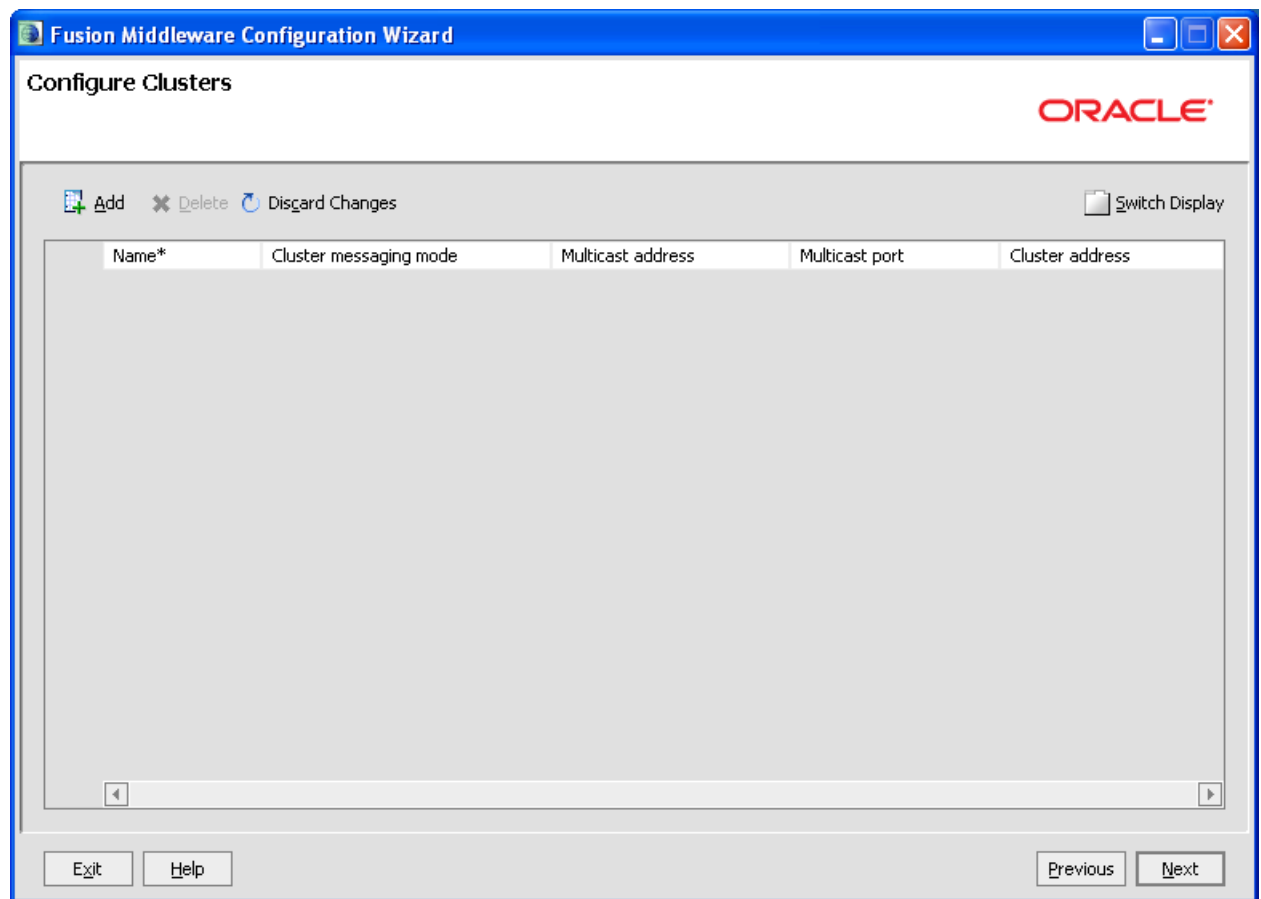Figure 31. Configure Clusters


10. In **Configure Machines** window, you can manage machines on this domain.

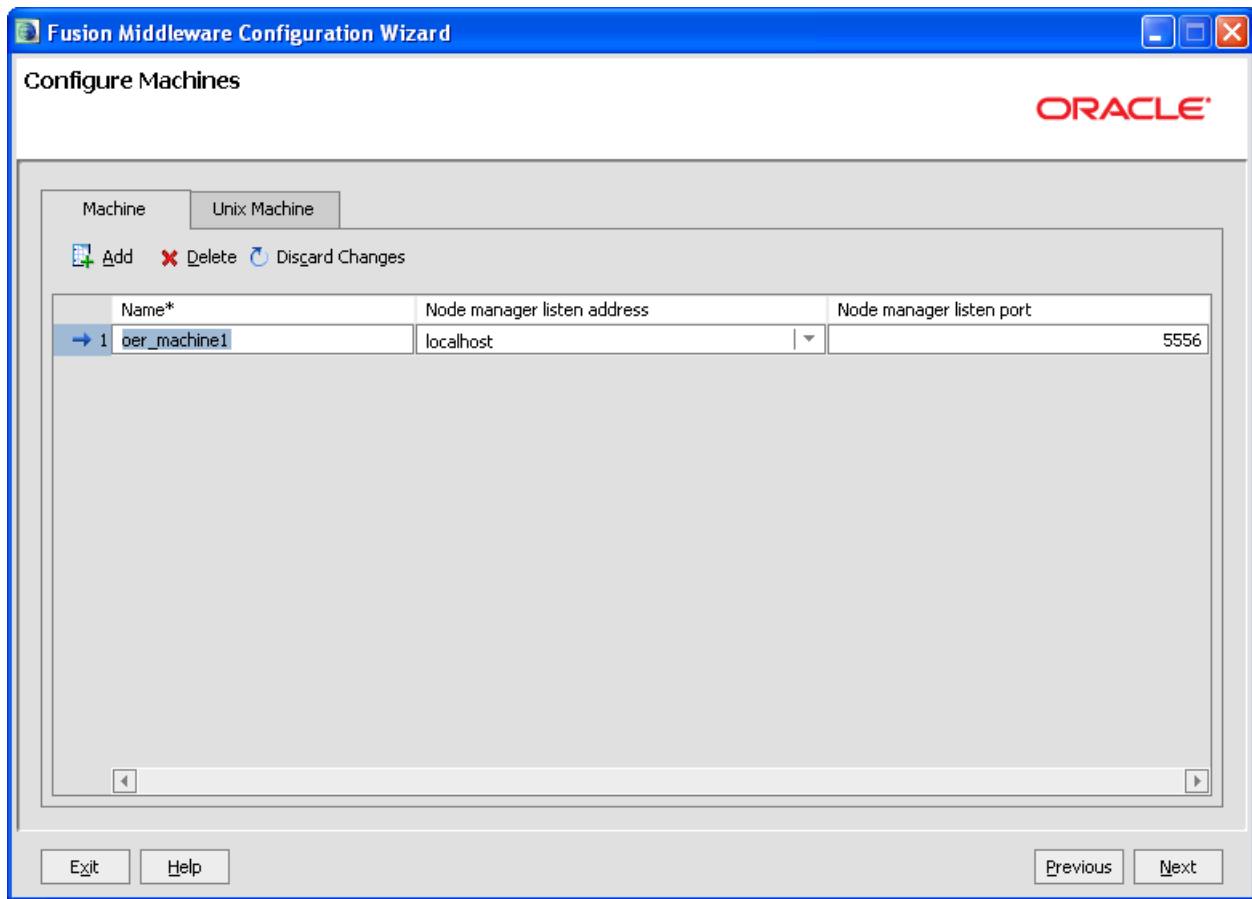Figure 32. Configure Machines


11. In **Assign Servers to Machines** window, you can assign a server on the left panel to a machine on the right panel.

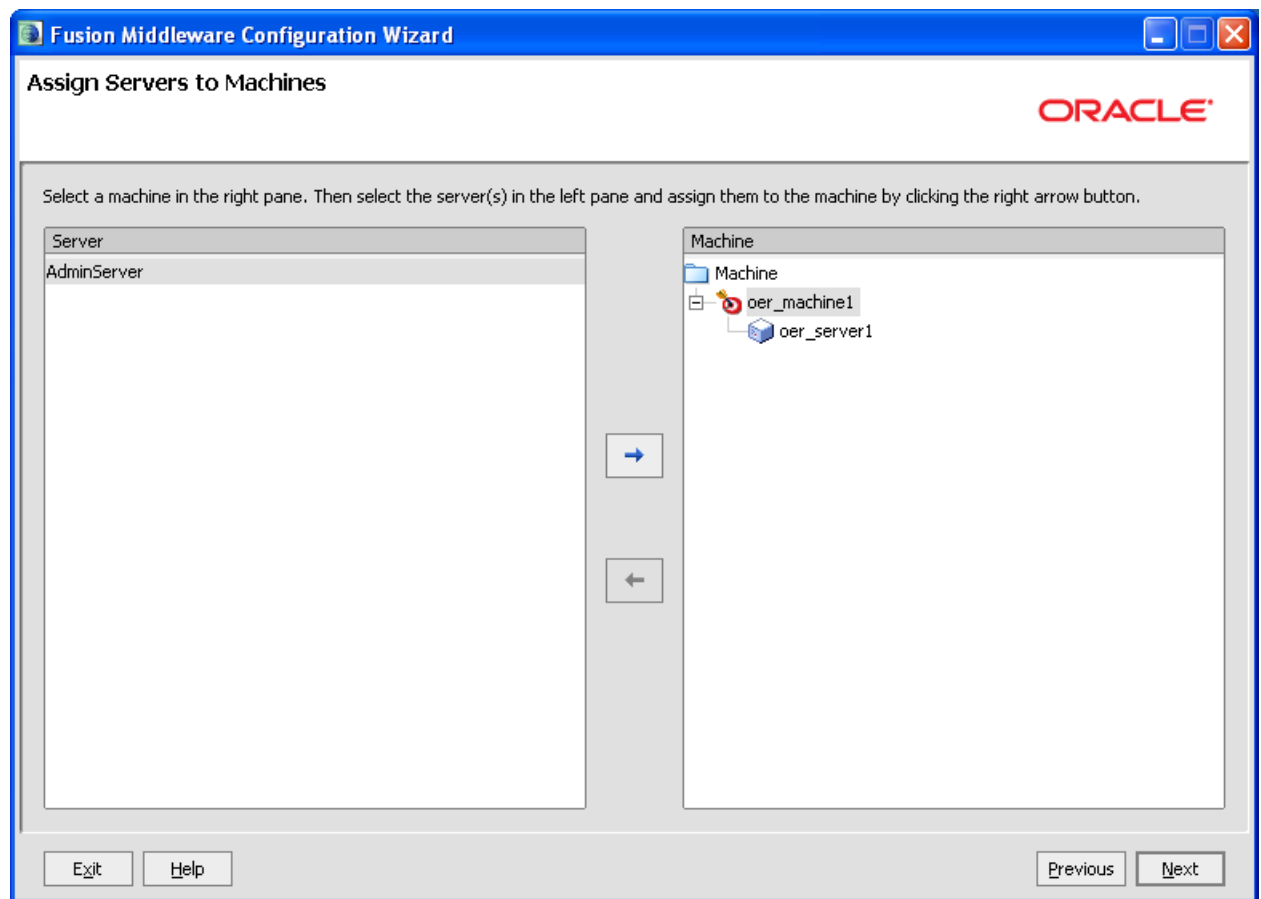Figure 33. Assign Servers to Machines

12. In **Target Deployments to Clusters or Servers** window, select clusters or servers in the left panel and then check deployments in the right panel to target them to the selected clusters or servers.

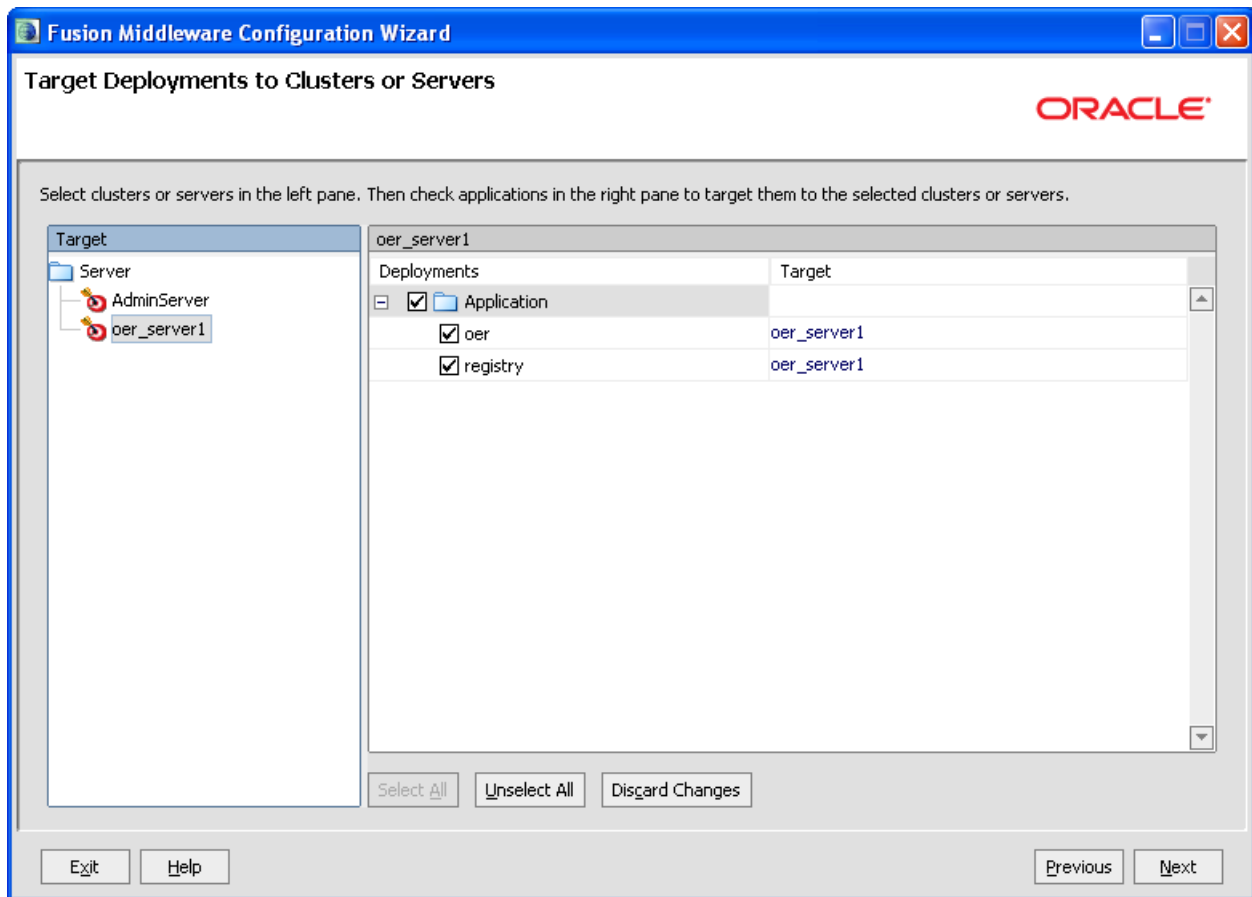Figure 34. Target Deployments to Clusters or Servers

13. In **Target Services to Clusters or Servers** window, select clusters or servers in the left panel and then check services in the right panel to target them to the selected clusters or servers.

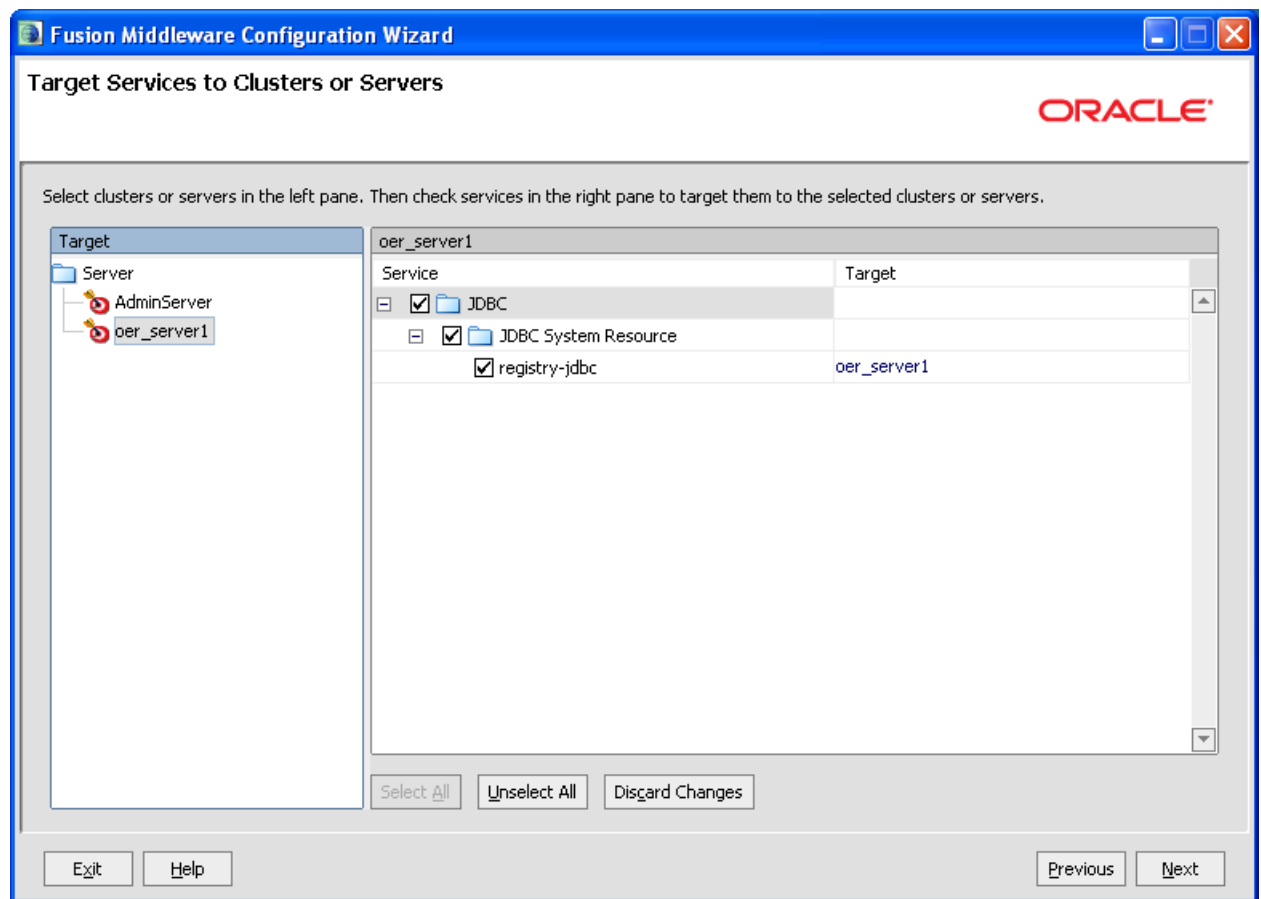Figure 35. Target Services to Clusters or Servers

14. After configuring these environments you can extend the existing domain.

2.3.6. Confirmation and Installation Process

Figure 36. Confirmation

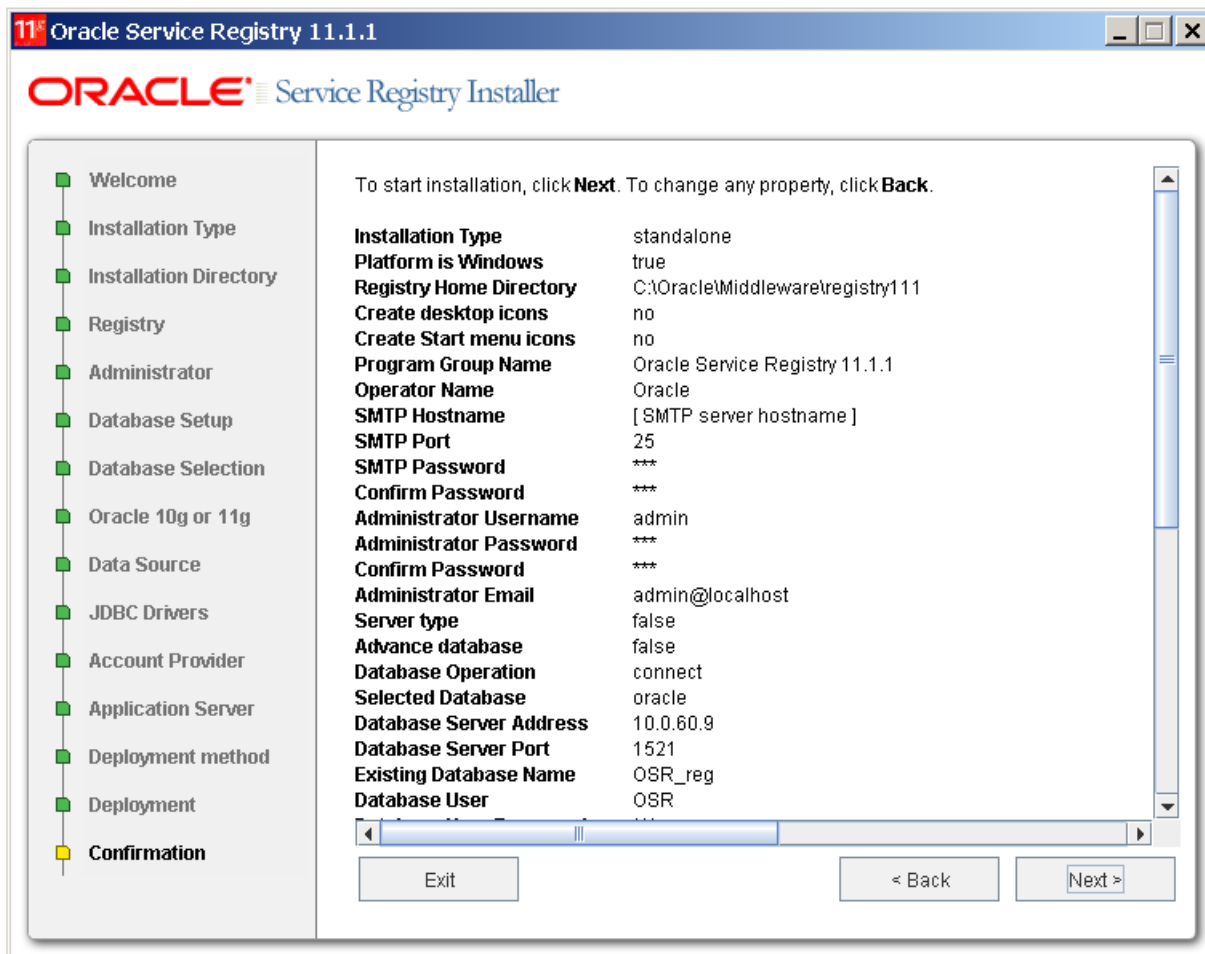
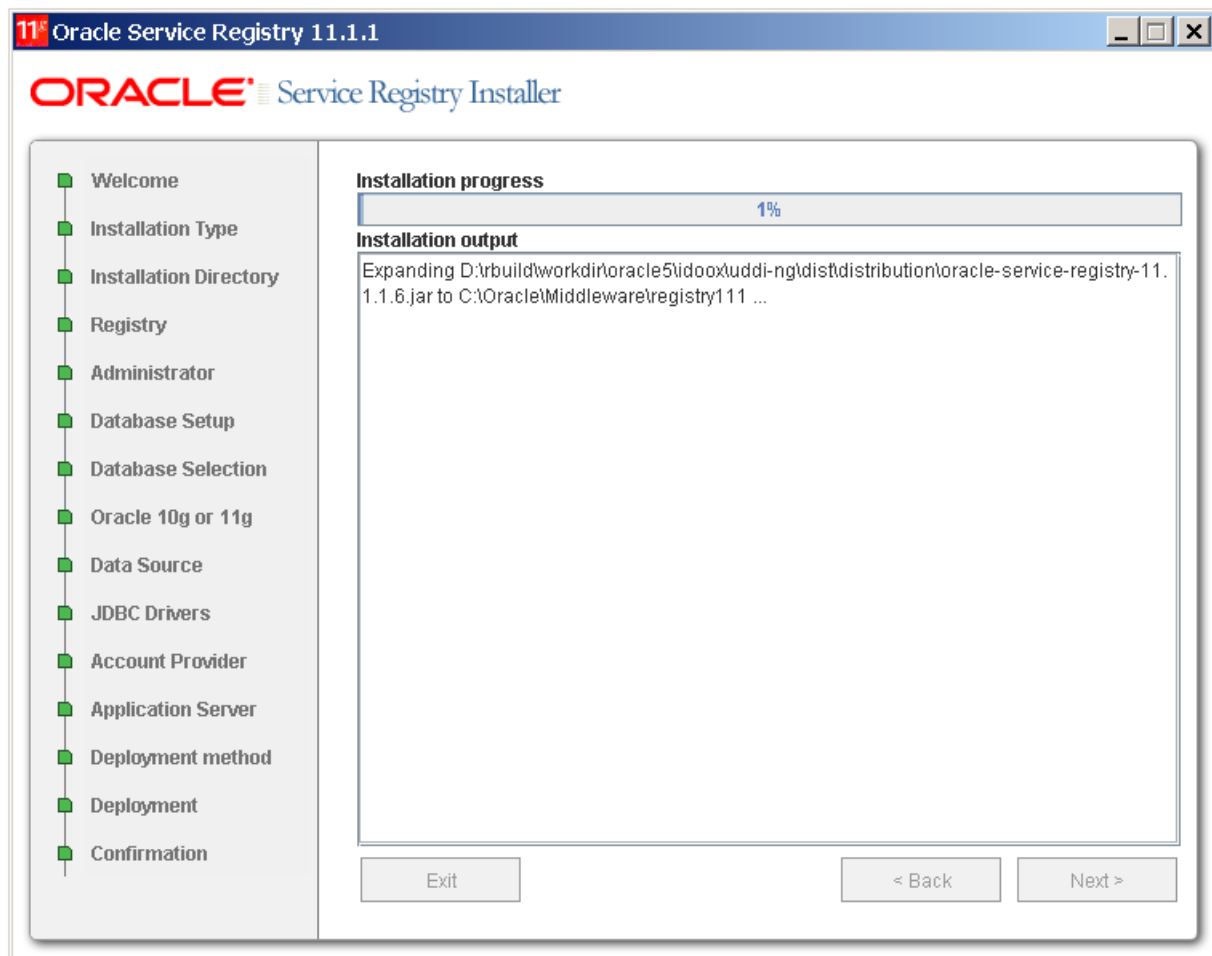
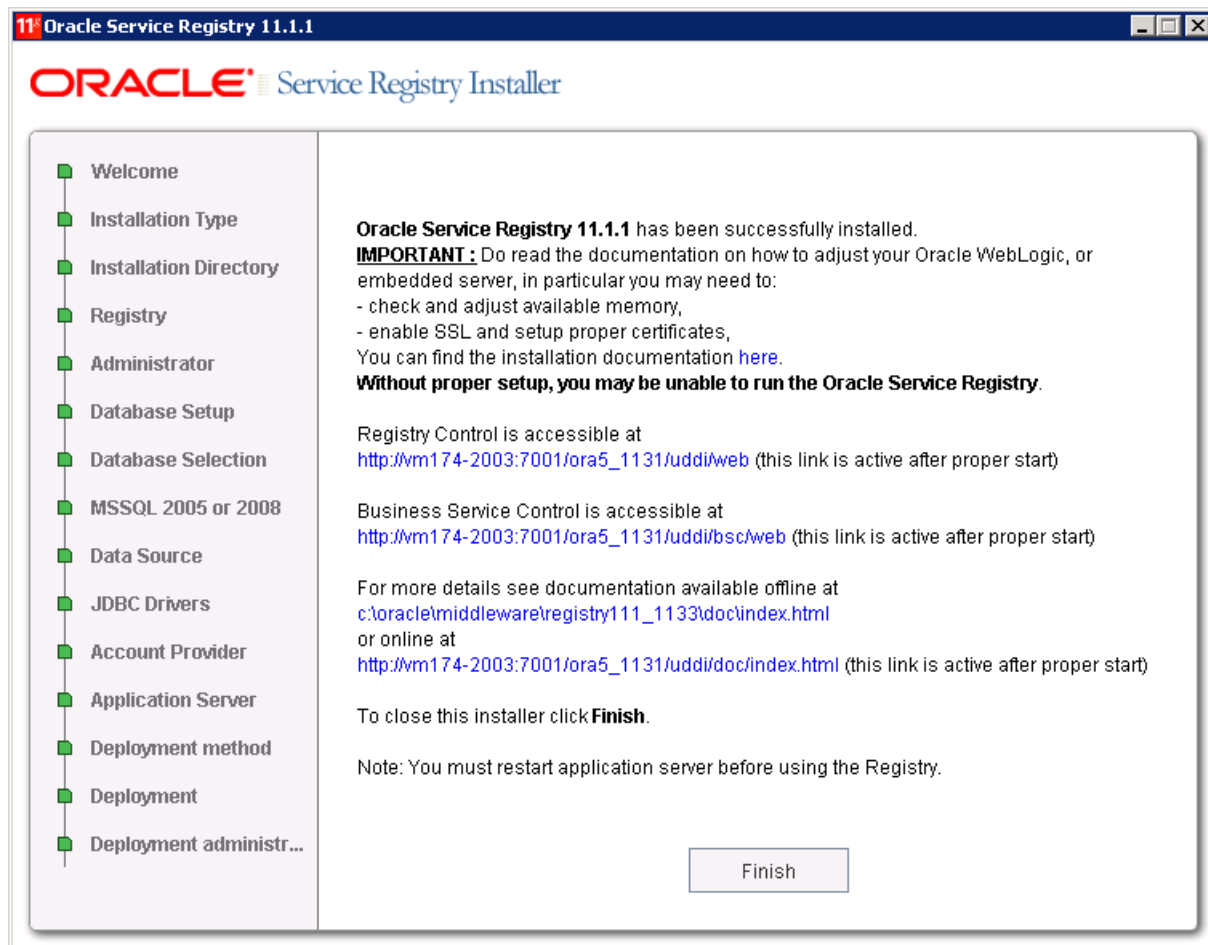


Figure 36 shows a summary of installation information. All required and optional properties are set. If you want to continue with the installation, click **Next** and the install process will start. If you want to change any property click **Back**.

Figure 37. Installation Process

[Figure 37](#) shows the installation output and progress. Installation consists of copying files, configuring the server, and installing the database. When the installation has completed successfully, the **Next** button is enabled. If there is a problem, an error message and **Recovery** button will appear on the screen.

For more information on recovery, see [Section 2.10, Troubleshooting](#)

Figure 38. Finish Panel

On this panel, click **Finish** to conclude the installation.

2.4. Clustering Oracle Service Registry

This section provides general instructions on clustering Oracle Service Registry (OSR) 11.1.1 instances in all supported application server environments.

2.4.1. Clustering Oracle Service Registry with Oracle WebLogic Server

In an Oracle WebLogic Server context, an Oracle Service Registry cluster is defined as a cluster of Oracle WebLogic Server instances, each hosting a Standalone Registry instance, with all instances connecting to the same database schema.

In this context, a cluster of Oracle WebLogic Server instances is defined as two or more instances configured in a cluster topology as described in the relevant Oracle WebLogic Server documentation:

- Using WebLogic Server Clusters Guide.

To install OSR into an Oracle WebLogic Server cluster, you must install a Registry instance into an WLS instance within each Oracle WebLogic Server node. This process is identical to installing OSR in a non-clustered configuration with the following exceptions.

Create the Registry tablespace and schema when you install the first Registry instance.

Connect each subsequent Registry instance you install to this database schema.

Supply the existing database username and password as part of this configuration.

The next key difference in the installation process is that you must supply the same values for the following fields in the **Deployment to Application Server** panel of the installer for each Registry installation. These values, which are described below, will enable all Registry instances within the cluster to receive requests from the same Oracle HTTP Server instance.

HTTP Port

Oracle HTTP Server listener port

SSL Port

secure listener port

Hostname

Oracle WebLogic Server HTTP Server hostname – *not Oracle WebLogic Server instance hostname!*

Application Server Context

Ensure that this value is the same across all instances

Application Server Name

Ensure that this value is the same across all instances

If these values are configured correctly, then the Oracle WebLogic Server HTTP Server is able to route requests to any OSR instance in the cluster.

For more information, see [Section 7, Cluster Configuration](#).

2.5. Installation Summary

2.5.1. Directory Structure

The installation directory structure contains the following directories:

bin

Contains command-line scripts for running Oracle Service Registry. See [Section 2.6, Command-line Scripts](#).

conf

Contains the Oracle Service Registry configuration files

demos

Contains demos of Oracle Service Registry functionality. For more information, please see [Demos](#).

dist

Contains Oracle Service Registry client packages.

doc

Contains the Oracle Service Registry documentation.

etc

Contains additional data and scripts.

lib

Contains the Oracle Service Registry libraries

log

Contains logs of installation, setup, and server output. See [Section 2.9, Logs](#).

work

This directory is a working area used by the command line tools.

2.5.2. Registry Endpoints

Oracle Service Registry is configured as follows. The <host name>, <http port> and <ssl port> are specified during installation and the <application name> are specified earlier. See [Section 2.3.5, Application Server Settings](#) for details. For each endpoint you can use either http or ssl port.

- Business Service Control home page: `http://<host name>:<http port>/<application name>/uddi/bsc/web`
- Registry Control home page: `http://<host name>:<http port>/<application name>/uddi/web`
- UDDI Inquiry API endpoint - `http://<host name>:<port>/<application name>/uddi/inquiry`

See Developer's Guide, [Section 2.1.2, UDDI Version 1](#), [Section 2.1.3, UDDI Version 2](#), [Section 2.1.4, UDDI Version 3](#).

- UDDI Publishing API endpoint - `http://<host name>:<port>/<application name>/uddi/publishing`

See Developer's Guide, [Section 2.1.2, UDDI Version 1](#), [Section 2.1.3, UDDI Version 2](#), [Section 2.1.4, UDDI Version 3](#).

- UDDI Security Policy v3 API endpoint - `http://<host name>:<port>/<application name>/uddi/security`

See Developer's Guide, [Section 2.1.4, UDDI Version 3](#).

- UDDI Custody API endpoint - `http://<host name>:<port>/<application name>/uddi/custody`

See Developer's Guide, [Section 2.1.4, UDDI Version 3](#).

- UDDI Subscription API endpoint - `http://<host name>:<port>/<application name>/uddi/subscription`

See Developer's Guide, [Section 2.1.4, UDDI Version 3](#).

- Taxonomy API endpoint - `http://<host name>:<port>/<application name>/uddi/taxonomy`

See Developer's Guide, [Section 2.2.2, Taxonomy](#).

- Category API endpoint - `http://<host name>:<port>/<application name>/uddi/category`

See Developer's Guide, [Section 2.2.3, Category](#).

- Administration Utilities API endpoint - `http://<host name>:<port>/<application name>/uddi/administrationUtils`

See Developer's Guide, [Section 2.2.5, Administration Utilities](#).

- Replication API endpoint - `http://<host name>:<port>/<application name>/uddi/replication`

See Developer's Guide, [Section 2.2.6, Replication](#).

- Statistics API endpoint - `http://<host name>:<port>/<application name>/uddi/statistics`

See Developer's Guide, [Section 2.2.7, Statistics](#).

- WSDL2UDDI API endpoint - `http://<host name>:<port>/<application name>/uddi/wsdl2uddi`

See Developer's Guide, [Section 2.2.8, WSDL Publishing](#).

- XML2UDDI API endpoint - `http://<host name>:<port>/<application name>/uddi/xml2uddi`

See Developer's Guide, [Section 2.2.9, XML Publishing](#).

- XSD2UDDI API endpoint - `http://<host name>:<port>/<application name>/uddi/xsd2uddi`

See Developer's Guide, [Section 2.2.10, XSD Publishing](#).

- XSLT2UDDI API endpoint - `http://<host name>:<port>/<application name>/uddi/xslt2uddi`

See Developer's Guide, [Section 2.2.11, XSLT Publishing](#).

- Extended Inquiry API endpoint - `http://<host name>:<port>/<application name>/uddi/inquiryExt`
- Extended Publishing API endpoint - `http://<host name>:<port>/<application name>/uddi/publishingExt`
- Configurator API endpoint - `http://<host name>:<port>/<application name>/uddi/configurator`
- Account API endpoint - `http://<host name>:<port>/<application name>/uddi/account`

See Developer's Guide, [Section 2.3.1, Account](#).

- Group API endpoint - `http://<host name>:<port>/<application name>/uddi/group`

See Developer's Guide, [Section 2.3.2, Group](#).

- Permission API endpoint - `http://<host name>:<port>/<application name>/uddi/permission`

See Developer's Guide, [Section 2.3.3, Permission](#).

2.5.3. Pre-installed Data

Oracle Service Registry contains the following data:

- Operational business - This entity holds miscellaneous nodes' registry settings such as the validation service configuration.
- Built in tModels - tModels required by the UDDI specification.
- Demo data - Data required by the Oracle Service Registry demos. For more information, please see [Demos](#).

2.6. Command-line Scripts

The `bin` subdirectory contains scripts, including those for changing configuration.

2.6.1. Setup

Windows:	<code>setup.bat</code>
UNIX:	<code>./setup.sh</code>

Setup may be launched with the following optional arguments:

```
setup.sh ( .bat ) [--help] | [-h] | [--gui] | [-g] | [-a] | [-u file] | [--use-config file] | [-s file] | [--save-config file] | [--debug]
```

`-h` | `--help` shows help message

-g | --gui starts the setup wizard. The wizard is the default mode.

-a starts the setup wizard using advanced database options.

-u | --use-config *file* starts setup in non-interactive mode; it reads all properties from the specified file.

-s | --save-config *file* starts the setup wizard. All configuration will be saved into specified file instead of execute configuration. The file may be used later in a non-interactive installation. The configuration file contains all passwords entered in the setup. The passwords are normally encoded. If you want clear-text passwords, specify also option -t | -save-clear-text

--debug the setup produces more information to localize problems or errors.

To change the Oracle Service Registry configuration after installation follow [Section 2.7, Reconfiguring After Installation](#).

2.6.2. Signer

Windows:	signer.bat
UNIX:	./signer.sh

The Signer is a graphical application that can be used to add, remove, and verify the signatures of UDDI structures you have published. Follow [Section 5.6, Signer Tool](#).

2.6.3. SoapSpy

Windows:	SoapSpy.bat
UNIX:	./SoapSpy.sh

Debugging tool to control low level soap communication. Follow [Section 5, How to Debug](#).

2.6.4. PStoreTool

Windows:	PStoreTool.bat
UNIX:	./PStoreTool.sh

Protected security storage manipulation tool. See [Section 8, PStore Tool](#).

2.6.5. env

Windows:	env.bat
UNIX:	./env.sh

Helper script to set system variables. We recommend not to use it directly.

2.7. Reconfiguring After Installation

Many settings may be changed after installation using the Setup tool.


The Setup tool also facilitates other functions such as apply multi-host support (described in [Section 3.2, Change Server URLs](#)), deployment to application server and data migration from previous installation (described in [Section 9, Migration](#)).

The Setup tool contains similar panels to those in the installation tool. To run this tool, execute the following script from the bin subdirectory of your installation:

Windows:	setup.bat
UNIX:	./setup.sh

See command-line parameters in [Section 2.6.1, Setup](#).

By default setup starts in wizard mode (GUI) as shown here:

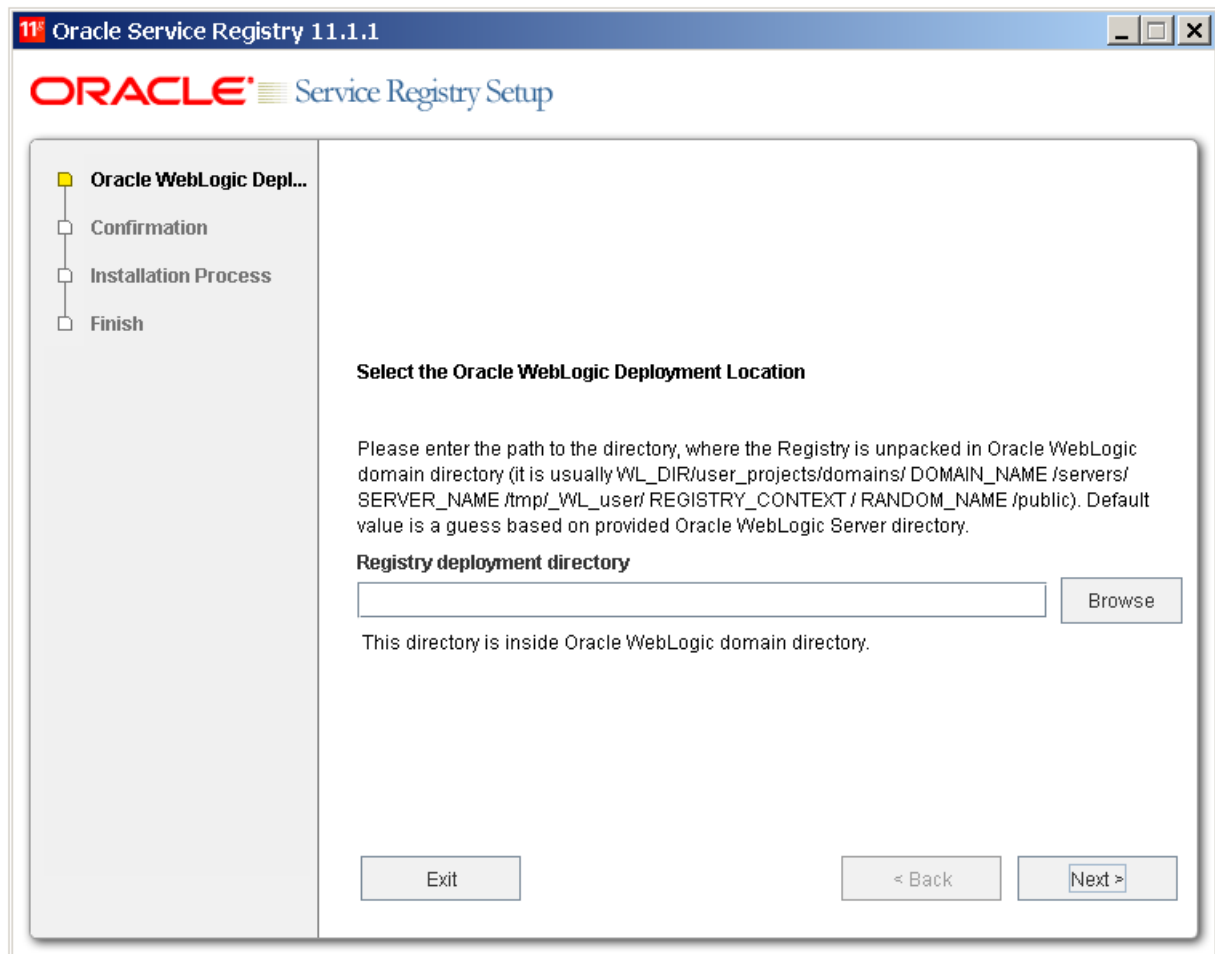

The first screen prompts for a directory which is used to find configuration files. This directory should contain most current configuration files. Setup asks for different directories to find configurations depending on deployment type:


- Oracle WebLogic - The Setup Tool will ask for directory where Registry is unpacked inside WebLogic. The exact location differs, but it usually follows this pattern: WL_DIR/user_projects/domains/ DOMAIN_NAME /servers/AdminServer/tmp/_WL_user/registry/ RANDOM_NAME /public
- Embedded HTTP/HTTPS Server - The Setup Tool will ask for Registry installation directory (which is also called REGISTRY_HOME).



Caution

If you do not set up the **Deployment location** properly, most of Setup Tool functions do not work properly. The Setup Tool checks whether the location is filled correctly and warns you before proceeding to further panels if necessary.

The following main screen allows you to choose which setup task you want to perform:

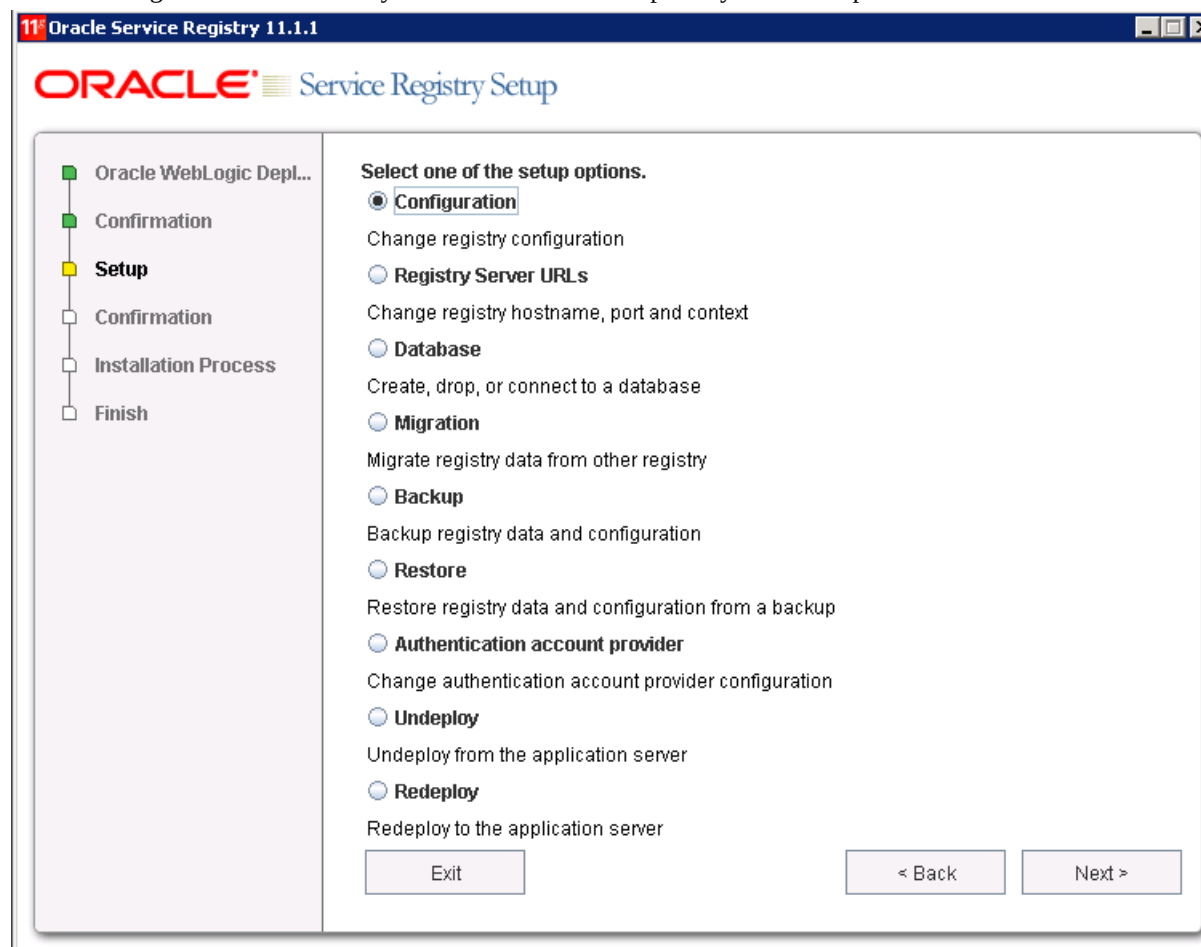

The following topics may be configured:

Configuration

Change server and registry configuration. Follow [Section 3, Server Configuration](#).

Registry Server URLs

Change multi-host support configuration and registry server URLs in database. Follow [Section 3.2, Change Server URLs](#).

Database

Create, drop, or connect to a database. Follow [Section 4, Database Installation](#).

Migration

Migrate registry data from other registry. Follow [Section 9, Migration](#).

Backup and Restore

Backup and restore Oracle Service Registry. Follow [Section 10, Backup](#)

Authentication account provider

Change account backend configuration. Follow [Section 6, External Accounts Integration](#).



Caution

Before you run any of the tasks, *except undeploy*, you have to shut down the running Oracle Service Registry. After the task completes, you may run the Oracle Service Registry again.

2.8. Server Properties

System properties are the main means of configuring Oracle Service Registry as deployed into Oracle WebLogic Server. Default property values can be overridden in the `init-param` elements in the web application deployment descriptor, `web.xml`.

The following properties are checked when Oracle Service Registry is initialized:

Property	Description
<code>wasp.location</code>	This property is mandatory for running a Oracle Service Registry server. It must point to the directory in which Oracle Service Registry is installed.
<code>wasp.config.location</code>	This is an absolute or <code>wasp.location</code> -relative path pointing to the registry configuration file. Setting this property is optional; the default value is <code>conf/clientconf.xml</code> .
<code>wasp.config.include</code>	Comma-separated list of additional config paths to include. These paths can be either absolute or relative to the working directory. This property is optional.
<code>wasp.impl.classpath</code>	Sets a classpath for the registry implementation. This property is optional; if it is not set, registry interfaces and implementation are loaded in the same classloader.
<code>wasp.shutdownhook</code>	Set to true if Oracle Service Registry should be automatically destroyed just before JVM is destroyed. Set to false if you want to manage the shutdown process yourself. The default setting is true .
<code>idoox.debug.level</code>	Determines the number of debugging messages produced by Oracle Service Registry: • 0: none • 1: errors • 2: warnings • 3: infos • 4: debugs This property is optional; the default value is 2 for the client and 3 for the server. The debug level is available in the non-stripped distribution only. The logging level specified by the <code>idoox.debug.level</code> property overrides the level specified in the configuration file determined by the <code>log4j.configuration</code> property
<code>idoox.debug.logger</code>	Specifies which logging system is used, <code>waspLogger</code> or <code>log4j</code> . Default is <code>log4j</code> . Setting the value of this property to <code>waspLogger</code> uses this logger, instead.

Property	Description
log4j.configuration	Specifies the location of the configuration (properties file) for log4j. This property can contain a relative (conf/log4j.config) or absolute (/home/waspuser/log4j.config) path to the configuration file. If it is not set, the default configuration (ConsoleAppender with the pattern %p: %c{2} - %m\n) will be used. An example configuration file for log4j, log4j.config, is located in the conf subdirectory of the Oracle Service Registry installation directory.

2.9. Logs

Log files are created by the Install and Setup tools, and by the running Oracle Service Registry instance. The tool log files can be found in `INSTALL_DIR/log` directory.

These two log files are produced by the Installation and Setup processes and placed into the `INSTALL_DIR/log` directory:

install.log

This log contains installation output information including all properties set during installation, and output from the installation process. If an error occurs during installation, see this log for details.

setup.log

The log of the Setup tool. Any execution of the Setup tool writes the set properties and output from setup processes here. Errors occurring during setup are written to this log.

The server logs are placed to the deployed application root directory on the Oracle WebLogic Server. The default server logs are:

logEvents.log

The standard server output contains informative events which occur on the Oracle Service Registry server.

errorEvents.log

This file contains detailed logs of error events which occur on the Oracle Service Registry server.

replicationEvents.log

Replication process logs can be found in the `REGISTRY_HOME/log/replicationEvents.log` file.

configuratorEvents.log

Cluster configuration events are logged in the `REGISTRY_HOME/log/configuratorEvents.log` file.

The server logs may be configured by one of two logging systems, the in-house `wasLogger` and `log4j`. By default, `log4j` is used. The default `log4j` configuration file is located in `REGISTRY_HOME/conf/log4j.config`.



Note

An explanation of using `log4j` is outside the scope of this documentation; please see [the Apache log4j documentation](http://logging.apache.org/log4j/docs/index.html) [http://logging.apache.org/log4j/docs/index.html] for more information.

2.9.1. Using the syslog Daemon with Oracle Service Registry

The `log4j` system used in Oracle Service Registry can be configured to send log messages to the `syslog` daemon. In order to utilize this feature, your system must be configured as follows:

1. Edit `log4j` in `REGISTRY_HOME/conf/log4j.config` to add a `syslog` appender, as shown below:

```
# Appender to syslog
log4j.appender.syslog=org.apache.log4j.net.syslogAppender
log4j.appender.syslog.syslogHost=localhost
log4j.appender.syslog.Facility=local6
log4j.appender.syslog.layout=org.apache.log4j.PatternLayout
log4j.appender.syslog.layout.ConversionPattern=%p: %c{2} - %m%n
```

Note the following properties in particular:

- syslogHost - Set to host name of the computer where syslog is running.
 - Facility - Oracle Service Registry log message facility recognized by syslog
2. Edit log4j in REGISTRY_HOME/conf/log4j.config to add syslog to the value of the property log4j.category.com.systinet.wasp.events, as shown below:

```
# Appender to syslog
log4j.category.com.systinet.wasp.events=INFO,eventLog,syslog
```

3. Set the syslogd configuration to recognize log messages from Oracle Service Registry. Implicitly, Oracle Service Registry sends log messages to syslog under the facility local6. Therefore, modify the /etc/syslog.conf file by adding the following line of text:

```
local6.* /var/log/registry.log
```



Note

The local6 facility is not mandatory in any way. You may use other localX facilities instead.

Oracle Service Registry will now log messages of all priorities into the file /var/log/registry.log. You should create this file now with appropriate permissions (otherwise syslogd will create it for you automatically with default permissions, which may not be suitable for you).

4. Your syslog daemon must be started with remote logging enabled (the -r command line option). To make sure that:
 - syslogd is running, use the pgrep syslogd command.
 - remote logging is enabled, use the netstat -l command (syslog's udp port is 514).

2.9.2. Running Oracle Service Registry as a UNIX Daemon

On UNIX platforms, Oracle Service Registry can be forced to start as a system daemon using the script REGISTRY_HOME/etc/bin/registry.sh. This script can be renamed registry as per UNIX conventions. The directions for using this script follow.

1. Tailor the service script as needed. The meaning of variables is shown in the following table:

Variable Name	Description	Default Value
REGISTRY_HOME	Home directory of Oracle Service Registry	Oracle Service Registry Installation directory
JAVA_HOME	Home directory of Java	None. This variable must be set manually.
REGISTRY_USER	User under whom the Oracle Service Registry server should run. If this is set to root, it will be changed to nobody.	None. This variable must be set manually.
TIMEOUT	Number of seconds the system waits for Oracle Service Registry to successfully start up.	60 seconds

- Rename the script registry (without the .sh extension) and save it in the /etc/init.d/ directory.
- Optionally, to start Oracle Service Registry automatically in the appropriate run-level, create SXXregistry and KXXregistry symbolic links in the appropriate /etc/rcX.d/ directory.
- Start and stop Oracle Service Registry using the installed script. You can invoke this script directly or by using specific OS tools. For example, on RedHat, by using the redhat-config-services command. The parameters of the script are shown in the following table:

Variable Name	Description	
start	Starts Oracle Service Registry	
stop	Stops Oracle Service Registry	
restart	Restarts Oracle Service Registry	
condrestart	Restarts Oracle Service Registry only if it is already running	
status	Displays whether Oracle Service Registry is running or not	

2.10. Troubleshooting

If errors occur during the installation process, the installer displays a message and a **Recovery** button.

Execution of Task fails. You can click **Recovery** and correct erroneous selections or click **Exit** to exit the installation.

If you click **Recovery**, the installation returns to the step that should be corrected. For example, if the installation fails during copying files, it will return to the installation type panel. If the process fails during configuring database it will return to the database panels.

If errors occur when using the Setup tool, only the error message is displayed, you can continue by clicking **Next**.

The following general problems may occur:

Installation backend timeout

If the task does not respond for a long time, a timeout error is thrown and the task is stopped. The default timeout is 30 minutes. If you have a slow machine, try to redefine the `timeout` system property for a greater value in minutes at a java command line.

For 60 minutes, run installation by following command: **java -Dtimeout=60 -jar oracle-service-registry-11.1.1.6.jar**

For 60 minutes, edit the `setup.sh` (`setup.bat`) file; add the `-Dtimeout=60` option into the java command line so it looks like:

Windows:	"%JAVA_CMD%" -Dtimeout=60
UNIX:	"\$JAVA_CMD" -Dtimeout=60

Cannot find JDBC driver

java.lang.ClassNotFoundException

Some external classes cannot be found. Usually the path to JDBC driver does not contain the needed *.jar or *.zip files. Another reason this error may be thrown is that the JDBC driver is not supported by Oracle Service Registry. See [Section 4, Database Installation](#) for more information about supported databases.

Cannot access database

java.sql.SQLException

This usually happens during the creation of database which already exists. To resolve this error, try to connect or drop this database first.

This error is also thrown when trying to drop a database which is currently in use, or does not exist. Note that some set properties must exist on the database engine and some of them are optional. Please see [Section 4, Database Installation](#) for more information about supported databases.

Couldn't create or access important files. Wrong path

This error is displayed when the installation directory specified is bad or the user does not have read and write permissions for it. Try to install to another directory or reset the read and write permissions.

Consult [support](#) if problems persist or any other problems occur.

3. Server Configuration

The server configuration may be set during installation or by using the Setup tool after installation. Both of these scenarios use the same set of GUI panels for server configuration shown in this section.


To run the Setup tool, execute the following script from the `bin` subdirectory of your installation:

Windows:	setup.bat
UNIX:	./setup.sh

See command-line parameters in [Section 2.6.1, Setup](#).

When the Setup Tool is launched, it will prompt for the **deployment location** of the Oracle Service Registry. See [Section 2.7, Reconfiguring After Installation](#) for details how to fill this field.

Select **Configuration** on the second panel.

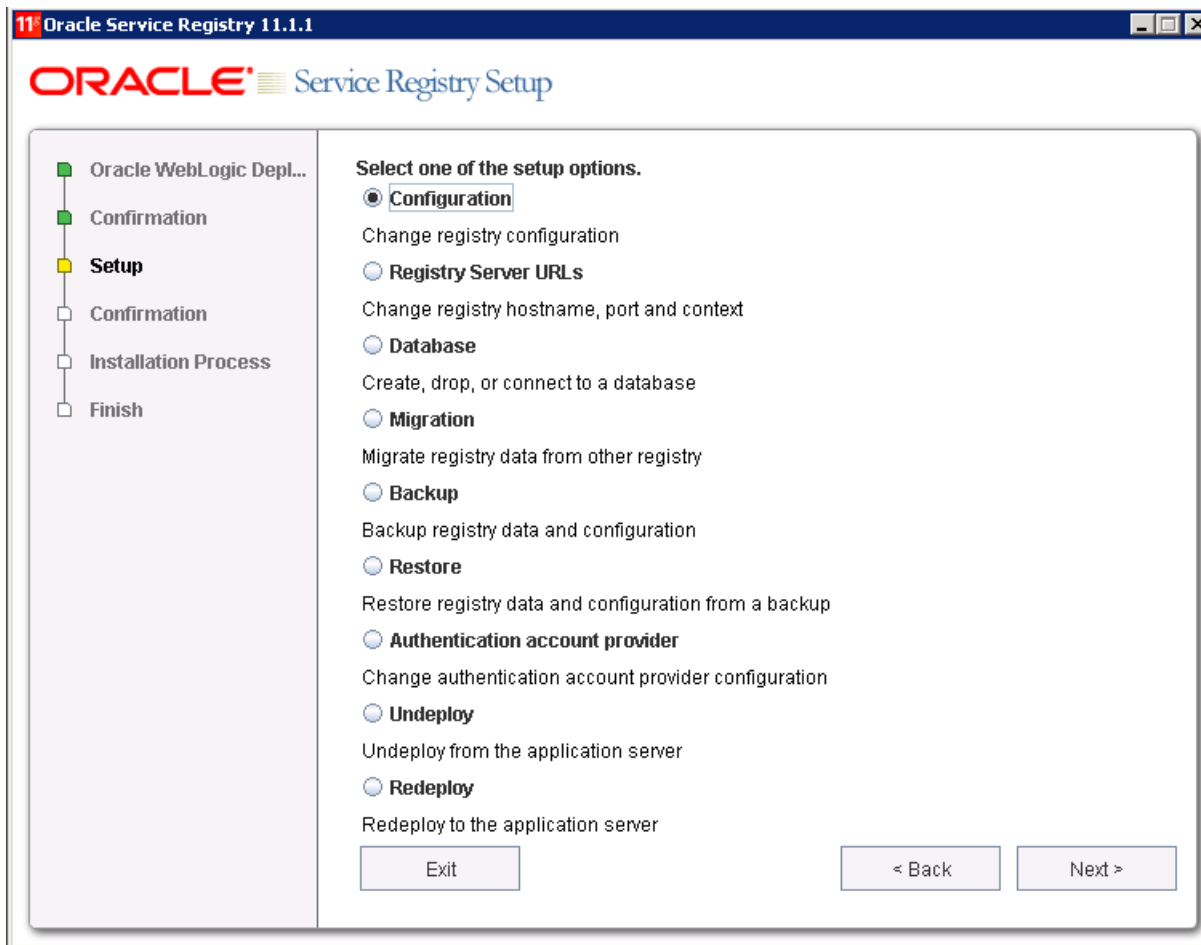Figure 39. Setup

For more information on the Setup tool, please see [Section 2.7, Reconfiguring After Installation](#).

3.1. SMTP Configuration

Figure 40. SMTP Configuration

Oracle Service Registry 11.1.1

ORACLE Service Registry Setup

Oracle WebLogic Depl...
 Setup
Registry
 Confirmation
 Installation Process
 Finish

Registry Configuration

Enter the registry configuration properties.

SMTP Hostname [SMTP server hostname]
 SMTP Port 25
 SMTP Account Name
 SMTP Password
 Confirm Password
 SMTP Default Sender E-mail
 SMTP Default Sender Name

Exit < Back Next >

[Figure 40](#) allows you to configure SMTP. The SMTP configuration is important when users need to receive email notification from subscriptions and from the approval process.

SMTP Host Name

Host name of the SMTP server, through which all e-mail alerts and notification are sent to administrator and users.

SMTP Port

Port number for this SMTP server

SMTP Password

Password to access SMTP server

Confirm password

Retype the same password. Note that if it is not same as the password in the previous box, you cannot continue.

SMTP Default Sender E-mail, Name

Oracle Service Registry will generate email messages with this identity.

3.2. Change Server URLs

Figure 41. Change Server URLs Oracle WebLogic deployment

Oracle Service Registry 11.1.1

ORACLE Service Registry Setup

Oracle WebLogic Depl...
 Setup
Server Configuration
 Confirmation
 Installation Process
 Finish

Server Configuration

Following properties are used to construct URLs that will be used by web user interfaces. If you use load-balancer, the constructed URL must point to it.

Hostname: 10.0.61.87
 HTTP Port: 7301
 SSL(HTTPS) Port: 7302
 Application Server Context: registry

☒ **Multiple hostname support**
 Uses hostname and port from request

☐ **Update demo data**
 Select to change URLs in demo data and publish to registry

Exit < Back Next >

Application Server Context

Context part of the URL, used to access Oracle Service Registry ported to an application server.

Multiple hostname support

When the option Multiple hostname support is selected you can deploy Oracle Service Registry on another instance where hostname and port are different. However, you also have to change hostname and ports to use demos on another instance

Update demo data

When the option Update demo data is selected demo data will be deployed to the registry as well. However, it is not imported during installation

Figure 42. Change Server URLs standalone deployment

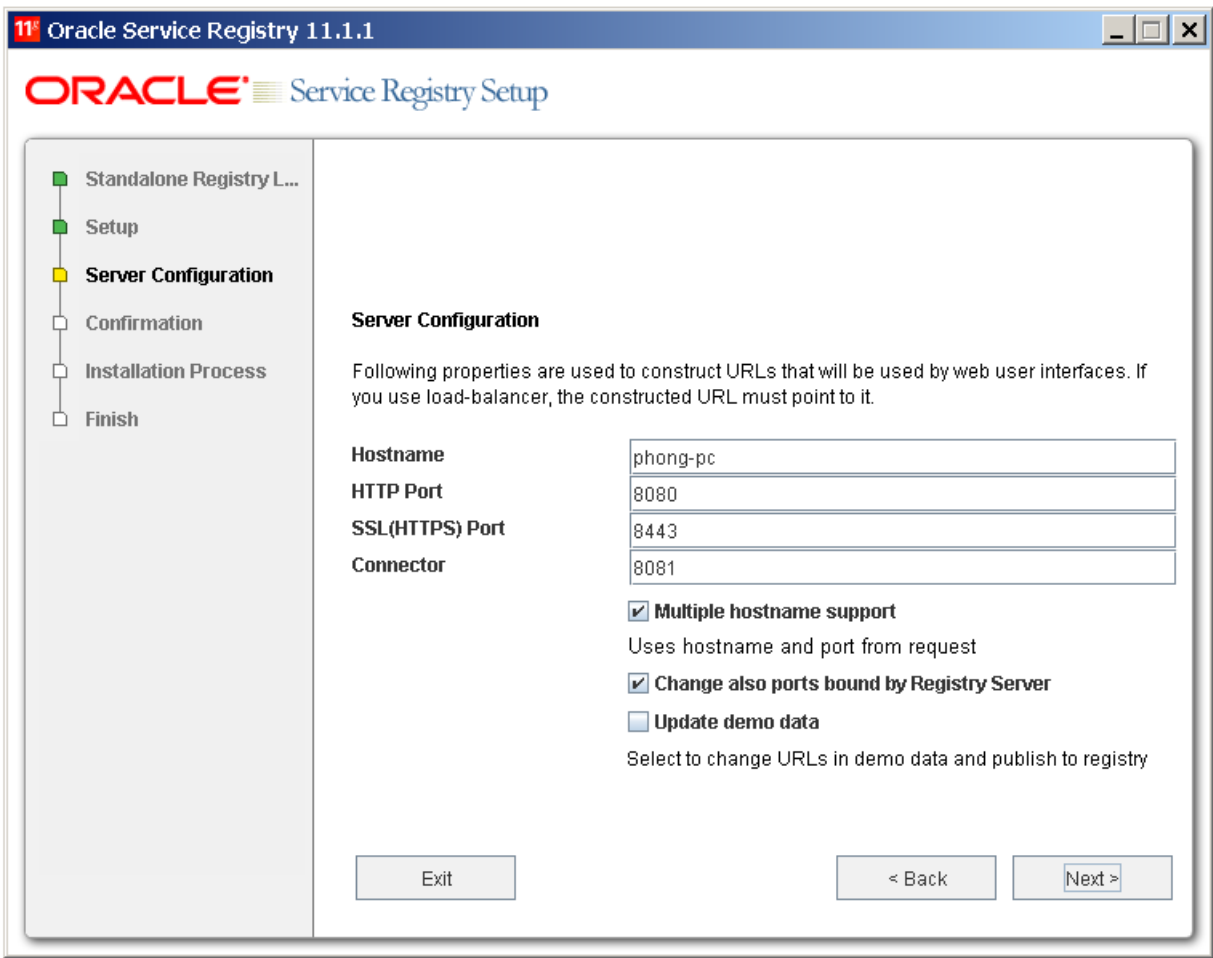


Figure 42 allows you to configure server URLs. There is no context field in a standalone deployment.

Change also ports bound by Registry Server

Select this option to change ports bound to the Jetty server. When 'Change also ports bound by Registry Server' is selected, the connector port field will be enable. It will remain disable if otherwise.


4. Database Installation

The database may be set up during installation or by using the Setup tool after installation. Both of these scenarios use the same set of GUI panels shown in this section.

To run the Setup tool, execute the following script from the bin subdirectory of your installation:

Windows:	setup.bat
UNIX:	./setup.sh


See command-line parameters in [Section 2.6.1, Setup](#).

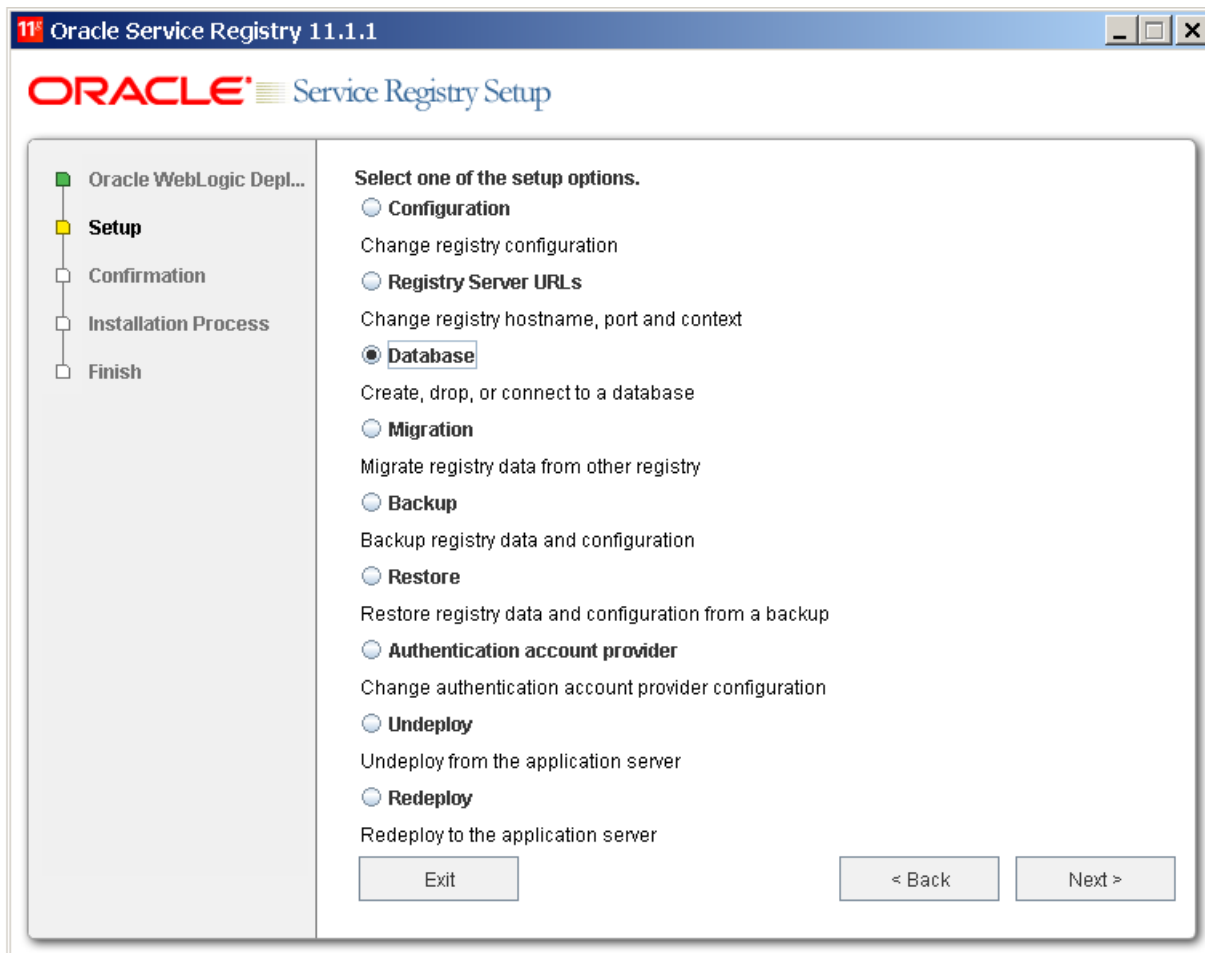Figure 43. Setup Select Database

Select your database. For more information on the Setup tool, please see [Section 2.7, Reconfiguring After Installation](#).

4.1. Database Creation Method

The registry requires a database. During installation with the **-a** option, you can create a new database, create schema in an existing empty database or connect to an existing database with created schema. Using the Setup tool with the option **-a**, you can also drop a database or database schema. Select your database operation on the following panel:

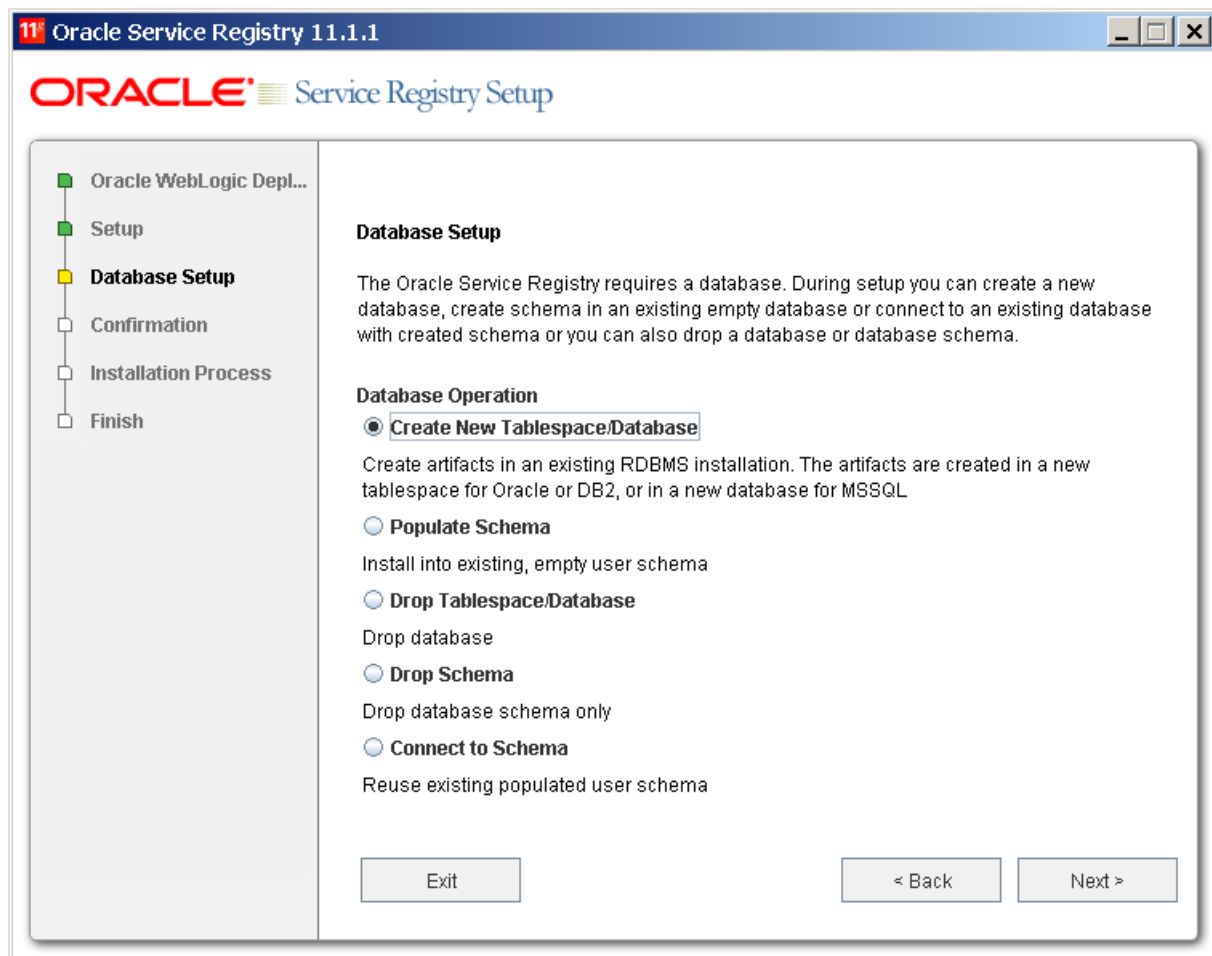Figure 44. Database Creation Method

Select a method from those shown in [Figure 44](#).

Create database

Create new database/users/tablespaces (depending on the type of database server) and database schema. This is the easiest way to attach the required database to Oracle Service Registry. Note that you must have the credentials of the database administrator.

Populate schema

Create a new schema in existing database. Select this method if you have access to an existing empty database with the ability to create tables and indexes. This option is suitable when you does not know the administrator's credentials. We assume the administrator has already created a new database/users/tablespaces for this option.

Drop database

Drops the whole database/users/tablespaces. Note that this option depends on the type of database server.

Drop schema

Drops all tables in the database but leave the empty database.

Connect to Schema

Reuse existing populated user schema. Use this method if the registry database already exists, for example, from a previous Oracle Service Registry installation of the same release number, and fill in only the connection parameters.

4.2. Select Database Type

Figure 45 shows the supported database engines that can be prepared for Oracle Service Registry. The panel may differ if another method was selected in the previous step.

Figure 45. Select Database Type

The screenshot shows the 'Oracle Service Registry 11.1.1' setup window. The title bar includes the Oracle logo and the text 'Service Registry Setup'. On the left is a navigation pane with a tree view containing: 'Oracle WebLogic Depl...', 'Setup', 'Database Setup', 'Database Selection' (highlighted with a yellow square), 'Confirmation', 'Installation Process', and 'Finish'. The main area is titled 'Database Selection' and contains the following text: 'The Oracle Service Registry supports the following databases. Select database and specify if you want to install demo data to the database.' Below this, under the heading 'Databases', are three radio button options: 'Oracle 10g or 11g' (selected), 'MSSQL 2005 or 2008', and 'DB2 9.7'. Under the heading 'Registry Name', there is a text input field containing 'Oracle Service Registry' and a note: 'The name is used for the operational business entity. It also appears in the top right corner next to the login name in web consoles.' Under the heading 'Data Settings', there is a checkbox labeled 'Install demo data to the database' which is currently unchecked. At the bottom of the window are three buttons: 'Exit', '< Back', and 'Next >'. The 'Next >' button is highlighted with a blue border.

Follow these links for selected database.

- [Section 4.3, Oracle Database Settings](#)
- [Section 4.4, MSSQL](#)
- [Section 4.5, DB2](#)

4.3. Oracle Database Settings

You need to manually create a database user schema by having your database administrator run a script.

Here is a sample of the script with default values

```
CREATE TABLESPACE OSR_TABLESPACE LOGGING
DATAFILE 'OSR.DBF' SIZE 50M REUSE AUTOEXTEND
```

```
ON NEXT 10M MAXSIZE UNLIMITED
DEFAULT STORAGE (
  INITIAL 5M
  NEXT 5M
  MINEXTENTS 1
  MAXEXTENTS UNLIMITED
  PCTINCREASE 50);

CREATE USER OSR
  PROFILE "DEFAULT"
  IDENTIFIED BY <CHANGE_PASSWORD>
  DEFAULT TABLESPACE OSR_TABLESPACE
  TEMPORARY TABLESPACE "TEMP"
  ACCOUNT UNLOCK;

GRANT "CONNECT" TO OSR;
GRANT "RESOURCE" TO OSR;
GRANT UNLIMITED TABLESPACE TO OSR;
GRANT CREATE ANY SYNONYM TO OSR;
GRANT DROP ANY SYNONYM TO OSR;
```

The **Create database** option on the installer/Setup tool does not mean to create a new physical database. The installation process creates a new tablespace, database user associated with that tablespace and a new database schema. Then the database schema is populated with default data. If you want to create more UDDI databases (such as databases for *publication* and *discovery* registries), you must create them using different database users.

Oracle Service Registry 11.1.1

ORACLE Service Registry Installer

☐ Welcome
☐ Installation Type
☐ Installation Directory
☐ Registry
☐ Administrator
☐ Database Setup
☐ Database Selection
☒ **Oracle 10g or 11g**
☐ Confirmation
☐ Installation Process
☐ Finish

Oracle

Installation creates a database schema and loads UDDI data. For more information about the properties consult the documentation.

Database Server Address: localhost
 Database Server Port: 1521
 Existing Database Name: orcl
 Database User: OSR
 Database User Password:

Exit < Back Next >

Oracle database creation requires the following properties. To connect or create a schema requires a subset of these properties.

Database Server Address

Usually the host name or IP address of the computer where the database server is accessible.

Database Server Port

Port on which the database listens for a connection

Existing Database Name

Name of a database that already exists into which the Oracle Service Registry tablespace, user and schema will be created.

Database User

A new user account which will be created to connect to the database.

Database User Password

Password for the user account specified in the previous text box.

Continue with [Section 4.7, JDBC Driver](#).

4.3.1. Oracle RAC Database Settings

Systinet Registry supports Oracle RAC database except for fast connection failover. The normal failover works. To setup this database, you must provide more information than just the fields above. Oracle RAC database uses a special connection string. In the **JDBC Drivers** page, select **Use custom connection string** and fill-in the connection string containing RAC parameters.

An example connection string looks like this:
 jdbc:oracle:thin:@(DESCRIPTION=(LOAD_BALANCE=on)(ADDRESS_LIST=(ADDRESS=(PROTOCOL=TCP)(HOST=node1.example.com)(PORT=1521))(ADDRESS=(PROTOCOL=TCP)(HOST=node2.example.com)(PORT=1521)))(CONNECT_DATA=(SERVICE_NAME=myservice)) (FAILOVER_MODE =(TYPE = SELECT)(METHOD = BASIC)(RETRIES = 180)(DELAY = 5)))

4.4. MSSQL

The installation process creates a new database on the database server under the given user name. The database schema is created and UDDI data are loaded. This user should have the Database Creators server role.



Important

Make sure your database server has case-sensitive collation, otherwise all comparisons will be case insensitive, even if the caseSensitiveMatch findQualifier is set. Alternatively, you can create a database with case-sensitive collation manually and use the **create schema** option.



Important

If you selected the option **Populate schema** in the installation/Setup shown in [Figure 44](#), you need to create a database user account with the Database creators server role and a database owned by the account. To create such account and database, you can use the SQL Server Enterprise Manager:

1. Login with Administrator role
2. Select **Console Root > Microsoft SQL Servers > SQL Server Group > server name > Security > Logins**.
3. Right-click on **Logins** and select the **New Login** from the context menu.
4. Enter the account name, click on the **SQL Server Authentication** option and fill in the password.
5. Select **Server Roles** tab, mark the **Database Creators**, click **OK**, and retype the password.
6. Logout, login again with account created in step 5
7. Select **Console Root > Microsoft SQL Servers > SQL Server Group > server name > Databases**.
8. Right-click on **Databases** and select the **New Database** from the context menu.
9. Enter the database name, click **OK**.

Here is a sample of the script with default values

```
USE master;
GO
CREATE DATABASE uddinode;
GO
CREATE LOGIN OSR WITH PASSWORD='<CHANGE_PASSWORD>',
```

```

DEFAULT_DATABASE=uddinode, CHECK_EXPIRATION=OFF, CHECK_POLICY=OFF;
GO
EXEC sp_addsrvrolemember @loginame = 'OSR', @rolename = 'dbcreator'
GO
USE uddinode;
GO
CREATE USER OSR FOR LOGIN OSR;
GO
EXEC sp_addrolemember 'db_owner', 'OSR';

```

If you selected the option **Create database** in the installation/Setup panel shown in [Figure 44](#), you need a database user account with the Database creators server role. To create such account, you can use the SQL Server Enterprise Manager:

1. Select the **Console Root > Microsoft SQL Servers > SQL Server Group > server name > Security > Logins**.
2. Right-click on **Logins** and select the **New Login** from the context menu.
3. Enter the account name, click on the **SQL Server Authentication** option and fill in the password.
4. Select **Server Roles** tab, mark the **Database Creators**, click **OK**, and retype the password.

Oracle Service Registry 11.1.1

ORACLE Service Registry Setup

☒ Oracle Home
☒ Setup
☒ Database Setup
☒ Database Selection
☒ **MSSQL 2005**
☐ Confirmation
☐ Installation Process
☐ Finish

MSSQL

Installation creates a new database on the database server under the given database user account. So the user should have the Database Creators server role. Then, the database schema is created and UDDI data are loaded. For more information about the properties consult the documentation.

Properties marked with an asterisk (*) must not collide with existing objects in the database.

Database Server Address	localhost
Database Server Port	1433
Database Name *	uddinode
Database User	uddiuser
Database User Password	****

MSSQL database creation requires the following properties. To connect or create schema requires a subset of these properties. Please note that properties marked with an asterisk (*) must not collide with existing objects in the database.

Database Server Address

Usually the host name or IP address where the database server is accessible.

Database Server Port

Port on which the database listens for a connection.

Database name *

Name of the database that will hold UDDI data structures.

Database user

User name of a user who is able to create a new database.

Database User Password *

Password for the user specified above.

Continue with [Section 4.7, JDBC Driver](#).

4.5. DB2

The **Create database** option from the installer/Setup tool does not create a new database physically. The installation process creates a new tablespace in an existing database with the given (existing) bufferpool and associates the tablespace with the given file. Permission to use the tablespace is given to the specified user. Then, a database schema is created and UDDI data are loaded.



Important

Because relational tables are created in the implicit schema, if you want to create more UDDI databases (such as databases for *publication* and *discovery* registries for the approval process), you must create UDDI databases with different database users.



Important

You need create a bufferpool with 32K page size and a database user account, that can use a temporary tablespace with such a bufferpool.

- To create such a bufferpool using the DB2 Control Center:
 1. Select **Control Center** > **All Databases** > *database* > **Buffer Pools** from the left side tree.
 2. Right-click on **Buffer Pools**, and select the **Create...** option from the context menu.
 3. Fill in a **Buffer pool name**, such as "uddipool" and select **32K page size**.
- To create such a temporary tablespace using the DB2 Control Center:
 1. Select **Control Center** > **All Databases** > *database* > **Table Spaces** from the left side tree.
 2. Right-click on **Table Spaces** and select the **Create...** option from the context menu.
 3. Fill a tablespace name such as "udditempspace" and click **Next**.
 4. Select the **user temporary** option, and click **Next**.

5. Select the **uddipool** buffer pool and click **Next** twice.
 6. Select the location where data are physically stored such as C:\Db2\data\udditempspace, click **Next** 3 times and then click **Finish**.
- To create the database user that can use the temporary tablespace using DB2 Control Center:
 1. Select **Control Center > All Databases > database > User and Group Objects > DBUsers** from the left side tree.
 2. Right-click on **DBUsers** and select the **Add...** option from the context menu.
 3. Select the username, check **Connect to database**, **Create tables** and **Create schemas implicitly**.
 4. Click on the **Table Space** tab, the **Add Tablespace...** button, select the **udditempspace** and click **OK**.
 5. Select the **udditempspace** and select the **Yes** option from the **Privileges** drop down list .
 6. Click **OK** to save the account.

If you select the **Populate schema** option, you need create a regular tablespace that can use above bufferpool and grant permission to the user.

- To create such a regular tablespace using the DB2 Control Center:
 1. Select **Control Center > All Databases > database > Table Spaces** from the left side tree.
 2. Right-click on **Table Spaces** and select the **Create...** option from the context menu.
 3. Fill a tablespace name such as "uddiuserspace" and click **Next**.
 4. Select the **Regular** option, and click **Next**.
 5. Select the **uddipool** buffer pool and click **Next** twice.
 6. Select the location where data are physically stored such as C:\Db2\data\uddiuserspace, click **Next** 3 times and then click **Finish**.
- To create the database user that can use the regular tablespace using DB2 Control Center:
 1. Select **Control Center > All Databases > database > User and Group Objects > DBUsers** from the left side tree.
 2. Right-click on **DBUsers** and select the **Add...** option from the context menu.
 3. Select the username, check **Connect to database**, **Create tables** and **Create schemas implicitly**.
 4. Click on the **Table Space** tab, the **Add Tablespace...** button, select the **uddiuserspace** and click **OK**.
 5. Select the **uddiuserspace** and select the **Yes** option from the **Privileges** drop down list .
 6. Click **OK** to save the account.

Here is a sample of the script with default values

```

CREATE REGULAR TABLESPACE uddiuserspace
  PAGESIZE 32 K
  MANAGED BY DATABASE
  USING (FILE 'c:\db2\data\OSR' 25600)
  EXTENTSIZE 32
  OVERHEAD 24.1
  PREFETCHSIZE 16
  TRANSFERRATE 0.9
  BUFFERPOOL uddipool;
GRANT CREATETAB, CONNECT, IMPLICIT_SCHEMA ON DATABASE TO USER OSR;
GRANT USE OF TABLESPACE uddiuserspace TO USER OSR;

```

If you select the **Create database** option, you just need enter the bufferpool and user in the following panel

The screenshot shows the 'Oracle Service Registry 11.1.1' window with the 'Service Registry Setup' title. On the left is a navigation pane with steps: Oracle Home, Setup, Database Setup, Database Selection, **DB2 8.0** (highlighted), Confirmation, Installation Process, and Finish. The main area is titled 'DB2' and contains the following text: 'Installation creates a new tablespace in an existing database with the given (existing) bufferpool and associates the tablespace with a given tablespace datafile. Then, the database schema is created and UDDI data are loaded. For more information about the properties consult the documentation.' Below this is a note: 'Properties marked with an asterisk (*) must not collide with existing objects in the database.' A table of configuration fields follows:

Database Server Address	localhost
Database Server Port	50000
Existing Database Name	uddi
Database Administrator Name	sa
Database Administrator Password	*****
Database Tablespace Name *	uddiuserspace
Tablespace Datafile *	c:\db2\data\uddiuserspace
Buffer Pool /with 8k page size/	uddipool
Existing Database User	uddiuser
Database User Password	****

At the bottom are three buttons: 'Exit', '< Back', and 'Next >'.

DB2 database creation requires the following properties. To connect or create schema requires a subset of these properties. Please note that properties marked with an asterisk (*) must not collide with existing objects in the database.

Database Server Address

Usually the host name or IP address where the database server is accessible.

Database Server Port

Port on which the database listens for connection.

Existing Database Name

Name of a database that already exists. The UDDI tablespace will be created in this database.

Database Administrator Name

User name of the administrator of the database; this is required to create a new tablespace on the existing database.

Database Administrator Password

Password for the user specified in the previous text box.

Database Tablespace Name *

Name of tablespace to be created in the existing database and which will store UDDI data structures

Tablespace Datafile *

Full path of the host machine where the tablespace files will be stored

**Important**

You must have read and write permissions to this directory.

Buffer pool with 32K page size

Buffer pool for database; it must have pages with a size of 32K.

Existing Database User

User name of a user having the following authorities: connect database, create table and create schema implicitly.

**Important**

The user also must have access to a temporary tablespace with the associated 32K-length bufferpool to use for temporary tables.

Database User Password

Password for the user specified in the previous text box.

Specify the Oracle Service Registry Administrator account which will be created in the database. (If **configure database** is selected, this administrator account must correspond to one existing in the database.)

**Important**

Increase transaction log size (parameter logfilesiz) from default value 250 to 1000. You can use the Control Center tool to make this change.

Continue with [Section 4.7, JDBC Driver](#).

4.6. Oracle Data Source Creation


The Installation Wizard can create a data source for you from the information provided in the Datasource Creation panels. If you want the Installation Wizard to create a data source definition within the Oracle WebLogic server and Oracle Service Registry to access the database through the data source created within the Oracle WebLogic server, check the **Use data source in the application server** checkbox, and enter a valid JNDI name for the datasource. Of course, you can create the data source manually via the Administrator Console of WebLogic.



Note

If the data source is not created on the application server while Oracle Service Registry is set to access the database through the data source, Oracle Service Registry will not start successfully.

Figure 46. Data Source Creation

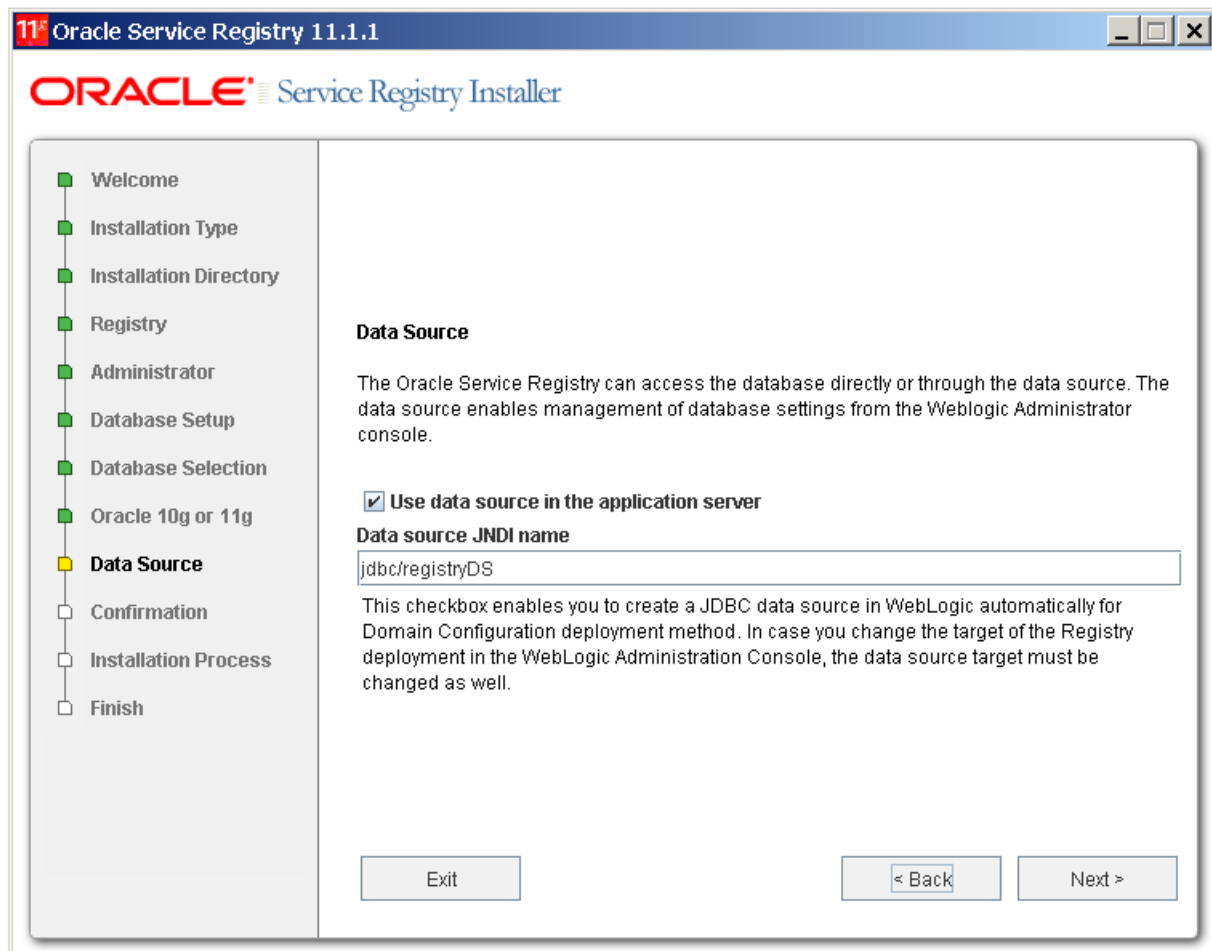

Important

Third-Party JDBC Drivers with WebLogic Server - Oracle Thin driver 10g/11g versions are installed with Oracle WebLogic Server, so you do not need to add these drivers to your CLASSPATH. If you plan to use a third-party JDBC driver that is not installed with WebLogic Server such as MSSQL or DB2, you must install the drivers, which includes updating your CLASSPATH with the path to the driver files. See more at [Using Third-Party JDBC Drivers with WebLogic Server](http://download.oracle.com/docs/cd/E13222_01/wls/docs91/jdbc_admin/third_party_drivers.html) [http://download.oracle.com/docs/cd/E13222_01/wls/docs91/jdbc_admin/third_party_drivers.html]


- Domain Configuration - Before you run the Weblogic Server Configuration tools, you must do the following:
 1. Setup Third-Party JDBC Drivers as described above.
 2. If you use DB2, you must uncomment the Driver element with the className `com.ibm.db2.jcc.DB2Driver` in `WL_SERVER_HOME\server\lib\jdbcdrivers.xml`.

- Manual Deployment - You must setup Third-Party JDBC Drivers as described above before creating the JDBC data source via the Administrator Console of WebLogic.

4.7. JDBC Driver


Select the JDBC Driver as shown in [Figure 8](#). It is not necessary to configure this path for the Oracle database as the JDBC drivers for these databases are installed in the distribution. It is also not necessary if you have already configured this path previously for the selected database. The JDBC drivers are usually supplied by database vendors.

Figure 47. Optional JDBC Driver

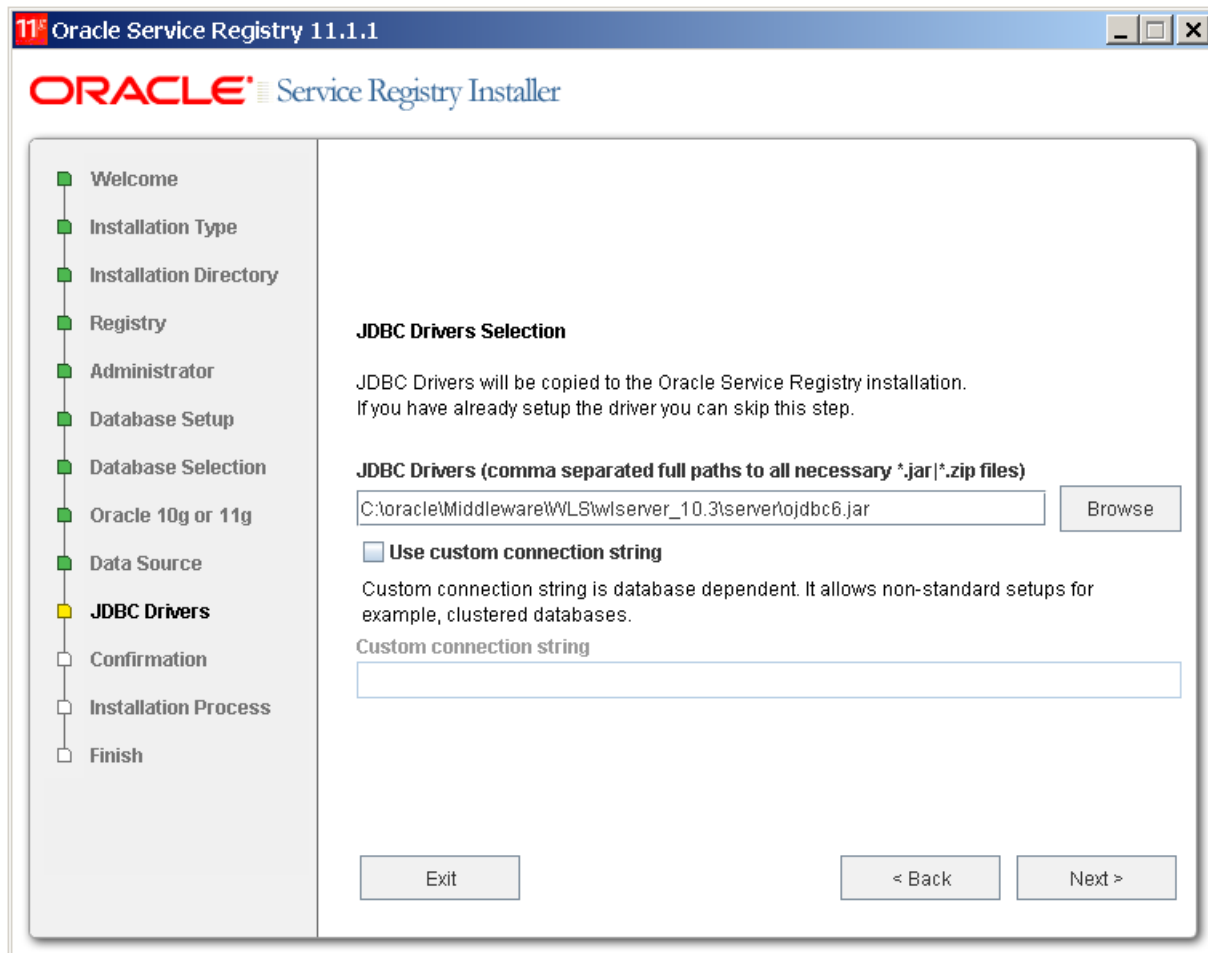

4.8. Account Backend

If you created a database or schema, you can configure an authentication account provider.

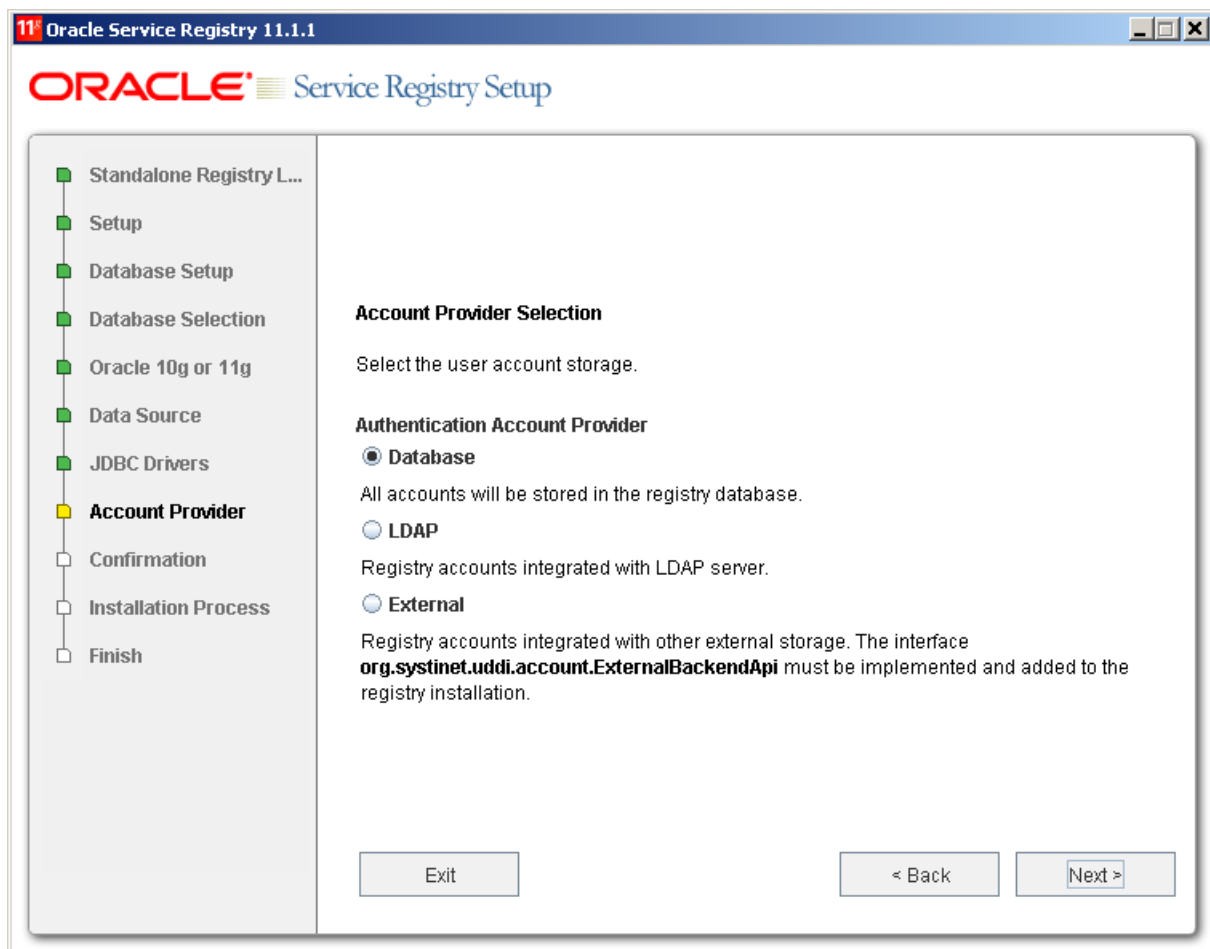Figure 48. Authentication Account Provider

[Figure 9](#) allows you to select the authentication account provider.

Database

All accounts will be stored in the registry database. This is the recommended backend.

LDAP

Registry accounts integrated with LDAP server.

External

Registry accounts integrated with other external storage. To integrate Oracle Service Registry, with an external backend, you must implement the interface `com.systinet.uddi.account.ExternalBackendApi` and add it to the registry installation.

For more information about LDAP, Oracle XML and External account backends, please see [Section 6, External Accounts Integration](#)

4.9. Multilingual Data

This section describes how Oracle Service Registry supports the storage of UDDI structures in the multilingual data format.

There are two types of text fields in UDDI structures: Unicode fields and ASCII fields.

Unicode fields

are intended for human readable information, the field length is measured in number of characters as follows:

Field Name	Max Length (in chars)
name of businessEntity and businessService	255
keyName	255
keyValue	255
useType	255
description	255
addressLine	80
personName	255

ASCII fields

are intended for machine processing, such as URIs. The length is measured in bytes. ASCII fields can typically hold multilingual data. Its length is limited by the number of bytes of its serialized form in UTF-8 encoding. For example, the name of a tModel can carry 85 Japanese characters, because Japanese characters are encoded into three bytes each under UTF-8 encoding ($255/3=85$).

Field Name	Max Length (in bytes)
name of tModel	255
overviewURL	4096
discoveryURL	4096
sortCode	10
email	255
phone	50
accessPoint	4096
instanceParms	8192

4.9.1. Oracle

Oracle database supports Unicode characters in both types (Unicode and ASCII) of fields.

4.9.2. MSSQL

MSSQL supports Unicode characters only in Unicode fields. Unicode characters are stored successfully to ASCII fields only if they match with the server collation, otherwise are converted to question marks (?). For example, Japanese characters are stored correctly if the Japanese_Unicode_CI_AS collation is default to the server. If the English collation is set up, Japanese characters are converted to ? characters.

4.9.3. DB2

The DB2 database supports Unicode characters in both types of fields. Maximal length of a field is measured in bytes in the default database schema despite it being a Unicode field. You can use any Unicode characters, but allowed string length is not guaranteed. For example, the name of a tModel can carry 85 Japanese characters, because Japanese characters are encoded into three bytes each under UTF-8 encoding ($255/3=85$).

Note that longer strings produce a database exception. The restriction is made because the cumulative length of indexed columns is limited to 800 bytes. The default schema prefers performance to multiple language support.

If you want to use Unicode fields with longer byte-length you must enlarge appropriate database columns. However indexes with cumulative length longer than 800 bytes must be removed as these can harm performance. Follow these steps:

1. Install Oracle Service Registry with the [no database](#) option.
2. Modify the database schema file `REGISTRY_HOME/etc/db/db2/schema_core.sql`
 - a. Increase column lengths for names and keyValues.
 - b. Remove appropriate indexes.
3. Use the [Setup tool](#) to create the database.

4.10. JDBC Drivers

Oracle Service Registry requires by default the following classes for connection to the database. Please ensure that your downloaded JDBC JAR(s) includes them:

Database	Driver class
DB2	<code>com.ibm.db2.jcc.DB2Driver</code>
MSSQL	<code>com.microsoft.sqlserver.jdbc.SQLServerDriver</code>
Oracle	<code>oracle.jdbc.OracleDriver</code>

4.10.1. Alternative JDBC Drivers

This section describes the use JDBC drivers other than the default drivers mentioned above. Suppose you downloaded `FooJDBC.jar`, where the driver class is `foo.jdbc.Driver` and the connection string is `jdbc:foo:...`

If you want to use an alternative JDBC driver while you already installed the registry and set up database with the default JDBC driver, edit the file `REGISTRY_HOME/app/uddi/conf/database.xml` as follows:

1. Add

```
<universalDriver name="fooDriver">
  <JDBC_driver>foo.jdbc.Driver</JDBC_driver>
  <URI_pattern>jdbc:foo:...</URI_pattern>
</universalDriver>
```

at the end of `<databaseMappings/>` element

You can use following parameters in the `<URI_pattern>` element

- `${hostname}` - hostname or IP address of the database server
- `${port}` - Port where the database server listens for requests
- `${dbName}` - Name of the database
- `${userName}` - Name of database account
- `${userPassword}` - Password of the account

Replace the parameters with corresponding values using the Setup tool or the Registry Control.

2. Replace the `className` attribute of the `interfaceMapping` element with `fooDriver` value for your database. Determine the right `databaseMapping` element by value of `type` attribute.)

If you want to create a database with the alternative JDBC driver (without needing to use the default driver):

1. Install the Oracle Service Registry without the database.
2. Modify `REGISTRY_HOME/app/uddi/conf/database.xml` as described above.
3. Replace the driver class and connection string in the installation scripts in `REGISTRY_HOME/etc/db/<database_type>/installXXX.xml`
4. Run the Setup tool to create database.

5. Approval Process Registry Installation

Oracle Service Registry allows for installation with an approval publishing process which requires two registries: a *publication registry* and a *discovery registry*. The *publication registry* is used for testing and verification of data. The *discovery registry* contains approved data that has been promoted from the *publication registry*.


Oracle Service Registry supports the following scenarios of approval process configuration:

- One *publication* and one *discovery* registry as shown in [Figure 49](#). This is the simplest configuration. Data is promoted from the *publication* to the *discovery* registry after an approver approves the data.


Figure 49. One-Step Approval Process



- Multiple *publication* registries as shown in [Figure 50](#). Promoted data is merged from more than one *publication registry* to a single *discovery registry*.

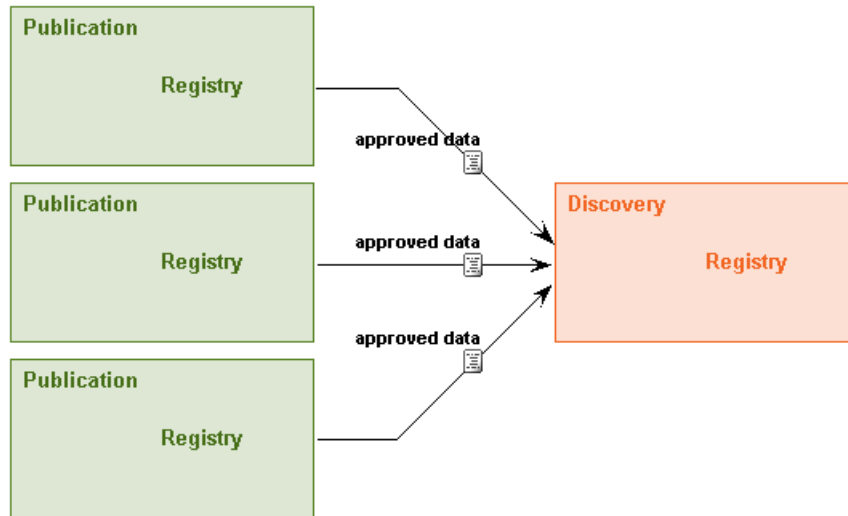Figure 50. One-Step Approval Process with Multiple Publication Registries

- Multiple step approval process as shown in [Figure 51](#). There can be many steps for promoting data from the *publication* to the *discovery* registry. For example, you can define the approval process to include two steps of data promotion. The first step is promoting data from a 'unit testing' registry to an 'integrated testing' registry. The next step is promoting data from the 'integrated testing' registry to a 'production quality' registry. In this case you need to install three registries as shown in [Figure 51](#). See [Section 5.3, Intermediate Registry Installation](#) to learn how to install a registry that behaves as both *publication* and *discovery* registry.

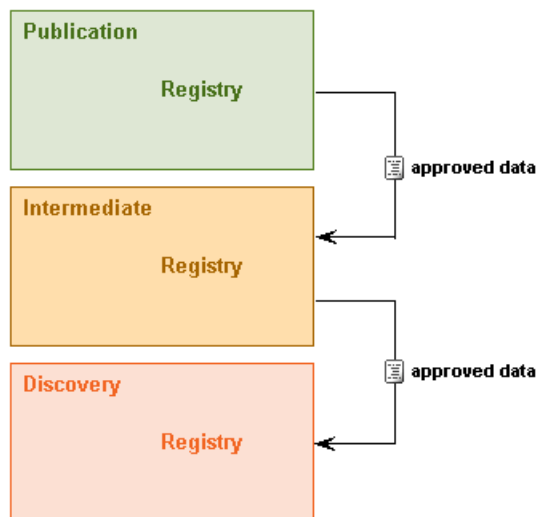Figure 51. Multiple Step Approval Process

We recommend that you install the *discovery registry* first, and then the *publication registry*, because the digital security certificate of the *discovery registry* is needed when installing the *publication registry*.



Important


To install the *publication* or *discovery* registry with accounts in external storage you *must* ensure that accounts from the *publication* registry are a subset of accounts on the *discovery* registry. Accounts may exist on the *discovery* registry that do not exist on the *publication* registry, but all accounts on the *publication* registry must exist on the *discovery* registry. Put another way: all accounts on the *publication* registry exist on the *discovery* registry, but not all accounts on *discovery* registry exist on the *publication* registry.

It is also not allowed to have two different LDAP servers, one for the *publication* registry and one for *discovery* registry. For more information about setting of external accounts, see the [External Accounts Integration](#) chapter in the Installation Guide.

To learn more about the approval process, see the [Approval Process](#) chapter in the Administrator' Guide.


5.1. Discovery Registry Installation

To install the *discovery* registry, install it as described in [Section 2, Installation](#). At installation, during installation type selection, choose **Discovery** instead of the default **Standalone** installation.

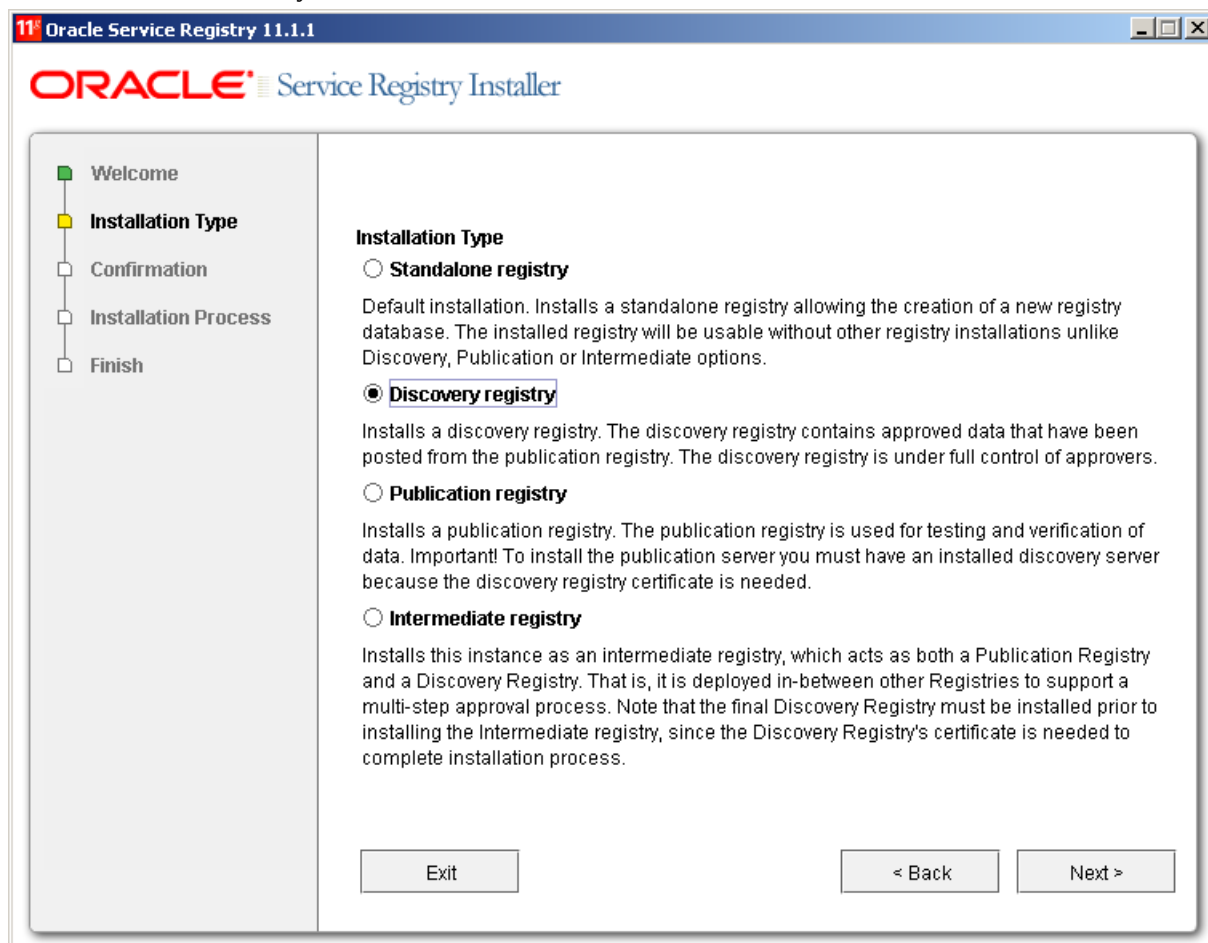

Fill in all properties on the discovery-specific panel shown in [Figure 52](#)

Figure 52. Discovery Settings

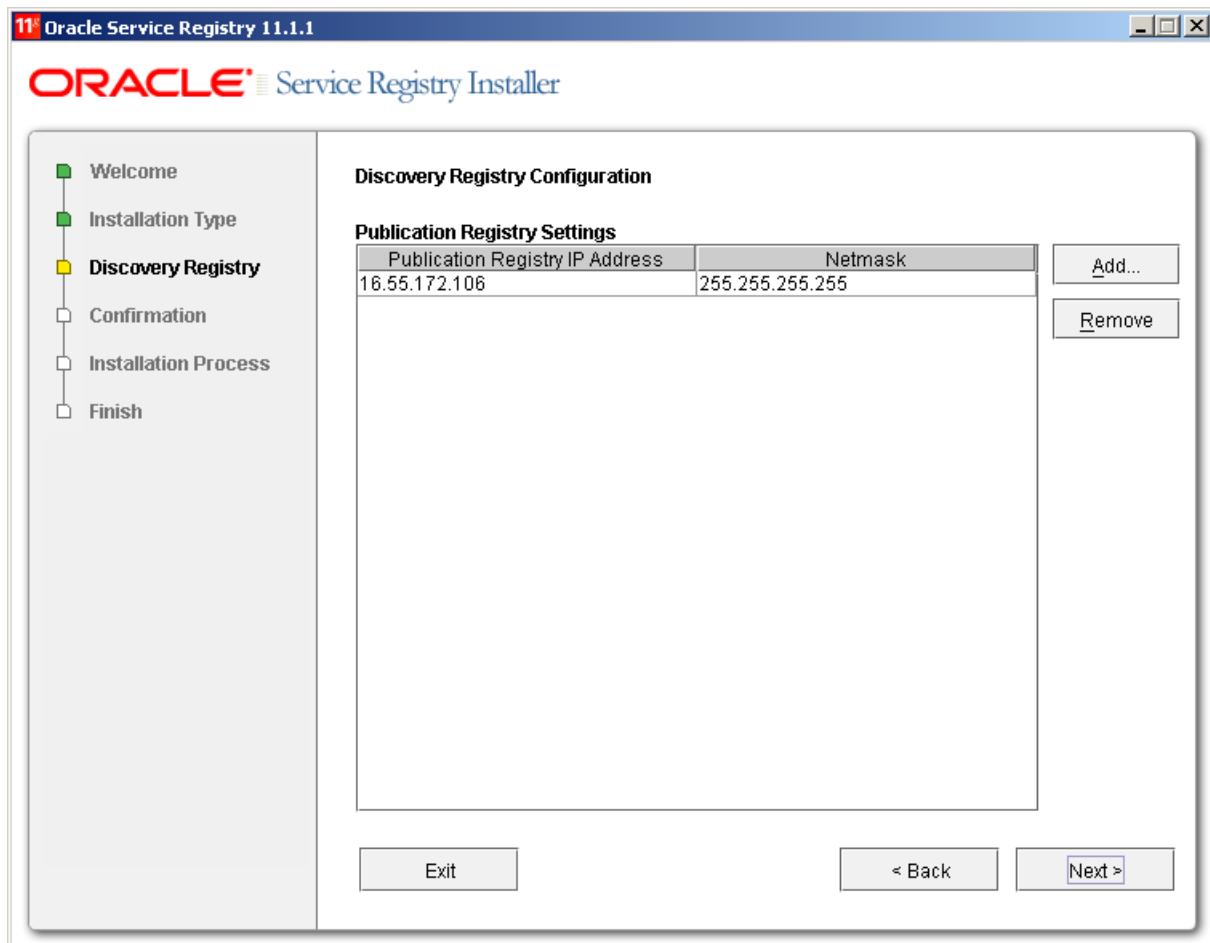

Set the following properties:

Publication Registry IP address

The IP address allowed to connect to this discovery registry .

Netmask

A netmask is a 32-bit mask used to divide an IP address into subnets and specify the network's available hosts.

The default netmask of 255.255.255.255 indicates that publication registry may be connected only from the IP address specified in **Publication Registry IP address**

Continue with standalone installation as described in [Section 2.3.3, Setup Administrator Account](#).


5.2. Publication Registry Installation




Important

To install the *publication registry* you **must** have an installed *discovery registry* as described in [Section 5.1, Discovery Registry Installation](#).

Install the *publication registry* in same way you would the Standalone registry as described in [Section 2, Installation](#). During installation selection, choose **Publication** instead of the default **Standalone installation**.

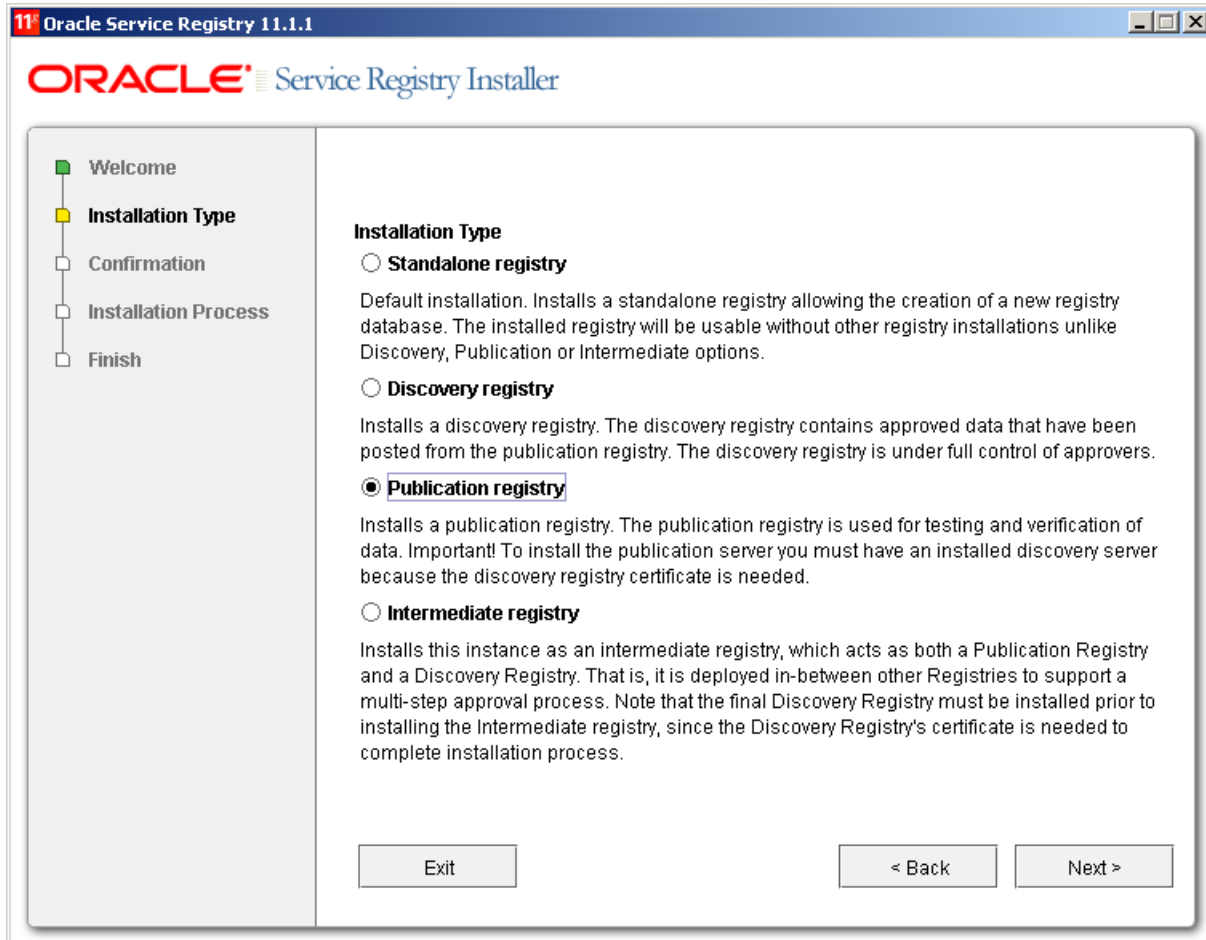

Fill in the properties shown below:

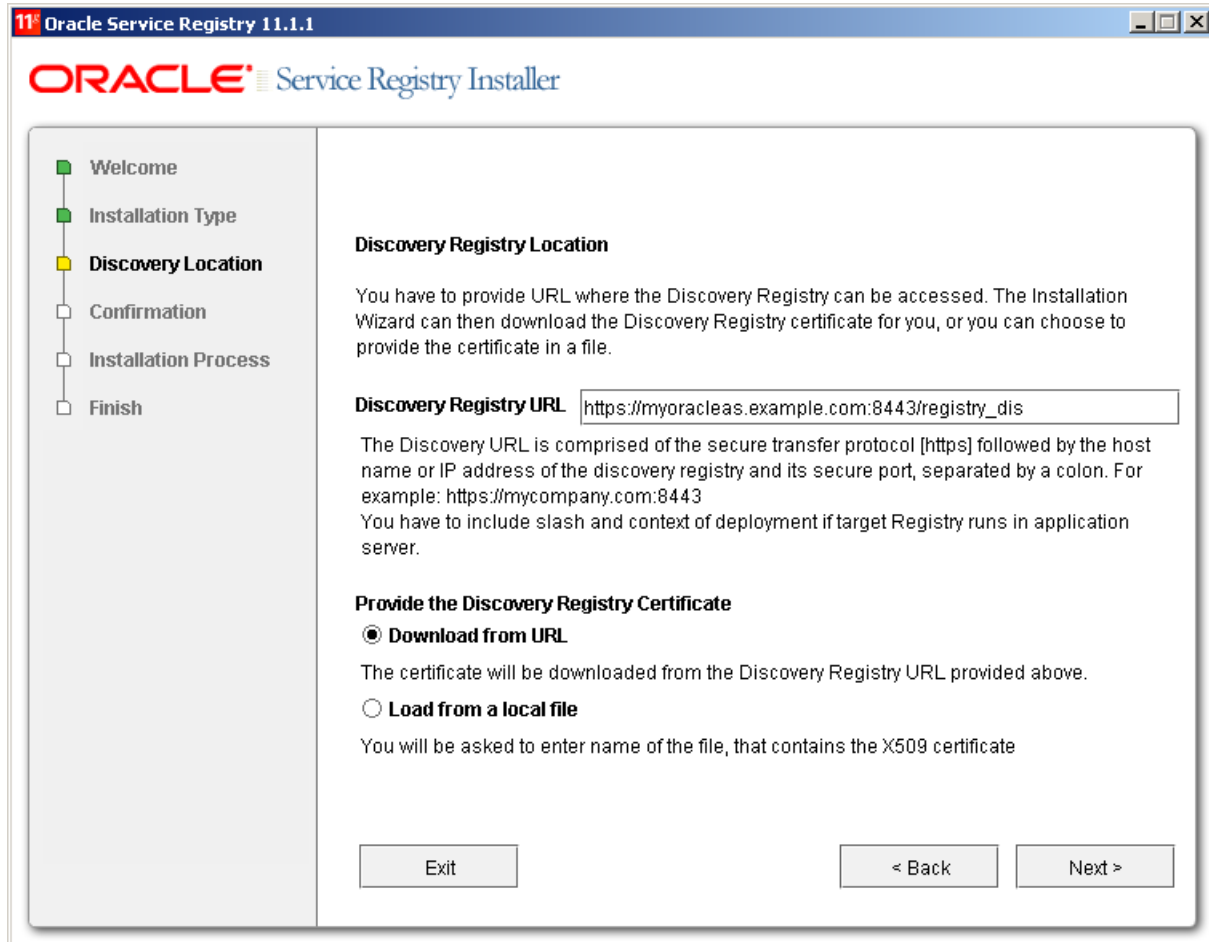

Discovery Registry URL

Enter the HTTPS URL (including port) of the *discovery registry*. Note that HTTP (nonsecure) connections between the *publication* and *discovery* registry are not allowed.



Caution


You need to enter the URL including the application context, where the discovery registry was deployed, so for example

`https://oracleas.mycomp.com:4443/reg_discovery`

Provide the Discovery Registry Certificate

You can choose a method which will be used to get certificate. The certificate can be either provided in file or downloaded from running server.

Following screen appears for the certificate from file option:

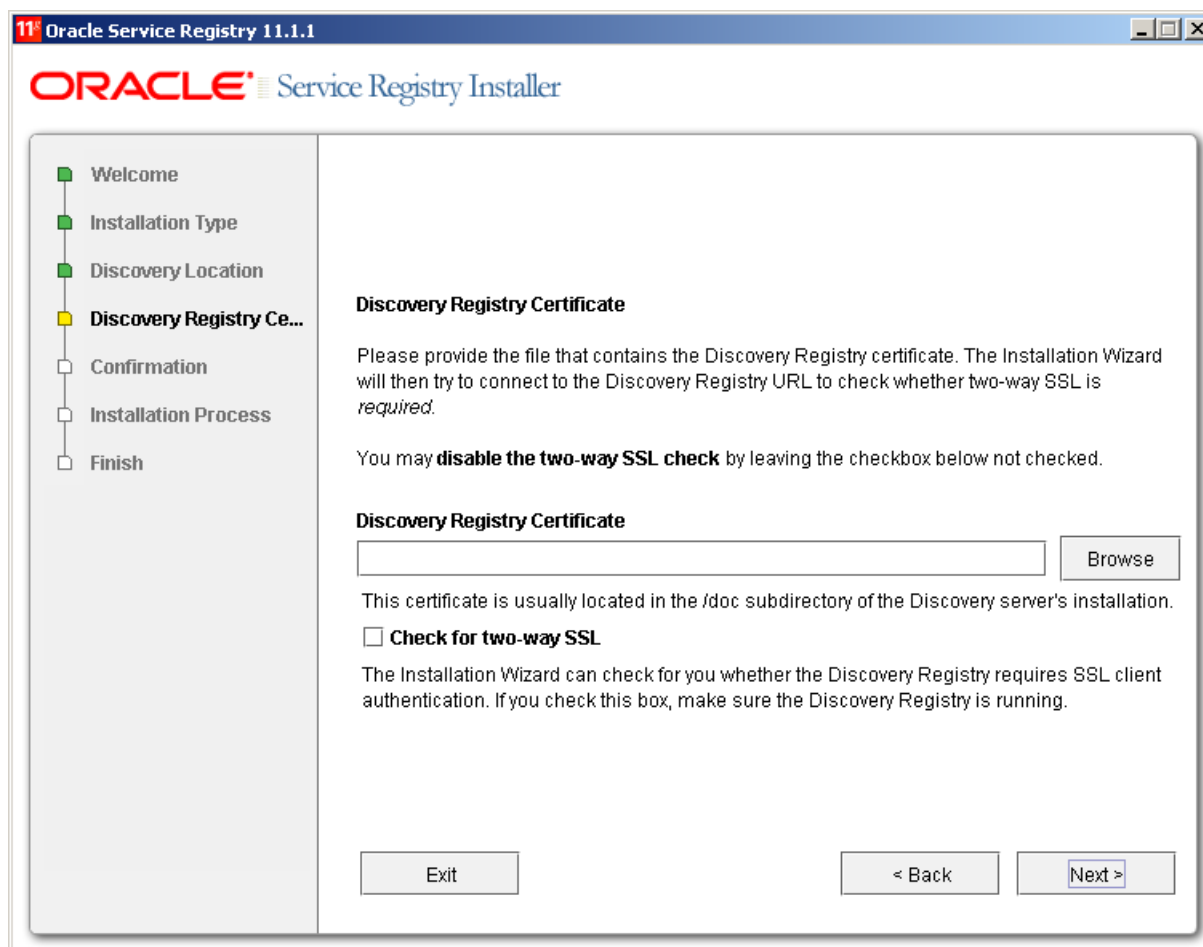

Discovery Registry Certificate

Enter or browse for the fully qualified path of the *discovery* registry's SSL certificate file.




Note

The SSL certificate must be obtained from the Oracle WebLogic Server, where the discovery registry is deployed. For information how to export SSL certificate from an Oracle WebLogic Server, please refer to your Oracle WebLogic Server documentation.

The installer *must* be able to read this certificate from a local or networked file system, in order to proceed with the installation.


Following screen appears for the download certificate option after the certificate is successfully downloaded:

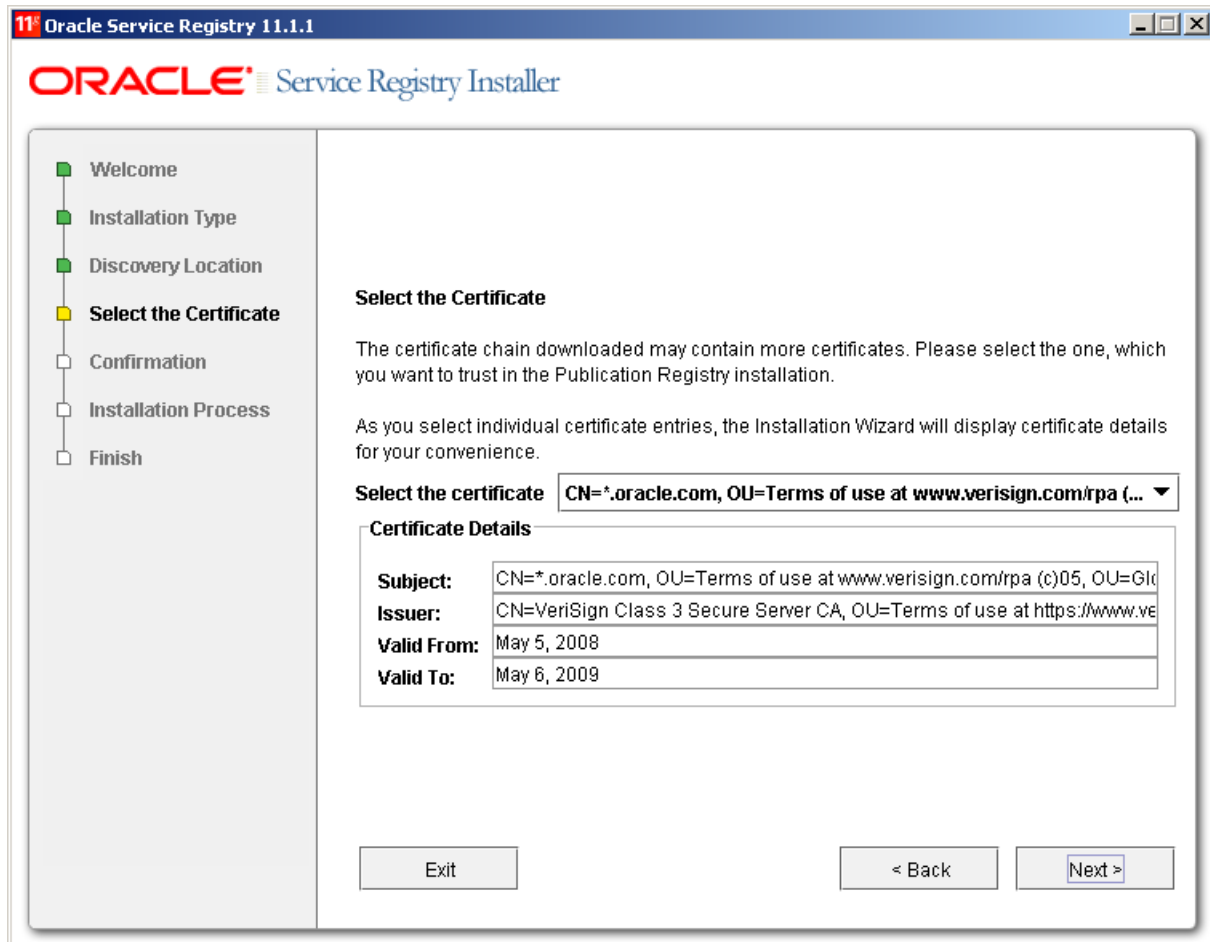

Continue with standalone installation as described in [Section 2.3.3, Setup Administrator Account](#).

5.3. Intermediate Registry Installation

Install the *publication registry* in same way you would the Standalone registry as described in [Section 2, Installation](#). During installation selection, choose **Intermediate** instead of the default **Standalone installation**.

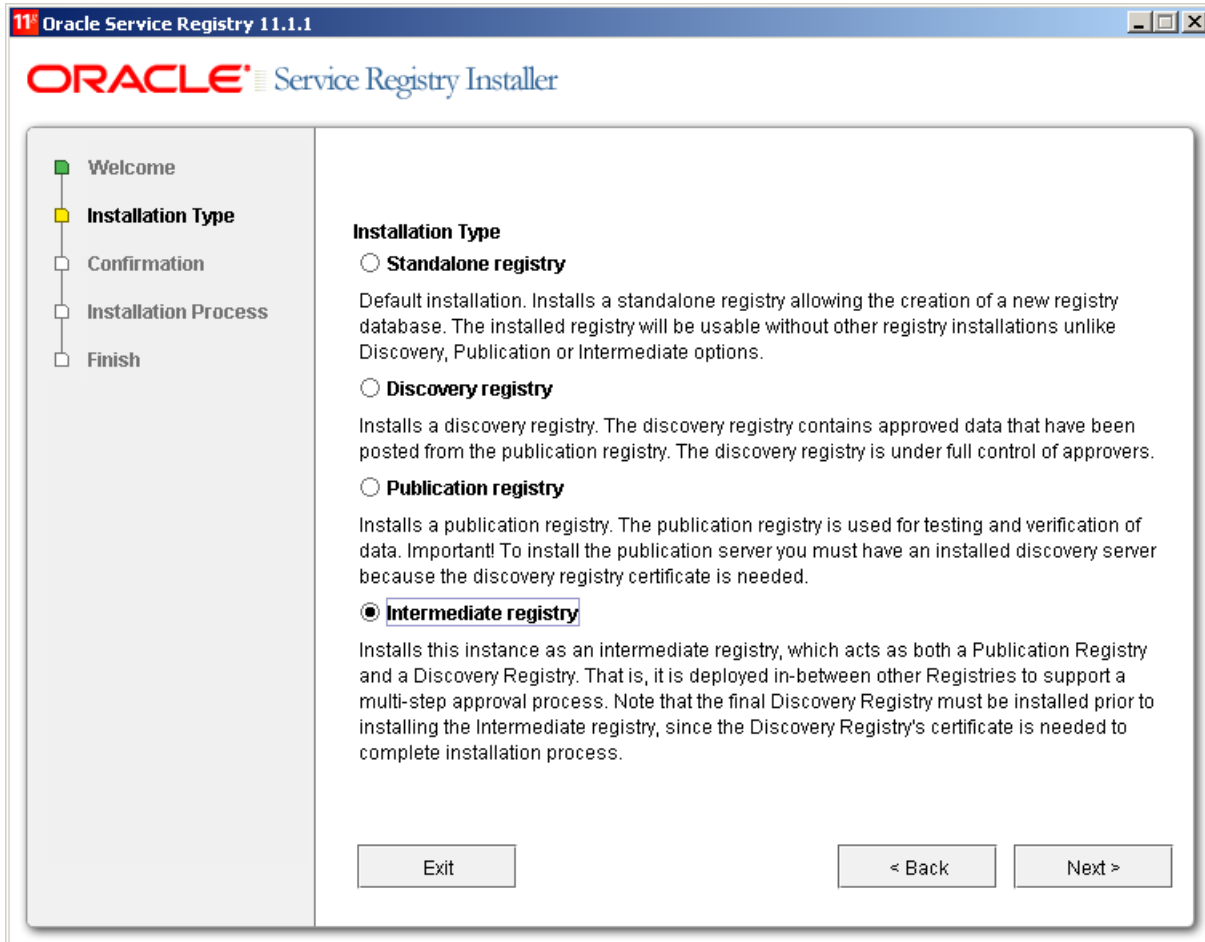

The Intermediate Registry role is to serve as both Discovery and Publication Registry combined therefore installer asks for the same options as in Discovery and Publication installations.

Continue with standalone installation as described in [Section 2.3.3, Setup Administrator Account](#).

6. External Accounts Integration

During database installation or by employing the Setup tool, you may choose to use accounts from external repositories. This chapter describes how to integrate accounts from an LDAP server and from non-LDAP user stores into Oracle Service Registry.

An LDAP server can be integrated with Oracle Service Registry with [these scenarios](#):

- [LDAP with a single search base](#) - The scenario is very simple. There is only one LDAP server in this scenario. All identities are stored under a single search base.
- [LDAP with multiple search bases](#) - In this scenario there is also only one LDAP server, but it has multiple search bases mapped to a domain. The domain is a specified part of the user's login name (that is, DOMAIN/USERNAME). All users must specify the domain name in the login dialog. When managing accounts or groups, we recommend using the DOMAIN/USERNAME format for performance reasons. If no domain is set, searches are performed across all domains.
- [Multiple LDAP services](#) - More than one LDAP service is used in this scenario. The correct LDAP service is chosen via DNS. As in the previous scenario, users must specify a domain name during login. When managing accounts or groups, users have to set domain name. If the domain name is not specified, then no domain is processed.

This chapter also contains the following configuration examples:

- [Oracle Internet Directory with a single search base](#)
- [Sun One with a single search base](#)
- [Sun One with multiple search bases](#)
- [Active Directory with a single search base](#)



Note

Oracle Service Registry treats external stores as read-only. User account properties stored in these external stores cannot be modified by Oracle Service Registry.



Important


The Administrator account must not be stored in the LDAP. We strongly recommend that users stored in `account_list.xml` (by default, only administrator) should not be in the LDAP. If you really need to have users from LDAP in the file `account_list.xml`, delete password items from the file and change of all the accounts' properties according to the LDAP. The `account_list.xml` file contains a list of users that can be logged into a registry without connection to the database.

To integrate external accounts from another repository, either:

- Create a database or create a new schema on the connected database by following the instructions in [Section 2.3.4, Database Settings](#), or
- Use the Setup tool and choose **Authentication provider**. To run the Setup tool, execute the following script from the `bin` subdirectory of your installation:

Windows:	<code>setup.bat</code>
UNIX:	<code>./setup.sh</code>


See command-line parameters in [Section 2.6.1, Setup](#).

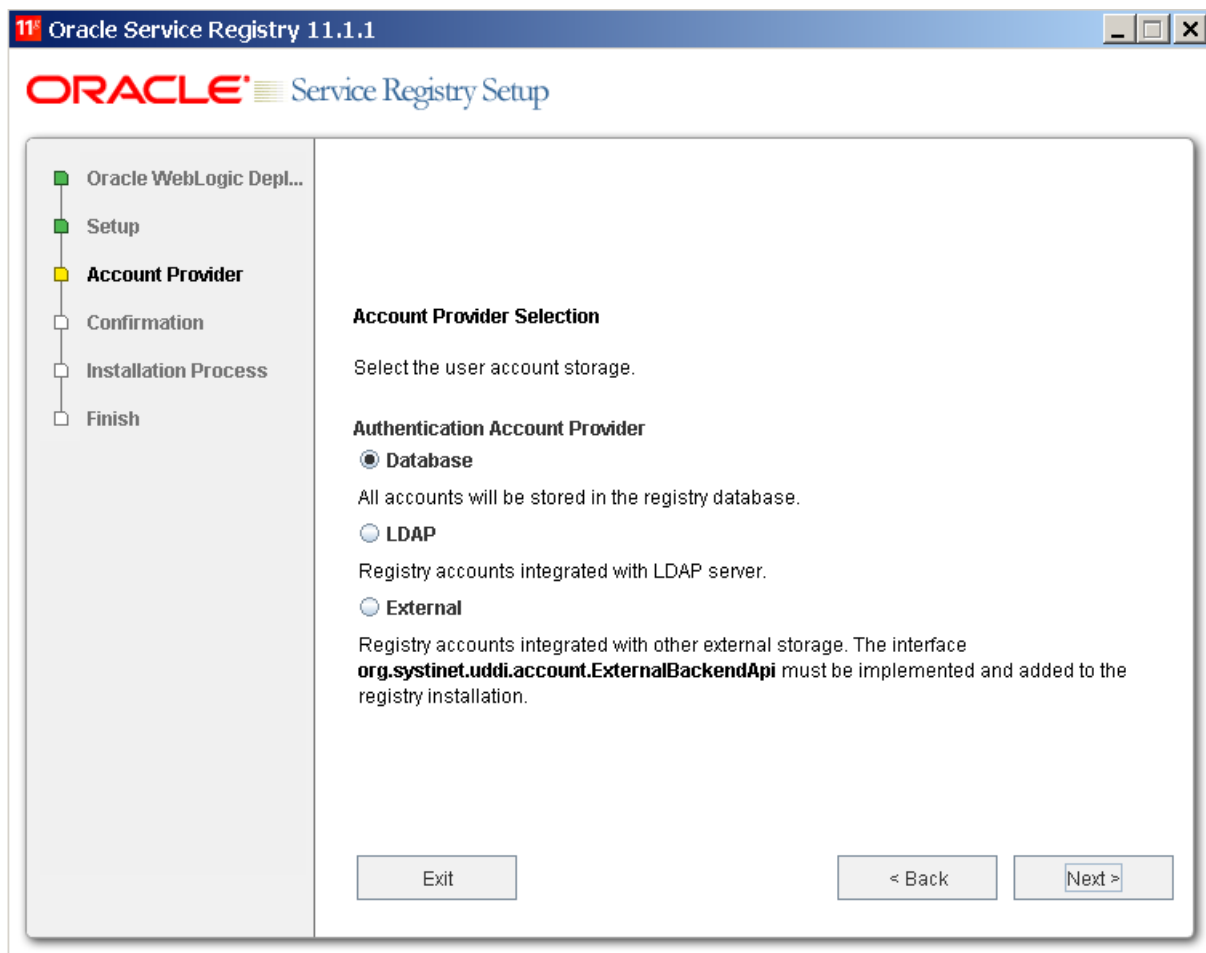Figure 53. Setup Select Authentication Account Provider

For more information on the Setup tool, please see [Section 2.7, Reconfiguring After Installation](#).

6.1. LDAP

Select **LDAP** on the **Account Provider** panel.

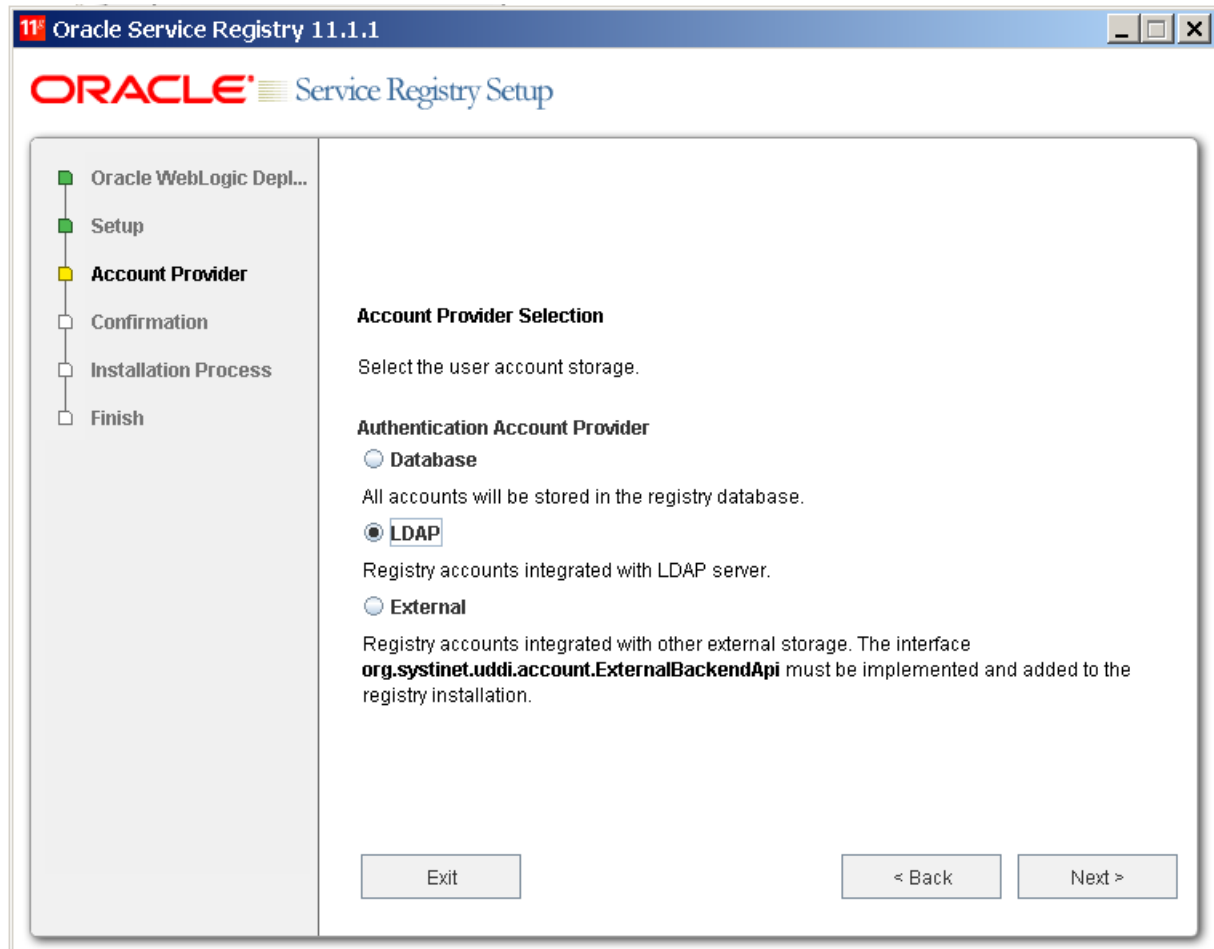

Enter the following settings:

Figure 54. LDAP Service

Oracle Service Registry 11.1.1

ORACLE Service Registry Setup

☒ Oracle WebLogic Depl...
☒ Setup
☒ Account Provider
☒ **LDAP Service**
☐ Confirmation
☐ Installation Process
☐ Finish

LDAP Service Configuration

Enter LDAP service properties.

Naming Provider URL
Initial Naming Factory
Security Principal
Password
Authentication

Oracle Service Registry uses a JNDI interface to connect to LDAP servers. The following JNDI properties must be known to the server. (The default properties are noted in parentheses.)

Java naming provider URL

A URL string for configuring the service provider specified by the "Java naming factory initial" property. (ldap://hostname:389).

Initial Naming Factory

Class name of the initial naming factory. (com.sun.jndi.ldap.LdapCtxFactory).

Security Principal


The name of the principal for anonymous read access to the directory service.

Password

Password of security principal.

Security Protocol

Name of the security protocol. (simple)

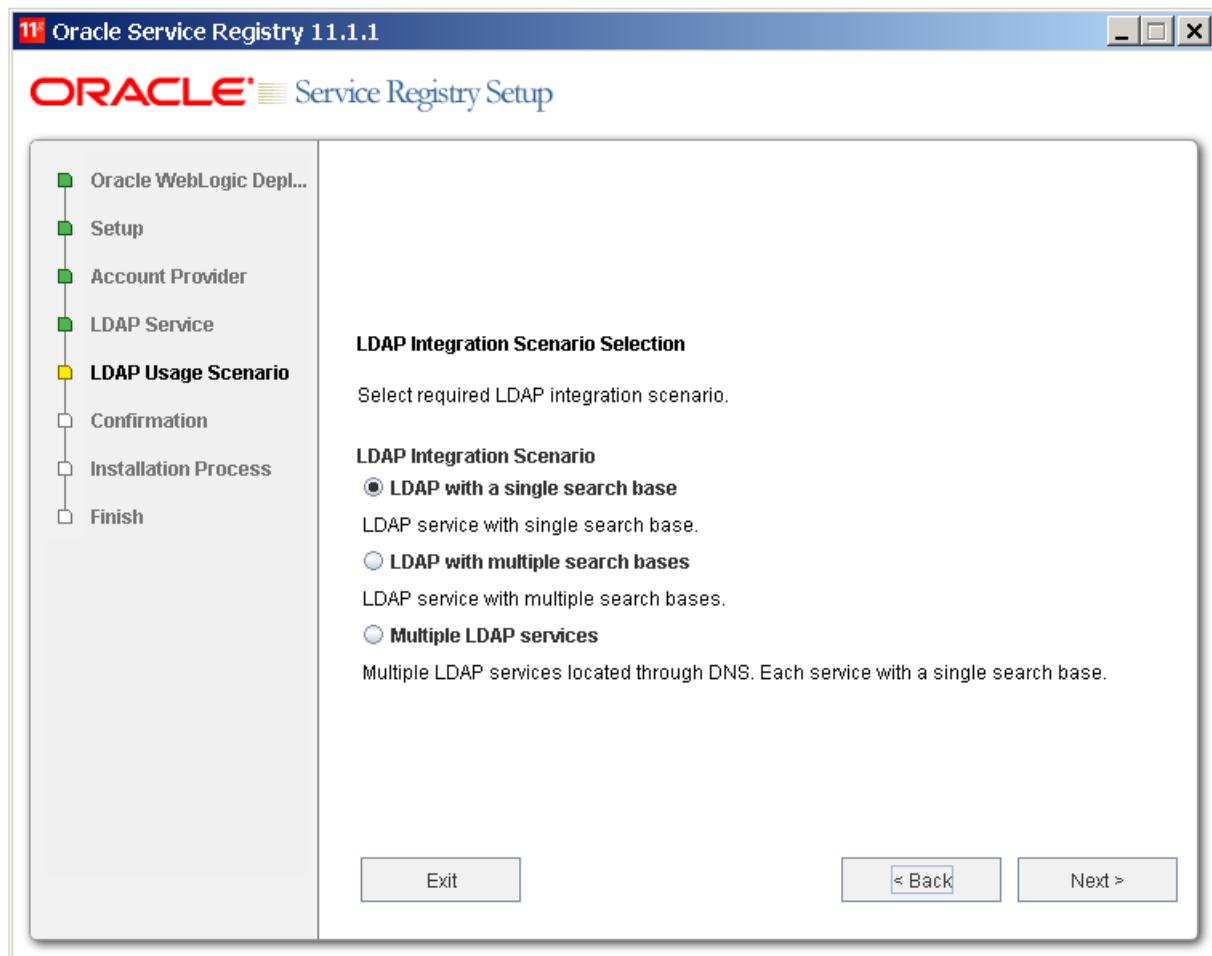Figure 55. LDAP Usage Scenarios

You can select the following LDAP usage scenarios:

LDAP with a single search base

The scenario is very simple. There is only one LDAP server in this scenario. All identities are stored under a single search base.

LDAP with multiple search bases

In this scenario there is also only one LDAP server, but it has multiple search bases mapped to a domain. The domain is a specified part of user's login name (that is, DOMAIN/USERNAME). All users must specify the domain name in the login dialog. During the managing with accounts or groups it is recommended to use DOMAIN/USERNAME because of performance. If no domain is set then search is performed across all domains.

Domains can be specified dynamically or statically. For dynamic settings it is necessary to specify, for example, a domain prefix or postfix. Static domains are set during the installation directly and so they must be known in time of installation.

Multiple LDAP services

More than one LDAP service are used in this scenario. The correct LDAP service is chosen via DNS. As in the previous scenario, users must specify a domain name during login. When managing accounts or groups users have to set domain name. If domain name is not specified then no domain is processed.

**Note**

Automatic discovery of the LDAP service using the URL's distinguished name is supported only in Java 2 SDK, versions 1.4.1 and later, so be sure of the Java version you are using.

The automatic discovery of LDAP servers allows you not to hardwire the URL and port of the LDAP server. For example, you can use `ldap:///o=JNDITutorial,dc=example,dc=com` as a URL and the real URL will be deduced from the distinguished name `o=JNDITutorial,dc=example,dc=com`.

Oracle Service Registry integration with LDAP uses the JNDI API. For more information, see <http://java.sun.com/products/jndi/tutorial/ldap/connect/create.html> and <http://java.sun.com/j2se/1.4.2/docs/guide/jndi/jndi-dns.-html#URL>

6.1.1. LDAP with a Single Search Base

The installation consists of the following steps:

1. Specify user/account search properties as shown in [Figure 56](#).
2. Map Registry user properties to LDAP properties as shown in [Figure 57](#).
3. Specify group search properties as shown in [Figure 58](#).
4. Map Registry group properties to LDAP properties as shown in [Figure 59](#).

Figure 56. User Search Properties

Field description:

Search Filter

The notation of the search filter conforms to the LDAP search notation. You can specify the LDAP node property that matches the user account.

Search Base

LDAP will be searched from this base including the current LDAP node and all possible child nodes.


Search Scope

Here you can specify how deep the LDAP tree structure's data will be searched.

- *Object Scope* - Only the search base node will be searched.
- *One-level Scope* - Only direct sub-nodes of the search base (entries one level below the search base) will be searched. The base entry is not included in the scope.
- *Subtree Scope* - Search base and all its sub-nodes will be searched.

Results Limit

Number of items returned when searching LDAP.

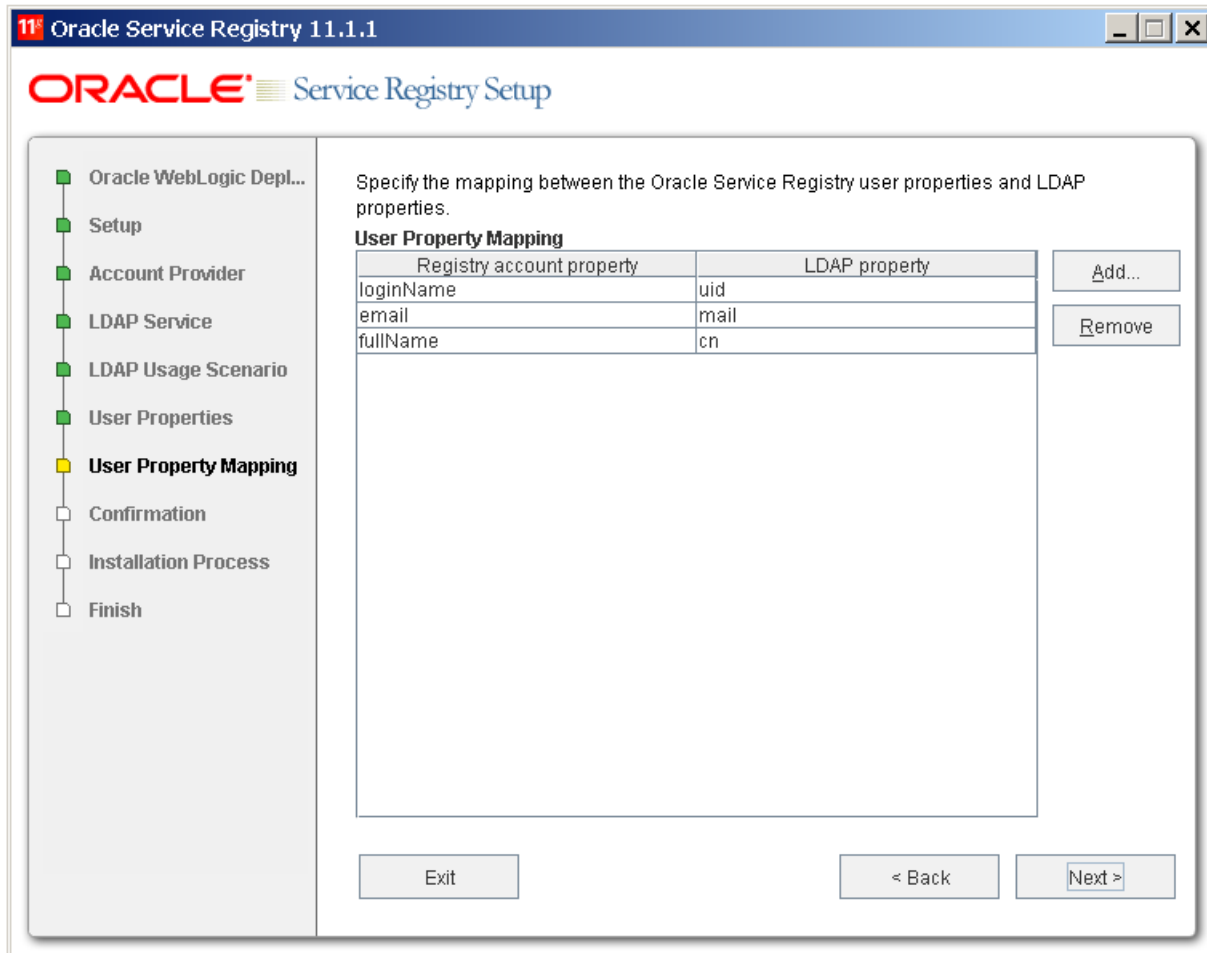Figure 57. User Properties Mapping

You can specify mapping between Oracle Service Registry user account properties and LDAP properties. You can add rows by clicking **Add**. To edit an entry, double click on the value you wish to edit.

The following user account properties can be mapped from an LDAP server:

```
java.lang.String loginName
java.lang.String email
java.lang.String fullName
java.lang.String languageCode
java.lang.String password
java.lang.String description
java.lang.String businessName
java.lang.String phone
java.lang.String alternatePhone
java.lang.String address
java.lang.String city
java.lang.String stateProvince
java.lang.String country
java.lang.String zip
java.util.Date expiration
java.lang.Boolean expires
```

```
java.lang.Boolean external
java.lang.Boolean blocked
java.lang.Integer businessesLimit
java.lang.Integer servicesLimit
java.lang.Integer bindingsLimit
java.lang.Integer tModelsLimit
java.lang.Integer assertionsLimit
java.lang.Integer subscriptionsLimit
```



Important

The Registry account property **dn** specifies the LDAP distinguished name. The value depends on the LDAP vendor.

- On the Sun ONE Directory Server, the value is **entryDN**
- On Microsoft Active Directory, the value is **distinguishedName**

If an optional property (such as email) does not exist in the LDAP, then the property's value is set according to the default account. The default account is specified in the config file whose name is `account_core.xml`.



Note

User account properties that you specify at the [Figure 57](#) will be treated as read-only from Registry Control and registry APIs.

For more information, please see [Developer's Guide, userAccount data structure](#).

Figure 58. Group Search Properties

Oracle Service Registry 11.1.1

ORACLE Service Registry Setup

☒ Oracle WebLogic Depl...
☒ Setup
☒ Account Provider
☒ LDAP Service
☒ LDAP Usage Scenario
☒ User Properties
☒ User Property Mapping
☒ **Group Properties**
☐ Confirmation
☐ Installation Process
☐ Finish

Enter group search parameters.

Search Filter

Search Base

Search Scope
☐ Object scope
☐ One level scope
☒ Subtree scope

Results Limit

Field description:

Search Filter

The notation of the search filter conforms to LDAP search notation. You can specify the LDAP node property that matches the group.


Search Base

LDAP, including the current LDAP node and possible all child nodes, will be searched from this base.

Search Scope

Here you can specify how deep the LDAP tree structure data will be searched.

- *Object Scope* - Only the search base node will be searched.
- *One-level Scope* - Search base and its direct sub-nodes will be searched.
- *Subtree Scope* - Search base and all its sub-nodes will be searched.

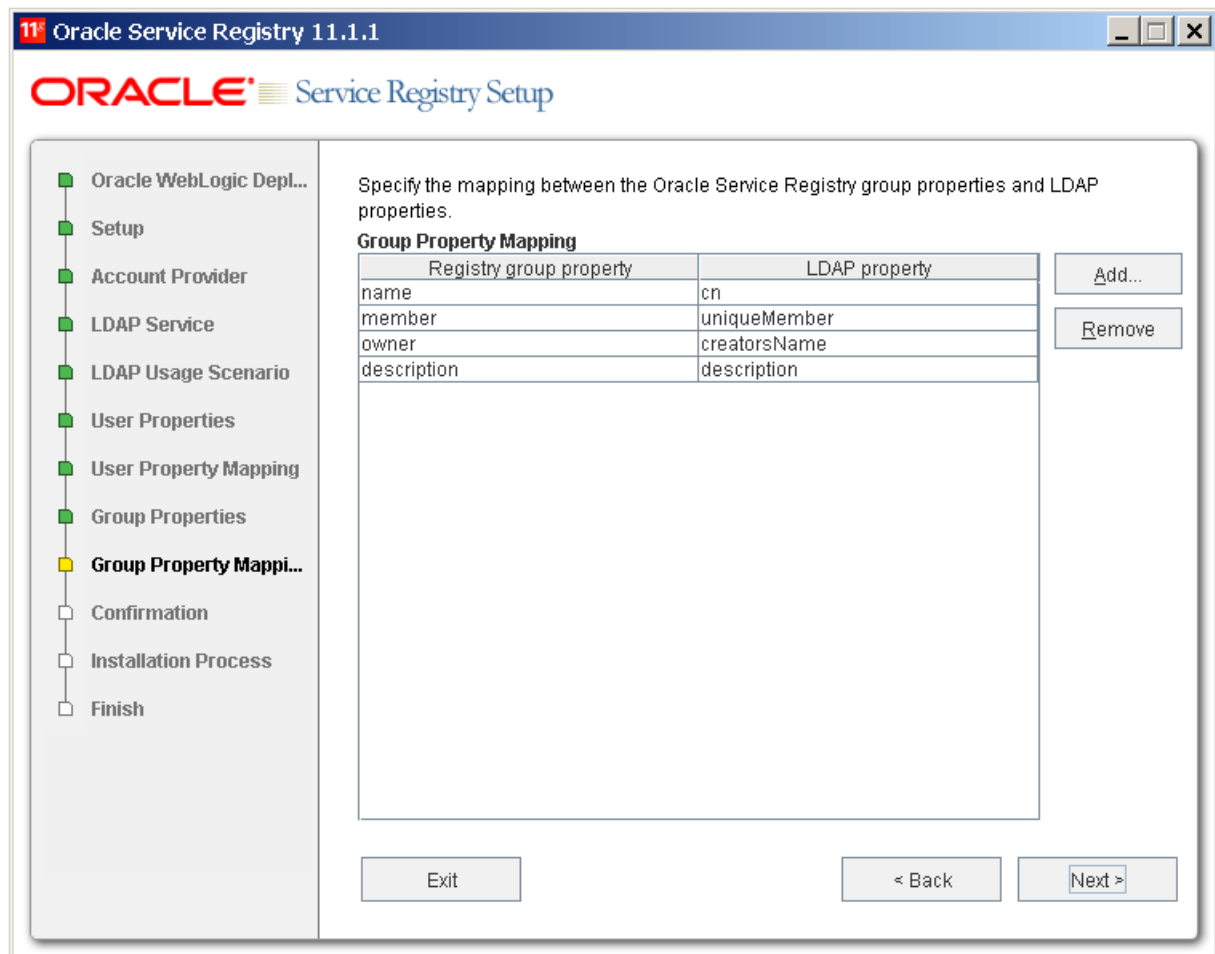Figure 59. Group Properties Mapping

You can specify mapping between Oracle Service Registry group properties and LDAP properties. You can add rows by clicking **Add**. To edit an entry, double click on the value you wish to edit.

If a property (such as description) does not exist in the LDAP then property value is set according to the default group. The default group (groupInfo) is specified in the config file whose name is group.xml.

For more information, please see [Developer's Guide, group data structure](#)

6.1.2. LDAP with Multiple Search Bases

The installation consists of the following steps:

1. Specify the domain delimiter, domain prefix and postfix as shown in [Figure 60](#).
2. Enable/Disable domains as shown in [Figure 61](#).
3. Specify User Search properties as shown in [Figure 56](#).
4. Map Registry user properties to LDAP properties as shown in [Figure 57](#).
5. Specify group search properties as shown in [Figure 58](#).

6. Map Registry group properties to LDAP properties as shown in [Figure 59](#)

Figure 60. Domain Delimiter

Oracle Service Registry 11.1.1

ORACLE Service Registry Setup

- Oracle WebLogic Depl...
- Setup
- Account Provider
- LDAP Service
- LDAP Usage Scenario
- Search String Delimite...**
- Confirmation
- Installation Process
- Finish

Search String Delimiters Configuration

In order to search multiple search bases you must provide textual delimiters to separate individual items in a query. Enter required delimiters.

Domain Delimiter

/

Domain Prefix

ou=

Domain Postfix

Exit < Back Next >

Field descriptions:


Domain Delimiter

Specifies the character that delimits domain and user name. When left empty, users are searched from all domains.

Domain Prefix, Domain Postfix

Domains are searched using the following pattern: {domain prefix}domain_name{domain postfix}{search base}

where {domain prefix} is value of property whose name is domain prefix, {domain postfix} is value of property whose name is domain postfix and {searchbase} is value of property whose name is searchbase.

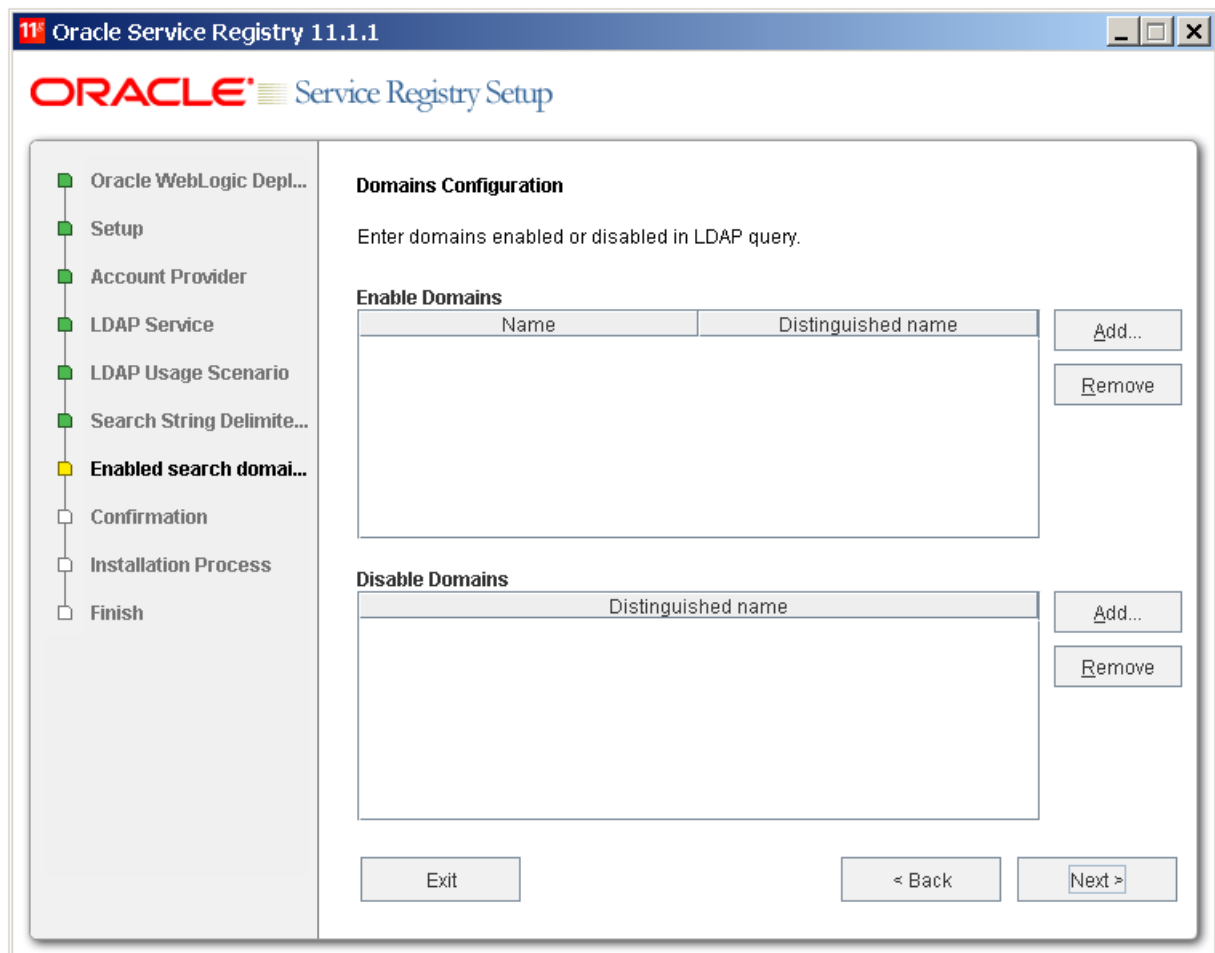Figure 61. Enable/Disable Domains**Enable Domains**

Left column: domain name that users will be using during login. Right column: distinguished domain name.

Disable Domains

Enter distinguished domain name of domains you wish to disable.

6.1.3. Multiple LDAP Services

The correct LDAP service is chosen via DNS. The installation consists of the following steps:

1. Specify user/account search properties as shown in [Figure 56](#).
2. Map Registry user properties to LDAP properties as shown in [Figure 57](#).
3. Specify group search properties as shown in [Figure 58](#).
4. Map Registry group properties to LDAP properties as shown in [Figure 59](#).

6.1.4. LDAP over SSL/TLS

It is only a matter of configuration to setup LDAP over *SSL* (or *TLS*) with a directory server of your choice. We recommend that you first install Oracle Service Registry with a connection to LDAP that does not use SSL. You can then verify the configuration by logging in as a user defined in this directory before configuring use of SSL.

The configuration procedure assumes that you have already installed Oracle Service Registry with an LDAP account provider. Oracle Service Registry must not be running.

LDAP over SSL Without Client Authentication

In this case only LDAP server authentication is required. This is usually the case.

Edit the `REGISTRY_HOME/app/uddi/conf/directory.xml` file in one of the following ways depending on the version of Java used to run Oracle Service Registry:

- If Oracle Service Registry will always be running with Java 1.4.2 or later:
 1. Change the `java.naming.provider.url` property to use the `ldaps` protocol and the port on which the directory server accepts SSL/TLS connections. For example `ldaps://sranka.in.idoox.com:636`;
- Otherwise, if Oracle Service Registry may be run with a Java version less than 1.4.2:
 1. Change the `java.naming.provider.url` property to the appropriate URL using the `ldap` protocol. For example `ldap://sranka.in.idoox.com:636`;
 2. Add a new property, after the `java.naming.provider.url` property, with name `java.naming.security.protocol` and value `ssl`;

This is shown in the following example:

Example 1. Directory configuration

```
<config name="directory" savingPeriod="5000">
  <directory>
    <!-- LDAP over (SSL/TLS) unprotected connection -->
    <!--
    <property name="java.naming.provider.url" value="ldap://hostname:47361"/>
    -->
    <!-- LDAP over SSL/TLS for Java 1.4.2 and later -->
    <!--
    <property name="java.naming.provider.url" value="ldaps://hostname:636"/>
    -->
    <!-- LDAP over SSL/TLS for Java where LDAP over SSL is supported -->
    <property name="java.naming.provider.url" value="ldap://hostname:636"/>
    <property name="java.naming.security.protocol" value="ssl"/>
    ...
    ...
    ...
  </directory>
</config>
```

In both cases, be sure that the hostname specified in the `java.naming.provider.url` property matches the name that is in the directory server certificate's subject common name (CN part of certificate's Subject). Otherwise you will get an

exception during startup of Oracle Service Registry. It will inform you of a hostname verification error. The stacktrace contains the hostname that you must use.

LDAP over SSL With Mutual Authentication

Oracle Service Registry does not support LDAP over SSL with mutual authentication.

Ensuring Trust of the LDAP Server

The client that connects to the SSL/TLS server must trust the server certificate in order to establish communication with that server. The configuration of LDAPS explained above inherits the default rule for establishing trust from JSSE (the Java implementation of SSL/TLS). This is based on trust stores.

When a trust store is needed to verify a client/server certificate, it is searched for in the following locations in order:

1. The file specified by the `javax.net.ssl.trustStore` system property, if defined;
2. Otherwise the file `JAVA_HOME\jre\lib\security\jssecacerts` if it exists;
3. Otherwise the file `JAVA_HOME\jre\lib\security\cacerts` if it exists;

It is recommended to use the first option to define a trust store specifically for the application you are running. In this case, you have to change the command that starts the registry (or the JVM environment of the ported registry) to define the following Java system properties:

Property	Description
<code>javax.net.ssl.trustStore</code>	Absolute path of your trust store file.
<code>javax.net.ssl.trustStorePassword</code>	Password for the trust store file.

To ensure that the server certificate is trusted, you have to:

1. Contact the administrator of the LDAP server and get the certificate of the server or the certificate of the authority that signed it;
2. Import the certificate into the trust store of your choice using the Java keytool:

```
keytool -import -trustcacerts -alias alias -file file -keystore keystore -storepass storepass
```

where the parameters are as follows:

alias

A mandatory, unique alias for the certificate in the trust store;

file

The file containing the certificate (usually with `.crt` extension);

keystore

The keystore file of your choice;

storepass

A password designed to protect the keystore file from tampering. Java level keystores (`cacerts` and `jssecacerts`) usually require the password `changeit`;

6.1.5. LDAP Configuration Examples

Oracle Internet Directory with Single Search Base

In this example, we show how to configure an Oracle Internet Directory under the [LDAP Single Search Base scenario](#).

[Section Oracle Internet Directory with Single Search Base](#) shows user properties that are stored in the LDAP server.

Figure 62. User Properties in LDAP

The screenshot shows the Softerra LDAP Administrator v.3 interface. On the left, a tree view displays the directory structure: Internet Public Servers > LDAP Administrator v2 Profiles > Oracle Internet Directory > cn=OracleContext > dc=com > dc=idoox > dc=in > cn=OracleContext > cn=Users > cn=Joe Patroni. The right pane displays the properties for the selected user:

Name	Value
authpassword;oid	{SASL/MD5}LszUPiOjhjueonOc/yQRv==
authpassword;oid	{SASL/MD5-DN}nr79Dnlv3xY6LCQKMohXA==
authpassword;oid	{SASL/MD5-U}uLGGwC0u0HC7EyhHf38Pv==
authpassword;orclcomm...	{X-ORCLIF5MD5}DtDdnvV9r3MeGZdYulCrQ==
authpassword;orclcomm...	{X-ORCLWEBDAV}gY5H/KgwaVBKGGMjzcoyrw==
authpassword;orclcomm...	{MD5}LRJk615P3hNoCv6SByRvQ==
authpassword;orclcomm...	{X-ORCLLMV}DE031FFACE7E6A9CAAD3B435B51404EE
authpassword;orclcomm...	{X-ORCLNTV}727EE90936F1ED2643173657CC52D259
givenname	Joe
sn	Patroni
telephonenumber	1-617-360-7089
facsimiletelephonenumber	1-781-369-1928
objectclass	top
objectclass	person
objectclass	organizationalPerson
objectclass	inetorgperson
uid	JPatroni
cn	Joe Patroni
mail	joe.patroni@mycompany.com
userpassword	{SHA}B95gTEe1ZKRJ5GcSEjaT7UfhofA=

[Section Oracle Internet Directory with Single Search Base](#) shows group properties that are stored in the LDAP server.

Figure 63. Group Properties in LDAP

The screenshot shows the Softerra LDAP Administrator v.3 interface. On the left, a tree view displays the directory structure: Internet Public Servers > LDAP Administrator v2 Profiles > Oracle Internet Directory > cn=OracleContext > dc=com > dc=idoox > dc=in > cn=OracleContext > cn=Users > cn=Groups > cn=OCS_PORTAL_USERS > cn=control-team. The right pane displays the properties for the selected group:

Name	Value
objectclass	top
objectclass	groupofuniquecnames
cn	control-team
description	control team
uniquemember	cn=joe patroni,cn=users,dc=in,dc=idoox,dc=com
uniquemember	cn=tanya smith,cn=users,dc=in,dc=idoox,dc=com

The following table shows how to configure Oracle Service Registry using this scenario.

Config Property	Config Value	See
Java naming provider URL	ldap://localhost:389	Figure 54
Initial Naming Factory	com.sun.jndi.ldap.LdapCtxFactory	Figure 54


Config Property	Config Value	See
Security Principal	c n = J o e Patroni,cn=Users,ou=uddi,dc=in,dc=idoox,dc=com	Figure 54
Security Protocol	simple	Figure 54
User Properties		
Search Filter	objectClass=person	Figure 56
Search Base	cn=Users,dc=in,dc=idoox,dc=com	Figure 56
Search Scope	Subtree Scope	Figure 56
Result Limit	100	Figure 56
telephoneNumber	phone	Figure 57
uid	loginName	Figure 57
cn	fullName	Figure 57
mail	email	Figure 57
Group Properties		
Search Filter	objectClass=groupofuniquenames	Figure 58
Search Base	cn=Groups,dc=in,dc=idoox,dc=com	Figure 58
Search Scope	Subtree Scope	Figure 58
Result Limit	100	Figure 58
creatorsName	owner	Figure 59
description	description	Figure 59
uniqueMember	member	Figure 59
cn	name	Figure 59

SUN One with Single Search Base


In this example, we show how to configure a Sun One Directory Server 5.2 under the [LDAP Single Search Base scenario](#).

[Section SUN One with Single Search Base](#) shows user properties that are stored in the LDAP server.

Figure 64. User Properties in LDAP

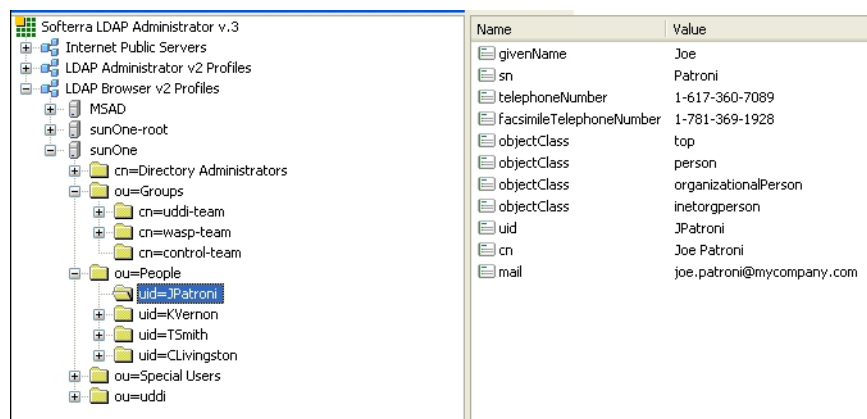

[Section SUN One with Single Search Base](#) shows group properties that are stored in the LDAP server.

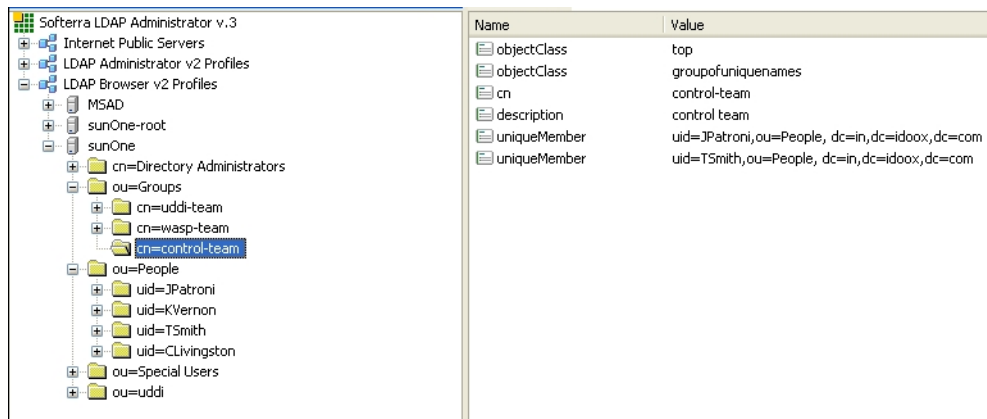Figure 65. Group Properties in LDAP

The following table shows how to configure Oracle Service Registry using this scenario.

Config Property	Config Value	See
Java naming provider URL	ldap://localhost:389	Figure 54
Initial Naming Factory	com.sun.jndi.ldap.LdapCtxFactory	Figure 54
Security Principal	uid=JPatroni,ou=people,dc=in,dc=idoox,dc=com	Figure 54
Security Protocol	simple	Figure 54
User Properties		
Search Filter	objectClass=person	Figure 56
Search Base	ou=people,dc=in,dc=idoox,dc=com	Figure 56
Search Scope	Subtree Scope	Figure 56
Result Limit	100	Figure 56
telephoneNumber	phone	Figure 57
uid	loginName	Figure 57
cn	fullName	Figure 57
mail	email	Figure 57
Group Properties		
Search Filter	objectClass=groupofuniquenames	Figure 58
Search Base	ou=groups,dc=in,dc=idoox,dc=com	Figure 58
Search Scope	Subtree Scope	Figure 58
Result Limit	100	Figure 58
creatorsName	owner	Figure 59
description	description	Figure 59
uniqueMember	member	Figure 59
cn	name	Figure 59

Sun One with Multiple Search Bases

In this example, we show how to configure Sun One Directory Server 5.2 with multiple search bases. In [Figure 67](#), you can see users and domains that are stored on the LDAP server. We want to configure the LDAP integration with Oracle Service Registry in this way:

- Only users from domain1 and domain10 can log into Oracle Service Registry. LDAP domain2 will be disabled.
- LDAP domain10 will be mapped to the domain3 user group in Oracle Service Registry.

[Figure 67](#) shows how users from LDAP are mapped to Oracle Service Registry

Figure 66. LDAP Users and Groups

The screenshot shows the Softerra LDAP Administrator v.3 interface. On the left, a tree view displays the LDAP hierarchy. The 'ou=example' container is expanded, showing sub-containers for 'ou=domain1', 'ou=domain2', and 'ou=domain10'. Under 'ou=domain1', the user 'uid=TStafford' is selected. On the right, a table displays the attributes and values for this user.

Name	Value
givenName	Thomas
sn	Stafford
telephoneNumber	1-617-803-1111
mail	thomas.stafford@mycompany.com
facsimileTelephoneNumber	1-717-889-5617
objectClass	top
objectClass	person
objectClass	organizationalPerson
objectClass	inetorgperson
uid	TStafford
cn	Thomas Stafford

Figure 67. Registry Users

[Home](#) > [Registry management](#) > [Find account](#)

[Browse](#) [Search](#) [Publish](#) [Profile](#) [Manage](#)

[Registry management](#) :: [Registry configuration](#) :: [Registry control configuration](#)

Find account

Filter: Login name: %

Displaying results 1 - 5 of 5

	Login name:	Full name:
☐	admin	administrator
☐	domain1/DShaw	Darby Shaw
☐	domain1/MStrong	Marry Strong
☐	domain1/RPhelan	Rex Phelan
☐	domain3/ETroy	Elliott Troy
☐	domain3/HGreen	Harris Green
☐	domain3/JCallahan	Joseph Callahan

The following table shows how to configure Oracle Service Registry using this scenario.

Config Property	Config value	See
Java naming provider URL	ldap://localhost:1000	Figure 54
Initial Naming Factory	com.sun.jndi.ldap.LdapCtxFactory	Figure 54
Security Principal	uid=JPatroni,ou=people,dc=in,dc=idoox,dc=com	Figure 54
Security Protocol	simple	Figure 54
uddi.ldap.domain.delimiter	/	Figure 60
uddi.ldap.domain.prefix	ou=	Figure 60
uddi.ldap.domain.postfix	leave empty	Figure 60
Enable domains		
domain name	domain3	Figure 61
Distinguished name	ou=domain10,ou=example,dc=in,dc=idoox,dc=com	Figure 61
Disable domains		
Distinguished name	ou=domain2,ou=example,dc=in,dc=idoox,dc=com	Figure 61
User Properties		
Search Filter	objectClass=person	Figure 56
Search Base	ou=people,dc=in,dc=idoox,dc=com	Figure 56
Search Scope	Subtree Scope	Figure 56
Result Limit	100	Figure 56
telephoneNumber	phone	Figure 57

Config Property	Config value	See
uid	loginName	Figure 57
cn	fullName	Figure 57
mail	email	Figure 57
Group Properties		
Search Filter	objectClass=groupofuniquenames	Figure 58
Search Base	ou=groups,dc=in,dc=idoox,dc=com	Figure 58
Search Scope	Subtree Scope	Figure 58
Result Limit	100	Figure 58
creatorsName	owner	Figure 59
description	description	Figure 59
uniqueMember	member	Figure 59
cn	name	Figure 59

Active Directory with Single Search Base

In this example, we show how to configure an Active Directory with a single search base. [Figure 68](#) shows group properties that are stored in the Active Directory. These group properties will be mapped to Oracle Service Registry as shown in [Figure 69](#).

Figure 68. LDAP User Group

The screenshot displays the Softerra LDAP Administrator v.3 interface. On the left, a tree view shows the LDAP hierarchy under 'MSAD' > 'DC=registry' > 'OU=example' > 'CN=control-team'. The 'CN=control-team' entry is selected. On the right, a table lists the properties and values for this group.

Name	Value
objectClass	top
objectClass	group
cn	control-team
description	control team
member	CN=Tanya Smith,OU=example,DC=registry,DC=in,DC=systinet,DC=com
member	CN=Joe Patroni,OU=example,DC=registry,DC=in,DC=systinet,DC=com
distinguishedName	CN=control-team,OU=example,DC=registry,DC=in,DC=systinet,DC=com
instanceType	4
whenCreated	20050628154305.0Z
whenChanged	20050628154416.0Z
uSNCreated	188864
uSNChanged	188868
name	control-team
objectGUID	{81BAEE1C-F8ED-472F-8F2D-924CF4DDCCCE}
objectSid	S-1-5-21-1332440743-3657354596-1717007476-1240
sAMAccountName	control-team
sAMAccountType	268435456
groupType	-2147483646
objectCategory	CN=Group,CN=Schema,CN=Configuration,DC=registry,DC=in,DC=systinet,DC=com
mail	control.team@mycompany.com

Figure 69. User Group in Oracle Service Registry

Home > Groups > View group Welcome admin

Browse Search Publish **Profile** Manage

My account :: Groups :: Favorite taxonomies

View group

Group name: **control-team**

Visibility: **public**

Description: **default description**

Users List

Login name Filter

Displaying results 1 - 2 of 2

Login name	Full name	Email	Description:
joe.patroni	Joe Patroni	joe.patroni@mycompany.com	Joe Patroni
tanya.smith	Tanya Smith	tanya.smith@mycompany.com	Tanya Smith

1

Figure 70 shows user properties that are stored in the Active Directory. These user properties will be mapped to Oracle Service Registry as shown in Figure 69.

Figure 70. LDAP User Properties

Softerra LDAP Administrator v.3

Internet Public Servers

LDAP Administrator v2 Profiles

MSAD

DC=registry

CN=Builtin

CN=Computers

OU=Domain Controllers

OU=example

CN=Cindy Livingston

CN=control-team

CN=Joe Patroni

CN=Keith Vernon

CN=sales-team

CN=Tanya Smith

CN=ForeignSecurityPrincipals

CN=Infrastructure

CN=LostAndFound

CN=NTDS Quotas

CN=Program Data

OU=Root

CN=System

CN=Users

Idap://TAPI3Directory.registry.in.systinet.com:389/CN=Configuration

Idap://ForestDnsZones.registry.in.systinet.com:389/CN=Schema

Idap://DomainDnsZones.registry.in.systinet.com:389/CN=Configuration

Idap://registry.in.systinet.com:389/CN=Configuration

CN=Configuration

CN=Schema

DC=DomainDnsZones

DC=ForestDnsZones

DC=TAPI3Directory

Name	Value
objectClass	top
objectClass	person
objectClass	organizationalPerson
objectClass	user
cn	Joe Patroni
sn	Patroni
telephoneNumber	1-617-879-9786
givenName	Joe
distinguishedName	CN=Joe Patroni,OU=example,DC=registry,DC=in,DC=systinet,DC=com
instanceType	4
whenCreated	20050628153947.0Z
whenChanged	20050629091350.0Z
displayName	Joe Patroni
uSNCreated	188829
memberOf	CN=control-team,OU=example,DC=registry,DC=in,DC=systinet,DC=com
uSNChanged	192534
name	Joe Patroni
objectGUID	{B828F27A-24EF-4A70-BD71-AB4E6A1A490F}
userAccountControl	512
badPwdCount	0
codePage	0
countryCode	0
badPasswordTime	0
lastLogoff	0
lastLogon	0
pwdLastSet	127644467902500000
primaryGroupID	513
objectSid	S-1-5-21-1332440743-3657354596-1717007476-1235
accountExpires	9223372036854775807
logonCount	0
sAMAccountName	joe.patroni
sAMAccountType	805306368
userPrincipalName	joe.patroni@registry.in.systinet.com
objectCategory	CN=Person,CN=Schema,CN=Configuration,DC=registry,DC=in,DC=systinet,DC=com
mail	joe.patroni@mycompany.com

Figure 71. User Properties in Oracle Service Registry

The screenshot shows a 'View account' window with a list of user properties. The properties are as follows:

Login name:	joe.patroni
Email:	joe.patroni@mycompany.com
Full name:	Joe Patroni
Default language:	English
Description:	Joe Patroni
Business Name:	
Phone:	1-671-879-9786
Alternate phone:	
Address:	
City:	
State province:	
Country:	
Zip:	
User profile:	Developer Profile
Last logged in:	Mon Jan 09 15:52:51 ICT 2006
External:	No
Blocked:	No
Assertions limit:	10
Bindings limit:	2
Businesses limit:	1
Services limit:	4

At the bottom of the window are three buttons: 'Back', 'Delete Account', and 'Edit Account'.


The following table shows how to configure Oracle Service Registry using this scenario.

Config Property	Config value	See
Java naming provider URL	ldap://localhost:389	Figure 54
Initial Naming Factory	com.sun.jndi.ldap.LdapCtxFactory	Figure 54
Security Principal	CN=OracleRegistry,DC=mycompany,DC=com	Figure 54
Security Protocol	DIGEST-MD5	Figure 54
User Properties		
Search Filter	objectClass=person	Figure 56
Search Base	ou=example-registry,dc=ind-mycompany,dc=com	Figure 56
Search Scope	Subtree Scope	Figure 56
Result Limit	100	Figure 56
sAMAccountName	loginName	Figure 57
cn	fullName	Figure 57
mail	email	Figure 57
telephoneNumber	phone	Figure 57
Group Properties		

Config Property	Config value	See
Search Filter	objectClass=group	Figure 58
Search Base	ou=exampledc=registrydc=ind=mycompanydc=com	Figure 58
Search Scope	Subtree Scope	Figure 58
Result Limit	100	Figure 58
member	member	Figure 59
cn	name	Figure 59
uniqueMember	member	Figure 59
cn	name	Figure 59

6.2. Custom (Non-LDAP)

Select **External** on the **Advanced Account Settings** panel.

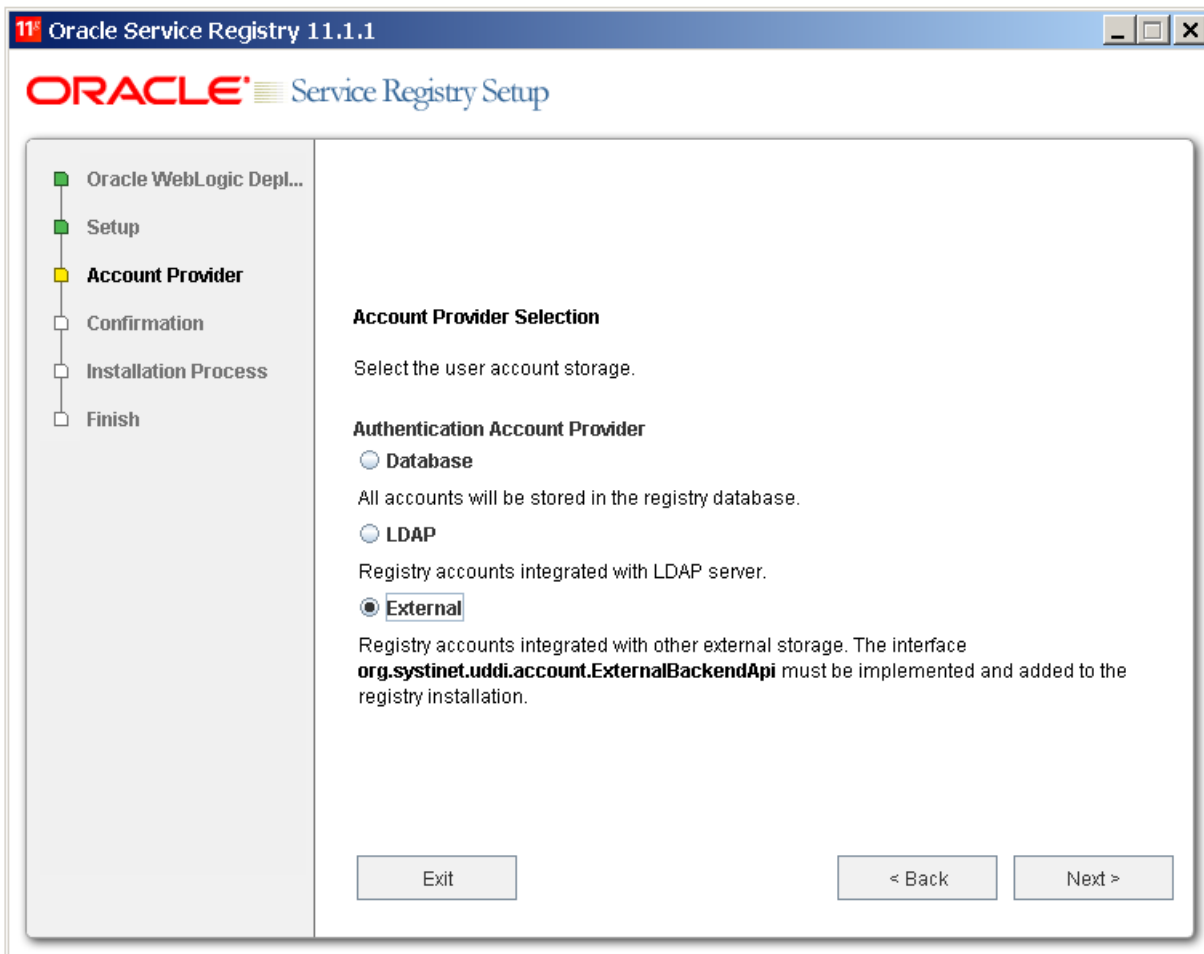

External accounts require implementation of the interface [org.systinet.uddi.account.ExternalBackendApi](#).

7. Cluster Configuration


This chapter contains general notes about the synchronized configuration of an Oracle Service Registry cluster and gives instructions on how to deploy Oracle Service Registry to a WebLogic Cluster ([Section 7.4, WebLogic High Availability Configuration](#)).

7.1. Cluster operation

Cluster operation is achieved by running multiple registries and joining their functionality with a load balancer (proxy).

Load balancing is used to distribute requests among registries to get the optimal load distribution. The load balancer should be configured to distribute requests among all physical endpoints of the registry nodes. If using an application server, refer to its documentation for details about configuring load balancing.

Figure 72. Oracle Service Registry in WebLogic Cluster

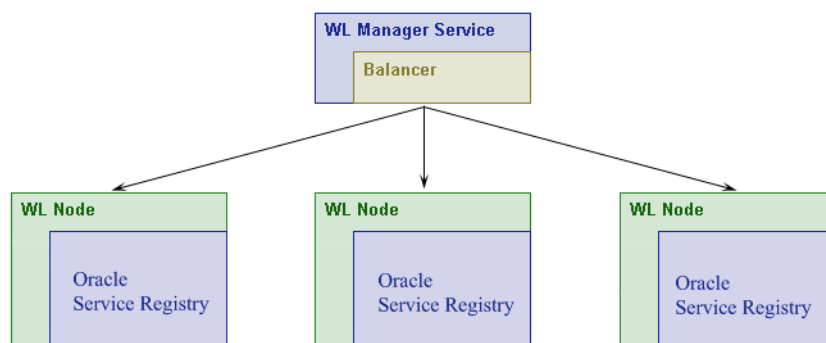

Clients to Oracle Service Registry access TCP ports on the balancer which forwards the connection to a running cluster node with an actual Oracle Service Registry. Each Oracle Service Registry has a connection to a common database so that each Oracle Service Registry has access to the latest data. This connection also serves as a distribution point for changed configurations and inter-node events.

When an Oracle Service Registry node fails (there are various reasons for this such as hardware problems, network connection problems or software failure), other nodes can work without it. The intelligent load balancer will detect this and further requests will not be directed there until the node starts to respond.

Every node has a Node ID - a string identifying the node. Each node should have a different ID. Breaking this rule will cause nodes with the same ID to miss some configuration changes and synchronization events.

Node ID can be specified by the administrator in the `REGISTRY_HOME\app\uddi\conf\nodeid.xml` file. If it is not specified before the initial start of Oracle Service Registry, it will be generated as a unique UUID string. It is possible to change it later, but node-local configurations under the old ID will be left in the database. Ensure that EAR/WAR file generated for deployment has either:

1. Empty Node ID - so that each deployment of the file will generate a unique Node ID on first run and will retain it until deletion or redeployment of the EAR/WAR file. You can use the EAR/WAR file to deploy on all nodes.
2. Specified Node ID - when you deploy the EAR/WAR file to a single node and generate another EAR/WAR file for others. You can choose meaningful names for Node ID this way.

You can set the Node ID in the `nodeid.xml` file before starting setup to generate EAR/WAR file. If you use generation of EAR/WAR file directly from installer the Node ID will be empty.




Note

Latest configurations are identified by internal index sequencing. Time stamps of configurations as displayed in configuration management UI are not relevant as they may be unreliable in case of clock skew on a cluster node.


Cluster operation is affected by the interaction of connection security (HTTPS) and the load balancer. For security reasons, client access is done using the HTTPS protocol. This protocol requires that there is a valid and matching security certificate on the server side (possibly on the client side too if client authentication is required). There are generally two methods for achieving clustered operation via independent load balancer. If you deploy on an application server it may provide an integrated load balancer for you which may be easier to configure than an independent load balancer.

1. Secure connection can take a place between a client and the load balancer. The load balancer is the end point for the secure connection which originated at the client. The load balancer will make an independent connection to some of the Oracle Service Registry nodes. This connection may be either in HTTP or HTTPS. The certificate which the client checks has to be placed on the load balancer. A connection between the load balancer and each Oracle Service Registry can be protected by HTTPS in which case the load balancer and the registries should know each others certificates.

Figure 73. Security in cluster, method 1.

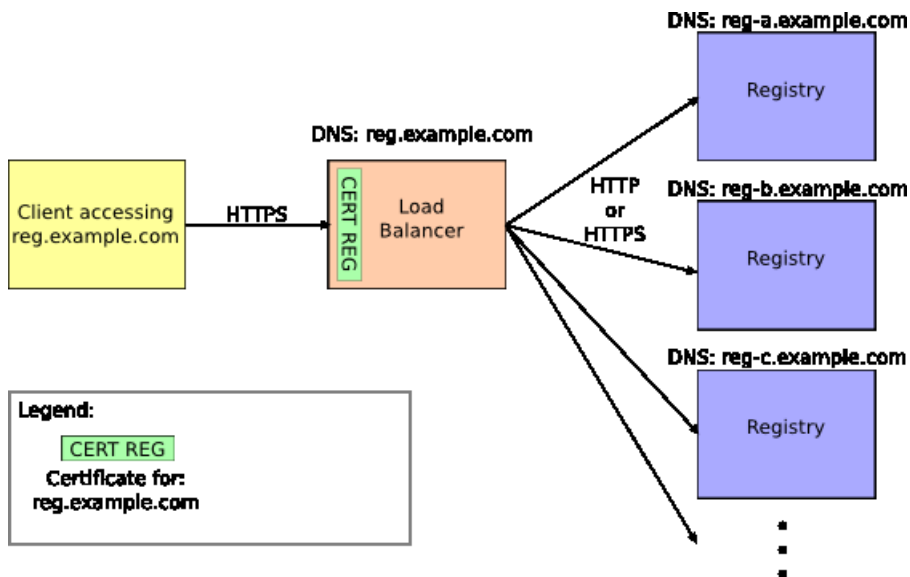

2. Secure connection can be passed by the load balancer and terminated at the cluster node. This case requires that the certificates on all the nodes be the same to provide the illusion of a single service. However the common name inside the certificate should specify the DNS name of the balancer.

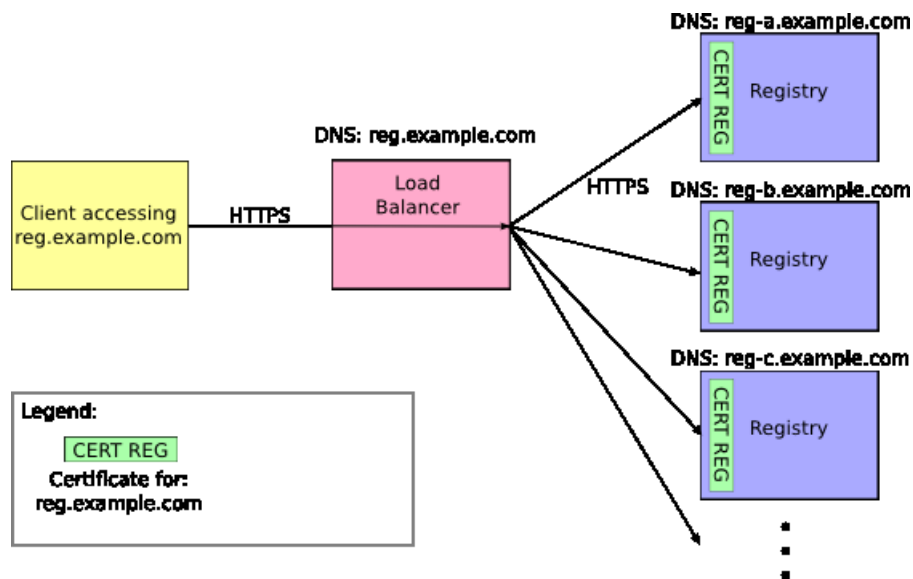Figure 74. Security in cluster, method 2.

Note

Load balancer is not part of Oracle Service Registry product. You can use almost any HTTP/HTTPS load balancer that supports the described configurations.

Most of the Client - Oracle Service Registry interactions require an authentication token to be passed along the way. This token is encrypted by the Oracle Service Registry certificate. Therefore each Oracle Service Registry behind the balancer has to have the same certificate.

WEB interfaces of Oracle Service Registry (Registry Console) need to know the absolute HTTP addresses of themselves. This address in the cluster is the address of the load balancer and the possible context under which it is deployed. This address can be changed during setup.

7.2. Cluster installation

Cluster installation requires the setup of a load balancer and multiple registries. These steps are recommended on the Oracle Service Registry side when an application server is used:

1. Install Oracle Service Registry.
 - Fill-in the hostname and ports of the load balancer.
2. Port Oracle Service Registry via the Deploy option in the Oracle Service Registry Setup program (or directly in Installer program).
3. Deploy the generated WAR or EAR to all cluster nodes via the application server.

These steps are recommended on the Oracle Service Registry side where multiple standalone instances of Oracle Service Registry are used:

1. Install the first Oracle Service Registry.
 - Fill-in the hostname and ports of the load balancer.

2. Setup SSL certificates as required in the first Oracle Service Registry.
3. Install other Registries.
 - Do not create new databases, just connect to the database of first Oracle Service Registry.
 - Copy `REGISTRY_HOME\conf\pstore.xml` from the first registry to each Oracle Service Registry. This assures that each Oracle Service Registry will have the same identity with respect to authentication tokens.
 - Copy the configuration files in the `REGISTRY_HOME\app\uddi\conf\` directory from the first Oracle Service Registry. This is required because some fields in the configuration files are coded by a key specified in `application_core.xml`. Failure to do so may result in error messages during startup and inconsistent configuration data in the database.
4. Run the first installed Oracle Service Registry first so that its configuration files are stored in database first. The next time you can run the Registries in any order (including the first one).

7.3. Setting Up Security

If using a cluster of standalone registries, they must [share the same private key](#) for validating authentication tokens.

7.3.1. Sharing Token Key

If Oracle Service Registry is installed as a cluster of standalone registries, you must ensure that all cluster nodes share the same private key for checking authentication token validity. (By a standalone registry, we mean Oracle Service Registry that is not deployed to an application server. You do not need to do this if Oracle Service Registry is deployed to an application server). To set this up, choose one of the cluster nodes and copy its private key to all other nodes in the cluster by entering this command at a command prompt:

```
PStoreTool copy -alias authTokenIdentity -keyPassword SSL_CERTIFICATE_PASSWORD -config  
REGISTRY_HOME\conf\pstore.xml -config2 TARGET_REGISTRY_HOME\conf\pstore.xml
```

`SSL_CERTIFICATE_PASSWORD` is a ssl certificate password entered during the installation

`TARGET_REGISTRY_HOME` is the directory where a cluster node is installed.

7.4. WebLogic High Availability Configuration

7.4.1. Objective


This guide provides step-by-step instructions to setup an Active-Active High-Availability (HA) setup for Oracle Service Registry 11g in a WebLogic Server cluster environment.

7.4.2. Pre-requisites

- Oracle Service Registry 11g Installable, available [here](http://www.oracle.com/technology/software/products/service-registry/index.html) [http://www.oracle.com/technology/software/products/service-registry/index.html]
- Weblogic 11g (10.3.1+), installed
- Oracle Database 10g or 11g, installed

7.4.3. Overview

[Figure 75](#) depicts the HA architecture that this article talks about:

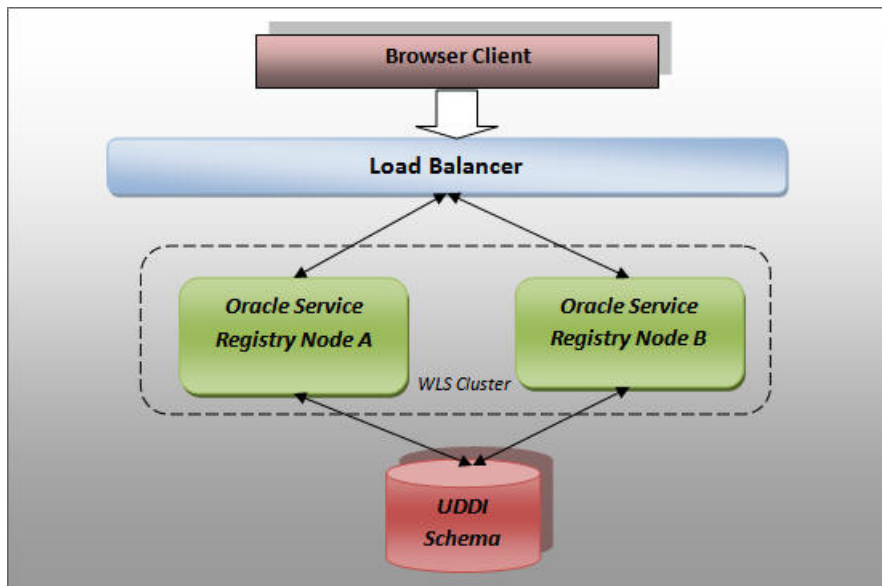Figure 75. Cluster Architecture

An overview of the steps involved:

1. Create the WebLogic environment - Domain, Servers & Cluster.
2. Create an Oracle Service Registry (OSR) application for the cluster.
3. Deploy the OSR application to the clustered nodes.
4. Simulate a load balancer, using WebLogic's inbuilt HTTPClusterServlet.
5. Test the newly created OSR HA environment.

7.4.4. Create the WebLogic Environment: Domain, Servers & Cluster

[Figure 76](#) and [Table 2](#), “The components in our WebLogic environment” show the WebLogic setup we will be creating:

Figure 76. The Oracle Service Registry setup includes an admin server and several managed servers.

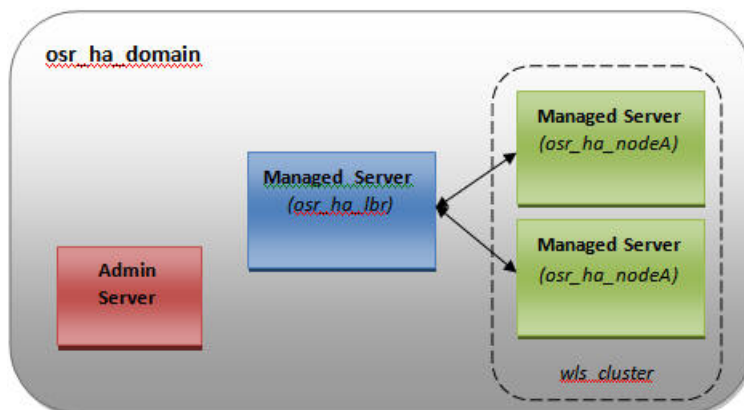
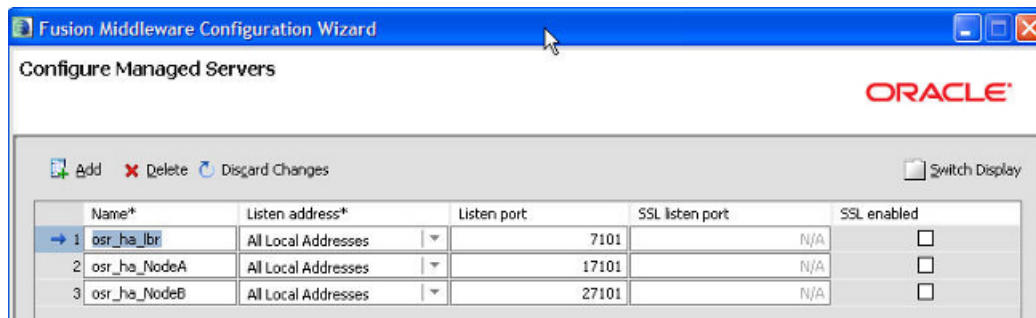


Table 2. The components in our WebLogic environment


WebLogic Component	Port	Description
osr_ha_domain	NA	This is the Weblogic domain where our OSR HA resides.
Admin server	7001	This is the Admin Server of our osr_ha_Domain. Every Weblogic Domain has one and only one Admin Server.
osr_ha_lbr	7101	This is a Managed Server, which will host the simulated Load Balancer. It is not a part of any cluster.
wls_cluster	NA	This a Weblogic cluster that we create where both the OSR nodes will be osr_ha_nodeA & osr_ha_nodeB.
osr_ha_nodeA	17101	This is a Managed Server – the first of the two OSR nodes.
osr_ha_nodeB	27101	This is a Managed Server – the second of the two OSR nodes.

The following steps explain how to create the Weblogic environment for our OSR HA setup. For further detailed instructions on Weblogic administration, please see [here](http://download.oracle.com/docs/cd/E15523_01/admin.htm) [http://download.oracle.com/docs/cd/E15523_01/admin.htm].


1. Select *Start > All Programs > Oracle WebLogic > WebLogic Server 11gR1 > Tools > Configuration Wizard*.
2. On the *Welcome* screen, select *Create a new Oracle WebLogic Server domain* and click *Next*.
3. On the *Select Domain Source* screen, select *Generate a domain configured automatically to support the following products* and click *Next*.
4. Enter your new domain information, and click *Next*:
 - *Domain name*: osr_ha_domain
 - *Domain location*: <\$MIDDLEWARE_HOME>\user_projects\domains
5. On the *Configure Administrator User Name and Password* screen, assign a *Username* and *Password* for your *AdminServer* and click *Next*. Note this down as you will need these credentials later.
6. On the *Configure Server Start Mode and JDK* screens, leave the default settings of *Development Mode* and the *Sun JDK* selection and click *Next*.
7. On the *Select Optional Configuration* screen, check *Administration Server* and *Managed Servers, Clusters, and Machines* and click *Next*.
8. On the *Configure the Administration Server* screen, click *Next*.
9. On the *Configure Managed Servers* screen, click *Add* to add the following managed servers, and click *Next* ([Figure 77](#)):

Figure 77. Configure Managed Servers

10. On the *Configure Clusters* screen, click *Add* to add *osr_cluster* as shown here and click *Next* ([Figure 78](#)):

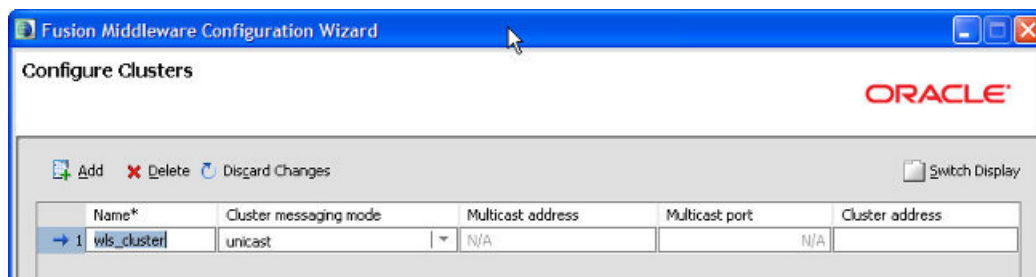Figure 78. Configure Clusters

11. On the *Assign Servers to Clusters* screen, assign *osr_nodeA* and *osr_nodeB* to *osr_cluster* and click *Next* ([Figure 79](#)).

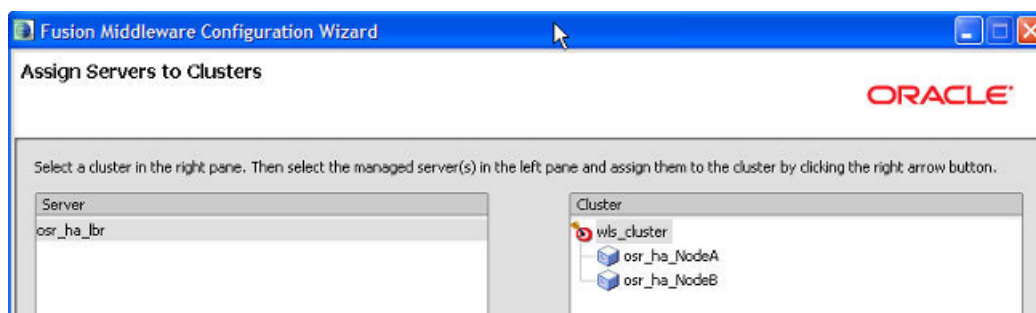Figure 79. Assign Servers To Clusters

12. On the *Create HTTP Proxy Applications* screen, leave the defaults and click *Next*.
13. On the *Configure Machines* screen, click *Next*.
14. On the *Configuration Summary* screen, verify the information and click *Create*.
15. When creation is complete, click *Done*.

Start your newly created Admin Server, and go to the Admin Console by using the following URL:
<http://<hostname>:7001/console>

Login using the username/password you provided. Go to *Servers* and/or *Clusters*, where you should see the following overview of the WebLogic environment you just created ([Figure 80](#)):

Figure 80. Servers and/or Clusters

Home > Summary of Servers > Summary of Clusters

Summary of Clusters

This page summarizes the clusters that have been configured in the current WebLogic Server domain.

A cluster defines groups of WebLogic Server servers that work together to increase scalability and reliability.

[Customize this table](#)

Clusters (Filtered - More Columns Exist)

New Clone Delete

☐	Name	Cluster Address	Cluster Messaging Mode	Migration Basis	Default Load Algorithm	Replication Type	Cluster Broadcast Channel
☐	wls_cluster		Unicast	Database	Round Robin	(None)	

New Clone Delete

Home > Summary of Servers > Summary of Clusters > Summary of Servers

Summary of Servers

Configuration Control

A server is an instance of WebLogic Server that runs in its own Java Virtual Machine (JVM) and has its own configuration.

This page summarizes each server that has been configured in the current WebLogic Server domain.

[Customize this table](#)

Servers (Filtered - More Columns Exist)

New Clone Delete

☐	Name	Cluster	Machine	State	Health
☐	AdminServer(admin)			RUNNING	✓ OK
☐	osr_ha_lbr			RUNNING	✓ OK
☐	osr_ha_NodeA	wls_cluster		RUNNING	✓ OK
☐	osr_ha_NodeB	wls_cluster		RUNNING	✓ OK

New Clone Delete

7.4.5. Create Oracle Service Registry (OSR) Application for the Cluster

Here we create the OSR application (WAR file) that we deploy to the WebLogic cluster later.

For detailed instructions on installing OSR, see [Installation Guide](#).

- Run the OSR 11.1.1.2 installer using the following command:

```
$java -jar oracle-service-registry-11.1.1.6.jar -debug
```


- Choose *Standalone Registry* in the *Installation Type* screen ([Figure 81](#)).

Figure 81. Installation Type




- Make sure the *Installation directory* you provide is unique and, as a best practice, at the same level as the Weblogic Server Home eg. `$MIDDLEWARE_HOME\osr_ha_home`. For eg. in the image below `ofm11gps2` is the `$MIDDLEWARE_HOME`, `wlserver_103` is the `$WEBLOGIC_HOME` & `osr11g` is the `$REGISTRY_HOME` (Registry Installation Directory) ([Figure 82](#)).

Figure 82. Directory Structure

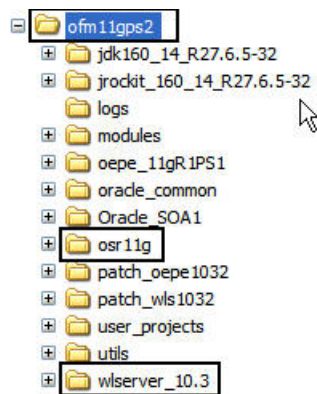

- If you chose the *Populate Schema* option in the *Database Setup* page, ensure you enter a unique user/schema name that does not already exist in your tablespace (eg., `uddiuser_ha`).
- For this exercise, don't choose to use or create a data source this time. (If you would like to, then make sure you create a datasource accordingly in your `osr_ha_domain` using the WLS Console before deployment of this app.)
- In the *Choose a Method of Deployment* screen, select *Manual deployment* ([Figure 83](#)).

Figure 83. Choose a Method of Deployment

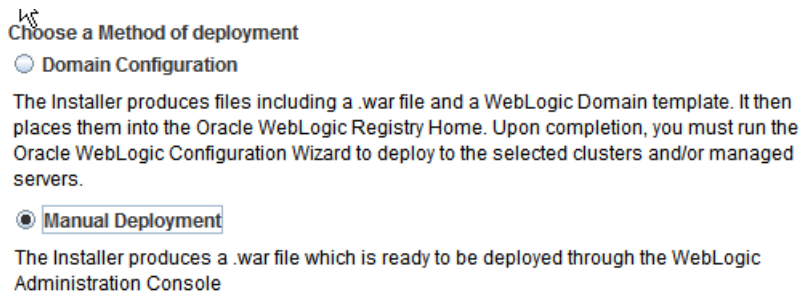

- In the next screen, enter the hostname & port of the *osr_ha_lbr* managed server. This is because, although we are not deploying the application via the installer now, we want the URL references created in the OSR WAR file to point to the Load Balancer to leverage its HA functionality (Figure 84).

Figure 84. Deployment to Application Server

Deployment to Oracle WebLogic Application Server

HTTP Port

7101

☐ Use SSL (HTTPS)

SSL(HTTPS) Port

7102

Hostname

myserver.domain.com

Application Server Context

registry

On completing the installation successfully, *registry.war* should be created under *\$MIDDLEWARE_HOME/osr_ha_home/conf/porting/weblogic/build*

7.4.6. Deploy the OSR Application to the Clustered Nodes

Now that we have the OSR application (*registry.war*) ready, we can proceed to deploy it to the OSR HA nodes.

1. Ensure that the *Admin Server* of your *osr_ha_domain* is running.
2. Go to Weblogic admin console - <http://<hostname>:7001/console>
3. From the *Domain Structure* group, select *Deployments*.
4. In *Deployments*, select *Install*, browse to the *registry.war* which the OSR installer created under *\$MIDDLEWARE_HOME/osr_ha_home/conf/porting/weblogic/build*, click *Next*
5. Select *Install this deployment as an application* and click *Next*
6. Select *wls_cluster* and *All Servers in the cluster*, click *Next* (Figure 85).

Figure 85. All Servers in the Cluster

7. Select *Copy this application onto every target for me*, click *Next*

8. Click *Finish*


The OSR application is now deployed to both the OSR HA nodes – *osr_ha_nodeA* and *osr_ha_nodeB*.

7.4.7. Simulate a Load Balancer, using Weblogic's inbuilt HTTPClusterServlet

In this step, we simulate a load balancer by using the *HTTPClusterServlet* available within Weblogic. The servlet is already available in Weblogic, but we need to configure the descriptor files for this servlet and tell it about the existence of our two OSR HA nodes. Also, we need to copy some of the user interface information of OSR to the load balancer application. Finally, we then have a Load Balancer application (*balancer.war*), which we deploy to the managed server *osr_ha_lbr*.

Create the Directory Structure for Balancer App

The first step is to create a new directory structure to hold all the files that need to get packaged into *balancer.war* ([Figure 86](#)):

Figure 86. Create the Directory Structure

To create the directory structure:

1. Create the directory *balancer* under *\$MIDDLEWARE_HOME\osr_ha_home*

2. Create all the sub-directories shown under balancer in the correct hierarchy (registry, registry\uddi, registry\uddi\bsc, registry\uddi\bsc\webdata, registry\webdata, and WEB-INF).
3. Create two new temporary directories, c:\tmp_bsc and c:\tmp_web.

Create the Load Balancer's Web Configuration File.

You must create the Web configuration file that describes the host and port for each of the clustered nodes as well as the context paths for the user interfaces and the online documentation.

To create the Web configuration file, open a simple text editor like notepad, create `$MIDDLEWARE_HOME\osr_ha_home\balancer\WEB-INF\web.xml` with this content:

```
<web-app>
<servlet>
  <servlet-name>HttpClusterServlet</servlet-name>
  <servlet-class>weblogic.servlet.proxy.HttpClusterServlet</servlet-class>
  <init-param>
    <param-name>WebLogicCluster</param-name>
    <param-value><your_hostname>:27101|<yourhostname>:27101</param-value>
  </init-param>
</servlet>
<servlet>
  <servlet-name>FileServlet</servlet-name>
  <servlet-class>weblogic.servlet.FileServlet</servlet-class>
</servlet>
<servlet-mapping>
  <servlet-name>FileServlet</servlet-name>
  <url-pattern>registry/uddi/bsc/webdata*</url-pattern>
</servlet-mapping>
<servlet-mapping>
  <servlet-name>FileServlet</servlet-name>
  <url-pattern>registry/uddi/webdata*</url-pattern>
</servlet-mapping>
<servlet-mapping>
  <servlet-name>FileServlet</servlet-name>
  <url-pattern>registry/uddi/doc*</url-pattern>
</servlet-mapping>
<servlet-mapping>
  <servlet-name>HttpClusterServlet</servlet-name>
  <url-pattern>/</url-pattern>
</servlet-mapping>
</web-app>
```

Create the Registry Context File


To create the Registry context file, open a simple editor like notepad, and create `$MIDDLEWARE_HOME\osr_ha_home\balancer\WEB-INF\weblogic.xml` with this content:

```
<weblogic-web-app>
  <context-root>/registry</context-root>
</weblogic-web-app>
```

Copy Registry User Interface Information to Balancer

You need to copy some of the content from the Oracle Service Registry installation which describes the user interface location into the balancer directory structure. One way to do this is to extract all the files from the bsc.jar and the web.jar packages into the temporary directories you created:

Figure 87. Extract Files From Jars

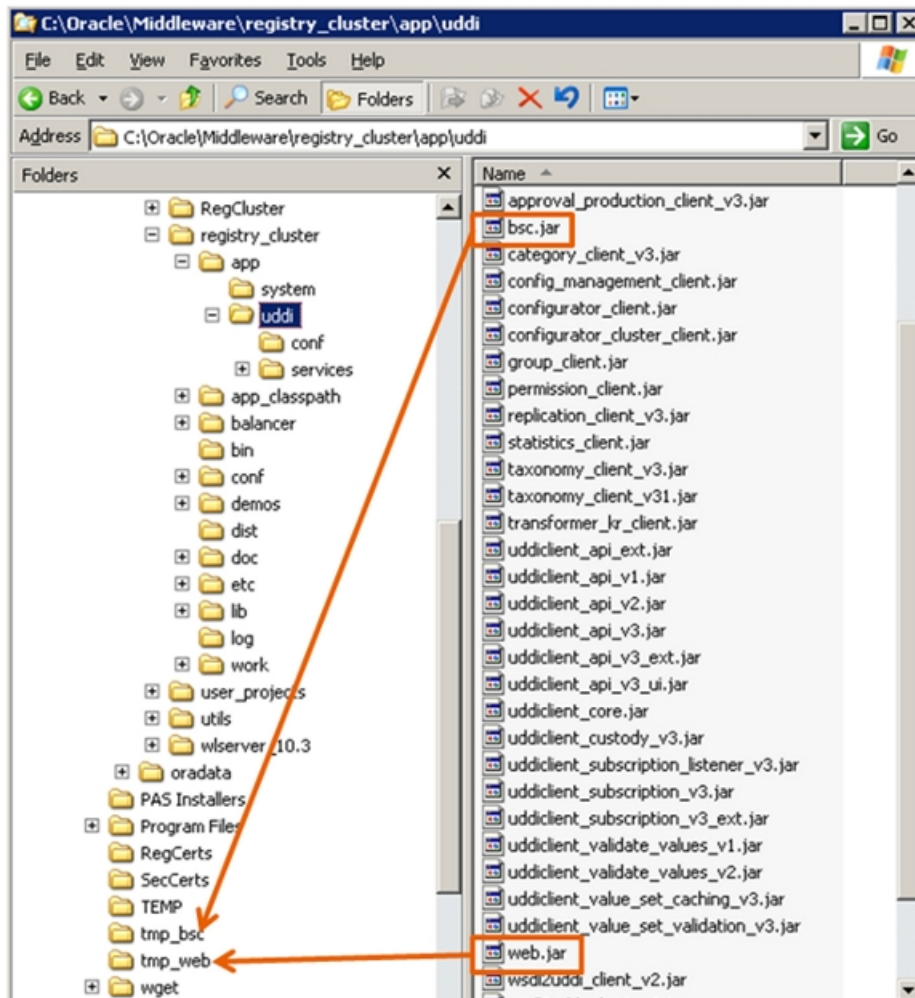

1. To extract the jar files *bsc.jar* & *web.jar*, you could use the command line (eg. *jar xvf bsc.jar*) or simply use a program like Winzip or 7-zip.
2. Copy the content of *c:\tmp_web\webroot* (but NOT *webroot* itself) into *\$MIDDLEWARE_HOME\osr_ha_home\balancer\registry\uddi\webdata*.
3. Copy the contents of *c:\tmp_bsc\webroot* (but not *webroot* itself) into *\$MIDDLEWARE_HOME\osr_ha_home\balancer\registry\uddi\bsc\webdata*.
4. Your directory structure should now look like ([Figure 88](#)):

Figure 88.

Create the Load Balancer Package

The package `balancer.war` should include all the files and sub-directories in `$MIDDLEWARE_HOME\osr_ha_home\balancer`.

To create the load balancer package (`balancer.war`), open a command prompt and browse to `$MIDDLEWARE_HOME\osr_ha_home\balancer`, and run the following:

```
jar cvf balancer.war *.*
```

Deploy Load Balancer to `osr_ha_lbr` Managed Server

Deploy the Load Balancer package (`balancer.war`) to the managed server, **`osr_ha_lbr`**:

1. Open the WebLogic Server administrator console by browsing to <http://localhost:7001/console>.
2. From the *Domain Structure* group, select *Deployments*. Click *Install*, browse to `$MIDDLEWARE_HOME\osr_ha_home\balancer\balancer.war` and click *Next*.
3. Choose *Install this deployment as an application* and click *Next*.
4. Choose `osr_ha_lbr`, and click *Next*.
5. Choose *Copy this application onto every target for me*, and click *Next*.
6. Click *Finish*.

7.4.8. Test the Newly Created OSR HA environment

To test the load balancing in your new OSR HA environment works:

1. Start each of the managed servers (`osr_ha_lbr`, `osr_ha_nodeA`, and `osr_ha_nodeA`).
2. Once all the servers are running, access Oracle Service Registry by browsing to `http://<hostname>:7101/registry/uddi/web`. Browse around, and try to search some entities, services etc to check that you get valid data back.
3. Shut down *either* `osr_ha_nodeA` or `osr_ha_nodeB` and check that the registry consoles still work.
4. Shut down *both* `osr_ha_nodeA` and `osr_ha_nodeB` and make sure you get the message *"No backend servers are available."*

You have now successfully created a highly available Oracle Service Registry 11g Active-Active environment on Weblogic Server 11g.

8. Authentication Configuration

This section explains how to change the Oracle Service Registry configuration to allow the following authentication options:

- [HTTP Basic](#)
- [Netegrity SiteMinder](#)
- [SSL Client authentication with Embedded HTTP/HTTPS Server](#)
- [SSL Client Authentication in Oracle WebLogic](#)
- [J2EE Server Authentication](#)
- [Internal SSL Client Authentication Mapping in J2EE](#)
- [Outgoing Connections Protected with SSL Client Authentication](#)

8.1. HTTP Basic



Important

In the case where Registry is deployed to an Oracle WebLogic Server

- Add the `<enforce-valid-basic-auth-credentials>false</enforce-valid-basic-auth-credentials>` element to `config.xml` in the directory `[domain]\config` within the `<security-configuration>` element.
- The *enforce-valid-basic-auth-credentials* flag effects the entire domain. Client requests that use HTTP BASIC authentication will be ignored by WebLogic Server authentication.

To allow HTTP Basic authentication:

1. Modify `REGISTRY_HOME/app/uddi/services/Wasp-inf/package.xml` to enable HTTP basic authentication as follows:
 - a. Under `<processing name="UDDIv1v2v3PublishingProcessing"/>`, uncomment `<use ref="tns:HttpBasicInterceptor"/>`. This enables the HTTP Basic authentication for UDDI Publishing API v1, v2, v3.
 - b. Under `<processing name="UDDIv1v2v3InquiryProcessing">`, add `<use ref="tns:HttpBasicInterceptor"/>`. This enables the HTTP Basic authentication for all three versions of the UDDI Inquiry API.
 - c. Under `<processing name="wsdl2uddiProcessing">`, add `<use ref="tns:HttpBasicInterceptor"/>`. This enables the HTTP Basic authentication for versions 2 and 3 of the WSDL2UDDI API.
 - d. Add the attribute `accepting-security-providers="HttpBasic"` to other service-endpoints (except UDDI publishing and Inquiry endpoint) you wish to access via HTTP Basic authentication.

A fragment of the `package.xml` is shown in [Example 2, package.xml - HTTP Basic Enabled](#)

2. Shutdown Oracle Service Registry, delete the REGISTRY_HOME/work directory, and restart the registry.

Example 2. package.xml - HTTP Basic Enabled

```

.....
    <service-endpoint path="/inquiry" version="3.0" name="UDDIInquiryV3Endpoint"
      service-instance="tns:UDDIInquiryV3" processing="tns:UDDIv1v2v3InquiryProcessing"
      accepting-security-providers="HttpBasic">
      <wsdl uri="uddi_api_v3.wsdl" service="uddi_api_v3:UDDI_Inquiry_SoapService"/>
      <envelopePrefix xmlns="arbitraryNamespace" value=""/>
      <namespaceOptimization xmlns="arbitraryNamespace">false</namespaceOptimization>
    </service-endpoint>
    <service-instance
      implementation-class="com.systinet.uddi.publishing.v3.PublishingApiImpl"
      name="UDDIPublishingV3"/>
    <service-endpoint path="/publishing" version="3.0" name="UDDIPublishingV3Endpoint"
      service-instance="tns:UDDIPublishingV3"
      processing="tns:UDDIv1v2v3PublishingProcessing"
      accepting-security-providers="HttpBasic">
      <wsdl uri="uddi_api_v3.wsdl" service="uddi_api_v3:UDDI_Publication_SoapService"/>
      <envelopePrefix xmlns="arbitraryNamespace" value=""/>
      <namespaceOptimization xmlns="arbitraryNamespace">false</namespaceOptimization>
    </service-endpoint>

    <processing name="UDDIv3Processing">
      <use ref="uddiclient_v3:UDDIClientProcessing"/>
      <fault-serialization name="MessageTooLargeFaultSerializer"
        serializer-
class="com.systinet.uddi.publishing.v3.serialization.MessageTooLargeFaultSerializer"
        serialized-exception-class="com.systinet.uddi.interceptor.wasp.MessageTooLargeException"/>
    </processing>

    <processing name="UDDIv1v2v3PublishingProcessing">
      <use ref="uddiclient_v3:UDDIClientProcessing"/>
      <use ref="uddiclient_v2:UDDIClientProcessing"/>
      <use ref="uddiclient_v1:UDDIClientProcessing"/>
      <!-- HttpBasic (without authtoken) -->
      <use ref="tns:HttpBasicInterceptor"/>
    </processing>

    <interceptor name="MessageSizeCheckerInterceptor"
      implementation-class="com.systinet.uddi.interceptor.wasp.MessageSizeCheckerInterceptor"

      direction="in">
      <config:maxMessageSize>2097152</config:maxMessageSize>
    </interceptor>
  </processing>

  <processing name="UDDIv1v2v3InquiryProcessing">
    <use ref="tns:UDDIv3Processing"/>
    <use ref="tns:UDDIv2Processing"/>
    <use ref="tns:UDDIv1Processing"/>
    <use ref="tns:HttpBasicInterceptor"/>
  </processing>
.....

```

8.2. Netegrity SiteMinder



Note

Support for Netegrity SiteMinder will be deprecated in a future release.

REGISTRY_HOME is either the installation directory or a WAR file when a registry is deployed to weblogic.

To allow Netegrity SiteMinder authentication:

1. Modify REGISTRY_HOME/app/uddi/services/Wasp-inf/package.xml as follows:
 - a. Under `<processing name="UDDIv1v2v3PublishingProcessing"/>`, add/uncomment `<use ref="tns:SiteMinderInterceptor"/>`. This enables the SiteMinder authentication for all three versions of the UDDI Publishing API.
 - b. Under `<processing name="UDDIv1v2v3InquiryProcessing">`, add `<use ref="tns:SiteMinderInterceptor"/>`. This enables the SiteMinder authentication for versions 1, 2, and 3 of the Inquiry API.
 - c. Under `<processing name="wsdl2uddiProcessing">`, add `<use ref="tns:SiteMinderInterceptor"/>`. This enables the SiteMinder authentication for versions 2 and 3 of the WSDL2UDDI API.
 - d. Add the attribute `accepting-security-providers="SiteMinder"` to other service-endpoints (except UDDI publishing and Inquiry endpoint) you wish to access via Netegrity SiteMinder authentication.
 - e. Under the elements `<securityProviderPreferences>` and `<interceptor name="SiteMinderInterceptor"`, fill in:
 - `<loginNameHeader>` - the name of HTTP header or cookie that carries the login name of authenticated user



Important

You must set the same element values to both `<securityProviderPreferences>` and `<interceptor name="SiteMinderInterceptor"` elements.

A fragment of the package.xml is shown in [Example 3, package.xml - Netegrity SiteMinder Enabled](#)

2. Shutdown Oracle Service Registry, delete the REGISTRY_HOME/work directory, and restart the registry.

Example 3. package.xml - Netegrity SiteMinder Enabled

```

.....
<!-- Netegrity SiteMinded security provider preferences for the server side -->
<securityProviderPreferences xmlns="http://systinet.com/wasp/package/extension"
    name="Siteminder">
    <loginNameHeader>sm-userdn</loginNameHeader>
</securityProviderPreferences>

<!-- Netegrity SiteMinded interceptor-->
<interceptor name="SiteMinderInterceptor"
    implementation-class="com.systinet.uddi.security.siteminder.SmInterceptor" >
    <config:loginNameHeader>sm-userdn</config:loginNameHeader>
</interceptor>
.....

```

8.3. SSL Client authentication with Embedded HTTP/HTTPS Server

Oracle Service Registry used with Embedded HTTP/HTTPS Server can be configured to perform authentication using client certificate obtained via 2-way SSL, where the client must also authenticate itself to a server. Setup instructions are different for an embedded HTTP/HTTPS server and a registry deployed to an application server. This section is focused on Embedded HTTP/HTTPS Server only, see [Section 8.5, J2EE Server Authentication](#) for instruction of how to configure SSL client authentication for deployed registry.

To allow SSL client authentication for a standalone registry:

1. Make sure that the registry is not running.
2. Modify `REGISTRY_HOME/conf/serverconf.xml` as follows:
 - Under `<httpsPreferences name="https">`, change `<needsClientAuth>` to `true`. This configures HTTPS transport to require client certificates.
 - Under `<securityPreferences name="main">`, add `<acceptingSecurityProvider>SSL</acceptingSecurityProvider>`. This ensures the mapping of client certificates to a user name.

A fragment of changed `REGISTRY_HOME/conf/serverconf.xml` is shown in [Example 4, A fragment of serverconf.xml with 2-way SSL turned on](#).

3. Trust the certificate of a certification authority that is used to issue client certificates. Run the `PStoreTool` tool from the `REGISTRY_HOME/bin` directory to import this certificate to a truststore that is used by registry.

```

PStoreTool add -certFile <client certificates authority certificate file>
-config <path to pstore.xml>

```

4. Configure how a client certificate is mapped to a user name. Registry comes with JAAS login module that extracts the user name out of a subject that is necessary part of a client certificate. The login module that performs this mapping is configured under the `CertsMapping` entry of the `REGISTRY_HOME/conf/jaas.conf` file. An example of `CertsMapping` entry is shown in [Example 5, CertsMapping JAAS configuration](#).

You can configure the following options:

- `debug` - if set to `true`, debug actions of the login module are printed to an error stream. False by default.
- `issuer` - issuer name. If set, mapped certificate must be issued by a certification authority with this subject name (recommended).
- `pattern` - regular expression (as per `java.util.regex`) that is used to get user names. The first capturing group of a specified pattern is used as a user name. When there is no capturing group and the pattern matches, the whole subject becomes a user name. Used regular expressions are case-insensitive. Examples are:
 - The default is `(?<!\\,\\s?)EMAILADDRESS=(.+)@`. It matches a name listed in `EMAILADDRESS`. This regular expression ignores the case of `EMAILADDRESS` possibly contained in another part of subject.
 - `CN=( [^, ]+ )` matches common name.
 - `.*` matches every subject. Since it has no capturing group, the whole subject DN is used.

You can configure more than one login module to perform certificate mapping. This is useful when you have to accept different issuers and/or provide a fallback to a failed certificate mapping of the first configured login module. An example of a `CertsMapping` entry that allows the mapping of certificates issued by 2 issuers with different mappings is shown in [Example 6, CertsMapping JAAS configuration with 2 possible issuers](#).

5. The registry is now configured for SSL client authentication. You may also change the applicability of SSL client authentication by changing the configuration of SSL security providers. This configuration is in the `<securityProviderPreferences name="SSL">` element of the `REGISTRY_HOME/conf/serverconf.xml` file. An example is shown in [Example 4, A fragment of serverconf.xml with 2-way SSL turned on](#).

Example 4. A fragment of serverconf.xml with 2-way SSL turned on

```

<?xml version="1.0" encoding="UTF-8"?>
<config name="main">
    ...
    <securityPreferences name="main">
        <!-- Added acceptingSecurityProvider -->
        <acceptingSecurityProvider>SSL</acceptingSecurityProvider>
        <pstoreInitParams/>
        ...
    </securityPreferences>
    ...
    <httpsPreferences name="https">
        ...
        <!-- Client authentication required -->
        <needsClientAuth>true</needsClientAuth>
        ...
    </httpsPreferences>
    ...
    <!-- security provider preferences intended mainly for SSL client authentication -->
    <securityProviderPreferences name="SSL">
        <!-- What to do when SSL is not used to access the resource? Available options:
        redirect
            - perform HTTP redirect to associated HTTPS URL (302 Moved Temporarily)
        fail
            - return a message that informs to use HTTPS URL (400 Bad Request)
        skip
            - do not perform certificate mapping at all
        perform
            - try to perform certificate mapping with no client certificates
        -->
        <whenNotSsl>skip</whenNotSsl>
        <!-- Can certificate mapping fail? If set to true and it fails, no received subject will
        be constructed. -->
        <certMappingMayFail>false</certMappingMayFail>
        <!-- Can a default account be created when no account for a mapped user exists? -->
        <createDefaultAccount>false</createDefaultAccount>
    </securityProviderPreferences>
</config>

```

Example 5. CertsMapping JAAS configuration

```

CertsMapping{
    com.systinet.uddi.security.jaas.CertMappingLoginModule sufficient
    pattern="(?!\\s?)EMAILADDRESS=(.+)@" debug=false issuer="CN=Company CA, OU=mycomp";
};

```

Example 6. CertsMapping JAAS configuration with 2 possible issuers

```
CertsMapping{
  com.systinet.uddi.security.jaas.CertMappingLoginModule sufficient
  pattern="(?!\\,\\s?)EMAILADDRESS=(.+)@" debug=false issuer="CN=Company CA, OU=mycomp";
  com.systinet.uddi.security.jaas.CertMappingLoginModule sufficient pattern="CN=([^,]*)"
  issuer="CN=Company CA2, OU=mycomp" debug=false;
};
```

8.4. SSL Client Authentication in Oracle WebLogic

This section describes how to enable SSL and SSL Client Authentication in Oracle Service Registry deployed to Oracle WebLogic Server 10.3. The following steps assume that Registry is already deployed to WebLogic.

1. Locate WEB-INF/web.xml for the WAR file that is used. You may either edit the WAR file with a file commander that allows you to edit such archives directly and redeploy it later or locate this file where the WAR file is unpacked.
2. a. Add tags inside <web-app>:

```
<context-param>
  <param-name>use.request.user</param-name>
  <param-value>true</param-value>
</context-param>

<login-config>
  <auth-method>CLIENT-CERT</auth-method>
</login-config>

<security-constraint>
  <display-name>HTTPS required to access registry</display-
name>

  <web-resource-collection>
    <web-resource-name>Protected Area</web-resource-name>
    <url-pattern>/*</url-pattern>
    <http-method>DELETE</http-method>
    <http-method>GET</http-method>
    <http-method>POST</http-method>
    <http-method>PUT</http-method>
  </web-resource-collection>
  <user-data-constraint>
    <description>Require confidentiality</description>
    <transport-guarantee>CONFIDENTIAL</transport-guarantee>

  </user-data-constraint>
</security-constraint>
```

- b. Change servlet class to look like this: <servlet-class>com.systinet.transport.servlet.server.registry.RegistryServlet</servlet-class>

3. Start Registry in WebLogic. The Registry still works with normal user/password authentication.
4. Select **Environment/Servers/_your_server_/Configuration/**

- a. Select the **Keystores** Tab. Select **Custom Identity and Custom Trust**". Provide values to your identity and trust stores. Click **Save**.
 - b. Select the **SSL** Tab. Click the **Advanced** option. Fill in **Identity Alias** and **Password**. Select **Client Certs Requested and enforced** in **Two Way Client Cert Behavior**. Click **Save**.
5. Click **Security Realms** in **Domain Structure**. Select **myrealm**.
- a. Click **Users and groups**. Create a new user called "admin". You can create other users here too. Their names are matched with the name part of emails in the certificate.
 - b. Click the **Providers** tab. Create a new authentication provider. Name it "mysslauthprovider" and select **DefaultIdentityAsserter**. Click on the provider properties. Add the **X.509** type. Click **Save**. Click the **Provider specific** tab. Check **Use Default User Name Mapper**. Leave default value "@" for **Default User Name Mapper Attribute Delimiter**. Click **Save**.



Note

The last step may not work when another provider with DefaultIdentityAsserter is present. Either modify the old provider or delete the old and configure the new "mysslauthprovider".

8.5. J2EE Server Authentication

The registry can be configured to let a J2EE application server perform authentication. Unlike [Section 8.2, Netegrity SiteMinder](#) and [Section 8.1, HTTP Basic](#), the authentication takes place for the whole registry application. To allow J2EE server authentication:

1. Locate the EAR or WAR file produced by the installer. It is available in REGISTRY_HOME/conf/porting or in the application server when deployed. Note that in case of an EAR file the actual WAR file is contained in it. Both files can be opened as ZIP archives.
2. Modify WEB-INF/web.xml file in the WAR file as follows:
 - a. Change the value of context parameter `use.request.user` to `true`.
 - b. Add a `login-config` element with a type of the chosen J2EE authentication. [Example 7, A fragment of web.xml](#) shows a login config that turns on the CLIENT-CERT authentication method, which is used for SSL client authentication.

You may also add a security-constraint element to specify a set of resources where confidentiality and/or integrity is required. [Example 7, A fragment of web.xml](#) contains a security-constraint that requires confidential communication between client and server for all registry resources, which typically means to allowing only HTTPS for communication with registry.

- c. Configure a J2EE application server for the authentication method of your choice. For SSL client authentication, this typically means setting up HTTPS transport to require client certificates and to map client certificates to user names. Consult your J2EE application server documentation for details.
3. Continue deployment of the modified war file.

Example 7. A fragment of web.xml

```

<?xml version="1.0" encoding="UTF-8"?>
<web-app>
  <display-name>Registry</display-name>
  ...
  <context-param>
    <param-name>use.request.user</param-name>
    <param-value>true</param-value>
  </context-param>
  ....
  <!-- Added CLIENT-CERT authentication method -->
  <login-config>
    <auth-method>CLIENT-CERT</auth-method>
  </login-config>

  <!-- Added security constraint that allow to access registry only via HTTPS -->
  <security-constraint>
    <display-name>HTTPS required to access registry</display-name>
    <web-resource-collection>
      <web-resource-name>Protected Area</web-resource-name>
      <url-pattern>*</url-pattern>
      <http-method>DELETE</http-method>
      <http-method>GET</http-method>
      <http-method>POST</http-method>
      <http-method>PUT</http-method>
    </web-resource-collection>
    <user-data-constraint>
      <description>Require confidentiality</description>
      <transport-guarantee>CONFIDENTIAL</transport-guarantee>
    </user-data-constraint>
  </security-constraint>
</web-app>

```

8.6. Internal SSL Client Authentication Mapping in J2EE

While J2EE application authentication can be configured in many ways, some configurations can be cumbersome on some application servers. Internal SSL client authentication mapping may be easier to configure for simple deployments.

Internal client authentication mapping offers the same options for configuration as CertMapper as described in [Section 8.3, SSL Client authentication with Embedded HTTP/HTTPS Server](#). Installation steps:

1. Ensure that certificates are trusted by the J2EE server. Some servers have dedicated trust stores, while others use the cacerts java keystore file inside Java runtime. Add the certificate of the Certification Authority you are using to the server's trust store as a trusted certificate.
2. Set up your J2EE server SSL. You usually need to provide the Java trust store file with the server identity. Configure the server SSL to use the trust store by specifying file, alias and store password.
3. Set up your J2EE server to ask for or require Client Authentication.
4. Edit web.xml inside the deployed registry.

- C h a n g e t a g s e r v l e t - c l a s s t o c o n t a i n
com.systinet.transport.servlet.server.registry.RegistryServletTwoWaySSL.

- Add the CLIENT-CERT authentication method (as described in [Example 8, A fragment of web.xml](#)).
- Add context parameters. Set the context parameter "twowayssl.use_user" to value "true".
- Set the context parameter "twowayssl.issuer" to the X.509 Issuer DN of certificates you want to allow.
- You can set the context parameter "twowayssl.mapping" to a regular expression for matching parts of Subject DN (by default, it is set to the name part of the email address in the email field).
- You can set the context parameter "twowayssl.debug" to "true" for run-time information about matching.

All context parameters that you set correspond to parameters in [Section 8.3, SSL Client authentication with Embedded HTTP/HTTPS Server](#). For examples of these parameters, see [Example 8, A fragment of web.xml](#).

Example 8. A fragment of web.xml

```
<login-config>
  <auth-method>CLIENT-CERT</auth-method>
</login-config>

<context-param>
  <param-name>twowayssl.use_user</param-name>
  <param-value>true</param-value>
</context-param>
<context-param>
  <param-name>twowayssl.issuer</param-name>
  <param-value>C=CZ, ST=Czech, L=Prague, O=Example company, OU=Security Team, CN=CA</param-value>
</context-param>
```

8.7. Consoles Configuration

In this section, we will show you how to configure authentication for both Registry Control and Business Service Control. The configuration of consoles is very similar to the configuration of other endpoints.



Note

REGISTRY_HOME is a war file when deployed to weblogic.



Referring to jar packages

The file path REGISTRY_HOME/app/uddi/web.jar/WASP-INF/package.xml means the /WASP-INF/package.xml inside the jar package REGISTRY_HOME/app/uddi/web.jar.

For the Registry Control, modify the file REGISTRY_HOME/app/uddi/web.jar/WASP-INF/package.xml with the following:

```
<service-endpoint path="/web" name="WebUIEndpoint1"
  service-instance="tns:WebUI" type="raw" other-methods="get"
  accepting-security-providers="HttpBasic"/>
<service-endpoint path="/web/*" name="WebUIEndpoint2"
  service-instance="tns:WebUI" type="raw" other-methods="get"
  accepting-security-providers="HttpBasic"/>
```

If you want to set Netegrity SiteMinder provider, use `accepting-security-providers="Siteminder"`

For the Business Service Control do the same in the file `REGISTRY_HOME/app/uddi/bsc.jar/WASP-INF/package.xml`



Note

You must re-deploy WAR file, so the war changes will apply.

Change registry configuration to point to proxy URL:

1. Change the following files, see also [Section 3. Configuration in Database](#)
 - `REGISTRY_HOME/app/uddi/conf/web.xml`
 - Add `updateDB="true"` to root (config) element
 - Update `url` and `secureUrl` elements with proxy URL (`https://pzavora/registry`)
 - `REGISTRY_HOME/app/uddi/conf/node.xml`
 - Add `updateDB="true"` to root (config) element
 - Update `webUIUrl` element with proxy URL + `"/uddi"` (`https://pzavora/registry/uddi`)
 - `REGISTRY_HOME/app/uddi/bsc.jar/conf/web.xml`
 - Add `updateDB="true"` to root (config) element
 - Update `url` and `secureUrl` elements with proxy URL (`https://pzavora/registry`)
 - `REGISTRY_HOME/app/uddi/bsc.jar/conf/bsc.xml`
 - Add `updateDB="true"` to root (config) element
 - Update `url` and `secureUrl` elements with proxy URL (`https://pzavora/registry`)
2. Re-deploy the Oracle Service Registry to the WebLogic server

8.8. Outgoing Connections Protected with SSL Client Authentication

Oracle Service Registry can be the client in SSL Client Authentication. This allows the following scenarios:

- SOAP Client - This is commonly used in following scenarios
 - Approval process
 - Replications
 - Cluster

Approval processes, Replications, and Cluster functionality connect via SOAP endpoints. Deployment in these scenarios does not usually require SSL protection because all registries are located in a dedicated internal network, but Oracle Service Registry can be configured to use client SSL certificates in these scenarios. When the registry on the other

side is protected with Client SSL Authentication and plain HTTP connection is not allowed, your registry must connect with an SSL Certificate. This can be achieved by configuring `destinationConfig` inside `security.xml`. See the documentation for `sslTool` in the Administration Guide, which describes the tool for SSL related tasks and `destinationConfig`. Destination config allows you to specify different certificates for different endpoints by either specifying the SOAP stub or the URL prefix.

- HTTPS protected resources
 - WSDL
 - XML
 - XSD
 - XSLT

Resources which are downloaded for processing by Oracle Service Registry can be behind HTTPS protected by Client SSL Authentication. Oracle Service Registry can be set up so that these connections use a specified certificate. The certificate must be present as a key entry inside `pstore.xml`. This key entry is identified by its alias. The alias and password has to be specified in `REGISTRY_HOME/app/uddi/conf/security.xml` inside `security` which is contained in `config` as shown in example:

```
<sslConnectionAlias>myAliasName</sslConnectionAlias>
<sslConnectionPassword_coded>9vTJ9GKyjIURFY0qrWvADA==</sslConnectionPassword_coded>
```

To get encoded password from clear-text password, use `REGISTRY_HOME/bin/sslTool(.bat or .sh)` with "encrypt" option.

9. Migration

Migration is used to migrate data from one database to another. You can migrate data during installation or during setup.

9.1. Migration using Setup Tool


To migrate data after installation, use the Setup tool described in [Section 2.7, Reconfiguring After Installation](#). Briefly:

1. Launch the Setup tool by issuing the following command from the `bin` subdirectory of your installation:

Windows:	<code>setup.bat</code>
UNIX:	<code>./setup.sh</code>

See command-line parameters in [Section 2.6.1, Setup](#).

2. Select the **Migration** tool on the first panel:

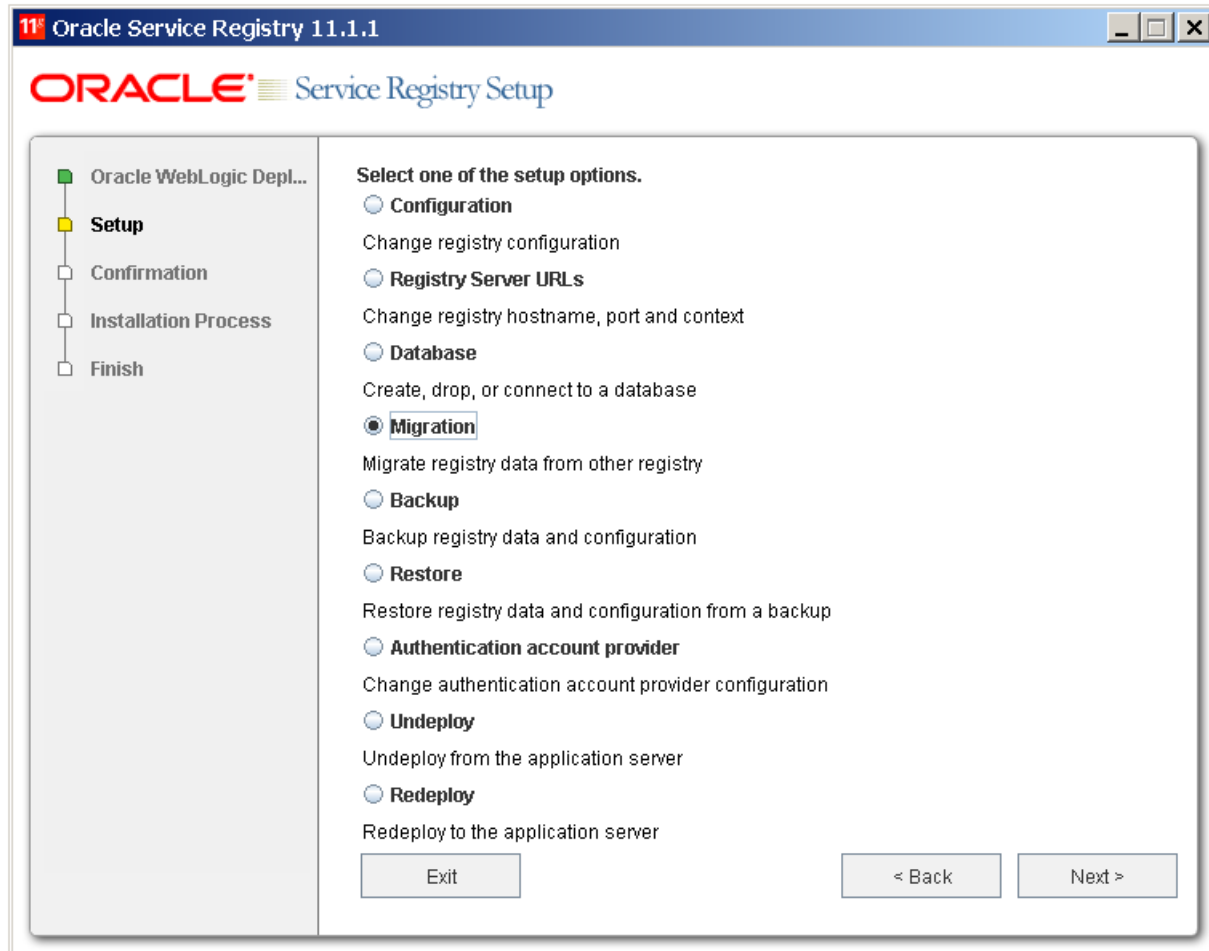

3. Fill in the following properties:

The screenshot shows the 'Oracle Service Registry 11.1.1' setup window. The title bar reads '11 Oracle Service Registry 11.1.1'. The main window has the Oracle logo and 'Service Registry Setup'. On the left is a navigation pane with a tree view containing: 'Oracle WebLogic Depl...', 'Setup', 'Migration' (highlighted with a yellow square), 'Confirmation', 'Installation Process', and 'Finish'. The main area is titled 'Migration Configuration' and contains the following fields and buttons:

- Migration Configuration**: Migrate registry data from other registry.
- Select Previous Version**: Three radio buttons are present:
 - ☒ Oracle Service Registry 11.1.1
 - ☐ Oracle Service Registry 10.3
 - ☐ Oracle Service Registry 10.1.3.1
- Previous Registry Directory**: A text box containing '[installation directory of previous version]' and a 'Browse' button.
- Previous Registry Administrator Username**: A text box containing 'admin'.
- Current Registry Administrator Username**: A text box containing 'admin'.
- JDBC Drivers (comma separated full paths to all necessary *.jar|*.zip files)**: A text box containing 'C:\oracle\Middleware\WLS\wls\server_10.3\server\ojdbc6.jar' and a 'Browse' button.
- At the bottom are three buttons: 'Exit', '< Back', and 'Next >'.

- **Previous Registry Version** - Oracle Service Registry version from which you are migrating data
- **Previous Registry Directory** - the directory in which the previous Oracle Service Registry is installed. The existing data will be migrated from it.
- **Previous Registry Administrator Username** - name of the user having rights to retrieve data from the previous Registry version.
- **Current Registry Administrator Username** - name of the user having rights to save UDDI structure keys. By default, only the administrator can migrate all data including private data.
- **JDBC drivers** - Set path to the directory in which the .jar (.zip) of JDBC drivers is located.



Important

Enter this path only if the previous Oracle Service Registry installation is configured with a different type of database than the current one.

9.2. Migration procedure

The following table summarizes what data is migrated by the migration tool in setup.

Table 3. Migration

Type of data	Data detail	Migrated by migration tool	Location
UDDI Data	UDDI v3 (v2) data (business entities and their sub-entities, tModels, subscriptions, publisher assertions, taxonomies).	Yes	Database
UDDI security	ACL	Yes (it is a part of UDDI entity)	Database
	Configuration of Permissions	No	File app/uddi/conf/permission_list.xml
	Certificate store	No	File conf/pstore.xml, conf/clientconf.xml
Accounts	Account (User Profile) and Group data	Yes	Database
	LDAP configuration	No	File app/uddi/conf/directory.xml
Approval	Approval requests	No	Database
	Approval configuration	No	File app/uddi/conf/production.xml, app/uddi/conf/staging.xml
Temporary UDDI Data	Custody transfer tokens	No	Database
Other configuration	Configuration of URLs	No. URLs are already set up in the installation preceding migration in setup. Migrated registries often run in different environments.	Multiple XML files in app/uddi/conf/, work/uddi/bsc.jar/conf/
	Configuration of BSC, including BSC customizations (accessible in BSC UI: Configuration tab)	No	Files in work/uddi/bsc.jar/conf/
	Configuration of Registry UI (accessible in Web UI: Manage->Registry control configuration)	No	Files in app/uddi/conf/
	Configuration of Registry (accessible in Web UI: Manage->Registry configuration)	No	Files in app/uddi/conf/
	Replication Items	No (manual steps are described below Section 9.3, Manual migration of replications from older versions of Oracle Registry)	File in app/uddi/conf/replication.xml, app/uddi/conf/replication_list.xml
	Configurations which are stored in the database and their history	No	Database

9.3. Manual migration of replications from older versions of Oracle Registry

Replications in this version use a different configuration from previous versions. The main difference is that replications are now transactional. In previous versions it was common to have two replication items, one for business entities (and sub-entities) and another for tModels. In this version the replication item can contain several subscriptions, but they have to be complete, as failure to replicate any entity means failure of the whole replication (failed replication will not leave any incomplete entities). Another difference is that referenced tModels are not fetched automatically, a subscription for them is needed. Time is specified in a more reliable way. Older versions specified a time of replication by an interval measured from the start of the Registry. The new version allows time specification patterns fixed relative to time of day, day of the week, or day of the month. New replications have some new features like color coded reports and an option to preserve owners of replicated entities.

For each group of related replication items in old Registry:

1. Create a new replication item which will reference all subscriptions from old items.
2. If the old replication depended on the fact that referenced tModels were replicated, a new subscription for such tModels will be needed. Add a key of this subscription to the replication item.
3. Convert the old time specification to the new one.
4. Fill all other fields in the same way they were filled in the older version of Registry.

10. Backup

The Setup tool provides backup and restore capabilities through the following options:

- Backup: Outputs Oracle Service Registry contents as a set of XML files in a specified directory.
- Restore: Loads backup-generated XML files into the same or a different Oracle Service Registry installation.

Backup functionality allows you to save the Oracle Service Registry data and configuration to a filesystem directory. Later the backup data can be used for full restore of Oracle Service Registry data and configuration.

10.1. What data is backed up?

When you use the Setup tool to perform an Oracle Service Registry backup, the following data is included in the backup:

- All registry data stored in the database (Except explicitly denied entities specified in `REGISTRY_HOME/app/uddi/conf/migrationXY.xml` which normally covers system entities and demo data. XY denotes the internal version number.).
- Configuration files.
- Oracle Service Registry libraries and JSP files.

In addition, consider backing up application server-specific data as described in [Section 10.2, Oracle Service Registry Backup Recommendations](#)



Important

The Oracle Service Registry server must be shut down before you start backup or restore operations.

Restoration is additive. It does not delete entities that are already present in Oracle Service Registry and not present in the data source. If you need to restore and do not want to retain any current data, you must clean the

database which can be done via: drop schema, create schema during setup. For details, see [Section 4, Database Installation](#)

10.2. Oracle Service Registry Backup Recommendations

This section describes application server-specific backup considerations.

10.2.1. Oracle Service Registry Backup and Oracle WebLogic Server

Ideally, the following static and runtime artifacts within the Oracle WebLogic Server directory structure should be backed up on a periodic basis.

Static artifacts include:

- BEA_HOME directories (excluding USER_PROJECTS directories) in the Admin Server and all the Managed Servers.
- WLS product home (by default, it resides in BEA_HOME but it can be configured by the user to point to a different location) in Admin Server and all the Managed Servers.

Runtime artifacts include:

- USER_PROJECTS directory in all the servers (by default, it resides in BEA_HOME, but it can be configured by the user to point to a different location).
- Application artifacts (EAR and WAR files) which reside outside of the domain directory on each of the servers (in case of nostage or external_stage application staging modes).
- Persistent Stores (by default, it resides in USER_PROJECTS, but it can be configured by the user to point to a different location).

10.3. Backup Oracle Service Registry

To back up Oracle Service Registry data:


1. Stop the Oracle Service Registry instance.

The Oracle Service Registry instance must be stopped when running Setup tool in the Backup mode. If the Oracle Service Registry is running during backup, the Setup tool returns errors indicating various XML files could not be updated.

2. Use the Setup tool and choose **Backup**. To run the Setup tool, execute the following script from the bin subdirectory of your installation:

Windows:	setup.bat
UNIX:	./setup.sh


For more information, see command-line parameters in [Section 2.6.1, Setup](#).

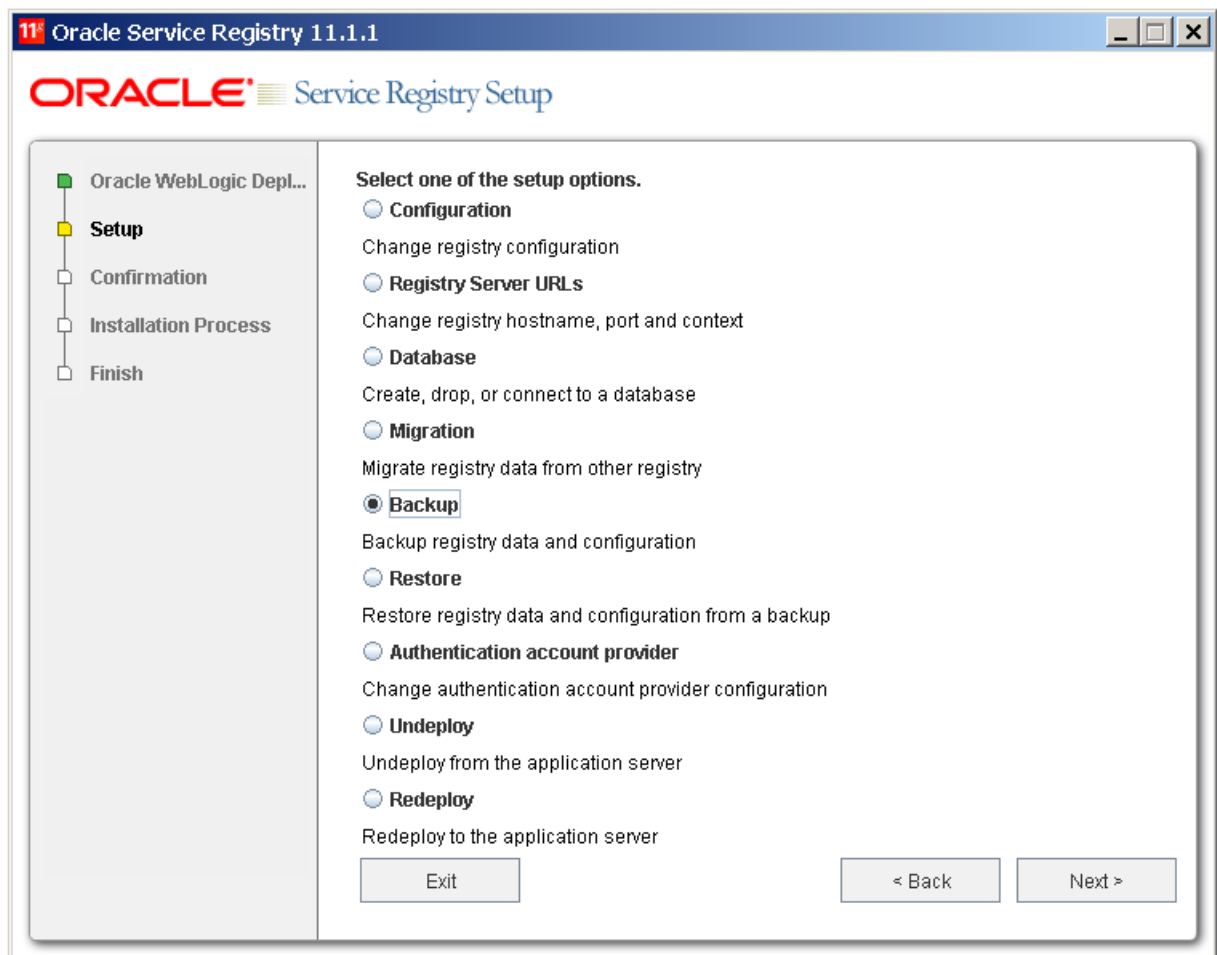Figure 89. Setup Tool - Select Backup

3. Select whether you want to use a Oracle Service Registry that is deployed (second choice) or not (first choice).
4. Specify the location of the backup directory. You can check which items you wish to back up as shown in [Figure 90](#).

Item description.

- a. **Backup data** makes a backup of UDDI data such as different kinds of entities and taxonomies.
- b. **Backup configuration files** makes a backup of configuration files from `REGISTRY_HOME/app/uddi/conf` and `REGISTRY_HOME/work/uddi/bsc.jar/conf`.
- c. **Backup configuration from Database** makes a backup of configuration files and their history as they are stored in the database. See Configurations in Database in the Administration Guide.
- d. **Backup libraries** makes a backup of `bsc.jar` and `web.jar` from both `app` and `work` directories. These files and directories contain UI customizations and modifications.

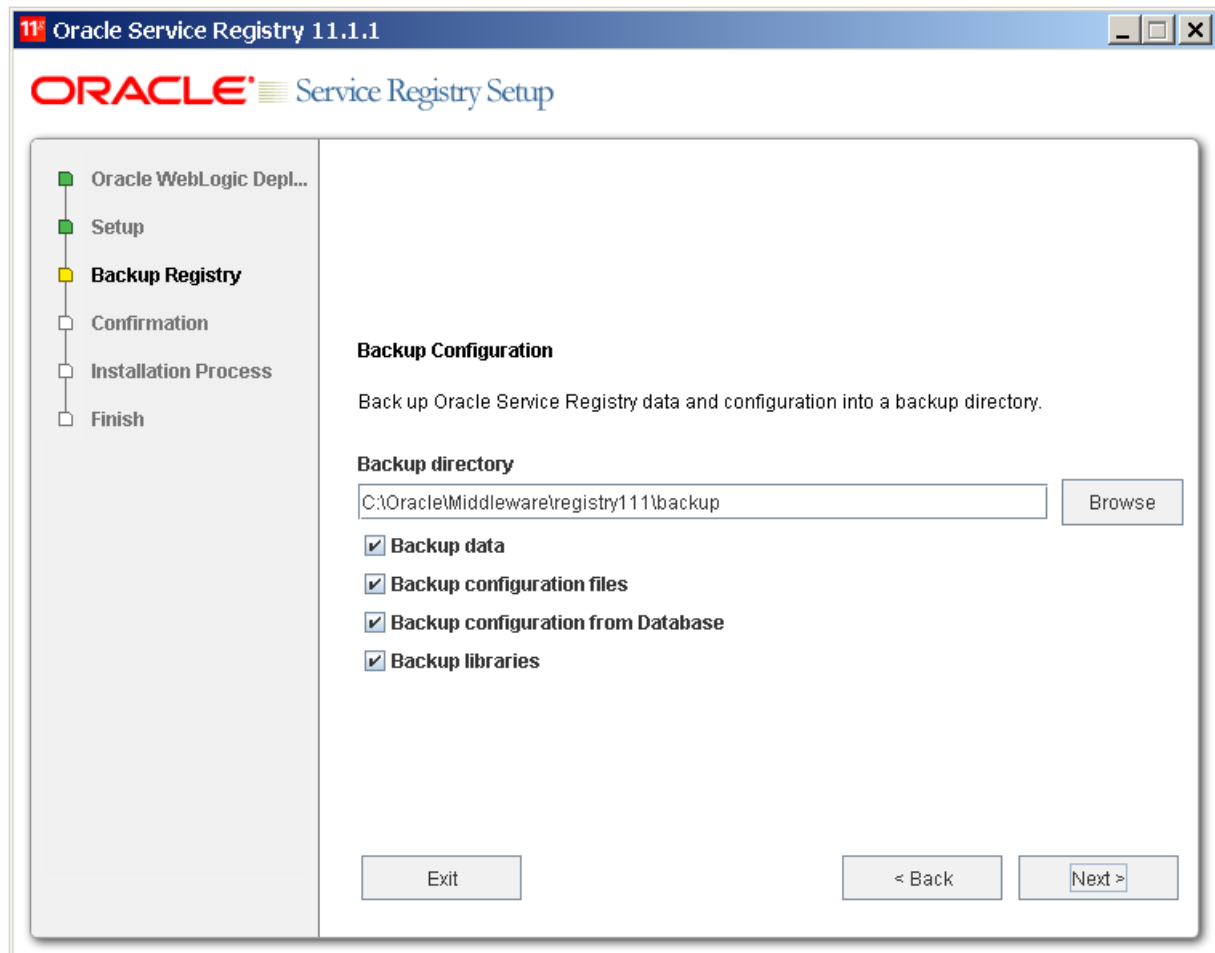Figure 90. Setup Tool - Backup

10.4. Restore Oracle Service Registry

Important


The restore operation adds data or replaces data in the database. Data in database which are not in the backup are left untouched. We recommend to restore into newly created database.

To restore registry data and configuration from a backup:


1. Use the Setup tool and choose **Restore**. To run the Setup tool, execute the following script from the `bin` subdirectory of your installation:

Windows:	setup.bat
UNIX:	./setup.sh

See command-line parameters in [Section 2.6.1, Setup](#).

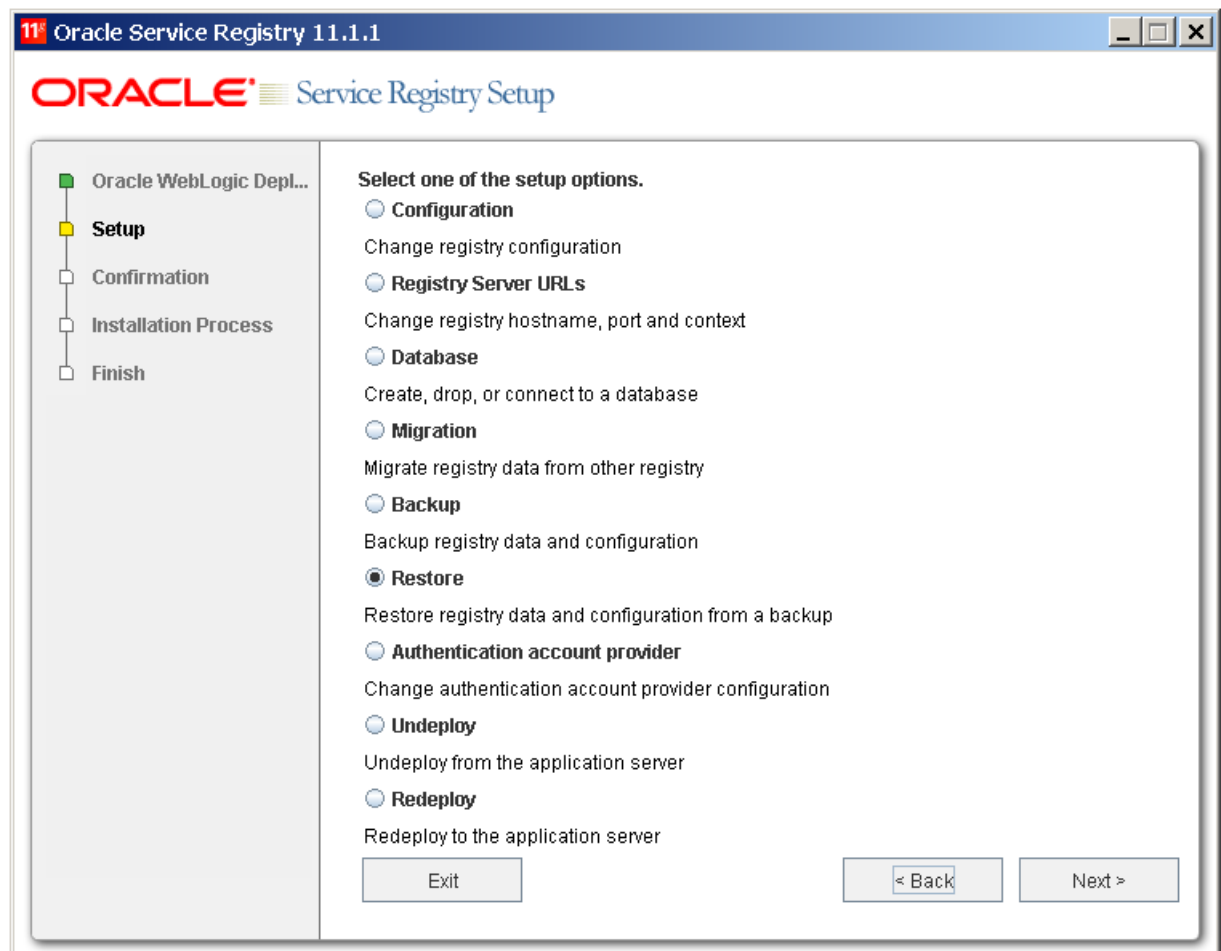Figure 91. Setup Tool - Select Restore

2. Specify the location of backup directory and check the items you wish to restore.

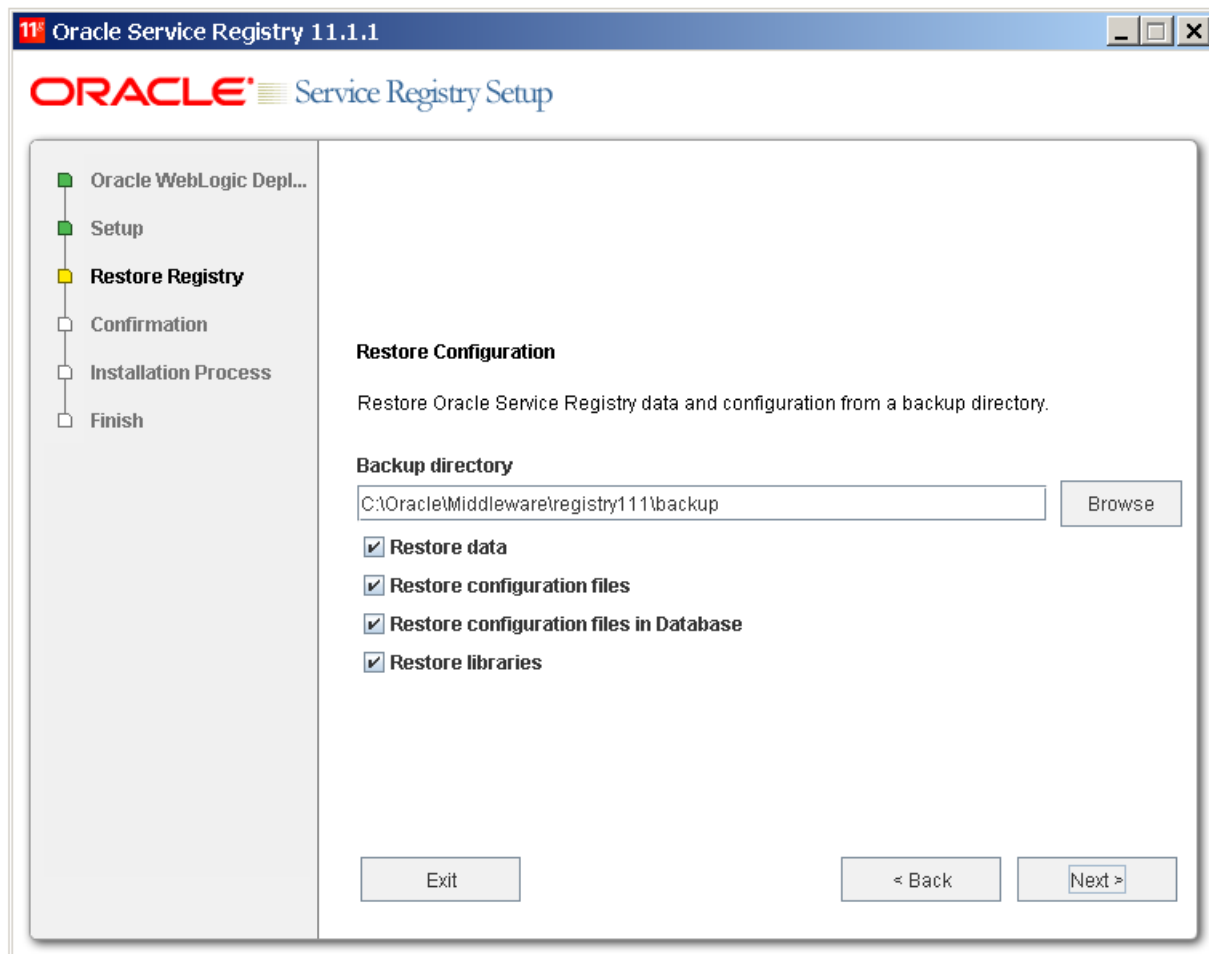Figure 92. Setup Tool - Restore from Backup

3. Restore any application-server specific backup files. For more information, see [Section 10.2, Oracle Service Registry Backup Recommendations](#).

11. Uninstallation

1. Remove Icons and Start menu items on Windows platform.
2. Undeploy registry from application server. This can be also done via the Setup tool. See [Section 2.7, Reconfiguring After Installation](#).
3. Drop database manually via the Setup tool. Setup should automatically detect the current configuration of the database. See [Section 2.7, Reconfiguring After Installation](#).
4. Delete installation directory of Oracle Service Registry.

User's Guide

The Oracle Service Registry User's Guide is mainly focused on the web user interface. The users to whom this guide is addressed are those who query the registry or publish to it using this interface as opposed to accessing the registry over SOAP. It is comprised of the following sections:

[Introduction to Oracle Service Registry](#)

This section is a brief introduction to Oracle Service Registry including basic concepts of UDDI specifications.

[Registry Consoles](#)

This section presents both Business Service Control and Registry Control

[Demo Data Description](#)

The Oracle Service Registry's Demo Data chapter describes the business domain and UDDI data structures used in the Oracle Service Registry Demo Suite and both registry consoles.

[Business Service Control](#)

Describes the Business Service Control and basic tasks you can perform with it.

Advanced Topics

[Access Control Principles](#)

Describes principles of permissions and access control to UDDI data structures.

[Publisher-Assigned Keys](#)

Under UDDI v3, users may assign alpha-numeric keys to structures rather than having these keys automatically generated by the registry (as was the case under UDDI v1 and v2).

[Range Queries](#)

Oracle Service Registry's range queries functionality allows you to search UDDI entities with the ability to use comparative operators (>, <).

[Taxonomy: Principles, Creation and Validation](#)

This section gives you a brief overview of taxonomy classification in Oracle Service Registry

[Registry Control Reference](#)

Describes the Registry Control and basic tasks you can perform with it.

[Signer Tool](#)

Allows the user to digitally sign published UDDI structures and validate digital signatures.

1. Introduction to Oracle Service Registry

Oracle Service Registry is a fully V3-compliant implementation of the UDDI (Universal Description, Discovery and Integration) specification, and is a key component of a Service Oriented Architecture (SOA). A UDDI registry provides a standards-based foundation for locating services, invoking services and managing metadata about services (security, transport or quality of service). A UDDI registry can store and provide these metadata using arbitrary categorizations. These categorizations are called taxonomies.

This introduction has the following sections:

- [Section 1.1, UDDI's Role in the Web Services World - UDDI Benefits](#)
- [Section 1.2, Typical Application of a UDDI Registry](#)
- [Section 1.3, Basic Concepts of the UDDI Specification](#)
- [Section 1.4, Subscriptions in Oracle Service Registry](#)

- [Section 1.5, Approval Process in Oracle Service Registry](#)

1.1. UDDI's Role in the Web Services World - UDDI Benefits

When development teams start to build Web service interfaces into their applications, they face such issues as code reuse, ongoing maintenance and documentation. The need to manage these services can increase rapidly.

The UDDI registry can help to address these issues and provides the following benefits:

- It delivers **visibility** when identifying which services within the organization can be reused to address a business need.
- It promotes **reuse** and prevents reinvention. It accelerates development time and improves productivity. This ability of UDDI to categorize a growing portfolio of services makes it easier to manage them. It helps you understand relationships between components, supports versioning and manages dependencies.
- It supports service **configurability and adaptability** by using the service-oriented architectural principle of location and transport independence. Users can dynamically discover services stored in the UDDI registry.
- It allows you to understand and manage **relationships** between services, component versions and dependencies.
- It makes it possible to manage the **business service lifecycle**. For example, the process of moving services through each phase of development, from coding to public deployment. For more information, see the [Approval Process](#).

1.2. Typical Application of a UDDI Registry

A UDDI registry stores data and metadata about business services. A UDDI registry offers a standards-based mechanism to classify, catalog and manage Web services so that they can be discovered and consumed by other applications. As part of a generalized strategy of indirection among services-based applications, UDDI offers several benefits to IT managers at both design-time and run-time, including increasing code reuse and improving infrastructure management by:

- Publishing information about Web services and categorization rules (taxonomies) specific to an organization.
- Finding Web services that meet given criteria.
- Determining the security and transport protocols supported by a given Web service and the parameters necessary to invoke the service.
- Providing a means to insulate applications (and providing fail-over and intelligent routing) from failures or changes in invoked services.

1.3. Basic Concepts of the UDDI Specification

UDDI is based upon several established industry standards, including HTTP, XML, XML Schema (XSD), SOAP, and WSDL. The latest version of the UDDI specification is available at: <http://www.oasis-open.org/committees/uddi-spec/doc/tcspecs.htm#uddiv3>.

The UDDI specification describes a registry of Web services and its programmatic interfaces. UDDI itself is a set of Web services. The UDDI specification defines services that support the description and discovery of:

- Businesses, organizations and other providers of Web services;
- The Web services they make available;
- The technical interfaces which may be used to access and manage those services.

1.3.1. UDDI Data Model

The basic information model and interaction framework of UDDI registries consist of the following data structures:

- A description of a service business function is represented as a `businessService`.
- Information about a provider that publishes the service is put into a `businessEntity`.
- The service's technical details, including a reference to the service's programmatic interface or API, is stored in a `bindingTemplate`.
- Various other attributes, or metadata, such as taxonomy, transports, and policies, are stored in `tModels`.

These UDDI data structures are expressed in XML and are stored persistently by a UDDI registry. Within a UDDI registry, each core data structure is assigned a unique identifier according to a standard scheme. This identifier is referred as a UDDI key.

Business Entity

A business entity represents an organization or group of people responsible for a set of services (a service provider). It can also represent anything that overreaches a set of services; for example a development project, department or organization. The business entity structure contains the following elements:

- **Names and Descriptions.** The business entity can have a set of names and descriptions, in a variety of languages if necessary.
- **Contacts.** The list of people who are associated with the business entity. A contact can include, for example, a contact name, addresses, phone numbers, and use type.
- **Categories.** Set of categories that represent the business entity's features or quantities. For example the business entity can be associated with the category California to say that the business entity is located in that geographical area.
- **Identifiers.** The business entity can be associated with arbitrary number of identifiers that uniquely identify it. For example, the business entity can be identified by a department number or D-U-N-S number.
- **Discovery URLs** are additional links to documents describing the business entity.

Business entities can be linked to one another using so-called assertions that model a relationships between them.

Business Service

Business services represent functionality or resources provided by business entities. A business entity can reference multiple business services. A business service is described by the following elements:

- **Names and descriptions.** The business service can have a set of names and descriptions, in a variety of languages if necessary.
- **Categories.** A set of categories that represent the business service features and quantities. For example, the business service can be associated by a category that represents service availability, version, etc.

A business service in a UDDI registry does not necessarily represent a Web service. The UDDI registry can register arbitrary services such as example EJB, CORBA, etc.

Binding Template

A business service can contain one or more binding templates. A binding template represents the technical details of how to invoke its service. Binding templates are described by the following elements:

- Access point represents the service endpoint. It contains endpoint URI and specification of the protocol.
- tModel instance infos can be used to represent any other information about the binding template
- Categories. The binding template can be associated with categories to reference specific features of the binding template, for example certification status (test, production) or versions.

tModel

The tModel provides a reference to an abstraction describing compliance with a specification and concepts. TModels are described by the following elements:

- Name and description. The tModel can have a set of names and descriptions, in different languages if required.
- An overview document is a reference to a document that specifies the tModel's purpose.
- Categories. Like all the other UDDI entities, tModels can be categorized.
- Identifiers. The tModel can be associated with an arbitrary number of identifiers that uniquely identify it.

UDDI entities are categorized through tModels via taxonomies. Business entities, business services, and binding templates declare associations to a certain category by presence of specific tModels in their categoryBags.

1.3.2. Taxonomic Classifications

UDDI provides a foundation and best practices that help provide semantic structure to the information about Web services contained in a registry. UDDI allows users to define multiple taxonomies that can be used in a registry. Users can employ an unlimited number of appropriate classification systems simultaneously. UDDI also defines a consistent way for a publisher to add new classification schemes to their registrations.

Taxonomies are used for representing various UDDI entity features and qualities (such as product types, geographical regions or departments in a company).

The UDDI specification mandates several standard taxonomies that must be shipped with each UDDI registry product. Some are internal UDDI taxonomies such as the UDDI types taxonomy or geographical taxonomy. A taxonomy can be marked as specific to business, service, binding template or tModel or it can be used with any type of the UDDI entity

Enterprise Taxonomies

Enterprise taxonomies are taxonomies that are specific to the particular enterprise or application. These taxonomies reflect specific categories like company departments, types of applications, and access protocols.

Oracle Service Registry allows definition of enterprise taxonomies. Users can also download and upload any taxonomy as an XML file. Oracle Service Registry offers tools for creating, modifying and browsing taxonomies on both the web user interface and SOAP API levels.

Checked and Unchecked Taxonomies

There are two types of taxonomies: checked and unchecked. Checked taxonomies are rigid, meaning that the UDDI registry does not allow the use of any categories other than those predefined in the taxonomy. Checked taxonomies are usually used when the taxonomy author can enumerate all distinct values within the taxonomy. A checked taxonomy can be **validated** using the internal validation service that is available in Oracle Service Registry or by using an external validation service.

Unchecked taxonomies do not prescribe any set of fixed values and any name and value pair can be used for categorization of UDDI entities. Unchecked taxonomies are used for things like volume, weight, price, etc. A special case of the unchecked taxonomy is the `general_keywords` taxonomy that allows categorizations using arbitrary keywords.

1.3.3. Security Considerations

UDDI specification does not define an access control mechanism. The UDDI specification allows modification of the specific entity only by its owner (creator). This does not scale in the enterprise environment where the right to modify or delete a specific UDDI entity must be assigned with more identities or even better with some role.

Oracle Service Registry addresses this issue with the ACL (Access Control List) extension to the UDDI security model. Every UDDI entity can be associated with the ACL that defines who can find (list it in some UDDI query result), get (retrieve all details of the UDDI object), modify or delete it. The ACL can reference either the specific user account or user group.

The UDDI v3 specification provides support for digital signatures. In Oracle Service Registry, the publisher of a UDDI structure can digitally sign that structure. The digital signature can be validated to verify the information is unmodified by any means and confirm the publisher's identity.

1.3.4. Notification and Subscription

The UDDI v3 specification introduces notification and subscription features. Any UDDI registry user can subscribe to a set of UDDI entities and monitor their creation, modification and deletion. The subscription is defined using standard UDDI get or find API calls. The UDDI registry notifies the user whenever any entity that matches the subscription query changes even if the change causes the entity to not match the query anymore. It also notifies about entities that were changed in a way that after the change they match the subscription query.

The notification might be synchronous or asynchronous. By synchronous, we mean solicited notification when the interested party explicitly asks for all changes that have happened since the last notification. Asynchronous notifications are run periodically in a configurable interval and the interested party is notified whenever the matched entity is created, modified, or deleted.

1.3.5. Replication

Content of the UDDI registry can be replicated using the simple master-slave model. The UDDI registry can replicate data according to multiple replication definitions that are defined using UDDI standard queries. The master-slave relationship is specific to the replication definition. So one registry might be master for one specific replication definition and slave for another. The security settings (ACL, users, and groups) are not subject to replication but you can set permissions on replicated data.

1.3.6. UDDI APIs

The core data management tools functions of a UDDI registry are:

- Publishing information about a service to a registry.
- Searching a UDDI registry for information about a service.

The UDDI specification also includes concepts of:

- Replicating and transferring custody of data about a service.
- Registration key generation and management.
- Registration subscription API set.
- Security and authorization.

The UDDI specification divides these functions into Node API sets that are supported by a UDDI server and Client API Sets that are supported by a UDDI client .

1.3.7. Technical Notes

Technical Notes (TN) are non-normative documents accompanying the UDDI Specification that provide guidance on how to use UDDI registries. Technical Notes can be found at <http://www.oasis-open.org/committees/uddi-spec/doc/tns.htm>. One of the most important TNs is "Using WSDL in a UDDI Registry".

1.3.8. Benefits of UDDI Version 3

The most important features include:

- **User-friendly identifiers** facilitate reuse of service descriptions among registries.
- **Support for digital signatures** allows UDDI to deliver a higher degree of data integrity and authenticity.
- **Extended discovery features** can combine previous, multi-step queries into a single-step, complex query. UDDI now also provides the ability to nest sub-queries within a single query, letting clients narrow their searches much more efficiently.

1.4. Subscriptions in Oracle Service Registry

Subscriptions are used to alert interested users in changes made to structures in Oracle Service Registry. The Oracle Service Registry Subscription API provides users the ability to manage (save and delete) subscriptions and evaluate notification. Notifications are lists of changes made within a specified time interval. The Subscription mechanism allows the user to monitor new, changed, and deleted entries for businessEntities, businessServices, bindingTemplates, tModels or publisherAssertions. The set of entities in which a user is interested is expressed by a SubscriptionFilter, which can be any one of the following UDDI v3 API queries:

- find_business, find_relatedBusinesses, find_services, find_bindings, find_tmodel
- get_businessDetail, get_serviceDetail, get_bindingDetail, get_tModelDetail, get_assertionStatusReport



Note

In Business Service Control, users can also create subscriptions also resources (WSDL, XML, XSD and XSLT) without a detailed knowledge of how resources are mapped to UDDI data structures.

1.4.1. Subscription Arguments

A subscription is the subscriber's interest in changes made to entities as defined by the following arguments:

- **SubscriptionKey** - The identifier of the subscription, as generated by the server when the subscription is registered.
- **Subscription Filter** - Specifies the set of entities in which the user is interested. This field is required. Note that once the subscription filter is set, it cannot be changed.
- **Expires After** - The time after which the subscription is invalid (optional).
- **Notification Interval** - How often the client will be notified (optional). The server can extend it to the minimum supported notification interval supported by the server as configured by the administrator.

For more information, please see Administrator's Guide, [Section 2, Registry Configuration](#).

- **Max Entities** - how many entities can be listed in a notification (optional). When the number of entities in a notification exceeds max entities, the notification will contain only the number of entities specified here or in the registry configuration. A chunkToken different from "0" will be specified in the notification. This chunkToken can be used to retrieve trailing entities.

- **BindingKey** - points to the bindingTemplate that includes the endpoint of the notification handling service (optional). Only http and mail transports are currently supported. If this bindingKey is not specified, the notification can be retrieved only by synchronous calls.
- **Brief** - By default, notifications contain results corresponding to the type of the Subscription Filter. For example, when the subscription filter is find_business, notifications contain Business Entities in the businessInfos form. If brief is toggled on, notifications will contain only the keys of entities. (optional)

1.4.2. Subscription Notification

Notification is the mechanism by which subscribers learn about changes. Notifications inform subscribers about entities that:

1. Satisfy the Subscription Filter now and were last changed, or created, within a given time period. The entities are included in a list of the appropriate data type by default. For example, when find_business represents the Subscription Filter, notifications contain Business Entities in the businessList/businessInfo form. (If the brief switch is toggled on, only the entity keys in the keyBag are included.)
2. Were changed or deleted in the given time period and no longer satisfy the Subscription Filter. Only the keys of the appropriate entities are included in the keyBag structure and the deleted flag is toggled on.

There are two types of notifications:

- **Asynchronous notification** - Using asynchronous notification, the server periodically checks for changes and offers them to the client via HTTP or SMTP. HTTP is suitable for services listening to UDDI changes. SMTP (that is, mail notification) is suitable for both services and users. With this transport, the user is notified at each notification interval by email. To perform asynchronous notification, the subscription must be populated with notification interval and bindingKey. See Developer's Guide, [Section 3.5, Writing a Subscription Notification Service](#) for details.
- **Synchronous notification** - Using synchronous notification, the server checks for changes and offers them when the client explicitly asks for them outside of periodical asynchronous notifications. It is useful for client applications which cannot listen for notifications, and for services that want to manage the time of notification by themselves. See Demos, [Section 2.3, Subscription](#) for details.

1.4.3. XSLT Over Notification

To improve the readability of notifications sent to users via email, Oracle Service Registry provides the ability to process the XSL transformation before the notification is sent. To enable this feature:

1. Register the XSL transformation in UDDI as a tModel that refers to XSL transformation in its first overviewDoc.
2. Modify the bindingTemplate (with the bindingKey specified in the subscription) to refer to the XSLT tModel by its tModelInstanceInfo.
3. Tag the XSLT tModel by a keyedReference to uddi:uddi.org:resource:type with the keyValue="xslt".

1.4.4. Suppressing Empty Notifications

Another Oracle Service Registry extension to the specification is the ability to suppress empty notifications. To do this, tag the bindingTemplate referenced from the subscription with a keyedReference to the tModel uddi:uddi.org:categorization:general_keywords with keyValue="suppressEmptyNotification" and keyName="suppressEmptyNotification".

1.4.5. Related Links

- To manage subscriptions via the Business Service Control, see the section [Business Service Control Subscriptions](#).
- To manage subscriptions via the Registry Control, see the [Registry Control Reference](#).
- To use and manage subscriptions, see the [Subscription API](#).
- More details about subscriptions can be found in the [Subscription API](#) [http://uddi.org/pubs/uddi-v3.00-published-20020719.htm#_Toc42047327] chapter of the UDDI v3 Specification.

1.5. Approval Process in Oracle Service Registry

The approval process provides functionality to ensure consistency and quality of data stored in Oracle Service Registry. There are two registries in the approval process:

- a *publication registry* is used for testing and verification of data;
- a *discovery registry* only contains data that has been approved and promoted from the publication registry.

See [Section 5, Approval Process Registry Installation](#) in the [Installation Guide](#) for details of how to install and configure these registries.

The approval process includes two types of users:


- A *requestor* is a user of the *publication* registry who can request approval of data for promotion to the *discovery* registry;
- An *approver* is a user who can approve or reject requests for promotion of data.

Administrators can specify:

- the users or groups of users who are approvers;
- the users or groups of users whose requests they can approve;

Every user can ask for approval, but to have data considered for promotion, a user must have an administrator-assigned approver.

For more information see [Section 1.7, Approval Process Management](#) in the [Administrator's Guide](#).

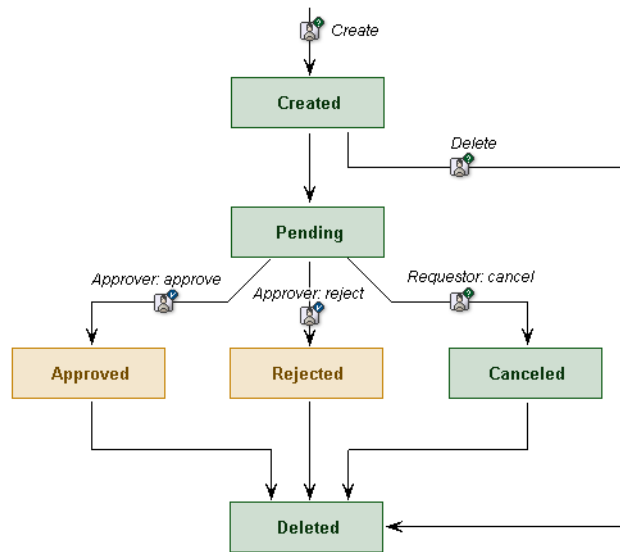Figure 1. Approval Request Lifecycle

Approval requests have a lifecycle shown in [Figure 1](#). A requestor can create a request. Once the request is created, the requestor can add UDDI data structures (described in [Section 1.3.1, UDDI Data Model](#)) or resources (WSDL, XML, XSD and XSLT) to the request. Note that the requestor does not need to know how resources are mapped to UDDI data structures. When the requestor adds a resource to the request, all underlying UDDI structures (bindings, tModels) the resource represents are automatically added to the request. Once the requestor specifies all entities to promote, the request may be submitted for approval.

The approver will review incoming requests, and then can approve or reject the request. If the approver approves the request, the requested data is immediately promoted to the *discovery* registry. If the requestor is not satisfied with the approver's response time, this user can remind the approver to review the requests. The requestor can also cancel submitted requests.

In the following section, we will look at requestor's and approver's actions in detail.

1.5.1. Requestor's Actions

A requestor may perform the following actions:

- Submit a request for approval of data promotion

After submitting the request, all data referenced in the request is blocked (locked for writing) until the request is either canceled by the requestor, approved for promotion, or rejected by the approver.



Note

A requestor may request approval for the promotion of the same set of data several times, and may have several unprocessed requests at one time.

- Find request.

This action provides the requestor with the ability to list information about all requests. If the requestor has privileged access on the Requestor API, then it is possible to get brief information on the requests of other users. Otherwise only the requestor's own requests may be viewed.

- Get request

This action returns full information about the given request. If the requestor has privileged access on the Requestor API then they can obtain full details of other user's requests. Otherwise only the requestor's own requests may be accessed.

- Cancel request

Provides requestor with the ability to cancel the given request. Only requestors with privileged access can cancel the requests of other requestors.

- Synchronize data

This action enables the requestor to synchronize data on the publication registry with data on the discovery registry. There are three types of synchronization - publication priority, partial discovery priority, and full discovery priority. For detailed information about synchronization, please see [Synchronization of Data](#).

To publish data to the discovery registry, the data must first be published to the publication registry and then approved by an appropriate approver. Once the requestor is satisfied with the quality of data, it is possible to ask for data promotion.

Requestors can publish data on the publication registry for testing. Once this data is ready for approval, the requestor asks for approval. An approval request contains two different sets of keys - keys for saving and keys for deletion. The keys select the data. Keys for saving are used for entities to be published (saved or updated) to the discovery registry. Keys for deletion can be used for deletion of any entity from the discovery registry. Approval requests can contain data (keys of entities) either for saving or for deletion.

Both types of keys can contain keys for businessEntities, businessServices, bindingTemplates, tModels or publisherAssertions. For example, if a requestor wants to promote a businessEntity to the discovery registry and remove a bindingTemplate from a service on the discovery registry then the request for approval must contain the key of the businessEntity in the keys for saving and the key of the bindingTemplate in the keys for deletion. After successful approval the business entity is saved (created or updated) to the discovery registry and the binding template is deleted from the discovery registry.

Context Checking

During a request for approval, and when approval is granted, automatic context checking is processed to ensure the integrity of data from a request. The context checker has the following rules:

- If an entity is contained in keys for saving, then the parent entity must already exist on the *discovery* registry or be contained in keys for saving to the *discovery* registry. For a businessService, the parent is a businessEntity; for a bindingTemplate, the parent is a businessService.
- An entity whose key is included in those for deletion may not be referenced by an entity whose key is included in those being saved.
- An entity whose key is included in those for deletion must exist on the *discovery* registry.
- Deleting a tModel that is referenced by entities on the *discovery* registry is not allowed.
- If a publisher assertion is included in keys for saving, then its business entities (specified in fromKey, toKey) and tModel must already exist on the *discovery* registry or be contained in keys for saving.

If the data is valid, according to these rules, the request for approval is made.

If data is invalid (for example, an entity is included in keys for deletion that does not exist on the *discovery* registry), an exception is thrown and the request for approval is not made.

If context checking fails, the requestor is informed that the data must somehow be changed before requesting approval again.

A Special Approval Case

If the registry administrator trusts a requestor, that requestor may be assigned the approval contact `AutoApprover`. Under this approval contact, there is no human review of the data. The data is automatically promoted to the *discovery* registry as long as automatic context checking is successful.

1.5.2. Approver's Actions

Approval contacts are assigned by users who have permission to set up the approval process via the `ApprovalConfiguration` API (such as registry administrator). The approval contact reviews requests to promote data to the *discovery* registry and approves or rejects these requests.

If enabled, content checking (additional rules applied to approved data) is performed at this time as well.

If [context checking](#) and [content checking](#) are successful, an email is sent to the requestor indicating the successful promotion of data, and including any message entered in the **Message for requestor** box.

Optional Content Checking

Optional content checking provides an approver with the ability to programmatically check data for approval. For example, the approver can set a policy that:

- Each business service must include a binding template, or
- Each business service must be categorized by specified categories

To enforce such a policy, a developer can write an implementation of the Checker API to enforce these checks. The implementation is called automatically during the approval process when an approver presses the **Approve request** button. So the approver does not have to check it manually. For more information on setting up optional content checking, see [Section 7.2, Optional Content Checking Setup](#) in the Administrator's Guide.

1.5.3. Synchronization of Data

Requestor's synchronization is used to synchronize the information on the *publication* and *discovery* registries. There are three different kinds of synchronization described below - publication priority, partial discovery priority and full discovery priority. Each is performed on all data structures associated with the synchronizing user's account. Synchronization is performed only upon request.



Note

These tools do not change information on the *discovery* registry. The only way to change data on *discovery* registry is via the *publication* registry and the approval process. Only administrator can publish to *discovery* registry.

Publication priority

Publication priority has the following rules:

- If an entity exists only on the *discovery* registry then it is copied to the *publication* registry.
- If an entity exists only on the *publication* registry then it is preserved.
- If an entity exists on both registries, then the *publication* registry takes priority over the *discovery* registry.

Publication Priority Example

Before synchronization, structures A and X exist on the *publication* registry and structures X and B exist on the *discovery* registry.

The Publication Priority synchronization copies structure B to the *publication* registry. Structure X on *publication* registry remains the same because when the same entity exists on both servers, Publication Priority synchronization favors the *publication* registry.

Partial Discovery Priority

Partial discovery priority has the following rules:

- If an entity exists only on the *discovery* registry, then it is copied from the *discovery* registry to the *publication* registry.
- If an entity exists only on the *publication* registry then it is preserved.
- If an entity exists on both registries, then data on the *publication* registry is overwritten by data from the *discovery* registry.

Partial Discovery Example

Before this synchronization, structures A and X exist on the *publication* registry and structures X and B exist on the *discovery* registry.

Partial discovery synchronization copies structure B to the *publication* registry and overwrites the version of structure X on the *publication* registry with that from the *discovery* registry.

Full Discovery Priority

Under this synchronization scenario, all the user's data on the *publication* registry is deleted, and all the user's data from *discovery* registry is copied to the *publication* registry. After full discovery priority synchronization, data on the *discovery* and *publication* registries is identical.



Important

The Oracle Service Registry administrator cannot execute full discovery priority synchronization.

Full Discovery Example

Before synchronizing, structures A, X, Y and B exist on the *publication* registry and structures A, X and B exist on the *discovery* registry.

Full discovery synchronization deletes structures A, X, Y and B from the *publication* registry, and replaces them with A, X, and B from the *discovery* registry.

1.5.4. Mail notification in approval process

Mails are sent in approval process for notification of involved parties. Approvers are notified via mail that requestors ask for their approval, cancel approval requests and so on. Requestors are notified via mail that approvers approve requests, reject requests and so on. Mail's form is determined by XSL transformation and so it can be changed.

By default the following transformation are used. They are specified by the key of appropriate tModel. `uddi:systinet.com:approval:defaultRequestEmailXSLT` is used for notifications of approvers about requestor's submission of approval requests. `uddi:systinet.com:approval:defaultMessageEmailXSLT` is used for notifications of approvers and requestors about approval request's cancellation, approval or rejection.

User can change mail's form in case that he defines his transformations for himself. In such a case these transformations are taken into the account instead of default ones. User can set special properties into its account. Property whose name is `approval.email.approver.request.tranformation` determines custom transformation for mail notification about newly created approval requests. If approver set value of this property to the key of XSL transformation, then this transformation is used for mail notification he receives. In a similar way, property whose name is `approval.email.approver.message.tranformation` specifies custom transformation for notification mails about request's cancellation, approval or rejection. If user wants to receive other mails than default ones he sets this property to the key of new transformation.



Note

If you are using approval process from the Registry Control, the form of mail notifications is determined by `approval.email.approval.message.tranformation.60` property. By default transformation defined by `uddi:systinet.com:approval:defaultMessageEmailXSLT_60` tModel is used.

1.5.5. Related Links

- Installation of publication and discovery registries - Installation Guide, [Section 5, Approval Process Registry Installation](#)
- Approval process via Business Service Control - User's Guide, [Section 4.8, Approval Process](#)
- Configure requestors and approvers - Administrator's Guide, [Section 1.7, Approval Process Management](#)

2. Registry Consoles

Oracle Service Registry provides two user interfaces.

- **Business Service Control** Using the Business Service Control developers, architects and business users can browse the various perspectives of the registry including business-relevant classifications such as service and interface lifecycle, compliance or operational/readiness status. They can browse information through business-relevant abstractions of SOA information such as schemas, interface local names or namespaces. The Business Service Control also provides easy to use and customizable publication wizards.

The Business Service Control can be found at `http://<hostname>:<port>/<context>/uddi/bsc/web`. Host name and port are defined when Oracle Service Registry is installed. The default port is 7101 or 8888 depending on application server setting. The *context* is specified during installation and defaults to registry. See [Section 4, Business Service Control](#)

- **Registry Control** Using the Registry Control users can browse and publish registry contents, create subscriptions and perform ownership changes. The Registry Control is the primary console for administrators to perform registry management.

The Registry Control can be found at `http://<hostname>:<port>/<context>/uddi/web`. Host name and port are defined when Oracle Service Registry is installed. The default port is 7101 or 8888 depending on application server settings. See [Section 5.5.2, Registry Console Overview](#)



Note

Make sure your browser allows HTTPS connections, supports JavaScript and does not block popup windows.

3. Demo Data

Demo data is pre-installed with Oracle Service Registry. There are two demo data sets:

- [demo data to demonstrate Business Service Control](#)
- [demo data to demonstrate Registry Control and Demo Suite](#)

3.1. Demo Data for Business Service Control

Demo data is pre-installed with Oracle Service Registry for use with the Business Service Control. This data describes a financial institution (bank) with several departments. It contains entities providing services for its operations. Entities providing services are modelled as service providers. There are the following providers and their services in the demo data:

Account Services

Account Services provides services related to account information, transfers, check orders, bill pay, online statements.

- Account - The account service provides the account related operations :getAccount, listAccountDetail, listRelatedAccounts, listTransactionHistory.
- Bill Payment - The bill payment service provides the ability to establish bill payment service, cancel bill payment service and get information about bill payment for a customer. Operations: authorizeAcctForBillPymt, cancelBillPymtSvc, createBillPymtSvc.
- Check Order - This service supports new check orders, check reorders, check order inquiry. Operations: getLastCheckOrder, orderChecks, reorderChecks.
- Direct Deposit Advance -This service supports the operations used to set up the advancement of money. Operation: addDirectDepositAdvance.
- Notification Services - This service is used to provide notifications. Operation: sendAccountTransferNotification.
- Stop Payment - This service allows stops to be set and maintained. Operations: addStopPaymentForCheck, cancelStopPay
- Transfer Funds - This service allows funds to be transferred from one account to another. Operations: authorizeTransfer, sendInvoicePayment, transferFunds.

Customer Management System

Customer relationship and management system.

- Add Customer - This service allows a customer to be added to the enterprise customer system. Operation: addCustomer.
- Customer Notification - This service provides notification messages for various customer changes. Operations: customerNameChangeNotif, customerAddressChangeNotif.

Outlet Locator

Provides information about outlets and sites.

- Outlet - The Outlet service gets all of the information about a Company outlet. Operation: getOutletDetail.
- Site - This service gets information about a site. Operations: getSiteDetail, listSites, searchSites

Document Services

Provides access to company forms.

- Electronic Forms - Provides access to company forms. Operations: updateAddrPhone, updateNameAndTitle.

Transaction Services

Middleware applications for posting transactions with high performance SLA.

- Monetary Transaction - Monetary Posting. Operation: postTransaction.

Each service has a WSDL definition. Demo data also contains information about service interfaces and endpoints including categorization as certification statuses, availability statuses, and stages of lifecycle.

3.2. Demo data for Registry Control and demos

Demo data describes a multinational company with offices in several locations and Oracle Service Registry installed in its headquarters division. The headquarters division has two departments: IT and HR.

There are two predefined users, demo_john and demo_jane. The passwords for these users are the same as their log on names.

Departments are represented as the following Business Entities:

- Headquarters
- HR
- IT

The following taxonomies are used:

demo:hierarchy

Represents the organizational structure (hierarchy). KeyValue is the businessKey of the parent department.

demo:location:floor

Represents the geographical location of departments. Headquarters is located in a building; IT and HR are located in different floors of the same building. KeyValue is the number of the floor.

demo:departmentID

Identifies each department uniquely. The value from keyValue can be used as an argument in WSDL services.

Pre-published services are shown in [Table 1, “Pre-published Demo Web Services”](#):

Table 1. Pre-published Demo Web Services

Name	WSDL Service	Description
Holiday request	Yes	stored in the HR department; used by employees to submit holiday request
Phone support	No	stored in the IT department; used by employees to call IT phone support for help with their PCs.
Employee list	Yes	stored in the HR department, projected to IT department; takes single argument - departmentId; used by employees to view a list of employees that belong to a department.

Assertions are an alternate way to represent relationships between business entities. In the Oracle Service Registry demo data, assertions are created between the Headquarters and HR departments.

The demo data also contains the following resource files located in the `REGISTRY_HOME/demos/conf` directory:

- `EmployeeList.wsdl`
- `employees.xml`
- `employees.xsd`
- `employeesToDepartments.xsl`
- `departments.xml`
- `departments.xsd`

4. Business Service Control

Using the Business Service Control, developers, architects and business users can browse the various perspectives of the registry including business-relevant classifications such as service and interface lifecycle, compliance or operational/readiness status. They can browse information through business-relevant abstractions of SOA information such as schemas, interface local names or namespaces. The Business Service Control also provides easy to use and customizable publication wizards.

The Business Service Control is designed to be consistent, intuitive and user friendly. This documentation demonstrates general procedures using typical examples. It has the following subsections:

[Section 4.1, Overview](#) A general description of the Business Service Control user interface.

[Section 4.2, User Account](#) User accounts and profiles.

[Section 4.3, Searching](#) Searching for [providers](#) and [endpoints](#).

[Section 4.4, Publishing](#) Publishing [providers](#) and [services](#).

[Section 4.5, Reports](#) The **Reports** tab.

[Section 4, Business Service Control Configuration](#) How an administrator can configure the Business Service Control according to your needs.

[Section 4.7, Subscription and Notification](#) How to create and manage subscriptions so that you are notified of changes to data stored in the registry.

[Section 4.8, Approval Process](#) The process for approval of publications from the perspective of a [requestor](#) or [approver](#).

4.1. Overview

[Figure 2](#) illustrates common features of the Business Service Control:

A: Main Menu Tabs The appearance of the **Main** menu tabs depends on your [user profile](#).

Home

This is a good place to start navigating the Business Service Control since it contains many links.

Catalog

This tab allows you to list, search and [publish entities](#) on Oracle Service Registry.

Tools

This tab allows you to view and manage [subscriptions](#) and [approval requests](#).

Report

This tab allows you to view the predefined set of [reports](#).

Configure

This tab allows you to configure the Business Service Control.

B: History Path (bread crumbs) This area displays the log of your recent actions. You can return to any of these previous actions by clicking on the hyperlinks.

C: Side Bar On some screens a side bar is available showing a list of item types.

D: Hide/Show Side Bar Click here to hide or show the side bar when available.

E: Main Display Area Information chosen from the tabs and the tree display is made available in the Main Display Area.

F: User Profile The name of the user profile of the currently logged in user.

G: Login/logout Here you can log in as a particular user or logout and use the Business Service Console anonymously.

H: Registry Name The name of the registry is taken from the name of the Operational Business Entity which represents the UDDI registry.

I: Action Icons There are two icons in this area. The first one allows you to refresh the page content, while the second one opens the product documentation page.

J: Reference Links Links at the bottom of the page. These are always the same and always there if you need them.

Figure 2. Example Business Service Console page

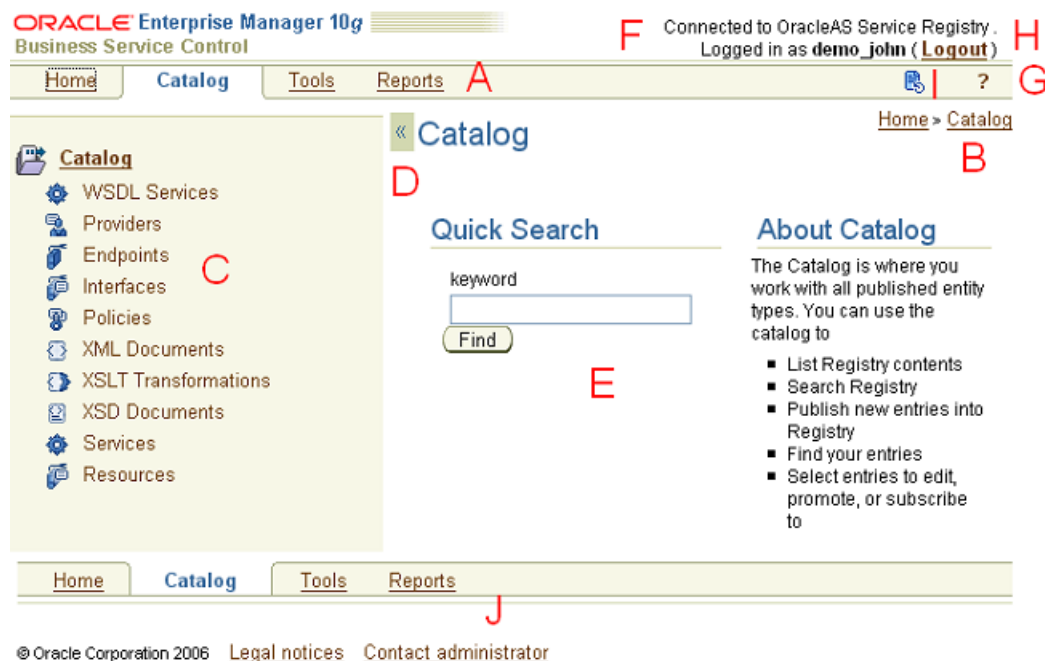


Figure shows features available on other screens:

V: Link to an entity References to entities or other resources appear in many places as links. Generally, clicking on such a link displays details of the resource. See [Section 4.6.1, Entity Details](#).

W: Result View Drop Down List This feature allows you to toggle among business, technical, and common views. Views differ in formatting and column selection.

X: Filters You can filter data you wish to display. To perform a filter, select a column name from the **Filter Column** drop down list, enter the **Filter value**, then click the **Filter** button. You can use wild card characters.

Y: Links for entity selection This section contains a set of links for selecting entities in the main display area. If you select all entities or clear (deselect) all entities displayed in the main display area will be selected. If the display area contains multiple pages, the **Select All** link will select entities in all pages.

Z: Action Drop Down List The action drop down list allows you to perform operations with selected entities. To perform the selected action, click the **Go** button.

Figure 3. Example Business Service Console page

ORACLE Enterprise Manager 10g
Business Service Control

Connected to OracleAS Service Registry .
Logged in as demo_john (Logout)

Home Catalog Tools Reports

List of my WSDL Services

Home > WSDL Services > List of my WSDL Services

Display: Technical View as a Table Sort by: Name in A-Z order

Filter by: Name which starts with

Apply

Displaying items 1 - 1:

	Name	Local name	Namespace	Version	Milestone	Release Date	Endpoints	Edit
☐	EmployeeList	EmployeeList	http://systemet.com/wsdl/demo/uddi/services/				(1)	☐

1

Select an Action: (No items selected)

Delete Go

Select All Clear All Publish a new Service

4.2. User Account

Before you can publish data to the registry, you must have an Oracle Service Registry account. Follow these steps to create a user account:

1. Click the **Create Account** link on the Business Service Control home page. This returns the **Create account** page shown in [Figure 4](#).
2. Fill in all fields. Those labeled with an asterisk (*) are required. Your email address may be used later for enabling your account.
3. Switch to the **My profile** tab, shown in [Figure 5](#) to specify profile preferences and subscription preferences.
4. When finished, click **Create Account**.

**Note**

Oracle Service Registry may be configured to require email confirmation in order to enable the user account. In this case, the registry sends an email confirmation. Follow the instructions in this email to enable your account.

Figure 4. Create Account

[Home](#) > [Create New Account](#)

[Edit Account](#) [My Profile](#) [View All](#)

Required fields are marked *

* Login name:	john
* Email:	john@company.com
* Password:	****
* Retype password:	****
* Full name:	John Johnson
Default language:	English ▼
Description:	
Business Name:	My Business
Phone:	858-505-8114
Alternate phone:	
Address:	3745 Beach Ave
City:	San Diego
State/Province:	CA
Country:	
Zip/Postal Code:	92123

Figure 5. User Profile

[Home](#) > [Create New Account](#)

[Edit Account](#) **My Profile** [View All](#)

Profile Preference

★ Use the following profile: Developer Profile ▼

Subscription Preferences

Email Addresses to send to: (comma-separated emails)

Default Notification Interval: 1 week ▼

Default Subscription Duration: ☐ Subscriptions Never Expire ☒ Subscriptions Expire After 1 year ▼

Maximum Updates to Send: ☐ No maximum ☒ 50 Entries

Suppress Empty Notifications ☒

Send Raw XML ☐

My Subscription Results Preferences

Show Updates in Last: 1 week ▼

Maximum Updates to Display: 30 Entries

[Create Account](#) [Cancel](#)

4.2.1. User Profile Fields

The **My Profile** tab has the following fields:

- **Profile preference** - Select your [preferred predefined user profile](#) from this drop down list

**Note**

Oracle Service Registry Administrator can disable selection of user profiles. In this case, a default user profile appears in a noneditable field.

- **E-mail addresses to send subscription notification** - You can enter a list of e-mail addresses to which email notifications will be sent. These addresses will be defaulted on the **Create subscription** page.
- **Default notification interval** - Specify how often email notifications will be sent.
- **Default subscription duration** - Enter the default subscription lifetime here.
- **Maximum Updates to Send** - Use this field to limit number of entries sent by an email notification.
- **Suppress Empty Notifications** - If checked, empty notifications will not be sent.

- **Send Raw XML** - If checked, email notifications will be sent in XML format.
- **Show Updates in Last** - If you want to view the updates made in the most recent period, specify the period here. For example, if you want to view updates made in the last three days, enter **3** in the first box and select **days** from the drop down list.
- **Maximum Updates to Display** - Enter how many items will be displayed .

4.2.2. Predefined User Profiles

Oracle Service Registry contains a list of predefined user profiles which differ in which main menu tabs will be available to them. Each user profile also contains a definition of default formats for result views. The registry administrator can adjust these user profiles. See [Section 4, Business Service Control Configuration](#).

The predefined user profiles are:

- **Business Expert** - Understands problems that needs to be solved and relationships and implications to other systems within the enterprise. The Business Expert proposes reusable functional components (future business services) and how these solve particular problems. This user associates both functional and non-functional requirements with the components. The Business Expert also suggests reuse of existing services.
 - Functional requirements are usually provided as descriptions attached to proposed components.
 - Non-functional requirements are usually represented with high-level capabilities and constraints that are rendered as categories (For example, secure, 24x7 uptime, transactional etc.).

- **Developer** - Implements business services according to description and associated capabilities/constraints (such as compliance). This user reuses low-level infrastructure services for the implementation.

Business service implementation usually undergoes some QA and testing after development.

- **SOA Architect** - Re-factors input from the Business Expert. This user performs the following:
 - Translates Business Expert deliverables into a set of reusable business services.
 - Transforms high-level capabilities/constraints into standards-based capabilities/constraints that can be enforced and implemented by other roles (developers, administrators and operation managers).
 - Defines capabilities/constraints (such as compliance constraints) that enforce standards-compliance and common implementation and deployment service practices in the enterprise.
 - Enforces compliance to selected standards (SOAP, WSDL, UDDI, WS-S, WS-RM etc.).
 - Suggests reuse of existing business services.
- **Operator** - Deploys and manages business services implemented by the Developer into the production environment. This user also:
 - Publishes service endpoint and other runtime data about the deployed service.
 - Ensures that the business service is properly managed and secured by tagging the service with the appropriate category that triggers security and WSM registration processes.
- **SOA Administrator** - This user performs the same functions as the Operator, but has higher privileges:

- Publishes service endpoint and other runtime data about the deployed service.
- Ensures that the business service is properly managed and secured by tagging the service with the appropriate category that triggers security and WSM registration processes.
- **Anonymous User Profile** - This profile applies to not authenticated users. The profile is a configuration placeholder for users that did not log in to the Business Service Control

4.3. Searching

The Business Service Control allows you to search Oracle Service Registry. You can search for providers, services, endpoints and interfaces. The tab also allows you to search for artifacts that have been published to Oracle Service Registry.

Properties of search criteria are used in conjunction with one another. The search returns all records that satisfy any of the search criteria property values.

Searching functions are under the **Search** main menu tab.

Figure 6. Search Tab

We will explain how to search in the following examples:

- [Searching for providers](#)
- [Searching for endpoints](#)

4.3.1. Searching Providers

To search for providers:

1. On the **Home** main menu tab select the **Search providers** link in the right display area. The page shown in [Figure 7](#) appears.

Figure 7. Searching Providers

[Home](#) > [Search](#) > [Search Providers](#)

Search Providers

Search Terms
Results

Name

Keywords

Keywords
=
Add another

Find
Cancel

Enter search criteria. You can enter wild card characters. Then click **Find**.

- Search results will be displayed on the page shown in [Figure 8](#).

Figure 8. Searching Providers - Result

[Home](#) > [Search](#) > [Search Providers](#)

Search Providers

Search Terms
Results

Display
as a Table
Sort by
in
order
Apply

Filter by
which starts with

Displaying items **1 - 1** :

Provider name ▲	Contact name	Contact phone	Contact email
Account Services	Virginia Smith	208-243-1754	SmithI@Company.com
Account Services provides services related to account information, transfers, check orders, bill pay, online statements			

In [Figure 8](#), you can also switch result views using the **Display** drop down list. The default result view is configurable for each [user profile](#). See [Section 4, Business Service Control Configuration](#) for more information.

If the result view contains too many records, you can filter which records will be displayed as follows:

- Select the **Filter by** on which you wish to apply the filter.
- Enter the filter string in the Filter value edit box. Wildcards can be used. The "%" character is replaced by any number of characters. The "_" character is replaced by any single character. The end of the string is treated as if it has a "%" wildcard suffix so there is no need to add a terminating wildcard.
- Click the **Apply** button. The view is updated with only those records matching the filter.

The result view table can view sorted by each column. To sort, just click on the appropriate column header.

Large result lists are divided into multiple pages. The number of records per page can be configured by administrator. See [Section 4.4, Paging Limits](#) for details.

If you click on the provider's name, provider details will displayed as shown in [Figure 9](#).

Figure 9. Searching Providers - Provider Detail

[Advanced details...](#)
[Home](#) > [Search Providers](#) > [Provider Detail](#)

Provider Details: Account Services

Details	Classifications	Services	References	System Info	View All

Description Account Services provides services related to account information, transfers, check orders, bill pay, online statements

Web Pages

UseType	Link
homepage	http://www.systinet.com

Contacts

UseType	Person Name	Email	Phone
Business Analyst	Virginia Smith	SmithI@Company.com	208-243-1754

Keywords

No keywords associated

Back

 Delete all Services ▼
Go

See [Section 4.6.1, Entity Details](#) for more information.

If you access a detail screen from the result view under the **Catalog** tab, the entity can be edited or deleted. You can also request approval of the entity (on a publication registry) or create a subscription.

4.3.2. Searching Endpoints

To search for service endpoints:

1. On the **Home** main menu tab select the **Search endpoints** link in the right display area. The page in [Figure 10](#) is displayed.

Figure 10. Searching Endpoints

[Home](#) > [Search Endpoints](#)

Search Terms

Results

Common properties

Usage

Account%

WS-I Compliance

☐ Basic Profile 1.0 ☐ Basic Profile 1.1

Operation properties

Availability

☐ Available ☐ Degraded ☐ Unavailable

Status

☐ In Maintenance ☐ In Test ☐ Not Available ☐ Operational

Keywords

=

Add another

Technical properties

Local name

Namespace

Binding properties

Protocol

☐ soap ☐ http

Transport

☐ http

Find

Cancel

Enter your search criteria. You can enter wild card characters. Then click **Find**.

2. The search results will be displayed on the page shown in [Figure 11](#).

Figure 11. Searching Endpoints - Result

[Home](#) > [Search Endpoints](#)

[Search Terms](#)
Results

Display Technical View ▼ as a Table ▼ Sort by AccessPoint ▼ in A-Z ▼ order

Filter by AccessPoint ▼ which starts with

Apply

Displaying items 1 - 1 :

	AccessPoint ▲	UseType	Namespace
+	http://company.com/accou.../account	http://schemas.xmlsoap.org/soap/http	

To display complete information about an endpoint, click on the endpoint URL in the result view. Endpoint details will be displayed. See [Section 4.6.1, Entity Details](#) for more information.

4.4. Publishing

Under the **Catalog** main menu tab, you can use publishing wizards to publish data to Oracle Service Registry.



Note

You must be logged in to publish data to Oracle Service Registry. See [Section 4.2, User Account](#) to learn how to register your user account.



Tip

To try publishing wizards, you can use the demo data account with the username [demo_john](#) and password [demo_john](#).

Figure 12. Catalog Tree

[Home](#)
[Catalog](#)
[Tools](#)
[Reports](#)
 ?

« **Catalog**

Catalog

- WSDL Services
- Providers
- Endpoints
- Interfaces
- Policies
- XML Documents
- XSLT Transformations
- XSD Documents
- Services
- Resources

Quick Search

keyword

Find

About Catalog

The Catalog is where you work with all published entity types. You can use the catalog to

- List Registry contents
- Search Registry
- Publish new entries into Registry
- Find your entries
- Select entries to edit, promote, or subscribe to

[Home](#) > [Catalog](#)

[Home](#)
[Catalog](#)
[Tools](#)
[Reports](#)

You can publish the following data to Oracle Service Registry:

- [Providers](#) - A two-step publishing wizard allows you to enter provider's name and description, provider's taxonomy classification and contact persons.
- [Services](#) - A four-step publishing wizard guides you through publishing a service, its interfaces, and its endpoints.
- **Interfaces** - A wizard for publishing and republishing service interfaces.
- **Resources** - This node allows you to start publishing wizards for publishing WSDL files, XML files, XML schema, and XSL transformations.

We will demonstrate publishing wizards in the following examples:

- [Publishing providers](#)
- [Publishing services](#)

4.4.1. Publishing Providers

In this section we show, step by step, how to publish a provider. We will create the provider HR Services. To publish this provider:

1. **Login** to Oracle Service Registry using the link under the **Home** main menu tab.
2. Click on the **Catalog** main menu tab. Click on the **Providers** link in the **Catalog** tree. Then, click on the **Publish a new provider** link in the right-hand display area.



Note

If you do not see the **Catalog** main menu tab, log in with username `demo_john` and password `demo_john` in order to follow this example.

3. The page shown in [Figure 13](#) appears.

Figure 13. Publish Provider - Step 1

Publish new provider

[Home](#) > [Providers](#) > [Publish new provider](#)

Cancel
Step 1 of 2
Next

Name and description

★ Name	HR Services
Description	Provides services for human resource management
Homepage	http://www.mycompany.com/hr

Keyword

=

Add another

Cancel
Step 1 of 2
Next

- Enter the provider name and description. You can also enter the home page URL of the provider. Click **Next**.
- The page shown in [Figure 14](#) appears.

Figure 14. Publish Provider - Step 2

Publish new provider

[Home](#) > [Providers](#) > [Publish new provider](#)

Step 2 of 2

Contacts

Person name:	UseType:	Description:	Email:	Phone:	Actions
Jane Smith			janeS@company.com	1-123-123-1237	
					Add

Step 2 of 2

- Enter the contact's data, and click **Add**. This returns a list of contacts you have entered and a blank New Contact form. Click **Finish** when you have entered all of your contacts.

The person's name is only a required field when you enter any contact information. It is possible to create a provider without a contact.

- On a publication registry, you then have the opportunity to request approval for the new provider as shown in [Figure 15](#).

Figure 15. Publish Provider - Approval Step

Publish new provider

[Home](#) > [Providers](#) > [Publish new provider](#)

The provider has been successfully published.

Summary

Provider [HR Services](#)

For more information see [Section 4.8.1, Requestor's Actions](#).

4.4.2. Publishing Services

In this section, we will show you how to publish a business service step-by-step. The service will be created from a WSDL file accessible from the registry server. Note that it is also possible to publish a service without a WSDL, in which case some additional details must be entered.

The following locations are supported for the WSDL and documents it imports:

- the server filesystem, perhaps on a network drive shared with user workstations;
- an HTTP server, optionally:
 - requiring HTTP Basic authentication;
 - using SSL (https);

If Oracle Service Registry receives the response 401-Unauthorized when attempting to retrieve the WSDL or a (direct or indirect) import, you will be prompted for HTTP Basic authentication credentials (a login name and password). If necessary these will be used to retrieve subsequent imports. This assumes that the server for each import requires the same credentials or none at all.



Note

Oracle Service Registry will always attempt to retrieve imported documents without credentials first and will only try sending credentials if this results in a 401-Unauthorized response. A potential security issue is that a third-party server may be intentionally configured to return the 401-Unauthorized response to gain knowledge of credentials from Oracle Service Registry.



Tip

In an SOA it is desirable for such documents to be widely accessible without unnecessary security constraints. Furthermore, once published to the registry, the documents will be accessible without the same credentials. The security policies governing the registry and servers from which WSDL documents and imports are retrieved, must take these issues of trust into account.

You can easily retrieve the WSDL URL for a service you want to publish using the Web Services Inspection Language (WSIL) service browser application deployed by default to Oracle Application Server 10.3. This application uses WSIL to find and expose the URL for every WSDL available within an Oracle Application Server cluster. You can simply locate the WSDL URL you need, then copy and paste it into the Registry's publication wizard.

To retrieve a WSDL URL using the WSIL service browser:

1. Launch the WSIL service browser.

Enter the following URL in a Web browser to access the WSIL service browser:

```
http://ohs_host:ohs_port/inspection.wsil
```

ohs_host and *ohs_port* have the following definitions:

- *ohs_host* is the address of the OHS host machine.; for example, `server07.company.com`
- *ohs_port* is the HTTP listener port assigned to OHS

2. Locate the service you want to publish in the browser.

3. Copy the WSDL URL for the selected service.

The WSDL URL appears as the value of the **location** attribute.

To publish a business service:

1. **Login** to Oracle Service Registry using the link under the **Home** main menu tab.
2. Click on the **Catalog** main menu tab. Click on the **WSDL Services** link in the **Catalog** tree. Then, click **Publish a new service** in the right-hand display area.



Note

If you do not see the **Catalog** main menu tab, log in with username [demo_john](#) and password [demo_john](#).

3. The page appears as in [Figure 16](#):

Figure 16. Publish Services - Step 1

Publish new WSDL service [Home](#) > [WSDL Services](#) > [Publish new WSDL service](#)

Cancel Step 1 Next

WSDL Location:

★ Provider:	HR Services ▼	detail
★ WSDL Location:	http://localhost/auth_wsd/EmployeeList.wsdl	

Cancel Step 1 Next

4. From the **Provider** drop down list, select a provider. Which providers are listed depends on the user's permissions. The user must have permission to write to the provider. You can use the provider created in the [previous section](#).

Enter the location of the WSDL file, for example: `http://localhost/auth_wsd/EmployeeList.wsdl`.

Click **Next**.

5. If HTTP Basic authentication is required to access the WSDL then you will be presented with the screen shown in [Figure 17](#).

Figure 17. Entering HTTP Basic credentials**Publish new WSDL service**[Home](#) > [WSDL Services](#) > [Publish new WSDL service](#)

[Cancel](#) [Back](#) Step 2 of 3 [Next](#)

Enter Credentials For Secured WSDL Access

Enter Credentials For Secured WSDL Access.

* Username:

* Password:

[Cancel](#) [Back](#) Step 2 of 3 [Next](#)

Enter credentials and click **Next**.

- The page shown in [Figure 18](#) will appear.

Figure 18. Publish Service - Service Properties**Publish new WSDL service**[Home](#) > [WSDL Services](#) > [Publish new WSDL service](#)

[Cancel](#) [Back](#) Step 2 of 4 [Next](#)

Service properties

Service creation method:

☒ new service
☐ rewrite service

Service properties

Name	EmployeeList		
Description			
Usage			
Keyword		=	Add another
Certification	☐ Certified ☐ Not Applicable ☐ Pending ☒ N/A		
Release date			
Version			
Milestone			

[Cancel](#) [Back](#) Step 2 of 4 [Next](#)

7. You can optionally specify service properties. The service **Usage** will classify the service by functional areas. You can enter the service certification status, release date, version and milestone. Then click **Next**.
8. The next step allows you to specify service interface properties. You can specify the interface status and compliance.

Figure 19. Publish Service - Interface Properties

Publish new WSDL service

Home > WSDL Services > Publish new WSDL service

Cancel
Back
Step 3 of 4
Next

Interface properties

Interface creation method

☒ new interface

☐ rewrite interface

☐ reuse interface

EmployeeList_portType

detail

EmployeeList_portType

detail

Interface properties:

Local name

EmployeeList_portType

Description

Usage

Keyword

=

Add another

Status

☐ Beta
 ☐ Deprecated
 ☐ Obsolete
 ☐ Stable
 ☒ N/A

Compliance

N/A

Cancel
Back
Step 3 of 4
Next

Then click **Next**.

9. The last step of the wizard allows you to specify service endpoint properties.

Figure 20. Publish Service - Endpoint Properties

Publish new WSDL service [Home](#) > [WSDL Services](#) > [Publish new WSDL service](#)

Cancel Back Step 4 of 4 Finish

Endpoint properties

AccessPoint urn:unknown-location-uri

Usage

Keyword = Add another

Compliance N/A

Availability ☐ Available ☐ Degraded ☐ Unavailable ☒ N/A

Status ☐ In Maintenance ☐ In Test ☐ Not Available ☐ Operational ☒ N/A

Cancel Back Step 4 of 4 Finish

Then click **Finish**.

10. A summary of how the service has been published to Oracle Service Registry will appear, as shown in [Figure 21](#).

Figure 21. Publish Service - Summary

Publish new WSDL service [Home](#) > [WSDL Services](#) > [Publish new WSDL service](#)

 The service has been published

Summary

Service	EmployeeList
Provided by	HR Services
Endpoints	urn:unknown-location-uri
Interfaces	EmployeeList_portType

Request Approval for this Service Done


On a publication registry, you then have the opportunity to request approval for the new service as shown in [Figure 21](#). For more information see [Section 4.8.1, Requestor's Actions](#).

4.5. Reports

Under the **Reports** main menu tab you can browse various reports. In the reports tree shown in [Figure 22](#) you can select a report which will be shown in the right display area. Most of the reports can be displayed in different views. The Business

Service Control contains the predefined reports shown in [Figure 22](#). If you see different reports in the tree, they have been [reconfigured](#) (Browsable Classification) by an administrator.

Figure 22. Reports Tree

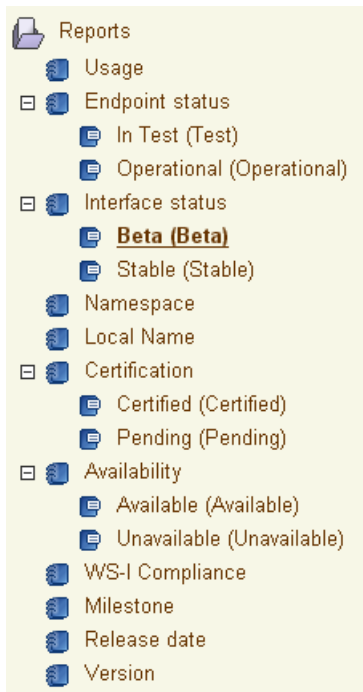

The Business Service Control includes the following predefined reports:


- **Usage** - This report shows services, endpoints, and interfaces categorized by the `systinet-com:taxonomy:usage` taxonomy.
- **Endpoint status** - This report shows endpoints categorized by the `systinet-com:taxonomy:endpoint:status` taxonomy.
- **Interface status** - This report shows interfaces categorized by the `systinet-com:taxonomy:interface:status` taxonomy.
- **Namespace** - This report shows services, endpoints, interfaces, and resources categorized by the `uddi-org:xml:namespace` taxonomy.
- **Local Name** - This report shows services and endpoints categorized by the `uddi-org:xml:localName` taxonomy.
- **Certification** - This report shows services categorized by the `systinet-com:taxonomy:service:certification` taxonomy.
- **Availability** - This report shows endpoints categorized by the `systinet-com:taxonomy:endpoint:availability` taxonomy.
- **WS-I Compliance** - This report shows endpoints and interfaces categorized by the `ws-i-org:conformsTo:2002_12` taxonomy.
- **Milestone** - This report shows services categorized by the `systinet-com:versioning:milestone` taxonomy.

- **Release date** - This report shows services categorized by the `systinet-com:versioning:releaseDate` taxonomy.
- **Version** - This report shows services categorized by the `systinet-com:versioning:version` taxonomy.

4.6. Entities

The preceding sections describe how to navigate to entities by [Section 4.3, Searching](#) or with [reports](#). The **Catalog** tab provides a data-centric approach. It lists types of entity and allows the user to select a type before performing an action. One way to perform actions on an entity type is to bring up the Context Menu by right-clicking on an entity type.

Figure 23. Catalog tab

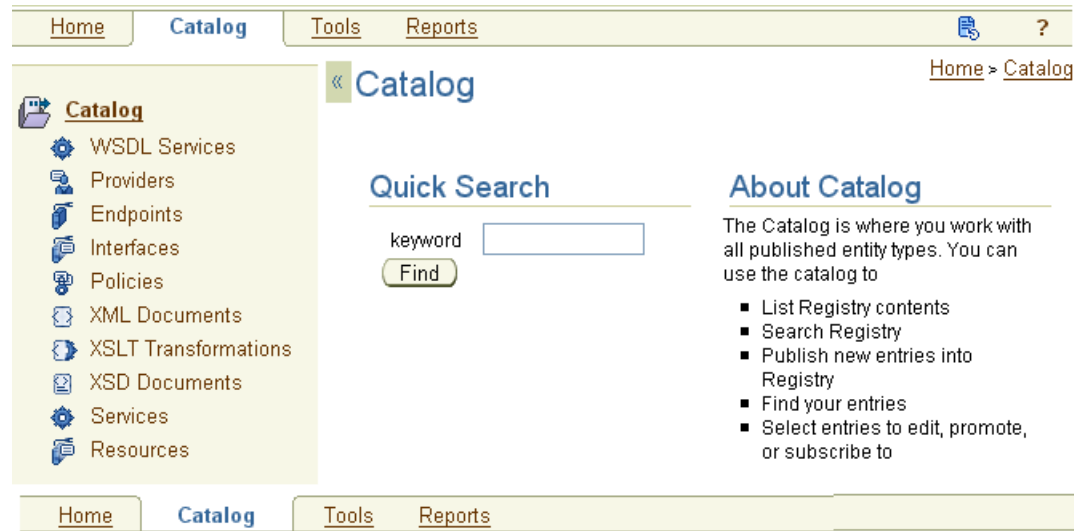

This section focuses on the entity types listed in the catalog and how they are displayed by the Business Service Control.

4.6.1. Entity Details

References to entities and resources on the Business Service Control are generally hyperlinks, allowing you to navigate to them by various routes. Clicking such a link displays a details page. For example, in [Section 4.3.1, Searching Providers](#) the example resulted in the page shown in [Figure 24](#).

Figure 24. Provider Details

[Advanced details...](#)
[Home](#) > [Search Providers](#) > [Provider Detail](#)

Provider Details: Account Services

Details	Classifications	Services	References	System Info	View All

Description Account Services provides services related to account information, transfers, check orders, bill pay, online statements

Web Pages

UseType	Link
homepage	http://www.systinet.com

Contacts

UseType	Person Name	Email	Phone
Business Analyst	Virginia Smith	SmithI@Company.com	208-243-1754

Keywords

No keywords associated

[Back](#)

Some of the tabs are specific to the entity type. For example, **Services** in the above example. This section focuses on general purpose tabs.

Table 2. General Purpose Detail Tabs

Label	Description
Details	Basic details relating to the entity, depending on its type.
Classifications	How this entity is classified using taxonomies.
References	References to related entities. Note that there is also a Referenced by action to list other entities that refer to the entity.
System Info	Information relating to storage of the entity in Oracle Service Registry, including ownership, creation and modification dates and UDDI keys that uniquely identify it.
View All	This tab displays all the information on the other tables on a single screen.

Note that the tabs displayed and their content depend on:

- the user's profile. See [Section 4.2, User Account](#);
- customization of the Business Service Control by administrators. See [Section 4, Business Service Control Configuration](#);

4.6.2. Resources

Resources are essentially entities that are documents, identified by a URL. Together with generic features such as classifications and references, resources are the means by which Oracle Service Registry supports arbitrary document types. Oracle Service Registry provides special support for the following types of resource.

Table 3. Special Resources

Type	Description
XML Documents	eXtensible markup language documents
XSLT Transformations	XML Stylesheet Language Transformations specifying how an XML document can be transformed into another document, typically also an XML document.
XSD Documents	XML Schema Document, specifying a particular type of XML document.
Policies	WS-Policy documents that can be attached to other entities to specify: • conformance constraints on entities implementing SOA governance policies; • constraints on how a client may use a service, to facilitate establishment of a contract between a provider and a service user; Policies attached to entities are visible as references.

Note that all of the above are XML documents. Furthermore, there is a generic type on the **Catalog** tab with label **Resource**. This enables all types of resource, including the above, to be processed using the flexible generic features of Oracle Service Registry.



Note

Resources are represented as UDDI tModels. This representation is visible on the [Registry Control](#).

4.7. Subscription and Notification

Subscriptions are used to alert interested users in changes to structures made in Oracle Service Registry. The Business Service Control allows you to create and manage subscriptions for monitoring new, changed, and deleted entities. The following entities can be monitored: providers, services, interfaces, and endpoints, as well as resources (WSDL, XML, XSD and XSLT). You can establish a subscription based on a set of entities in which you are interested or on a specific search query. Users can receive notifications about modified structures via email messages or they may view the modified entities under the **Tools** main menu tab in the **My Subscription Results** section.



Note

If you wish to create more advanced subscriptions, see Advanced Topics, [Section Publishing Subscriptions](#).

In this chapter, we will show you on demo data the following actions:

- [Creating Subscriptions on Selected Entities](#)
- [Creating Subscriptions from Search Query](#)
- [Managing Subscriptions](#)
- [Viewing Changed Entities](#)

4.7.1. Subscription On Selected Entities

In this section we will show you how to create subscriptions on selected entities. The following steps guide you to create a subscription on the HR provider from demo data. You will then be notified about each modification made to the HR provider, and modifications made to all of its child entities: services, interfaces, endpoints etc.

1. Under the **Catalog** main menu tab, click on the **Providers** branch in the tree menu. Then click on the link, **List all providers**.
2. Locate the HR provider and toggle the check box in front of the provider's name.

If the list contains multiple pages, you can navigate between pages and select entities on multiple pages.

3. From the drop down list labeled **Select an Action**, located at the bottom of the page, select **Subscribe to Selected Providers** as shown in [Figure 25](#).

Figure 25. Subscription From Providers List

The screenshot shows the 'Providers List' interface. At the top, there are filters: 'Display' set to 'Default View', 'as a Table', 'Sort by' 'Provider name' in 'A-Z' order, and a filter box for 'Provider name' which starts with. An 'Apply' button is to the right. Below the filters, it says 'Displaying items 1 - 3 :'. A table follows with columns: 'Provider name', 'Contact name', 'Contact phone', 'Contact email', and 'Edit'. The table lists three providers: 'Headquarter' (Joe Black, 1-234-567-890), 'HR Services' (Provides HR related services), and 'IT' (John Demo, 1-123-456-7890). The 'HR Services' provider is selected with a checkmark. Below the table, a page indicator shows '1'. At the bottom, there is a 'Select an Action:' dropdown menu with '(1 item(s) selected)'. The dropdown menu is open, showing options: 'Delete', 'Delete', 'Promote/Demote', 'Subscribe to Selected Providers' (highlighted), and 'Subscribe to All Providers'. To the left of the dropdown are links for 'Select All' and 'Clear All', and a 'Publish a new provider' button. A 'Go' button is to the right of the dropdown. At the bottom left, there is a 'Reports' link.

	Provider name	Contact name	Contact phone	Contact email	Edit
☐	Headquarter Headquarter department	Joe Black	1-234-567-890		
☒	HR Services Provides HR related services				
☐	IT IT department	John Demo	1-123-456-7890		

1

Select an Action: (1 item(s) selected)

Select All
Clear All

Publish a new provider

Go

Delete
Delete
Promote/Demote
Subscribe to Selected Providers
Subscribe to All Providers

Reports

4. Click **Go** to start the subscription wizard. The page shown in [Figure 26](#) will appear.



Note

You can also create a subscription from an entity detail page.

Figure 26. Create Subscription

Create new subscription

[Home](#) > [Providers](#) > [List of my Providers](#) > [Create new subscription](#)[Cancel](#) Step 1 of 1 [Finish](#)

Notification setup

Subscription Filter

Subscribed to:

Name	Type
HR Services	Provider

Select notification parameters for this subscription:

Email Address:	☐ No notifications ☒ demo_john@mycompany.com
Notification Interval:	1 week
Notifications Expire After: (MM/DD/YYYY)	☐ No Expiration ☒ November / 23 / 2006
Maximum Updates to Send:	☐ No Maximum ☒ 50 Entries
Suppress Empty Notifications	☒
Send Raw XML	☐

[Cancel](#) Step 1 of 1 [Finish](#)

- The subscription filter contains a list of the entities you have selected on the previous screen. You can specify an email address to which notification messages will be sent. If do not want to receive email notifications, select the option **No notifications**. Configure the frequency of mail notifications using the drop down lists labeled **Notification Interval**.

You can specify the default email address and notification interval values in [your profile](#).

- Enter additional information on this panel. The default values are entered in [your profile](#). Click **Finish** when done.
- You can review your subscriptions under the **Tools** main menu tab, section **Manage My Subscriptions**. The page shown in [Figure 29](#) will appear.

4.7.2. Subscription from Search Query

In this section, we will show you how to create a subscription based on a search query. Our subscription will monitor all certified services, even newly created certified services.

- Under the **Catalog** main menu tab, click on the **Services** branch in the tree menu. Then click on the link **Search services**.

On the **Search services** page, check the certification status **certified** located under **Business properties**, and click **Find**.

2. The page shown in [Figure 27](#) contain a list of all certified services.

Figure 27. Subscription From Services Search

» **Search WSDL Services** [Home](#) > [WSDL Services](#) > [Search WSDL Services](#)

[Search Terms](#) [Results](#)

Display [Default View](#) as a [Table](#) Sort by [Name](#) in [A-Z](#) order
 Filter by [Name](#) which starts with

[Apply](#)

Displaying items **1 - 5** of 17 : ([Single page](#))

	Name ▲	Provider name	Description	Edit
☐	AccountService	Account Services	The account service provides the account related operations	✎
☐	AddCustomerService	Customer Management System	This service allows a customer to be added to the enterprise customer system.	✎
☐	BillPaymentService	Account Services	The bill payment service provides the ability to establish bill payment service, cancel bill payment service and get information about bill payment for a customer.	✎
☐	CheckOrderService	Account Services	This service supports new check orders, check reorders, check order inquiry	✎
☐	CustomerNotificationService	Customer Management System	This service provides notification messages for various customer changes	✎

1 2 3 4 [Next](#) ➔

Select an Action: (No items selected)

[Select Page](#) [Select All](#) [Publish a new Service](#) [Delete](#) [Go](#)
[Clear Page](#) [Clear All](#)

[Delete](#)
[Promote/Demote](#)
[Subscribe to Selected Services](#)
[Subscribe using this Search](#)

[Home](#) [Catalog](#) [Tools](#) [Reports](#) [Configure](#)

3. From the drop down list labeled **Select an Action**, located in the bottom of the page, select **Subscribe using this Search** as shown in [Figure 27](#). The page shown in [Figure 28](#) will appear.

Figure 28. Create Subscription

Create new subscription [Home](#) > [WSDL Services](#) > [Search WSDL Services](#) > [Create new subscription](#)

[Cancel](#) Step 1 of 1 [Finish](#)

Notification setup

Subscription Filter
You are subscribing to the query: [Preview Query](#)

Select notification parameters for this subscription:

Email Address:	☐ No notifications ☒ demo_john@mycompany.com
Notification Interval:	1 week
Notifications Expire After: (MM/DD/YYYY)	☐ No Expiration ☒ November / 23 / 2006
Maximum Updates to Send:	☐ No Maximum ☒ 50 Entries
Suppress Empty Notifications	☒
Send Raw XML	☐

[Cancel](#) Step 1 of 1 [Finish](#)

- The subscription filter contains the search query. You can execute the query to review the query specification. It is not possible to modify the query, so if you wish to change the query, click **Cancel** button and recreate the steps above.
- To review your subscriptions, select the **Tools** main menu tab, and click on **Manage My Subscriptions**. The page shown in [Figure 29](#) will appear.

4.7.3. Manage Subscriptions

You can manage your subscription when you click on **Manage My Subscriptions** under the **Tools** main menu tab. On the **Manage my subscription** page shown in [Figure 29](#), you can edit, delete or view subscription detail information.

Figure 29. Manage Subscriptions

[Home](#) > [Tools](#) > [Manage My Subscriptions](#)

Manage My Subscriptions

	Type	Notifications to	Notifications Expire	
☐	Get Provider	demo_john@mycompany.com	Nov 26, 2006 1:17:29 PM	
☐	Query Service	demo_john@mycompany.com	Nov 23, 2006 11:59:59 PM	

Select an Action: (No items selected)

[Select All](#)
[Clear All](#)

4.7.4. View Changed Entities

There are two options for viewing changed entities. If you have specified an email address during subscription creation, notification will be sent to you by email. The other option is to review changes under the **Tools** main menu tab. Click on the **Providers** link. If the HR provider has been modified and you created the [subscription](#) described in this chapter, you will see the page shown in [Figure 30](#)

Figure 30. View Changes

[Home](#) > [Tools](#) > [My Subscription Results](#)

My Subscription Results

[Services](#)
[WSDL Services](#)
[Providers](#)
[View All](#)

Provider Name	Provider Description	Subscription
HR	HR department	View
HR Services	Modify description to demo subscription.	View
IT	IT department	View

View updates in last

1

week

First 30

4.8. Approval Process

The approval process includes two types of users:

- **requestor** - A user of the *publication* registry who can ask for the approval of data for promotion. Every user can ask for approval, but to have data considered for promotion, a user must have an administrator-assigned approver.
- An **approver** is a user or group given the ability to review published information on the *publication* registry and grant or deny approval to promote that information to the *discovery* registry. If the approver is a group then any of its members may approve or reject approval requests.



Note

We recommend reading [Section 1.5, Approval Process in Oracle Service Registry](#) to become familiar with approval process.

In this chapter, we will describe:

- Requestor's actions
 - [Create and submit request](#)
 - [Manage Requests](#)
 - [Cloning Requests](#)
- Approver's actions
 - [Approve/Reject request](#)
 - [View Approval History](#)

4.8.1. Requestor's Actions

- [Create and submit request](#)
- [Manage Requests](#)
- [Cloning Requests](#)

Create and Submit Request

This section describes the steps to request approval of entities. This can be done in two ways:

1. When an entity is published on a publication registry, the final screen provides a button to request immediate approval of the entity and related entities for promotion to the discovery registry. See [Section 4.4, Publishing](#);
2. For published entities it is possible to request their promotion to the discovery registry or demotion from the discovery registry;

The procedure below uses the second of these as an example. The first case differs in that it is not possible to demote newly published entities and so the user is not presented with this option. The procedure has minor differences in the first few steps.

You need to publish entities before following this procedure. The first few steps request promotion of an existing provider as an example. The entities are those in sections [Section 4.4.1, Publishing Providers](#) and [Section 4.4.2, Publishing Services](#). These sections also explain the other way of starting the procedure.

1. On the **Catalog** tab, click on an entity type such as **Providers** in the tree menu. To select an existing provider click **My providers** and the existing providers are displayed as in [Figure 31](#).

Figure 31. Select Items for Promotion

[Home](#) > [Providers](#) > [List of my Providers](#)

List of my Providers

Display as a Table Sort by in order

Filter by which starts with

Displaying items 1 - 1 :

	Provider name ▲	Contact name	Contact phone	Contact email	Edit
☒	HR Services				☒

1

Select an Action: (1 item(s) selected)

[Select All](#) [Clear All](#)

- Delete
- Promote/Demote
- Subscribe to Selected Providers
- Subscribe to All Providers

[Home](#) [Catalog](#) [Tools](#) [Reports](#) [Configu](#)

- Toggle the check box in front of the provider's name, select **Promote** from the action drop down list located in the bottom of the page, and then click **Go**. A page appears like that shown in [Figure 32](#).

Figure 32. Add Items to Approval Request

Add to Approval Request [Home](#) > [Providers](#) > [List of my Providers](#) > [Add to Approval Request](#)

Filter by which starts with

Displaying items 1 - 3 :

Name ▲	Type	Promote	Demote
EmployeeList_binding	WSDL Bindings	☒	☐
EmployeeList_portType	Interfaces	☒	☐
HR Services	Providers	☒	☐

1

Choose a request:

☒ Create new request
 ☐ Add to existing request

★ Name:

Description:

Choose action on approval request:

☐ Submit for immediate approval
 ☒ Save and return back

Message for Approver:

- You can see which entities will be added to the approval request including the requested entity and entities related to it. If the entity previously existed then you can specify whether you are requesting promotion to the discovery registry or demotion (deletion) from the discovery registry. You are not given this choice if you are requesting approval immediately following publication.

In this example, an attempt to promote some entities and demote others would probably fail because they are related. However, you can select more than one entity in the catalog ([Figure 31](#)), promote entities related to some of them and demote the rest.

4. Further down you can choose to add the entities to a new approval request, in which case you must enter a name. Alternatively, if there are other pending requests, you can click **Add to existing request** and select one from the drop-down list.
5. Finally you can choose to **Submit for immediate approval**, in which case you can enter a message for the approver. Alternatively you can save the request. Then click **OK**.
6. If you have submitted the request for immediate approval, automatic context checking is performed. If it fails you may be presented with a page like [Figure 33](#):

Figure 33. Recover Approval Request

Recover Approval Request

[Home](#) > ... > [Unsubmitted Approval Requests](#) > [Recover Approval Request](#)

The following entities are not available for use in an approval request. The entities do not exist in the request and they do not exist in the discovery registry either. It is necessary to add them into the request or promote them to discovery registry. Are you sure you want to add them into the approval request?

Entities

Filter by Name ▼ which starts with
Apply

Displaying items **1 - 2** :

Name ▲	Type	Description
EmployeeList_binding	WSDL Bindings	wsdl:type representing binding
EmployeeList_portType	Interfaces	wsdl:type representing portType

1

Yes
No

You can then choose whether to recover by adding the suggested entities to the request.

7. Otherwise you are presented with a page displaying unsubmitted approval requests as shown in [Figure 34](#).

Figure 34. Unsubmitted Request

[Home](#) > [Tools](#) > [Unsubmitted Approval Requests](#)

Unsubmitted Approval Requests

Filter by which starts with

Displaying items 1 - 1 :

	Name ▲	Time	Description	Action
☐	request hr services	Jan 9, 2006 4:48:31 PM		 

1

Select an Action: (No items selected)

[Select All](#)

[Clear All](#)

- Click on a request in the list to display its details as shown in [Figure 35](#). From here you can enter a message for the approver and click **Submit Request for Approval**. Click on the **Back** button to return to the list.

Figure 35. Enter Message for Approver

Submit Approval Request

[Home](#) > ... > [Unsubmitted Approval Requests](#) > [Submit Approval Request](#)

Details

Name	request_hr_services
Status	open
Requestor's name	admin
Description	

Entities

Filter by which starts with

Displaying items 1 - 3 :

Name 	Type	Action
EmployeeList_binding	WSDL Bindings	Request Promotion to Discovery Registry
EmployeeList_portType	Interfaces	Request Promotion to Discovery Registry
HR Services	Providers	Request Promotion to Discovery Registry

1

History

User	Action	Time	Message
admin	saveRequest	Jan 9, 2006 4:53:06 PM	

Message for Approver

9. To view your submitted approval request, click on the **Submitted Approval Requests** link under the **Tools** main menu tab. A page similar to that shown in [Figure 36](#) will appear.

Manage Requests

You can manage your approval requests under the **Tools** main menu tab. On this tab, there are the following links for managing your approval requests:

- **Unsubmitted Approval Requests** - The request work list holds requests that you have not yet submitted to an approver. You can add multiple types of entities into a single approval request. The work list is also a place to which you can restore canceled requests or requests for editing and re-approval. The request work list is persistent. You can work with requests in the work list after you log out of the Business Service Console.
- **Submitted Approval Requests** - The **Submitted Approval Requests** link will display a page where you can see your submitted approval request. These requests have been submitted but have not yet been approved or rejected. You can cancel a pending request or remind approver about the request. See [Figure 36](#).
- **Completed Approval Requests** - The **Completed Approval Requests** link will display a page where you can see all your requests that have been approved or rejected. You can delete a request from this list or use the request for to create a new request. For more information, see [Section Cloning Requests](#).

Figure 36. Submitted Approval Requests

[Home](#) > [Tools](#) > [Submitted Approval Requests](#)

Submitted Approval Requests

Filter by Name which starts with Apply

Displaying items **1 - 1** :

Name	Time	Description	Action
request_hr_services	Jan 9, 2006 5:10:23 PM		

1

Back

Cloning Requests

You can create a new approval request from an existing approval request. We call this operation **cloning**.

To clone a request, follow these steps:

1. Click on the **Completed Approval Request** link under the **Tools** main menu tab. The page shown in [Figure 37](#) is returned.

Figure 37. Completed Approval Requests

Completed Approval Requests [Home](#) > [Tools](#) > [Completed Approval Requests](#)

Filter by which starts with

Displaying items 1 - 1 :

	Name ▲	Status	Time	Description	Action
☐	request hr services	closeApproved	Jan 9, 2006 5:17:41 PM		 

1

Select an Action: (No items selected)

[Select All](#) [Clear All](#)

- Select the approval request and click on the **Clone** icon in the **Action** column. The page shown in [Figure 38](#) will appear. Once you click on the **Yes** button, the new approval request will be created in your request work list with the name starting with The clone. Name of the original request. The cloned request contains the same entities as the original request.

Figure 38. Clone Request

Clone Selected Approval Request(s) to Unsubmitted Approval Requests [Home](#) > ... > [Clone Selected Approval Request\(s\) to Unsubmitted Approval Requests](#)

Are you sure you want to clone the selected approval request(s) to unsubmitted approval requests?

Name	Requestor	Status	Time	Description
request hr services	demo_john	closeApproved	Mon Jan 09 17:17:41 ICT 2006	

4.8.2. Approver's Actions

An approver can perform the following actions:

- [Approve/Reject request](#)
- [View Approval History](#)

Approve/Reject Request

To approve or reject an approval request:

1. Click on the **Approvals to Administer** link under the **Tools** main menu tab. The page shown in [Figure 39](#) will appear.

Figure 39. View Requests to Administer

Approvals to Administer

[Home](#) > [Tools](#) > [Approvals to Administer](#)

Filter by Name ▼ which starts with

Apply

Displaying items 1 - 1 :

Name ▲	Requestor name	Time	Description	Action
request_hr_services	demo_john	Jan 9, 2006 5:10:23 PM		 

1

Back

2. If you click on the request name, you will see the request's detailed information including a list of entities the requestor wants to be promote. To approve or reject the request, click on an appropriate button icon in the **Action** column. If you click **Approve**, the page shown [Figure 40](#) will appear.

Figure 40. Approve Request

Approve Approval Request

[Home](#) > [Tools](#) > [Approvals to Administer](#) > [Approve Approval Request](#)

Details

Name	request_hr_services
Status	submitted
Requestor's name	demo_john
Description	

Entities

Filter by which starts with

Displaying items 1 - 3 :

Name ▲	Type	Action
EmployeeList_binding	WSDL Bindings	Request Promotion to Discovery Registry
EmployeeList_portType	Interfaces	Request Promotion to Discovery Registry
HR_Services	Providers	Request Promotion to Discovery Registry

1

History

User	Action	Time	Message
demo_john	saveRequest	Jan 9, 2006 5:08:54 PM	
demo_john	askForApproval	Jan 9, 2006 5:10:23 PM	project#23234243

Message for Requestor

Good job!

- You can review all entities in the request, see request history, and optionally enter a message for the requestor. Once you click **Approve**, an email notification will be sent to the requestor and entities listed in the request will be promoted to the discovery registry.

View Approval History

Approvers have the ability to see all approval requests they have approved or rejected. To access the approval history, click on the **Approval Admin History** link under the **Tools** main menu link. The **Approval Admin History** page shown in [Figure 41](#) will appear.

**Note**

Approvers are not allowed to delete any approval requests, only requestors can delete their approval requests.

Figure 41. Approval Admin History

[Home](#) > [Tools](#) > [Approval Admin History](#)

Approval Admin History

Filter by Name which starts with Apply

Displaying items 1 - 1 :

Name	Requestor name	Status	Time	Description
request_hr_services	demo_john	closeApproved	Jan 9, 2006 5:17:41 PM	

1

Back

5. Advanced Topics

5.1. Data Access Control: Principles

This chapter describes the entity access control mechanism, which defines permissions for users and groups to access structures in Oracle Service Registry

There are two types of user groups: **public** and **private**. Both public and private groups are visible to all users in the registry, meaning that all users are able to see which groups exist. Public and private groups differ in that members of public groups are visible to all users of the registry whereas members of private groups are visible only to the owner of the group.

**Note**

There are other permissions in Oracle Service Registry used to control access to APIs and their operations. API permissions are relations between the user or group and operation only. Please see [Section 6, Permissions: Principles](#) in the Administration Guide for details.

Permission in this chapter is limited to Data Access Permission - ACL permission.

We use the following terms with regard to ACL permissions:

- **Party** A user or group of users
- **Core Structure** One of the major UDDI data structures: businessEntity, businessService, bindingTemplate or tModel
- **Action** An operation: "find", "get", "save", or "delete" on the entity plus special action "create", which means to save sub-entities. (For example, a user with the "create" permission on a businessService can save new bindingTemplates

under the businessService, but can not update whole businessService.) Note that the "create" permission makes sense only on businessEntity and businessService, because bindingTemplates and tModels have no sub-entities.

Standard UDDI access control defines that only the owner of a UDDI core structure can update or delete it. Every user can find or get the structure (with the exception that deleted/hidden tModels are visible for get_tModelDetail but not for the find_tModel operation). ACLs (Access Control Lists) added to a UDDI entity can override standard UDDI access control as there are several cases in which standard access control is not sufficient.

Examples:

- When a Web service is under construction, its UDDI representation (businessService and bindingTemplate) should be visible only to members of the development team. Arbitrary users should not be able to obtain it in the result set of get_serviceDetail or find_service operations. Moreover, a get_businessDetail or find_business operation result, which includes a superior businessEntity, should not give away the existence of the businessService.
- On the other hand when the server (where the service prototype is running) goes down, the administrator should be able to deploy the Web service on another server and repair the service endpoint in the accessPoint within its bindingTemplate, despite not being the owner of the bindingTemplate.

5.1.1. Explicit Permissions

Explicit permission gives (positive permission), or revokes (negative permission), access rights to a party to process an action on a specified entity.

Explicit permissions are saved with the entity as special keyedReferences in the categoryBag. For more information, please see [Setting ACLs on UDDI v3 Structures](#) and [Setting ACLs on UDDI v1 and v2 Structures](#) below.

5.1.2. Permission Rules

When no explicit permission is set for the find/get action on an entity, everyone can find/get it. When no explicit permission is set for the save/delete action on an entity, only owner of the entity can save/delete it. This is a standard UDDI access control. When an explicit Permission is set for an action, a completely different access control is used which is defined by the following rules:

1. **Owner always has full control** The owner can always process an operation over an owned entity, even if the permission is explicitly revoked.
2. **Negative permission for a user overrides positive permission for a user.** Example: User U has explicit *positive* permission on businessEntity BE for the get action. However, if U also has explicit *negative* permission on BE for action get, then an attempt to process get_businessDetail by user U on the BE will fail.
3. **Negative permission for group overrides positive permission for group.** Example: User U has belongs to groups G1 and G2. Group G1, has explicit *positive* permission on the BE for action get. Group G2, has explicit *negative* permission on the BE for action get. Because of this negative permission, any attempt to process get_businessDetail by user U on the BE will fail.
4. **Permission for user has more weight than permission for group** Example: User U has explicit *positive* permission on businessEntity BE for action get. Group G, to which U belongs, has explicit *negative* permission on the BE for action get. User U can process get_businessDetail on the BE, even though U belongs to group G.
5. **The owner of an entity can always process get_XXX on a direct sub-entity** Example: User U1 owns businessEntity BE. U1 (as owner) grants "create" permission to user U2. Then U2 saves new businessService BS with bindingTemplate BT under BE. When user U1 executes get_businessDetail, U1 obtains BE with BS but without BT, because BT is not a direct sub-element of the BE.

Motivation: This rule ensures that the owner of an entity will see all direct sub-entities. The number of sub-entities is limited. By default, a user can save only one businessEntity, four businessServices per businessEntity, two bindingTemplates per businessService and 10 tModels. Suppose that user U1 has businessEntity BE. User U2 can save businessServices in BE (permission "create" on BE). If U2 has already saved four businessServices under BE, user U1 cannot, therefore, save a new businessService. Therefore, the owner of an businessEntity should see why the limit is reached.

6. **Delete and Save positive permissions are inherited from parent entities and override negative permissions on sub-entities** Example: User U has "delete" permission on businessEntity BE. Then U can execute the delete_business operation, which deletes the BE with all its businessServices and bindingTemplates, even if some of these sub-entities have negative permission for deletion by the user U.

Motivation: Sub-entities can not survive parent entity deletion. This rule ensures that a user who can save/delete an entity can do this despite not having sufficient privileges on sub-entities.

7. **To perform update by save_XXX operation, it is necessary to have both "save" and "get" permissions** Example: User U1 has "save" and "get" permissions on businessEntity BE, but he is not the owner. User U2 owns the BE and saves businessService BS1, which has "get" permission for U1, and businessService BS2 without any permissions. Both BS1 and BS2 are created under BE. U1 gets BE with only BS1 and updates BE in this way: U1 can add a category and save BE again without BS1. In fact, when BE is updated, BS1 is deleted but BS2 remains.

Example:

User U1 owns a businessEntity BE. The user U1 defines the explicit get allowed permission to user group G1. Everyone can find the BE, because there is no explicit permission for find and therefore the standard UDDI access control is used. On the other hand, only user U1 (as the owner) and all users from group G1 can get the BE.

5.1.3. Composite Operations

BusinessService BS can be moved from one businessEntity BE1 to other businessEntity BE2. By performing the save_service operation on BS, where BS has updated businessKey to point to the BE2. To perform this action, the party must have permission to save BE1, BE2, and BS, because all these entities are changed.

Similarly bindingTemplate BT can be moved from businessService BS1 to businessService BS2. The party who moves it must have save permission on BS1, BS2 and BT.

BusinessService BS hosted in businessEntity BE1 can be projected into businessEntity BE2. The party who projects BS must have save permission on BE2.

5.1.4. Pre-installed Groups

ACL logic considers some special pre-published abstract groups during permission evaluation. These abstract groups allow a publisher to give a permission to a specific set of Oracle Service Registry users.

system#everyone

Holds all users of Oracle Service Registry (both users who have and who do not have an Oracle Service Registry account, authenticated and non-authenticated). If this group is used, all users always have the specified permission to the associated data.

system#registered

Holds all authenticated Oracle Service Registry users. Every user who is authenticated (that is, who has an account and has logged into the registry) is a member of this group. If this group is used, all authenticated users always have the specified permission to the associated data.

system#intranet

Holds users who access Oracle Service Registry via a local intranet. (This group is reserved for a future release. There is no implementation behind it as of Oracle Service Registry 11.1.1)

5.1.5. ACL tModels

ACL permissions are represented as tModels as detailed below:

ACL Permission	v3 tModelKey	v2 tModelKey
find allowed	uddi:systinet.com:acl:find-allowed	uuid:aacfc8e0-dcf5-11d5-b238-cbbeaea0a8d4
find denied	uddi:systinet.com:acl:find-denied	uuid:ced3c160-dcf5-11d5-b238-cbbeaea0a8d4
get allowed	uddi:systinet.com:acl:get-allowed	uuid:f9977a90-dcf5-11d5-b238-cbbeaea0a8d4
get denied	uddi:systinet.com:acl:get-denied	uuid:09e202d0-dcf6-11d5-b238-cbbeaea0a8d4
save allowed	uddi:systinet.com:acl:save-allowed	uuid:19885bd0-dcf6-11d5-b239-cbbeaea0a8d4
save denied	uddi:systinet.com:acl:save-denied	uuid:2a25e610-dcf6-11d5-b239-cbbeaea0a8d4
delete allowed	uddi:systinet.com:acl:delete-allowed	uuid:37f44ac0-dcf6-11d5-b239-cbbeaea0a8d4
delete denied	uddi:systinet.com:acl:delete-denied	uuid:4e51d8f0-dcf6-11d5-b239-cbbeaea0a8d4
create allowed	uddi:systinet.com:acl:create-allowed	uuid:5bc32980-dcf6-11d5-b239-cbbeaea0a8d4
create denied	uddi:systinet.com:acl:create-denied	uuid:6d0be7e0-dcf6-11d5-b239-cbbeaea0a8d4

5.1.6. Setting ACLs on UDDI v3 Structures

In UDDI v3, explicit ACL permission is saved in a special keyedReferenceGroup having the tModelKey uddi:systinet.com:acl. This keyedReferenceGroup can contain only keyedReferences to ACL tModels. Only the terms "user" and "group" are allowed in the included keyName, and the keyValue must contain the name of the user or group (according to keyName value).

For example, user demo_john can save (update) following businessEntity even if he is not the owner:

Example 1. Setting ACLs - v3

```
<businessEntity xmlns="urn:uddi-org:api_v3">
  ...
  <categoryBag>
    ...
    <keyedReferenceGroup tModelKey="uddi:systinet.com:acl">
      <keyedReference tModelKey="uddi:systinet.com:acl:save-allowed"
        keyName="user" keyValue="demo_john"/>
      ...
    </keyedReferenceGroup>
  </categoryBag>
</businessEntity>
```

5.1.7. Setting ACLs on UDDI v1/v2 Structures

Under versions 1 and 2 of UDDI, explicit ACL permission is saved as a special keyedReference in the categoryBag. This keyedReference refers to one of the tModels representing ACL permissions. Only the terms "user" and "group" are allowed in the included keyName and the keyValue must contain the name of the user or group (according to the keyName value).

For example, user demo_john can save (update) following businessEntity even if he is not the owner:

```
<businessEntity ...>
  ...
  <categoryBag>
    <keyedReference tModelKey="uuid:19885bd0-dcf6-11d5-b239-cbbeaea0a8d4"
                      keyName="user" keyValue="demo_john"/>
    ...
  </categoryBag>
</businessEntity>
```



Note

ACL permissions cannot be set on the bindingTemplate structure because this structure has no categoryBag in UDDI v1/v2.

5.2. Publisher-Assigned Keys

Under UDDI v1 and v2, keys are generated automatically when a structure is published. Generated keys in these versions are in form (uuid:)8-4-4-4-12 where the numbers indicate a count of hexadecimal values. For example, uuid:327A56F0-3299-4461-BC23-5CD513E95C55. Note that the prefix "uuid:" was only used in tModelKeys.

In UDDI v3 users may assign keys when saving a structure for the first time. These Keys can be 255 characters long and can contain numbers and Latin characters, so that the key itself describes what the UDDI structure means. For example, the key uddi:systinet.com:uddiRegistry:demo:businessService has the following elements:

- The prefix uddi: is a schema much like http: or ftp: and must be always present.
- systinet.com is an optional host name.
- The elements uddiRegistry, demo, and businessService represent a hierarchy of domains. The domain demo is a subdomain of uddiRegistry.

This description is sufficient for our purposes for now. For a more precise description of keys, please see the [UDDI v3 Specification](http://uddi.org/pubs/uddi-v3.00-published-20020719.htm#_Toc42047261) [http://uddi.org/pubs/uddi-v3.00-published-20020719.htm#_Toc42047261].

5.2.1. Generating Keys

The key generator tModel is a tModel with a key in the form domain:keygenerator. This tModel permits its owner to save structures with keys in the form domain:string. For example, the tModel uddi:systinet.com:uddiRegistry:demo:keygenerator allows its owner to publish structures with keys like:

- uddi:systinet.com:uddiRegistry:demo:businessService
- uddi:systinet.com:uddiRegistry:demo:b52

These are derived keys of the uddi:systinet.com:uddiRegistry:demo domain.

With one exception, the key generator tModel does *not* allow the user to save keys from subdomains such as uddi:systinet.com:uddiRegistry:demo:businessService:exchangeRate, that is, derived keys of uddi:systinet.com:uddiRegistry:demo:businessService.

The key generator tModel, however, permits the user to save the key generator for each direct subdomain. For example, the user can save uddi:systinet.com:uddiRegistry:demo:businessService:keygenerator. After creating this

second key generator, the user is permitted to save structures with keys of the `uddi:systinet.com:uddiRegistry:demo:businessService` domain, such as `uddi:systinet.com:uddiRegistry:demo:businessService:exchangeRate`.



Important

To generate keys for a domain, the user must own the domain's key generator tModel. Only the administrator can save structures with assigned keys without having the key generator tModel. To enable this process for other users, the administrator must save the domain's tModel and then change its ownership to the user via custody transfer. For more information, please see [Section Publish Custody Transfer](#).

5.2.2. Affiliations of Registries

The rules above ensure that two users can not create structures with the same key. A complicated situation arises when one user wants to copy UDDI structures from one registry to another while preserving the keys of those structures. There are two problems:

1. The key of the copied structure must not exist on the second registry. The key must be unique - this is required by the UDDI specification.
2. The user must be allowed to save a structure with a specified key on the second registry.

The **Affiliated registries** mechanism solves both problems. An affiliation is a relationship between two registries. The first registry gives up generation of keys for a certain domain and transfers this privilege to the second registry. This ensures that keys from both registries are unique.



Note

In the examples below we name the two registries 'master' and 'slave'. Moreover there are three people:

- The person 1 is an administrator of the master registry, this account is called **master-admin**.
- The person 2 is an administrator of the slave registry (account **slave-admin**) and a common user on the master registry (account **master-user2**).
- The person 3 is a common user on slave registry (account **slave-user3**) and a common user on master registry (account **master-user3**).

Affiliation Setup

To set up an affiliation:

1. The administrator of the slave registry (slave-admin) registers a user account on the master registry (master-user2).
2. Master-user2 requests a key generator tModel from the administrator of the Master registry.
3. This administrator, master-admin, creates the key generator tModel and transfers it to the master-user2 account using custody transfer.
4. Person 2 manually copies the key generator tModel to the slave registry (his slave-admin account has permission to assign any key) and sets up the slave registry to generate all keys based on this key generator. For more information, please see [Section 2.7, Node](#) in the Administrator's Guide.

All keys generated by the slave registry or its users will be from the domain or some subdomain defined by the key generator.

Copying Structures with Key Preservation

Given key should refer to the same structure no matter which registry the structure is in.

Suppose that slave-admin creates a key generator tModel for slave-user3 and this user uses the key generator to generate a key for a structure in the slave registry. To copy the structure to the master registry, this key generator tModel must exist on both registries.

To copy a structure from the slave to the master registry:

1. The slave-user3 must ask person 2 (slave-admin) to copy the second key generator, because only the holder of the account master-user2, as owner of the first key generator, can do this on the master registry.
2. Then master-user2 transfers ownership of the second key generator in the master registry to master-user3. Now master-user3 can copy the structure while preserving the generated keys.

5.3. Range Queries

Oracle Service Registry's range queries functionality allows you to search UDDI entities with the ability to use comparative operators (>, <) for matching keyValues in keyedReferences. There must be a defined type of keyValues in the taxonomy which defines the ordering. The following ordering types are supported: `string`, `numeric`, and `custom`. KeyedReferences in `find_XXX` queries are extended by a list of find qualifiers. Do not mix with find qualifiers of the whole query. Find Qualifiers are used for specifying comparison operators.

See [Section Find Business by Categories](#) how to search UDDI data structures using range queries with Registry Control.



Note

The Oracle Service Registry implementation of range queries goes beyond the current UDDI v3 specification since the specification does not define this functionality.

The following findQualifiers are supported:

- `equal` - the default find qualifier. If no one from the group of (`equal`, `greaterThan`, `lessThan` qualifiers) is specified. This is done due to the backward compatibility with a standard UDDI. When used, the keyedReference from the request matches to the all keyedReferences from the database with the same tModelKey and the **same** key value.
- `greaterThan` - When used, the keyedReference from the request match to the all keyedReferences from the database with the same tModelKey and a **greater** key value.
- `lessThan` - When used, the keyedReference from the request match to the all keyedReferences from the database with the same tModelKey and a **lesser** key value.
- `notExists` - This findQualifier has validity for the whole keyedReference (not just for keyValues). An entity matches the find request with `notExists` findQualifier if and only if the specific keyedReference does not exist in its categoryBag. This findQualifier can be arbitrarily combined with `greaterThan`, `lessThan` and `equal` findQualifiers. If the `notExists` findQualifier is used alone, then the `equal` findQualifier is considered automatically.

Comparators can be combined:

- `greaterThan` and `equal` find qualifiers can be used together with the keyedReference match to the all keyedReferences with the same tModelKey and a **greater or equal** key value (`>=`).
- `lessThan` and `equal` find qualifiers can be used together with the keyedReference match to the all keyedReferences with the same tModelKey and a **lesser or equal** key value (`<=`).

- `lessThan` and `greaterThan` find qualifiers can be used together with the `keyedReference` match to the all `keyedReferences` with the same `tModelKey` and a **not equals** `keyValue` (`<>`).
- Combination of `lessThan`, `greaterThan` and `equal` is not allowed.

5.3.1. Examples

The following examples demonstrate the usage of range queries. Suppose that the `keyedReferences` are placed in the category bag of the `find_business` request.

greaterThan Only business entities that have a `keyedReference` with `tModelKey` equal to `tmKey`, and a `keyValue` that is greater than `kv`, in their `categoryBags` are returned.

```
<keyedReference tModelKey="tmKey" keyValue="kv" keyName="kn">
  <findQualifiers>
    <findQualifier>greaterThan</findQualifier>
  </findQualifiers>
</keyedReference>
```

greaterThan and lesserThan Only business entities that have `keyedReference` with `tModelKey` that is equal to `tmKey`, and a `keyValue` not equal to `kv`, in their `categoryBags` are returned.

```
<keyedReference tModelKey="tmKey" keyValue="kv" keyName="kn">
  <findQualifiers>
    <findQualifier>greaterThan</findQualifier>
    <findQualifier>lessThan</findQualifier>
  </findQualifiers>
</keyedReference>
```

notExists Only business entities that do not have a `keyedReference` with a `tModelKey` equal to `tmKey`, and a `keyValue` equal to `kv`, in their `categoryBags` are returned.

```
<keyedReference tModelKey="tmKey" keyValue="kv" keyName="kn">
  <findQualifiers>
    <findQualifier>notExists</findQualifier>
  </findQualifiers>
</keyedReference>
```

notExists and greaterThan Only business entities that do not have a `keyedReference` with a `tModelKey` equal to `tmKey`, and a `keyValue` greater than `kv`, in their `categoryBags` are returned.

```
<keyedReference tModelKey="tmKey" keyValue="kv" keyName="kn">
  <findQualifiers>
    <findQualifier>notExists</findQualifier>
    <findQualifier>greaterThan</findQualifier>
  </findQualifiers>
</keyedReference>
```

notExists, greaterThan, equal Only business entities that do not have a `keyedReference` with a `tModelKey` equal to `tmKey`, and a `keyValue` greater than or equal to `kv`, in their `categoryBags` are returned.

```
<keyedReference tModelKey="tmKey" keyValue="kv" keyName="kn">
  <findQualifiers>
    <findQualifier>notExists</findQualifier>
    <findQualifier>greaterThan</findQualifier>
    <findQualifier>equal</findQualifier>
  </findQualifiers>
</keyedReference>
```

See also Demos, [Section 2.1, Advanced Inquiry - Range Queries](#).

5.4. Taxonomy: Principles, Creation and Validation

The [UDDI Version 3 Specification](#) [<http://www.oasis-open.org/committees/uddi-spec/doc/tcspecs.htm#uddiv3>] provides tools for setting the context on all four major UDDI structures: businessEntities, businessServices, bindingTemplates and tModels. This document covers basic principles and management of this feature - the taxonomies.

5.4.1. What Is a Taxonomy?

A taxonomy, or value set in the terminology of the UDDI specifications, is a tModel which can be used in categoryBags, identifier bags, or Publisher Assertions. This tModel must be in a specific form, so that Oracle Service Registry can recognize it as a taxonomy. The tModel must be categorized with the type of taxonomy and, optionally, with information concerning whether and how to validate the values in keyedReferences.

5.4.2. Taxonomy Types

The UDDI specification distinguishes four types of taxonomies: categorizations, categorizationGroups, identifiers, and relationships.

Categorizations

Categorizations can be used in all four main UDDI structures. They are used to tag them with additional information, such as identity, location, and what the taxonomy describes.

CategorizationGroups

New in UDDI version 3, CategorizationGroups group several categorizations into one logical categorization. For example, a geographical location comprised of two categorizations: longitude and latitude.

Identifiers

Used in businessEntities and tModels, Identifiers reference published information.

Relationships

Used only in Publisher Assertions, Relationships define the relation between two businessEntities.

5.4.3. Validation of Values

The publisher of a taxonomy can decide whether the values in keyedReferences within the taxonomy will be checked or not.

Unchecked Taxonomies

Oracle Service Registry does not perform any checks on values used in keyedReferences associated with unchecked taxonomies. Unchecked taxonomies are those that are marked as such, *or* those that are not marked as checked. These two states are equivalent.

Checked Taxonomies

If a taxonomy is checked, Oracle Service Registry executes its validation service for every keyedReference in which the checked taxonomy is used. The validation service may check the expected syntax of values, such as the format of a credit

card or ISBN number. Taxonomies like the ISO 3166 Geographic taxonomy, which permits only existing countries, check the existence of the value against a list. A validation service may even permit or deny values depending on the context in which they are used.

Oracle Service Registry Requirements

Oracle Service Registry conforms to the technical note [Providing A Value Set For Use In UDDI Version 3](http://oasis-open.org/committees/uddi-spec/doc/tn/uddi-spec-tc-tn-valuesetprovider-20030212.htm) [http://oasis-open.org/committees/uddi-spec/doc/tn/uddi-spec-tc-tn-valuesetprovider-20030212.htm]. To create a checked taxonomy, you must:

1. Prepare and deploy a validation service which implements the `Valueset_validation` API.
2. Publish the `tModel` categorized as a checked taxonomy and mark it as unvalidatable.
3. Publish the `bindingTemplate` that implements the `Valueset_validation` API and the taxonomy's `tModel`.
4. Republish the `tModel`, without the unvalidatable categorization, and with the categorization `uddi-org:validatedBy` pointing to the `bindingTemplate`.

Oracle Service Registry requires that the `bindingTemplate` be published in the `businessService` of the Operational Business Entity. If this `businessService` is not part of the Operational Business Entity, the checked taxonomy will not be validatable and thus it may not be used in `keyedReferences`. This implies that only the Oracle Service Registry administrator may publish checked taxonomies.

The `bindingTemplate` must contain an `accessPoint` with its `useType` attribute set to `"endPoint"`.

If the `accessPoint` starts with the prefix `class:`, then the remaining part is assumed to contain the fully qualified name of the class that implements interface `org.systinet.uddi.client.valueset.validation.v3.UDDI_ValueSetValidation_PortType` and is accessible by the Oracle Service Registry classloader.

If the `accessPoint` does not start with the prefix `class:`, it is assumed to be the URL of the Web service implementing the `Valueset_validation` API and a stub is created for this Web service.

Internal Validation Service

Oracle Service Registry contains a special validation service called the Internal Validation Service. This service is used by checked taxonomies that declare a list of available values published using the Taxonomy API.

5.4.4. Types of keyValues

The creator of the taxonomy must specify types of `keyValues` by assigning the appropriate comparator reference (comparator `tModel`) of the `systinet-com:isOrderedBy` taxonomy to the categorization taxonomy you want to use to categorize a UDDI entity. The following types of key values types are supported:

- `string` - `keyValues` are treated as string values. If `keyValues` type is unknown then `keyValues` are treated as strings. The maximum length is 255 characters.
- `numeric` - `keyValues` are treated as decimal numbers. The value can have maximum 19 digits before the decimal point and maximum 6 digits after the decimal point.
- `custom` - `keyValues` must be transformed to string or numeric values using a transformation service. Please see [Section Custom Ordinal Types](#) for more information.

For example, the `tModel` of the categorization taxonomy with numeric key values must have the following `keyedReference` in its category bag:


```
<keyedReference tModelKey="uddi:systinet.com:isOrderedBy"
  keyValue="uddi:systinet.com:comparator:numeric"/>
```

Figure 42. Example of Numeric Categorization

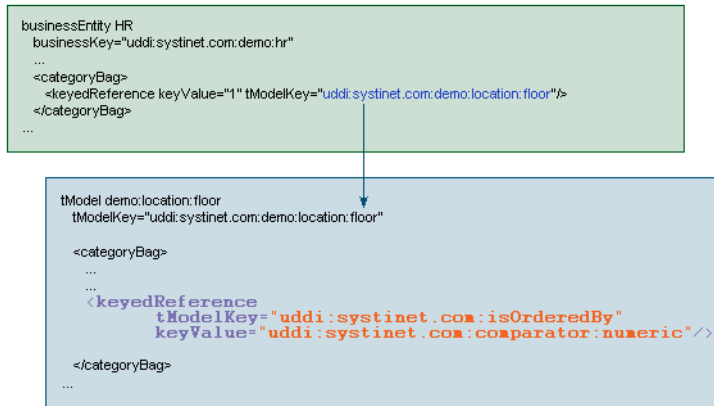


Figure 42 shows how the demo:location:floor taxonomy from [Demo data](#) can be assigned numeric key values.



Important

If you change type of keyValues of the taxonomy and there are entities in the Oracle Service Registry that were already categorized with the taxonomy, the Oracle Service Registry administrator must execute the task **Transform keyed references**. The button for executing this task is located in the Registry Control under the **Manage** tab, **Registry Management** link. See Administrator's Guide, [Section 1.1, Accessing Registry Management](#)

- To learn how to make this assignment using the Registry Control , see User's Guide, [Section Adding a Category](#).
- See User's Guide, [Section 5.5.5, Searching](#) how to search UDDI data structures using range queries with Registry Control.
- See Administrator's Guide , [Section 1.5.3, Editing Taxonomies](#) how to edit taxonomy type.

Custom Ordinal Types

You can define your custom ordinal types. To demonstrate possible extensions, Oracle Service Registry contains two demo comparators:

- systinet-com:comparator:date
- systinet-com:comparator:stringToLowerCase

Let's assume you want to create a taxonomy with date values in keyValues. You must mark the taxonomy tModel (that is, add the following keyedReference into its categoryBag) by `<keyedReference tModelKey="uddi:systinet.com:isOrderedBy" keyValue="uddi:systinet.com:comparator:date"/>`. It is quite easy because there is a demo comparator for date in the registry. Imagine the date comparator is not present. Take the following steps to create it in the registry:

1. Create a transformer service that transforms the date value into a string or numeric value. The transformer service must implement `org.systinet.uddi.client.transformer.kr.TransformerKeyedReferenceApi` and add this class to the Oracle Service Registry class path.
2. Create a new comparator tModel for date. The tModel must be categorized as a comparator using the `systinet-com:comparator` taxonomy. The comparator must refer to the transformer service. This reference is specified by the taxonomy `IsTransformedBy` (where "uddi:cba104c0-fb5c-11d8-8761-eb2505508761" is the key of the bindingTemplate with the specification of the transformer service).




Important

If you change implementation of the of the transformer service of the taxonomy and there are entities in the Oracle Service Registry that were already categorized with the taxonomy, the Oracle Service Registry administrator must execute the task **Transform keyed references**. The button for executing this task is located in the Registry Control under the **Manage** tab, **Registry Management** link. See Administrator's Guide, [Section 1.1, Accessing Registry Management](#)

[Figure 43](#) shows the tModel references for date categorization ordering. It describes a purchase order document that has been mapped to Oracle Service Registry via XML-to-UDDI functionality, and then categorized by the `acceptancedate` taxonomy. The categorization taxonomy must refer to the comparator tModel `uddi:systinet.com:comparator:date` that references a bindingTemplate with the location of the date transformation service.

Figure 43. Example of Custom Categorization (date)

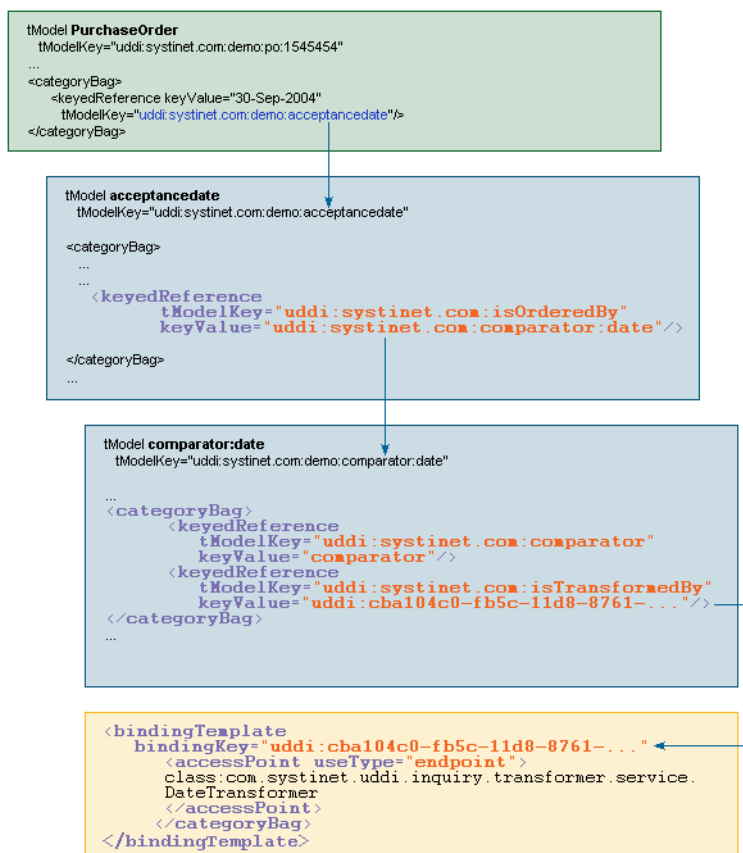

The transformer service is called whenever the appropriate keyedReference is processed. If any entity contains the keyedReference with a taxonomy tModel whose type is custom then the transformer service is called to discover the correct (that is, transformed) keyValue of the keyedReference. Such transformed values are stored into the database. If you want to find entities by this keyedReference (the keyedReference with the same taxonomy tModel), the service is called again to get the transformed value. Transformed values are used for the saving and searching of keyedReferences.

See Administrator's Guide , [Section 1.5.3, Editing Taxonomies](#) how to edit taxonomy type.

5.4.5. Taxonomy API

This section demonstrates the basics of taxonomy API and taxonomy persistence format. A comprehensive description of the Taxonomy API can be found in the Developer's Guide, [Section 2.2.2, Taxonomy](#).



Note

For clarity, we use an XML representation, but you can achieve the same results with Java objects.

```
<taxonomy xmlns="http://systinet.com/uddi/taxonomy/v3/5.0"
  xmlns:uddi="urn:uddi-org:api_v3"
  check="false">
  <tModel tModelKey="uddi:systinet.com:demo:myTaxonomy">
    <uddi:name>My taxonomy</uddi:name>
    <uddi:description>Category system</uddi:description>
  </tModel>
  <compatibilityBag>
    <compatibility>businessEntity</compatibility>
  </compatibilityBag>
  <categorizationBag>
    <categorization>categorization</categorization>
  </categorizationBag>
</taxonomy>
```

Each taxonomy, in order to be saved, requires a valid tModel. While it must contain a tModelKey and a name, you do not need to set the content of the categoryBag.

- The Taxonomy attribute check determines whether the taxonomy will be checked or not.
- The compatibilityBag is an interface to Systinet's uddi:systinet.com:taxonomy:categorization taxonomy, which is used to limit usage of the selected taxonomy within the four main UDDI structure types. In this way you can enforce that your taxonomy can be used only within the UDDI structures of your choice and not in others.
- The categorizationBag is used to declare the type of the taxonomy, for example, whether it is a categorization, categorizationGroup, identifier or relationship taxonomy.

Note that values may be combined.

Let's enhance the previous example and convert the taxonomy from unchecked to checked. Checked taxonomies must contain Validation. In this example, the taxonomy is checked by the Custom Validation Web service located at <http://www.foo.com/MyValidationService.wsdl>.

```
<taxonomy xmlns="http://systinet.com/uddi/taxonomy/v3/5.0"
  xmlns:uddi="urn:uddi-org:api_v3"
  check="true">
  <tModel tModelKey="uddi:foo.com:demo:myTaxonomy">
```

```

    <uddi:name>My taxonomy</uddi:name>
    <uddi:description>Category system</uddi:description>
  </tModel>
  <compatibilityBag>
    <compatibility>businessEntity</compatibility>
  </compatibilityBag>
  <categorizationBag>
    <categorization>categorization</categorization>
  </categorizationBag>
  <validation>
    <bindingTemplate bindingKey="" serviceKey="" xmlns="urn:uddi-org:api_v3">
      <accessPoint useType="endPoint">
        http://www.foo.com/MyValidationService.wsdl
      </accessPoint>
      <tModelInstanceDetails>
        <tModelInstanceInfo
          tModelKey="uddi:uddi.org:v3_valueSetValidation"/>
        <tModelInstanceInfo
          tModelKey="uddi:systinet.com:demo:myTaxonomy"/>
      </tModelInstanceDetails>
    </bindingTemplate>
  </validation>
</taxonomy>

```

The validation element must hold the bindingTemplate identifying the validation Web service or categories structures. In this example we chose bindingTemplate. It must contain complete accessPoint and tModelInstanceDetails must hold the Valueset_validation API and tModelKey of the saved taxonomy. If the serviceKey is specified and if the businessService already exists, it must be part of the Operational Business Entity.



Important

Be aware that the service will be replaced during the save_taxonomy process.

If you can provide a list of allowed values, you do not need to implement your own validation Web service. Just provide the allowed values inside the categories structure (as shown below) and the Internal Validation Service will be responsible for validation of the keyedReferences.

```

<taxonomy xmlns="http://systinet.com/uddi/taxonomy/v3/5.0"
  xmlns:uddi="urn:uddi-org:api_v3"
  check="true">
  <tModel tModelKey="uddi:foo.com:demo:myTaxonomy">
    <uddi:name>My taxonomy</uddi:name>
    <uddi:description>Category system</uddi:description>
  </tModel>
  <compatibilityBag>
    <compatibility>businessEntity</compatibility>
  </compatibilityBag>
  <categorizationBag>
    <categorization>categorization</categorization>
  </categorizationBag>
  <validation>
    <categories>
      <category keyName="Value A" keyValue="A"/>
    </categories>
  </validation>
</taxonomy>

```

```

        <category keyName="Value B" keyValue="B">
            <category keyName="Value B1" keyValue="B1"/>
            <category keyName="Value B3" keyValue="B3" disabled="true" />
        </category>
        <category keyName="Value C" keyValue="C"/>
    </categories>
</validation>
</taxonomy>

```

As you can see, you can arrange your values hierarchically. This is useful for the Registry Control that implements the drill-down pattern. If you really need, you can even specify bindingTemplate along with the categories structure, but its accessPoint must point to the Internal Validation Service.

5.4.6. Predeployed Taxonomies

Oracle Service Registry comes with the following predeployed taxonomies:

- uddi-org:types is a UDDI Type Category System.

v3 UDDI key	uddi:uddi.org:categorization:types
v2 UUID key	uuid:c1acf26d-9672-4404-9d70-39b756e62ab4
Categorization	categorization
Compatibility	tModel
Checked	yes, Internal Validation Service

- uddi-org:general_keywords is a category system consisting of namespace identifiers and the keywords associated with namespaces.

v3 UDDI key	uddi:uddi.org:categorization:general_keywords
v2 UUID key	uuid:A035A07C-F362-44dd-8F95-E2B134BF43B4
Categorization	categorization
Compatibility	tModel, businessEntity, businessService, bindingTemplate
Checked	yes

- uddi-org:entityKeyValues is a category system used to declare that a value set uses entity keys as valid values.

v3 UDDI key	uddi:uddi.org:categorization:entitykeyvalues
v2 UUID key	uuid:916b87bf-0756-3919-8eae-97dfa325e5a4
Categorization	categorization
Compatibility	tModel
Checked	yes, Internal Validation Service

- uddi-org:isreplacedby is the identifier system used to point to the UDDI entity, using UDDI keys, that is the logical replacement for the one in which isReplacedBy is used.

v3 UDDI key	uddi:uddi.org:identifier:isReplacedBy
v2 UUID key	uuid:e59ae320-77a5-11d5-b898-0004ac49cc1e
Categorization	identifier
Compatibility	tModel, businessEntity
Checked	yes

- uddi-org:nodes is a category system for identifying the nodes of a registry.

v3 UDDI key	uddi:uddi.org:categorization:nodes
v2 UUID key	uuid:327A56F0-3299-4461-BC23-5CD513E95C55
Categorization	categorization
Compatibility	businessEntity
Checked	yes

- uddi-org:owningBusiness_v3 is a category system used to point to the businessEntity associated with the publisher of the tModel.

v3 UDDI key	uddi:uddi.org:categorization:owningbusiness
v2 UUID key	uuid:4064c064-6d14-4f35-8953-9652106476a9
Categorization	categorization
Compatibility	tModel
Checked	yes

- uddi-org:validatedBy is a category system used to point a value set or category group system tModel to associated value set Web service implementations.

v3 UDDI key	uddi:uddi.org:categorization:validatedby
v2 UUID key	uuid:25b22e3e-3dfa-3024-b02a-3438b9050b59
Categorization	categorization
Compatibility	tModel
Checked	yes

- uddi-org:wSDL:types is a WSDL Type Category System.

v3 UDDI key	uddi:uddi.org:wSDL:types
v2 UUID key	uuid:6e090afa-33e5-36eb-81b7-1ca18373f457
Categorization	categorization
Compatibility	tModel, businessEntity, businessService, bindingTemplate
Checked	yes, Internal Validation Service

- uddi-org:wSDL:categorization:protocol

v3 UDDI key	uddi:uddi.org:wsdl:categorization:protocol
v2 UUID key	uuid:4dc74177-7806-34d9-aecd-33c57dc3a865
Categorization	categorization
Compatibility	tModel
Checked	yes

- uddi-org:wsdl:categorization:transport

v3 UDDI key	uddi:uddi.org:wsdl:categorization:transport
v2 UUID key	uuid:e5c43936-86e4-37bf-8196-1d04b35c0099
Categorization	categorization
Compatibility	tModel
Checked	yes

- uddi-org:wsdl:portTypeReference is a category system tModel that can be used to identify a relationship to a portType tModel.

v3 UDDI key	uddi:uddi.org:wsdl:portTypeReference
v2 UUID key	uuid:082b0851-25d8-303c-b332-f24a6d53e38e
Categorization	categorization
Compatibility	tModel
Checked	yes

- systinet-com:taxonomy:compatibility enhances a taxonomy tModel with additional information, in which structures the taxonomy can be used.

v3 UDDI key	uddi:systinet.com:taxonomy:compatibility
v2 UUID key	uuid:cf68c700-f93d-11d6-8cfc-b8a03c50a862
Categorization	categorization
Compatibility	tModel
Checked	yes, Internal Validation Service

- systinet-com:dependency creates link between two structures (may be different types). Both keyName and keyValue must be specified. KeyName must be one of businessEntity, businessService, bindingTemplate and tModel. KeyValue must be existing UDDI key of specified structure.

v3 UDDI key	uddi:systinet.com:dependency
v2 UUID key	uuid:179e5540-f27b-11d6-9738-b8a03c50a862
Categorization	categorization
Compatibility	tModel, businessEntity, businessService, bindingTemplate
Checked	yes

- dnb-com:D-U-N-S - Thomas Registry Suppliers

v3 UDDI key	uddi:uddi.org:ubr:identifier:dnb.com:d-u-n-s
v2 UUID key	uuid:8609c81e-ee1f-4d5a-b202-3eb13ad01823
Categorization	identifier
Compatibility	tModel, businessEntity, businessService, bindingTemplate
Checked	no

- microsoft-com:geoweb:2000 - Geographic Taxonomy: GeoWeb (2000 Release)

v3 UDDI key	uddi:297aaa47-2de3-4454-a04a-cf38e889d0c4
v2 UUID key	uuid:297aaa47-2de3-4454-a04a-cf38e889d0c4
Categorization	categorization
Compatibility	tModel, businessEntity, businessService, bindingTemplate
Checked	no

- ntis-gov:naics:1997 - Business Taxonomy: NAICS (1997 Release)

v3 UDDI key	uddi:uddi.org:ubr:categorization:naics:1997
v2 UUID key	uuid:c0b9fe13-179f-413d-8a5b-5004db8e5bb2
Categorization	categorization
Compatibility	tModel, businessEntity, businessService, bindingTemplate
Checked	yes, Internal Validation Service

- ntis-gov:sic:1997 - Business Taxonomy: SIC (1997 Release)

v3 UDDI key	uddi:70a80f61-77bc-4821-a5e2-2a406acc35dd
v2 UUID key	uuid:70a80f61-77bc-4821-a5e2-2a406acc35dd
Categorization	categorization
Compatibility	tModel, businessEntity, businessService, bindingTemplate
Checked	yes, Internal Validation Service

- ntis-gov:naics:2002 - Business Taxonomy: Business Taxonomy: NAICS (2002 Release)

v3 UDDI key	uddi:uddi.org:ubr:categorization:naics:2002
v2 UUID key	uuid:1ff729f2-1948-46cf-b660-31ec107f1663
Categorization	categorization
Compatibility	tModel businessEntity businessService bindingTemplate
Checked	yes, Internal Validation Service

- unspsc-org:unspsc:3-1 - Product Taxonomy: UNSPSC (Version 3.1)

v3 UDDI key	uddi:db77450d-9fa8-45d4-a7bc-04411d14e384
v2 UUID key	uuid:db77450d-9fa8-45d4-a7bc-04411d14e384
Categorization	categorization
Compatibility	tModel, businessEntity, businessService, bindingTemplate
Checked	no

- unspsc-org:unspsc - Product Taxonomy: UNSPSC (Version 7.3)

v3 UDDI key	uddi:unspsc-org:unspsc
v2 UUID key	uuid:cd153257-086a-4237-b336-6bdcbdcc6634
Categorization	categorization
Compatibility	tModel, businessEntity, businessService, bindingTemplate
Checked	yes, Internal Validation Service

- unspsc-org:unspsc:v6.0501 - Product and Service Category System: United Nations Standard Products and Services Code (UNSPSC)

v3 UDDI key	uddi:uddi.org:ubr:categorization:unspsc
v2 UUID key	uuid:4614C240-B483-11D7-8BE8-000629DC0A53
Categorization	categorization
Compatibility	tModel businessEntity businessService bindingTemplate
Checked	yes, Internal Validation Service

- ws-i-org:conformsTo:2002_12 is a category system used for UDDI entities to point to the WS-I concept to which they conform.

v3 UDDI key	uddi:65719168-72c6-3f29-8c20-62defb0961c0
v2 UUID key	uuid:65719168-72c6-3f29-8c20-62defb0961c0
Categorization	categorization
Compatibility	tModel
Checked	no

WSM Taxonomies

The following taxonomies are used for integration with a web service management system:

systinet-com:management:metrics:avg-byte

Average sum of incoming and outgoing message length

v3 UDDI key	uddi:systinet.com:management:metrics:avg-byte
v2 UUID key	uuid:3c13a2e2-dfd0-30a2-bd58-c5de8c2ae3bb
Categorization	categorization

Compatibility	tModel
Checked	no

systinet-com:management:metrics:avg-byte-input

Average input message length per hour

v3 UDDI key	uddi:systinet.com:management:metrics:avg-byte-input
v2 UUID key	uuid:f18a50ad-ddb2-392a-b97c-1181c67b2817
Categorization	categorization
Compatibility	tModel
Checked	no

systinet-com:management:metrics:avg-byte-output

Average output message length

v3 UDDI key	uddi:systinet.com:management:metrics:avg-byte-output
v2 UUID key	uuid:7664723d-896a-3ed2-b7e9-46c9f38e7681
Categorization	categorization
Compatibility	tModel
Checked	no

systinet-com:management:metrics:avg-hits

Average message hits per hour

v3 UDDI key	uddi:systinet.com:management:metrics:avg-hits
v2 UUID key	uuid:bf010bf9-cafa-3f68-bf51-3cde3bd0f483
Categorization	categorization
Compatibility	tModel
Checked	no

systinet-com:management:metrics:avg-response-time

Average response time in milliseconds

v3 UDDI key	uddi:systinet.com:management:metrics:avg-response-time
v2 UUID key	uuid:099d67a9-eae6-3c30-8be9-48b44c5d9728
Categorization	categorization
Compatibility	tModel
Checked	no

systinet-com:management:metrics:errors

Count of application failures in the last hour

v3 UDDI key	uddi:systinet.com:management:metrics:errors
v2 UUID key	uuid:b074de10-e781-383a-bd00-248a1c42f0fa
Categorization	categorization
Compatibility	tModel
Checked	no

systinet-com:management:metrics:hits

Count of hits in the last hour

v3 UDDI key	uddi:systinet.com:management:metrics:hits
v2 UUID key	uuid:720689a4-dce4-398c-adba-e5c0f50d1eb2
Categorization	categorization
Compatibility	tModel
Checked	no

systinet-com:management:metrics:median-byte

Median sum of incoming and outgoing message lengths

v3 UDDI key	uddi:systinet.com:management:metrics:median-byte
v2 UUID key	uuid:0adefd4c-7624-3973-91a5-ea4971d6b0ef
Categorization	categorization
Compatibility	tModel
Checked	no

systinet-com:management:metrics:median-byte-input

Median value of incoming message lengths

v3 UDDI key	uddi:systinet.com:management:metrics:median-byte-input
v2 UUID key	uuid:c9c2fd87-f806-3ca0-819e-3f788cc8fd95
Categorization	categorization
Compatibility	tModel
Checked	no

systinet-com:management:metrics:median-byte-output

Median output message length

v3 UDDI key	uddi:systinet.com:management:metrics:median-byte-output
v2 UUID key	uuid:bdb4e8f8-1aba-3558-b1f5-cf89b5455529
Categorization	categorization
Compatibility	tModel
Checked	no

systinet-com:management:metrics:median-response-time

Median response time in milliseconds

v3 UDDI key	uddi:systinet.com:management:metrics:median-response-time
v2 UUID key	uuid:62f08146-1d3f-30e3-8c6a-1f2062c332d4
Categorization	categorization
Compatibility	tModel
Checked	no

systinet-com:management:metrics:policy-violations

Count of policy violations in the last hour

v3 UDDI key	uddi:systinet.com:management:metrics:policy-violations
v2 UUID key	uuid:be42511a-3c68-34d2-b137-d00e56bb4de4
Categorization	categorization
Compatibility	tModel
Checked	no

systinet-com:management:metrics:reference

Reference to a tModel containing all metrics about the service. The keyValues in keyedReferences that refer to this tModel must be a tModelKey of the metric tModel.

v3 UDDI key	uddi:systinet.com:management:metrics:reference
v2 UUID key	uuid:0d709256-b9f3-30a3-9aa1-51a1adb11324
Categorization	categorization
Compatibility	bindingTemplate
Checked	yes

systinet-com:management:proxy-reference

WSM Proxy Reference Taxonomy

v3 UDDI key	uddi:systinet.com:management:proxy-reference
v2 UUID key	uuid:79bf6f6d-b0b7-3f08-b45e-9893b525de9b
Categorization	categorization
Compatibility	bindingTemplate
Checked	yes

systinet-com:management:server-reference

WSM Server Reference Taxonomy.

v3 UDDI key	uddi:systinet.com:management:server-reference
v2 UUID key	uuid:1583604a-57a2-3887-9b1d-2549e270390c

Categorization	categorization
Compatibility	bindingTemplate
Checked	yes

systinet-com:management:state

WSM State Taxonomy

v3 UDDI key	uddi:systinet.com:management:state
v2 UUID key	uuid:73c7ef28-6150-36a0-ba82-414424ede582
Categorization	categorization
Compatibility	bindingTemplate
Checked	yes

systinet-com:management:state-change-request-type

WSM State Change Request Taxonomy

v3 UDDI key	uddi:systinet.com:management:state-change-request-type
v2 UUID key	uuid:64473cda-4a78-3ddb-b0c6-801533ce1943
Categorization	categorization
Compatibility	bindingTemplate
Checked	yes

systinet-com:management:system

WS Management System Taxonomy

v3 UDDI key	uddi:systinet.com:management:system
v2 UUID key	uuid:e148d85e-cc08-32f6-8f00-db85e258e511
Categorization	categorization
Compatibility	bindingTemplate
Checked	no

systinet-com:management:type

WSM Type Taxonomy

v3 UDDI key	uddi:systinet.com:management:type
v2 UUID key	uuid:5d14645d-66ea-39ac-8122-49d06b09b492
Categorization	categorization
Compatibility	bindingTemplate
Checked	yes

systinet-com:management:url

Endpoint URL Taxonomy

v3 UDDI key	uddi:systinet.com:management:url
v2 UUID key	uuid:4897f99b-bd23-3889-af37-b80351cf8b52
Categorization	categorization
Compatibility	bindingTemplate
Checked	no

5.5. Registry Console Reference

- [Registry Control Overview](#)
- [Manage user account and user groups](#)
- [Browsing the registry:](#)
- [Searching the registry](#)
- [Publishing in the registry](#)

5.5.1. Register/Create Account

Register

Before you can publish data to the registry, you must have a Oracle Service Registry account. You can create an account via the web interface.

Figure 44. Register Account



Follow these steps to register a user account:

1. Click the **Register** link on the main Registry Control page. This returns the **Create account** page.
2. Fill in all fields. Those labeled with an asterisk (*) are required. Your email address may be used later for enabling your account.

Figure 45. Create Account

Create account

Required fields are marked *

* Login name:	john
* Email:	john@company.com
* Password:	*****
* Retype password:	*****
* Full name:	John Johnson
Default language:	English ▼
Description:	
Business Name:	
Phone:	1-858-4648442
Alternate phone:	1-858-4648444
Address:	4587 Pacific Ave Suite 300
City:	San Diego
State/Province:	CA
Country:	
Zip/Postal Code:	
* User profile:	Developer Profile ▼
Blocked:	☐
Assertions limit:	10
Bindings limit:	2
Businesses limit:	1
Services limit:	4
Subscriptions limit:	5
TModels limit:	100

Create account
Cancel

- Click the **Create account** button.

The new account is now enabled.



Note

Oracle Service Registry may be configured to require email confirmation in order to enable the user account. In this case, the registry sends an email confirmation. Follow the instructions in this email to enable your account.

Login

To log on, click the **Login** link on the upper part of the Registry Control, and enter your username and password.

Figure 46. Login Tab



Once logged into the registry, you are able to publish, delete, and update the various UDDI structures. Users have access to their own account information. Administrators also have account administration access; that is, the ability to delete and edit accounts and produce account audit reports.

5.5.2. Registry Console Overview

Registry Control is comprised of the following objects:

A: Main Menu Tabs

Browse

This tab allows you to browse UDDI entities using taxonomies.

Search

This tab allows you to search the registry. You can perform inquiry on UDDI entities, you can find business entity, service, bindings, tModels, and related businesses. The menu option also allows you to browse taxonomies and directly get information from Oracle Service Registry when you know a key of UDDI data types (business, service, binding, and tModel)

Publish

This tab allows you to publish UDDI structures (businessEntities, businessServices, bindingTemplates, and tModels). On this tab, you can also assert relationships between business entities, subscribe interest in receiving information about changes made to a registry, transfer ownership of selected UDDI structures (Custody Transfer), and publish WSDLs to the registry.


Profile

Here you can manage your user account properties, account groups and favorite taxonomies.

Manage

This tab is used by the Oracle Service Registry administrator to perform management tasks. See [Administrators Guide](#) for more information.

B: Menu Bar Sub menu options are located here.

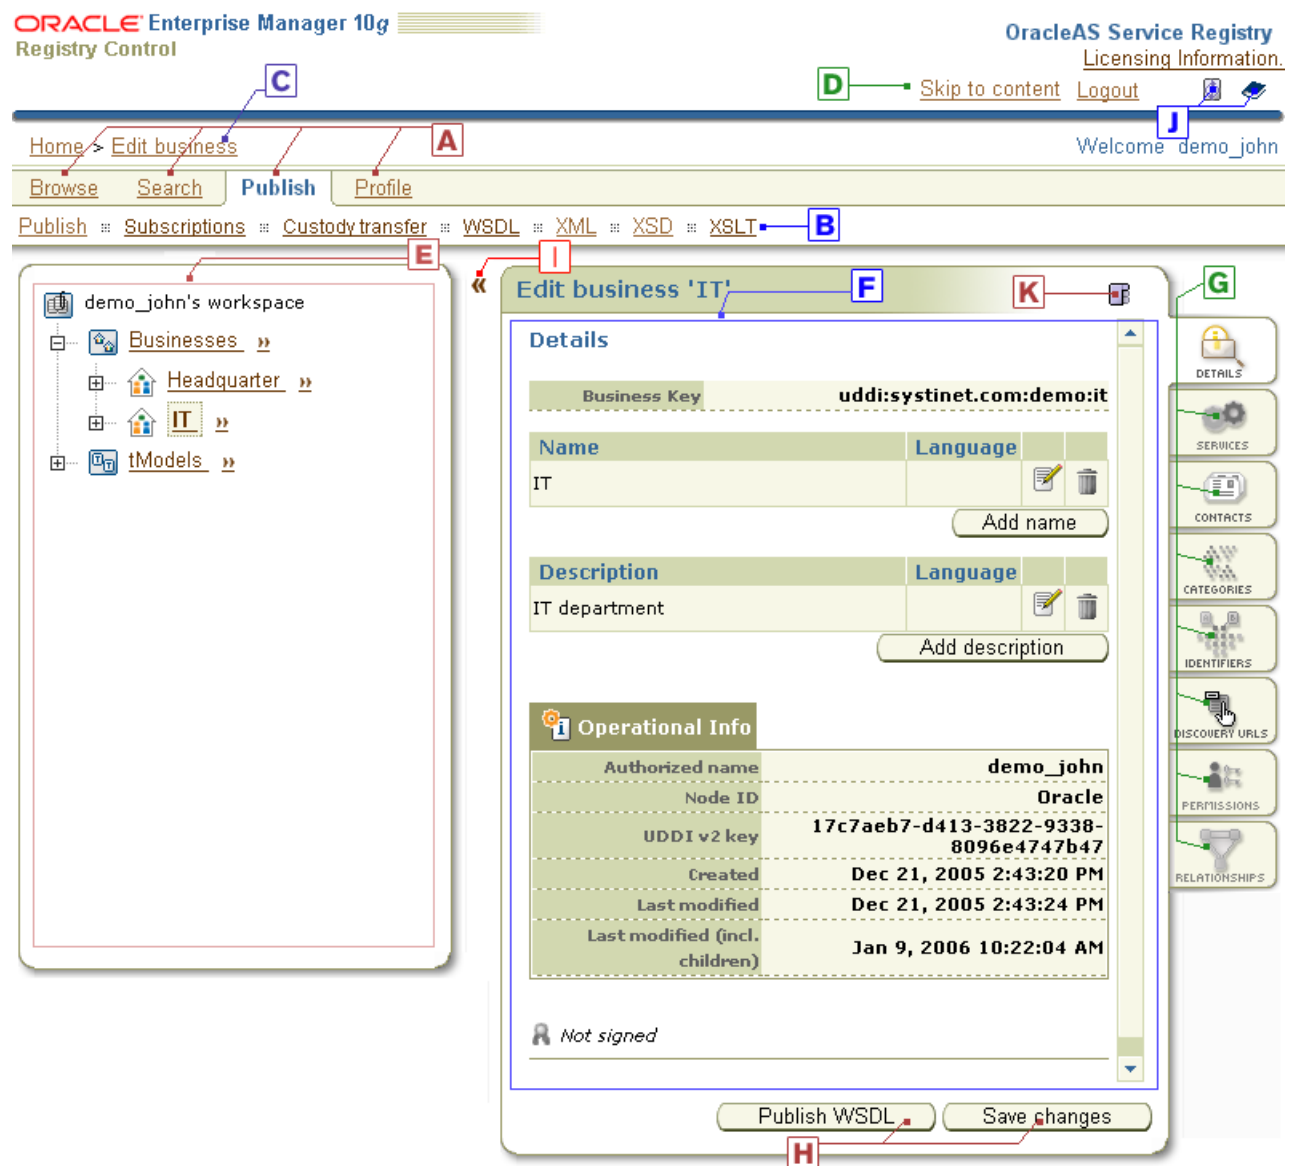Figure 47. Registry Control Overview

C: History path (breadcrumbs) This area displays the log of your recent actions. You can return to any of these previous actions by clicking on the hyperlinks.

D: User Actions This area contains several control elements that enable a user to:

- Create an account
- Log On
- Log Out

E: Tree Display Area A tree of available objects displays whenever applicable. It is displayed when viewing a business entity and its child objects and when the user may want a hierarchical overview of the UDDI workspace (such as when publishing).

F: Main Display Area Information chosen from the tabs and the tree display is made available in the Main Display Area.

G: Display Tabs These tabs allow the user to control the main area's display based on information type. A plain listing of all business properties would be very long and very difficult to read. Dividing the properties into tabs reduces the amount of information and improves page readability. The displayed information changes with the context.

H: Action Buttons The action buttons allow you to perform operations on the contents of the main display.


I: Show/Hide button This button allows to hide or show the tree display area.

J: Action Icons There are two icons in this area. The first one allows you to refresh the page content, second one will open the product documentation page.

K: Action Icons Icons from this area allow you to switch on/off display tabs and open the current page in the printer friendly mode.

L: Context Menu The context menu displayed in [Figure 48](#) is available by right mouse click on a node's icon in the tree display area.

Figure 48. Context Menu

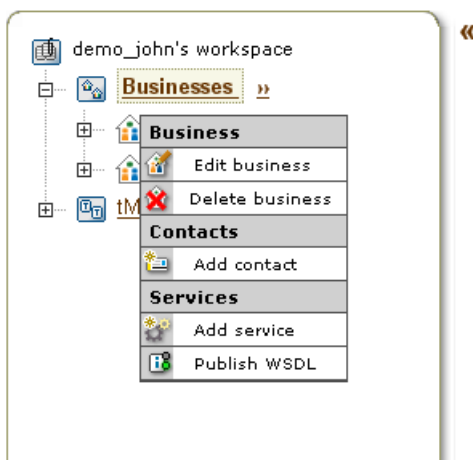

For more information, please see [Figure 47](#).

5.5.3. User Profile

You can manage your user account, user groups, and favorite taxonomies under the **Profile** menu tab.

Figure 49. Profile Menu Tab



To update your account properties, select **My account** and click the **Edit Account** button

Figure 50. View Account

The screenshot shows a web interface titled "View account" with a user profile for John Johnson. The profile details are as follows:

Login name:	john
Email:	john@company.com
Full name:	John Johnson
Default language:	English
Description:	
Business Name:	
Phone:	1-858-4648442
Alternate phone:	1-858-4648444
Address:	4585 Pacific Beach Ave
City:	San Diego
State province:	CA
Country:	USA
Zip:	92107
User profile:	Developer Profile
Last logged in:	Mon Jan 09 14:53:47 ICT 2006
External:	No
Blocked:	No
Assertions limit:	10
Bindings limit:	2
Businesses limit:	1
Services limit:	4

At the bottom of the interface are three buttons: "Back", "Delete Account", and "Edit Account".

Field descriptions (self-explanatory fields are omitted):

Default Language Code

Set the default language code. Used when publishing, it is the language code associated with a particular field when the language is not specified.

Use the following profile

Profile preference - Select your [preferred predefined user profile](#) from this drop down list

To maintain user groups, click the **Groups** link. From the Groups screen, you can:

- Create and manage your own groups
- Manage group membership

Figure 51. View User Groups

Groups

Filter: Filter:

Displaying results 1 - 2 of 2

Group name	Description	Visibility		
john_group_a	John Group A	public		
john_group_b	John Group B	private		

1

Add Group

Create and Manage Groups

To create a new group:

1. Click on the **Profile** menu tab, and select the **Groups** link. This returns the Group list shown in [Figure 51](#).
2. Click the **Add Group** button.

Figure 52. Edit Group Membership

Add group

★ Group name: john_group_a

Group owner: demo_john

Group visibility: ☐ public ☒ private

Description: John Group A

Save group properties

Users List

Login name Filter

Displaying results 1 - 5 of 5

	Login name	Full name
☐	admin	administrator
☐	demo_corporate	Corporate Demo User
☐	demo_jane	Jane Demo
☐	demo_john	John Demo
☐	oracleapplication	administrator

1

>

<

Group members

Login name Filter

Displaying results 1 - 1 of 1

	Login name	Full name
☐	demo_jane	Jane Demo

1

Select all Select none

Back

3. In the edit box labeled **Group name**, type the name of your group.
4. Use the radio buttons labeled **public** and **private** to establish whether this group should be visible to all members (public) or visible only to the group owner (private).
5. Click **Filter** to display a list of the registry's users.
6. Check the boxes for all members you wish to include, then click the right-pointing arrow to move them to the **Group members** table.
7. Once users are added, click **Save Group** to update Oracle Service Registry

Manage Group Membership

To add or remove members from a group:

1. Click on the **Profile** menu tab.
2. Click on the **Groups** link. This returns the Group list shown in [Figure 51](#).
3. Click on the **Edit** button.
4. Use arrow buttons to add and remove users as shown in [Figure 52](#)

favorite Taxonomies

You can manage your favorite taxonomies under the **Profile** tab. You can define which taxonomies will be present in the list of your favorite taxonomies. Favorite taxonomies help you to search and categorize UDDI entities.

To manage your list of favorite taxonomies:

1. Click on the **Profile** menu tab. Click on the **favorite taxonomies** link. This returns the list of your favorite taxonomies shown in [Figure 53](#).
2. Click **Filter** to search taxonomies by name.
3. Check the boxes for all taxonomies you wish to include, and click the right-pointing arrow to copy them to the favorite taxonomies table.
4. Once taxonomies are added, click the **Save** button to update the registry.

Figure 53. Manage favorite Taxonomies

Favorite taxonomies

Taxonomy list

Filter

Displaying results 1 - 10 of 88

☐	Taxonomy name	Checked
☐	Shippers	✓
☐	demo:ISBN	✓
☐	demo:departmentID	✗
☐	demo:hierarchy	✗
☐	demo:location:floor	✗
☐	dnb-com:D-U-N-S	✗
☐	ebxml-org:specifications	✗
☐	http://schemas.xmlsoap.org/ws/2003/03/localpolicyreference	✓
☐	http://schemas.xmlsoap.org/ws/2003/03/policytypes	✓
☐	http://schemas.xmlsoap.org/ws/2003/03/remotepolicyreference	✗

1 2 3 4 5 6 7 8 9 >

Select all Select none

Enterprise taxonomies

☐	Taxonomy name
☐	demo:departmentID
☐	demo:hierarchy
☐	demo:location:floor

Select all Select none


Save Cancel

5.5.4. Browsing

In this section, we will show you how to browse taxonomy structures to discover UDDI entities categorized or identified by taxonomies. You can also define a taxonomy filter and put your search criteria to a query. We present a [demo data](#) set that is installed with Oracle Service Registry. This demonstration set is designed to help familiarize you with the registry.

To browse taxonomies and UDDI entities:

1. Click on the **Taxonomies** link under the **Browse** main menu tab.
2. The page shown in [Figure 54](#) will appear.

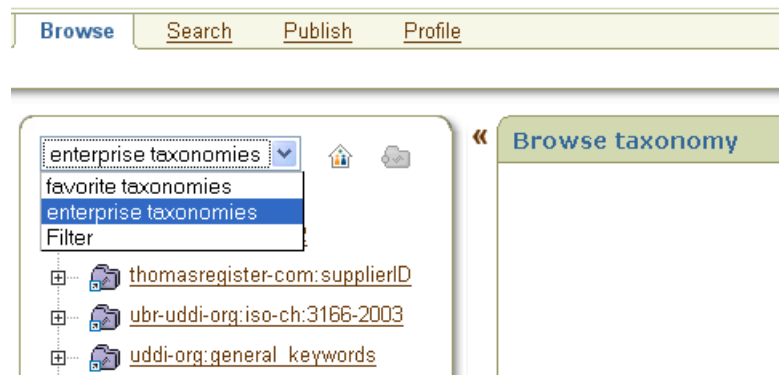Figure 54. Browse Menu Tab

On this page, you can use the drop down list to switch the taxonomy list to **favorite taxonomies**, **enterprise taxonomies**, and a defined **filter**.



Note

The **favorite taxonomies** option appears in the drop down list only if your list of favorite taxonomies is not empty. To add a taxonomy to your favorites, follow the direction in [Section favorite Taxonomies](#). The list of enterprise taxonomies is defined by an administrator. For more information, see [Section 1.5, Taxonomy Management](#) in the Administrator's guide.

Initially, the **filter** contains all taxonomies except system taxonomies. Icons next to the drop down list serve to show/hide categorized entities, and show all/suppress empty categories.

Drill down through the taxonomy tree to see all taxonomy categories. Those with sub-categories can be expanded and collapsed.

When you browse internally checked taxonomies you can see their value set to see UDDI entities categorized by these key values. For unchecked or externally checked taxonomies, you can search UDDI entities by key values. We will show you how to browse an unchecked taxonomy from the [demo data](#).

To browse the demo data using **demo:location:floor** taxonomy:

1. Switch the drop down list shown in [Figure 54](#) to the **filter** option.
2. Click on the **demo:location:floor** taxonomy. Expand the taxonomy by clicking on the plus sign in front of the taxonomy name. The key name and key value field pair appears.
3. Enter key value as **5**, then click **Search** button.
4. You will get a list of UDDI entities categorized by this taxonomy with matching key value (IT in this case) as shown in [Figure 55](#).

Figure 55. Browse Demo

The 'Browse Demo' interface consists of two main panels. The left panel, titled 'Filter', contains a 'Taxonomy list' with three items: 'demo:departmentID', 'demo:hierarchy', and 'demo:location:floor'. Below the list are input fields for 'Key name' and 'Key value' (containing '5'), and buttons for 'Search' and 'Add to query'. The right panel, titled 'Browse taxonomy', shows 'Categorized business entities' with 'Displaying results 1 - 1 of 1'. It contains a table with two columns: 'Name' and 'description'.

Name	description
IT	IT department

You can also add this search criterion to a [query](#).

Define Filter

You can reduce the number of taxonomies in the taxonomy list by defining a taxonomy filter. To switch from taxonomy browsing to filter definition, click on the **filter** link in the lower left corner. The page shown in [Figure 56](#) will appear.

Figure 56. Taxonomy Filter


The 'Taxonomy Filter' interface has a top navigation bar with 'Browse', 'Search', 'Publish', and 'Profile' tabs. The main content area contains several sections: 'Name' with a text input 'demo%', 'Type' with checkboxes for 'categorization' and 'identifier', 'Compatibility' with checkboxes for 'businessEntity', 'businessService', 'bindingTemplate', and 'tModel', and 'Validation' with radio buttons for 'all', 'checked', and 'unchecked'. At the bottom, there is a 'Show system taxonomies' checkbox and an 'Apply filter' button. A breadcrumb trail at the bottom reads 'Browse | Filter | Query'.

You can filter taxonomies by name using the wild card characters % and _. You can specify taxonomy type, compatibility, and a validation type. Once you define the filter criteria, click **Apply filter**. This will return you to the browse taxonomy page.

Define Query

You can also combine search criteria in a query. To add a search criterion to a query, use the button **Add to query** shown in [Figure 55](#). Then, you can expand another taxonomy and specify a new criterion. The page shown at [Figure 57](#) presents the query displaying business entities located on the 5th floor (demo:location:floor taxonomy) having Headquarter department as the superior department (demo:hierarchy taxonomy).

Figure 57. Query

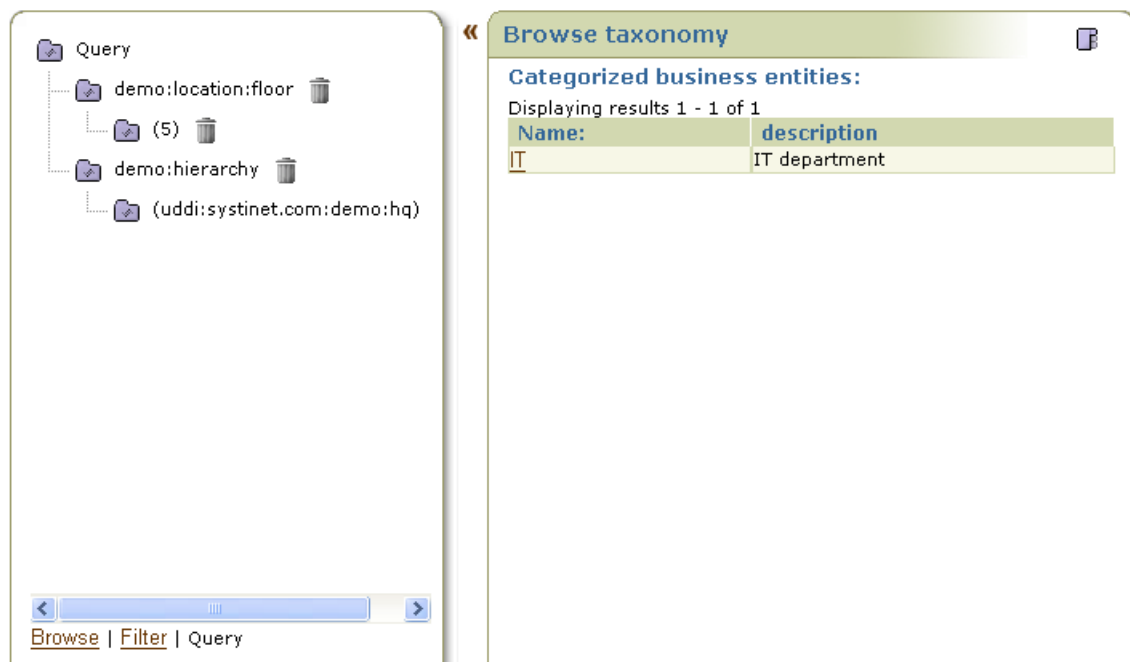

To remove a category from the query, right-click on the query and select **remove from query** from the context menu.



Note

The query definition is not persistent. Once you leave the **Browse** menu tab, the query will disappear.

5.5.5. Searching

Oracle Service Registry search function allows you to perform the following searches:

Find UDDI data structures

You can search for business entities, services, bindings, and tModels using names and categories in combination with find qualifiers including range queries.

- [Find Business](#)
- [Find Services](#)
- [Find Binding](#)

- [Find tModel](#)

Direct Get

You can retrieve data from Oracle Service Registry when you know the key of the UDDI entity you want to retrieve.

Find Resources

You can search for resources:

- [Find WSDL](#)
- [Find XML](#)
- [Find XSD](#)
- [Find XSLT](#)

In the Search section, we present a demonstration data set that is installed with Oracle Service Registry. This demonstration set is designed to help familiarize you with the registry.



Note

Oracle Service Registry supports the use of wildcard characters. You can use both % and _.

Use % in place of any number of characters and spaces. For example, if you wish to find all business beginning with A, type [A%](#). Use the underscore wildcard (_) in place of any single character. For example, to find Dan or Dane, type [Dan_](#).

See [Section Find Business by Categories](#) how to use [range queries](#) functionality.

Find Business

In this section, we cover locating business entities using a number of different methods. You can locate business entities by:

- Name
- Categories
- Identifiers
- Discovery URL
- tModel

For each find method, you can specify qualifiers located on the **Find Qualifiers** tab of the **Search** panel.

Figure 58. Find Qualifiers

Find business

By qualifiers

Key combination	☒ default	☐ andAllKeys	☐ orAllKeys	☐ orLikeKeys
Sort by name	☒ default	☐ ascending	☐ descending	
Sort by date	☒ default	☐ ascending	☐ descending	
Category bag	☒ default	☐ combine	☐ service subset	☐ binding subset
Approximate match	☐ no	☒ yes		
Case insensitive match	☐ no	☒ yes		
Binary sort	☒ no	☐ yes		
Case insensitive sort	☒ no	☐ yes		
Signature present	☒ no	☐ yes		
Suppress projected services	☒ no	☐ yes		
Show only my entities	☒ no	☐ yes		

NAME

CATEGORIES

IDENTIFIERS

DISCOVERY URLS

T-MODELS

FIND QUALIFIERS

Find Business by Name

To find a business by name:

1. Under the main **Search** tab, click the **Businesses** link.
2. Click the **Add Name** button in the **Search** panel.
3. Type in the business name, such as **IT** from the pre-installed demo data. Then click the **Find** tab at the bottom right corner.

To see all businesses, type the wildcard **%** and click **Find**.

4. The search result will appear on the **Results** panel. Click on the link with the business name, this opens the page shown at [Figure 59](#).

Figure 59. View Business Detail

The screenshot shows a web application interface for viewing business details. On the left is a sidebar with a tree view containing 'IT', 'Contacts', 'EmployeeList', and 'Support'. The main area is titled 'View business 'IT'' and contains two sections: 'Details' and 'Operational Info'. The 'Details' section has fields for 'Business Key' (uddi:systinet.com:demo:it), 'name' (IT), 'description' (IT department), and 'language'. The 'Operational Info' section is a table with fields like 'Authorized name' (demo_john), 'Node ID' (Oracle), 'UDDI v2 key' (17c7aeb7-d413-3822-9338-8096e4747b47), and 'Created' (Apr 13, 2006 5:43:23 PM). On the right is a vertical toolbar with icons for DETAILS, SERVICES, CONTACTS, CATEGORIES, IDENTIFIERS, DISCOVERY URLS, PERMISSIONS, and RELATIONSHIPS. At the bottom are buttons for 'Back', 'View as XML', 'Delete', and 'Edit'.

Details	
Business Key	uddi:systinet.com:demo:it
name:	IT
description	IT department
language	

Operational Info	
Authorized name	demo_john
Node ID	Oracle
UDDI v2 key	17c7aeb7-d413-3822-9338-8096e4747b47
Created	Apr 13, 2006 5:43:23 PM
Last modified	Apr 13, 2006 5:43:30 PM
Last modified (incl. children)	Apr 13, 2006 5:43:30 PM

Not signed

Back View as XML Delete Edit

Find Business by Categories

In this section we will show you how to search for business entities by categories. We will use demo data to demonstrate how to find all departments located on specific floors. Also, an example how to use [range queries](#) will be shown.

To find a business by category:

1. Under the main **Search** tab, click the **Businesses** link
2. Click the **Categories** tab, then click the **Add category** button. This returns a list of available taxonomies.

You can switch the **Show** drop down list from **favorite taxonomies** to see **all taxonomies**. To manage **favorite taxonomies** see [Section 5.5.3, User Profile](#).

3. Click on the desired taxonomy.

The taxonomy is shown as a tree; its sub-branches include categories.

Select demo:location:floor from our demo data.

4. Now you can enter **Key name** and **Key value**.

Type **1** in the box labeled **Key value** and then click the **Add category** icon.

Figure 60. Find Business by Category

Find business

By categories

Quantifier	tModel key	Key name
Taxonomy list		
demo:location:floor		
Quantifier:	exists	
Key name:		
★ Key value:	1	
Operator:		

- Once a category is added as your search criteria, click **Find**.

You will get the department with that is located on the first floor. If you want search for all departments located on higher floors you must use [range queries](#) functionality. We will continue with the previous search.

- Click the tab **Search** to return to the Find business by categories page.
- Click the **Edit category** icon. The page shown in [Figure 61](#) is returned.

Figure 61. Find Business by Range Category

Find business

By categories

Quantifier	tModel key	Key name	Operator	KeyValue
exists	demo:location:floor		>	1

- From the **Operator** drop down list, select the > operator, and click the **Update** icon.
- Click **Find**. You will get all departments located higher than the first floor.

Find Business by Identifier

In this section we will show you how to find a business entity by identifier. We will use demo data to demonstrate how to find departments by their department number identifiers.

To find a business by identifier:

- Under the main **Search** tab, click the **Businesses** link
- Click the **Identifiers** tab. Then click the **Add identifier** button. This returns a list of available taxonomies.

- Click on the desired taxonomy

The taxonomy is shown as a tree with its sub-branches including categories.

Select `demo:departmentID` from the demo data.

- Now you can enter **Key name** and **Key value**.

Type `002` in the box labeled **Key value**, and click **Add identifier**.

Figure 62. Find Business by Identifier

The screenshot shows a web interface titled "Find business". Under the "By identifiers" section, there is a "tModel key" dropdown menu with a folder icon and the text "Taxonomy list". Below it, a tree view shows a folder icon and the text "demo:departmentID". To the right of this is a "Key name" input field. Below the "Key name" field is a "Key value" input field with a star icon on the left and the text "002" inside. The interface has a light green header and a light yellow background for the input fields.

- Once the Identifier is added as your search criteria, click **Find**.

Find Business by Discovery URL

To find a business entity by discovery URL:

- Under the main **Search** tab, click the **Businesses** link.
- Select the **Discovery URLs** tab.
- Type in the discovery URL and click **Find**.

Find Services

You can find services using a number of different methods including by:

- Name
- Category
- tModel

Search principles for finding services are the similar to those used for finding business entities.

Find Binding

You can find bindings using a number of different methods including by:

- Parent service

- Category
- tModel

The search principles for finding bindings are similar to those used for finding business entities.

Find tModel

You can find tModels using a number of different methods including by:

- Name
- Category
- Identifiers

The search principles for finding tModels are similar to those used for finding business entities.

Direct Get

You can also use **Direct get** from the **Search menu** tab to retrieve data from Oracle Service Registry when you know the key of the UDDI structure you want to retrieve. Oracle Service Registry allows you to specify keys for both UDDI version 2 and UDDI version 3. Click the **Find by v2** tab if you want to search using UDDI v2 keys.

Figure 63. Direct Get

Direct get

Enter key value in UDDI version 3 format:

★ Business key:		View business
★ Service key:		View service
★ Binding key:		View binding
★ tModel key:		View tModel

WSDL location:		Get WSDL
tModel key:		
Service key:		
Binding key:		

V3
FIND BY V3

V2
FIND BY V2

Direct Get of XML Structures

You can also acquire the XML form of businesses, services, bindings, and tModels for use in automated processing by entering the key of the structure into a URI.

The form of the URI is:

`http://<hostname>:<port>/<context>/uddi/web/directGetXml?<structureKey>=<key>`

URI Examples Note that UDDI v3 is assumed by default.

- `http://localhost:8888/registry/uddi/web/directGetXml?businessKey=uddi:systinet.com:uddinodebusinessKey`
- `http://localhost:8888/registry/uddi/web/directGetXml?serviceKey=...`
- `http://localhost:8888/registry/uddi/web/directGetXml?bindingKey=...`
- `http://localhost:8888/registry/uddi/web/directGetXml?tModelKey=...`

Example with Login This URI includes username and password.

- `https://localhost:8888/registry/uddi/web/directGetXml?businessKey=uddi:systinet.com:uddinodebusinessKey&userName=admin&password=changeit`

Example with UDDI Version Specification Use this format when getting information associated with v1 and v2 structures.

- `http://localhost:8888/registry/uddi/web/directGetXml?businessKey=8f3033d0-c22f-11d5-b84b-cc663ab09294&version=2`

Find WSDL

You can find all WSDL documents published in Oracle Service Registry. When you supply the WSDL location URI, you can review how artifacts of the WSDL document are published in Oracle Service Registry. The following criteria: a WSDL document location, a tModel key, a business service key, and a binding template key can be used. To search for a WSDL document in Oracle Service Registry:

1. Select the **Search** menu tab and click the **WSDL** link. The page shown in [Figure 64](#) will appear.
2. Click the **Find all published WSDLs** button, or

Enter **WSDL location URI** , then click **Examine this WSDL** button.

Figure 64. Find WSDL

Find WSDL Document

You can either find all WSDL documents published in Oracle Registry or find a particular one by providing its URI location and then examine how its components are published in Oracle Registry.

Use below button to find all business services representing WSDL documents published in Oracle Registry

Find all published WSDLs

Enter location of WSDL document to see how it is published in Oracle Registry

★ WSDL location (URI)

Examine this WSDL

Cancel

Search Result

Find XML

You can search for an XML document in Oracle Service Registry according to location URI of the XML document.

To search an XML document:

1. Select the **Search** menu tab and click the **XML** link. The page shown in [Figure 65](#) will appear.
2. Enter a location and click **Find**.

Figure 65. Find an XML Document

Find XML resource

Enter one of following fields (use % as wildcard). You can also leave all fields blank to search for all XML resources published in the Oracle Registry.

Location (URI)

Enter XML schema that the searched XML shall be compatible with.

XML schema

Search Result

Find XSD

You can search for an XML Schema in Oracle Service Registry according to location URI of the XML document.

To search an XML document:

1. Select the **Search** menu tab and click the **XSD** link. The page shown in [Figure 66](#) will appear.
2. You can search by the location of the XML Schema document, namespaces, and by xsd:elements and xsd:types defined in the XML Schema document. Once you specify the search criteria, click **Find**.

Figure 66. Find XSD

Find XSD resource

Enter one of following fields (use % as wildcard). You can also leave all fields blank to search for all XSD resources published in the Oracle Registry.

Location (URI)

Enter namespace used in the searched XSD.

Namespace

Enter toplevel type defined in the searched XSD.

Defined type

Enter toplevel element defined in the searched XSD.

Defined element

Find XSLT

To search an XSL transformation:

1. Select the **Publish** menu tab and click the **XML** link. The page shown in [Figure 67](#) will appear.
2. You can enter the location of the XSLT. You can also search according to input and output XML schemas Search criteria for an XML schemas can be specified by tModel key or namespace. If you click on **Select XML Schema** you can specify additional criteria for the XML Schema, then select an XML Schema from the XML Schema list.
3. Before you click **Find**, click the **Update** icon if you specified to be search according to an XML Schema.

Figure 67. Find XSLT

Find XSLT resource

Enter one of following fields (use % as wildcard). You can also leave all fields blank to search for all XSLT resources published in the Oracle Registry.

Find XSL transformation

Location

Enter XML schema that the searched XSLT shall be able to process.

	Type	Value		
Input XML schema	☐ Key			
	☒ Namespace	* Select XML schema		

Enter XML schema that the documents generated by the searched XSLT shall be compatible with.

Output XML schema

Search **Result**

5.5.6. Publishing

Publishing in Oracle Service Registry has several components:

- Publish UDDI core structures:
 - [Section Publishing a Business](#)
 - [Section Publishing a Service](#)
 - [Section Publishing a Binding Template](#)
 - [Section Publishing a tModel](#)
 - [Section Publishing Assertions](#) - Asserting relationships between business entities.
- [Section Publishing Subscriptions](#) - Subscribing interest in receiving alerts regarding changes made to a registry.
- [Section Publish Custody Transfer](#) - Transferring ownership of selected UDDI structures.
- Publish Resources
 - [Section Publishing WSDL Documents](#) - Publishing Web Services Description Language documents (WSDL) to Oracle Service Registry.
 - [Section Publish XML](#) - Publishing XML Documents.
 - [Section Publish XSD](#) - Publishing XML Schema Definition (XSD) Documents.
 - [Section Publish XSLT](#) - Publishing Extensible Stylesheet Language Transformation (XSLT) Documents.



Note

You must be logged into Oracle Service Registry to publish to it. There is a limitation of how many UDDI structures a user can store. See Administrator's Guide, [Section Account Limits](#)

The main Publish page is divided into two panels. The left panel displays UDDI data structures that belong to the logged-in user or to which this user has access permissions. The panel on the right displays details about the data structure selected in the left panel. As you can see, if no structures are selected, buttons for adding businesses and tModels are displayed.

Figure 68. Publish Page




Publishing a Business

This section explains how to publish a businessEntity and edit businessEntity-related structures:

- Add business name and description
- Add Contact
- Add a Discovery URL
- Add a Category
- Add an Identifier
- Add Business Services
- Add Projected Services
- Assert Business Relationships

To publish a business:


1. Click the **Add Business** button in the right-hand panel of the publish page, or select **Add Business** from the context menu that appears when you right-click the **Business Entities** node.

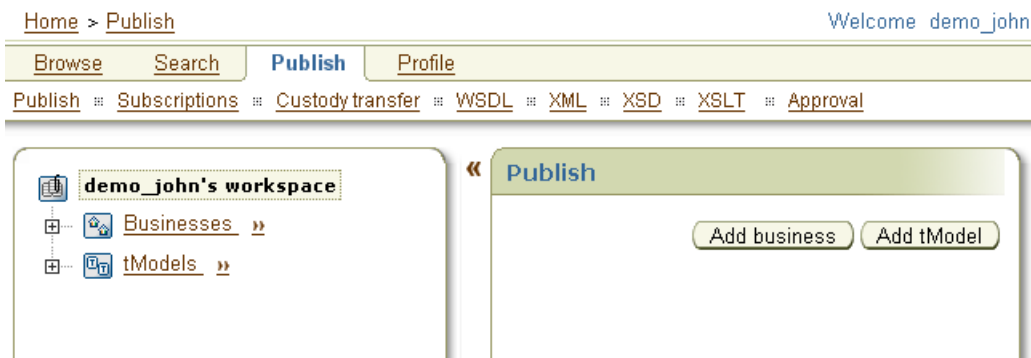Figure 69. Add Business

2. Enter the business name and a description, then click **Add Business**.
3. The business will appear in the left tree panel under the **Business entities** node

To edit a business entity:

1. Select the **Publish** menu tab.
2. Click the **Publish** link.
3. In the left tree panel, click on the business entity node you wish to edit.

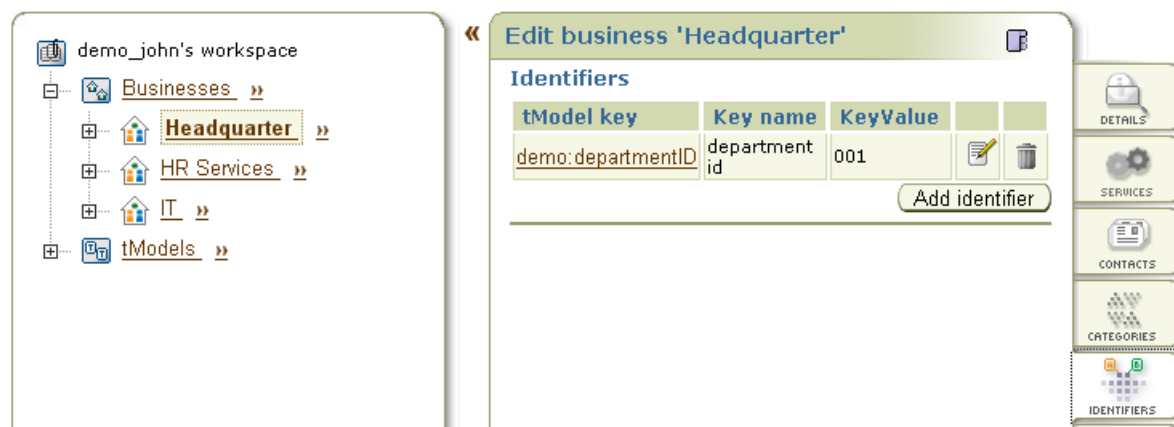Figure 70. Edit Business

4. After you modified the business entity, click the **Save changes** button.

Adding a Contact

The contact structure provides you with a space where you can list the people associated with the business entity. It is comprised of six properties: name, phone, email, address, description, and use type.

It is recommended that you use the description field to give a brief explanation of how the contact should be used.

Use types can be used to indicate the expected way in which the contact should be used. For example, "New Franchises", "Sales contact", "Technical Questions".

To add a contact:

1. On the **Contacts** tab of the Edit business or View business page, click the **Add contact** button. This displays the Add contact page where you can specify the contact's name and use type, as shown in [Figure 71](#):

Figure 71. Add Contact

2. Click **Add contact**.
3. Build your lists of information for descriptions, phone numbers, and addresses. Each collection page, with the exception of Address collection, functions in the same manner. Click the **Add** button for the element you want to add. You will see two or more edit fields to be completed.



Important

Once the fields have been edited, you must click the **Update** icon on the right.

For addresses, click the **Addresses** tab. On this tab, add, edit, or delete existing address structures by clicking through the appropriate buttons.

When you add or edit an address, fill in the desired fields, add the data to your list, and click **Update** when finished.

4. Once you have updated all of the contact's information, click **Save changes** at the bottom of the Edit contact page. You will see the name and use type of your new contact entry in the contacts list.

Adding a Discovery URL

To add a Discovery URL:

1. On the Edit business page click on the **Add discovery URL** button at the bottom of the **Discovery URLs** tab.
2. Complete the **Discovery URL** and **Use Type** edit fields with the relevant data.
3. When the fields are complete, click **Update** on the right to add this information to the list.
4. Click **Save changes**

Adding a Category

With categories you can make your business more visible to searches by associating it with a number of accepted taxonomies. These taxonomic categories identify a business and its services by location, product or service line, and industry.

Oracle Service Registry comes with keys for three basic checked taxonomies by default: These are the ISO 3166 geographical classification system and the NAICS and SIC industry and product classifications.

A key is also provided for Microsoft GeoWeb 2000, but as this is an unchecked taxonomy, key names and key values must be entered by hand.

To add a category to your list:

1. On the **Categories** tab of the Edit business page, click the **Edit** button. If there are already categories associated with this business entity, a list of them will be returned along with the **Add category** button. Otherwise, only the button will be displayed.
2. Click the **Add category** button beneath the **Categories** tab. This returns a list of available taxonomies from which you can choose categories to add to the list.
3. Click on an available taxonomy. Checked taxonomies will expand to a tree of categories valid for that model. You can type a known key name in the search box for faster retrieval. Note that larger branches are limited to ten items per page.
4. You can also search for the name of the taxonomy through the search box at the top of the taxonomy form. Use the **starts with**, **contains**, and **exact match** radio buttons as necessary. Like standard wild cards, these buttons search for the entered string as specified. For example, The pattern [Cana](#), when used with the **starts with** button and a geographic taxonomy, returns the set {"Canada" "Canarias"}. The result set is limited to a maximum of 250 items.



Note

If you provide too broad a search pattern, the resulting list will be truncated to 100 items.

With unchecked taxonomies (for example, Microsoft's GeoWeb taxonomy), it is possible to supply the key name and value through edit fields.

5. To add multiple categories, for example Albania and Armenia from the `uddi-org:iso-ch:3166:1999` taxonomy, check the boxes to the right of those key names, and click **Add category**. If you would like to add categories from different pages, you must click **Add category** on the first page before continuing to the next page containing your selections. For example, to choose Albania and Kazakhstan:
 - a. Select Albania and click **Add category**.
 - b. Click **Add category** on the Find service page.
 - c. Click the link for page 8 on the expanded Find service page.
 - d. Check the box next to Kazakhstan and click **Add category**.

Figure 72. Add Category

Edit business 'IT'

Categories

tModel key	Key name	KeyValue
demo:location:floor	Located on the 5th floor	5
demo:hierarchy	Link to the superior department	uddi:systinet.com:demo:hq

Show: enterprise taxonomies

Taxonomy list Displaying taxonomies 1 - 5 of 5

- ntis-gov:naics:2002
- ubr-uddi-org:iso-ch:3166-2003
- uddi-org:general keywords
- uddi-org:wsdl:types
- unspsc-org:unspsc:v6.0501

Category groups

No group tModels found.

Publish WSDL Save changes

- When you find the taxonomic classification you want, click the **Add category** button for checked taxonomies. For unchecked taxonomies, click **Add category** once the edit fields have been completed.

Adding an Identifier

You can also make your organization more visible by supplying any of your public or private identifiers, such as D-U-N-S, Tax, or Geographical Locator numbers to the registry. UDDI identifier structures are composed of the following elements:

tModel Key

Identifies a namespace or service in which the key name and key value have significance

keyName

The name or description of the key being used

keyValue

The value of the key

To add an identifier to your list:

- On the Edit business page, switch to the **Identifiers** tab.
- Click the **Add identifier** button at the bottom of the Identifiers list.
- Choose the identifier type from the displayed list of available taxonomical tmodels. This returns a field in which you enter key names and key values.
- When you have filled in the fields, click the **Add identifier** button to the right to add the new identifier to the list.



Important

If you use a tModel for a checked identifier, the key value must be of a recognizable form and value. For example, if you want to use a `uddi-org:isReplacedBy` key, you must supply the valid business entity UUID key in the `keyValue` field. Failure to do so will generate an error when you attempt to submit your business data to the database.

Publishing a Service

To publish a service:

1. Select the **Publish** menu tab and click the **Publish** link
2. In the left panel, click on the business to which you want to add a service. The right display area will show business details.
3. Select the **Services** tab, and click the **Add Service** button.

Alternately, right-click on the business node to which you want to add a service, and select **Add Service** from the context menu.

Figure 73. Add Service

Add service			
★ Name:	Holiday request	Language:	English
Description:		Language:	English
Service key:			

4. Enter the service name and description and click **Add service**.

The service is added to the left panel tree.

Publishing a Binding Template

Once you have declared and defined a business service, you must establish how current and potential business partners can access that service, a technical description of the service including where it can be found. This is accomplished through bindingTemplates.

A bindingTemplate represents a Web service instance where you obtain (among other things) the access point of an instance of the parent business service. Every bindingTemplate has a unique bindingKey for identification. (An access point contains contact information such as a URL, email address, or telephone number used to locate the service.)

The AccessPoint in a bindingTemplate structure can contain a URL of the endpoint of the web service. If there is more than one businessEntity that provides the same business service we recommend you reuse this information in a bindingTemplate. Create a bindingTemplate on the businessService that holds technical information. Other businessServices should contain bindingTemplates with accessPoints containing the key of the first technical bindingTemplate. These accessPoints should also contain useTypes with the value [hostingRedirector](#).



Note

Alternatively, reference to another bindingTemplate can be stored in a hostingRedirector structure instead of in an accessPoint. However the hostingRedirector structure (not the hostingRedirector value of useType) is a relic of UDDI v2 and is deprecated in UDDI v3.

To add a bindingTemplate:

1. Select the **Publish** menu tab and click the **Publish** link
2. In the left panel, click on the service to which you want to add a binding. The right display area will show service details. Select the **Bindings** tab and click the **Add Binding** button.

Alternatively, right-click the service node to which you want to add a binding, and select **Add Binding** from the context menu.

Figure 74. Add Binding

Add binding	
★ Access point:	1-123-45645654
Description:	IT issues shall be reported here
Language:	English
Use type:	other
If other, specify:	
Binding key:	

Publishing a tModel

The tModel is a structure that takes the form of keyed metadata (data about data). In a general sense, the purpose of a tModel within Oracle Service Registry is to provide a reference system based on abstraction. Among the roles that a tModel plays in UDDI is the ability to provide and to describe compliance with a specification or concept, to a taxonomy, for example.

To publish a tModel:

1. Select the **Publish** tab, and click the **Publish** link.
2. On the right Publish panel, click the **Add tModel** button.

Alternatively, right-click on the tModels node in the left panel and select **Add tModel** from the context menu.

Figure 75. Add tModel

Add tModel

This dialog allows you to add tModel.

★ Name:

Description:

Language:

tModel key:

3. Enter tModel name and description, and click the **Add tModel** button.



Note

If you delete an unused tModel, the tModel will be deleted from the database. The Oracle Service Registry Administrator can change this behavior that tModels will be only marked as deleted. See Administrator's Guide, [Section 2.7, Node](#).

Adding a Category

In this section we will show you how to assign demo:location:floor taxonomy to the numeric ordering as show at [Figure 42](#).

1. Log on as demo_john user. (password is the same as the username).
2. Click the **Publish** tab in the main menu. Click on the tModel demo:location:floor item in the tree in the left part of the page. Edit tModel 'demo:location:floor' page will appear.
3. Click **Add category** button. A taxonomy list will appear.
4. Select the taxonomy systinet-com:isOrderedBy, enter **Key value** uddi:systinet.com:comparator:numeric.
5. Click the button **Add category** , then **Save changes** button.

Publishing Assertions

You can assert relationships that businesses under your Oracle Service Registry custody have with others under your custody or with those under the custody of another user registered at the same operator node. The success of the latter assertion depends upon the approval of the user to whom the assertion is made.

When making an assertion you must supply:

- The identity of the business from which the assertion is being made
- The identity of the business to which it is making a claim. Oracle Service Registry specifies these business identities through their UUID keys.
- A reference explaining the nature of the relationship. References about the nature of the asserted relationship are derived from your own tModels or from the uddi-org:relationships tModel.

Adding an Assertion

To add a new assertion:

1. On the Edit business panel, switch to the **Relationships** tab. This displays the Relationship assertions page. If you have already set assertions you will see a list of those previously published. If not, you will see the message "No assertions found."
2. Click the **Add new assertion** button to display the Add assertion page shown in [Figure 76](#).

Figure 76. Add Assertion

3. If the business for which you are making an assertion will assume the "To" role, click the **Change Direction** button.
4. Find the business with which you want to assert a relationship in the same way you would on the inquiry side of UDDI. The difference is that, along with the business name, you will see the business descriptions in the retrieved record set and a **Select business key** icon next to each record.

When you locate the target business among the records, click its **Select business key** icon. This returns you to the Add assertion page with the UUID key of the selected business as the previously missing role.



Important

A Keyed Reference will be required for the assertion to be valid. Click the **Set** button on the right of the Keyed Reference line. The Set keyed reference page displays.

5. Locate a tModel for your reference in the same way you would on the inquiry side of UDDI. The difference is that there are edit fields for Key Names and Key Values next to the tModel names and a **Set** button at the end of each row. Pertinent tModels include uddi-orgs:relationship and those you have published yourself.
 - a. Enter the key value and the key name or description. For uddi-orgs:relationship, the key value may be [parent-child](#), [peer-peer](#), or [identity](#).
 - b. Click the **Set** value. This returns you to the Add assertion page. The tModel, key name, and key value added to the Keyed Reference record are displayed there.
6. Click the **Add assertion** button.
7. If the assertion is made to a business of which you have custody, the assertion will be completed automatically. If it is made to a business in the custody of another user, that user will need to review the assertion and complete it through his or her own account. This process is described below.

Accepting an Assertion

Assume that you have been notified by a parent company, a subsidiary, a peer, or a cooperative member that they have asserted a relationship with your company. Now you must review that assertion and, if you are in agreement, complete it.

To accept the assertion:

1. On the Edit business page, switch to the **Relationships** tab.
2. View the incomplete assertions made toward your business in the **Requested assertions** list. Each assertion will have a **Complete assertion** button next to its status message.
3. Click the **Complete assertion** button to accept the assertion.
4. If you wish to refuse, leave the assertion incomplete by omitting step 3. Return to the Publisher assertions page by clicking the link at the top of the page. Contact the business making the assertion to resolve the details of your relationship. Incomplete assertions will not appear when users query for related businesses.

Publishing Subscriptions

Subscriptions give you the ability to register interest in receiving information about changes made to Oracle Service Registry. It allows the monitoring of new, changed, and deleted UDDI structures. Each subscription has a filter that limits the subscription scope to a subset of registry entities.

You can establish a subscription based on a specific query or set of entities in which you are interested. Query-based subscriptions notify the user if the result set changes within a given time span; entity-based subscriptions notify the user if the contents of the specified entities change.

Subscriptions enable:

- notification of the registration of new businesses or services
- monitoring of existing businesses or services
- acquiring registry information for use in a private registry
- acquiring data for use in a marketplace or portal registry

This filter should be one of the following ordinary UDDI inquiry calls:

- find_business
- find_relatedBusinesses
- find_service
- find_binding
- find_tModel
- get_businessDetail
- get_serviceDetail
- get_bindingDetail
- get_tModelDetail

Figure 77. Add Subscription

★ Subscription filter: Not set Change filter	
Notification listener type:	None ▼
Expires after (MM/DD/YYYY hh:mm):	☐ Never ☒ 11 / 30 / 2005 17 : 55
Max entities:	-1
Brief:	☐

Adding Subscriptions

To add new subscription:

1. Click on the **Subscriptions** link under the **Publish** menu tab to display the Subscriptions page.
2. Click the **Add subscription** button to display the Add subscriptions page shown in [Figure 77](#).
3. Click **Change filter** to specify a filter for your subscriptions. This returns the **Subscription filter type** page.
4. Select the filter type from the drop down list labeled **Subscription filter type**.
5. Click **Select filter**.
6. Set the filter properties in the same way you would for ordinary search calls.
7. Click the **Preview results** button to check filter results.
8. Click **Save filter** to return to the page with the filter settings shown in [Figure 77](#).
9. Fill in the other subscription fields if needed. These are described below.

Notification Listener Types

Figure 78. Add Subscription - Email Notification Listener Type

Add subscription

★ Subscription filter:	Find business Change filter
Notification listener type:	Email address v
★ Email address:	use@company.com
XSLT transformer tModel:	systinet-com:notification:defaultEmailXSLT v
Business service:	EmployeeList v
Business entity:	IT v
Notification interval:	0 years 0 months 1 days 0 hours 0 minutes 0 seconds
Expires after (MM/DD/YYYY hh:mm):	☐ Never ☒ 11 / 30 / 2005 17 : 55
Max entities:	-1
Brief:	☐

- **Subscription filter** - Specifies on which UDDI structure change the notification will occur.
- **Notification listener type** - Select notification listener type
 - Email address
 - Service endpoint
 - Binding template
- **Email address** - Email address to which notifications will be sent
- **XSLT transformer tModel** - tModel that references XSLT
- **Business service** and **Business entity** - Business service and business entity to which the bindingTemplate representing the notification listener service will be saved. These drop down lists lists only business entities and business services under which you have the permission to create the binding template.
- **Notification interval** - Specifies how often change notifications are to be provided to a subscriber. Required only for asynchronous notifications.
- **Expires after** - Specifies the period of time for which the administrator would like the subscription to exist.
- **Max entities** - Contains the maximum number of entities in a notification returned to a subscription listener.
- **Brief** - Controls the level of detail returned to a subscription listener.

Figure 79. Add Subscription - Service Endpoint Listener Type

Add subscription

★ **Subscription filter:** Find business

Notification listener type: Service endpoint ▼

★ **Notification listener endpoint:**

Business service: EmployeeList ▼

Business entity: IT ▼

Notification interval: 0 years 0 months 1 days 0 hours 0 minutes 0 seconds

Expires after (MM/DD/YYYY hh:mm): ☐ Never ☒ 11 / 30 / 2005 17 : 55

Max entities: -1

Brief: ☐

- **Subscription filter** - Specifies on which UDDI structure change the notification will occur.
- **Notification listener type** - Select notification listener type here.
 - Email address
 - Service endpoint
 - Binding template
- **Notification listener endpoint** - URL to which the notification will be sent
- **Business service** and **Business entity** - business service and business entity to which the bindingTemplate representing the notification listener service will be saved. These drop down lists lists only business entities and business services under which you have the permission to create the binding template.
- **Notification interval** - Specifies how often change notifications are to be provided to a subscriber. Required only for asynchronous notifications.
- **Expires after** - Specifies the period of time for which the administrator would like the subscription to exist.
- **Max entities** - Contains the maximum number of entities in a notification returned to a subscription listener.
- **Brief** - Controls the level of detail returned to a subscription listener.

Figure 80. Add Subscription - Binding Template Listener Type

The screenshot shows a web form titled "Add subscription". It contains several fields for configuring a subscription:

- Subscription filter:** A dropdown menu set to "Find business" with a "Change filter" button next to it.
- Notification listener type:** A dropdown menu set to "Binding template".
- Binding key:** A text input field containing "uddi:b77 eb8f0-86ce-11d8-ba05-123456789012" and a "Select binding key" button.
- Notification interval:** A series of input fields for time units: 0 years, 0 months, 1 days, 0 hours, 0 minutes, and 0 seconds.
- Expires after (MM/DD/YYYY hh:mm):** A section with a radio button for "Never" and a date/time picker set to 11/30/2005 17:55.
- Max entities:** A text input field containing "-1".
- Brief:** A checkbox that is currently unchecked.

- **Subscription filter** - Specifies on which UDDI structure change the notification will occur.
- **Notification listener type** - Select notification listener type here.
 - Email address
 - Service endpoint
 - Binding template
- **Binding Template** - The bindingTemplate representing the notification listener service.
- **Notification interval** - Specifies how often change notifications are to be provided to a subscriber. Required only for asynchronous notifications.
- **Expires after** - Specifies the period of time for which the administrator would like the subscription to exist.
- **Max entities** - Contains the maximum number of entities in a notification returned to a subscription listener.
- **Brief** - Controls the level of detail returned to a subscription listener.

Editing Subscriptions

To edit an existing subscription:

1. Click on the **Subscriptions** link under **Publish** menu tab to display the Subscriptions page.
2. Click the **Edit** button beside the subscription you want to edit. This returns the Edit subscription page. Here you can edit all subscription arguments except Subscription filter.

Deleting Subscriptions

To delete subscription:

1. Click on the **Subscriptions** link under **Publish** menu tab to display the Subscriptions page.

2. Check the boxes beside subscriptions you want to delete.
3. Click the **Delete selected** button. This returns a confirmation page.
4. The confirmation page contains a list of subscriptions marked for deletion. If it is correct, press the **Yes** button to delete subscriptions permanently.

Publish Custody Transfer

Custody transfer is a service used to transfer ownership of a selected structure (business entity, business service, binding template or tModel) from one user to another. It consists of two steps: selecting structure(s) to transfer and generating a custody transfer token. When the potential new owner receives the transfer token (by a secure transport such as encrypted email), that user may accept or reject the custody transfer.



Important

This token must be kept secret, as it is sufficient information to transfer custody of the structure to any user!

If you decide to cancel the request (for example the transfer token has been compromised), use the **Discard transfer token** button.

Requesting Custody Transfer

To request custody transfer:

1. Click on the **Custody** link under **Publish** menu tab to display the Custody transfer page.
2. Click the **Request transfer token** link. This returns a list of UDDI data structures you own.
3. Check the box next to the UDDI structure(s) you wish to transfer, and click **Request transfer token**.
4. The next page will generate the transfer token. Copy the text of the transfer token to a file and send this file to the user who shall become the new owner of selected structures. Keep the token secret, as anyone who knows it can use it to transfer custody of that structure. Unencrypted email, for example, is not good data transfer choice.

Accepting Custody Transfer

To accept custody transfer:

1. Click on the **Custody** link under **Publish** menu tab to display the Custody transfer page.
2. Click on the **Transfer custody** link.
3. Open the file with the transfer token, copy its contents to clipboard and paste it to the edit area on the **Transfer structures** page.
4. Click **Transfer** button.

Publishing WSDL Documents

Oracle Service Registry WSDL to UDDI (WSDL2UDDI) mapping is compliant with OASIS's technical note [Using WSDL in a UDDI registry Version 2.0](http://www.oasis-open.org/committees/uddi-spec/doc/tn/uddi-spec-tc-tn-wsdl-v200-20031104.htm) [http://www.oasis-open.org/committees/uddi-spec/doc/tn/uddi-spec-tc-tn-wsdl-v200-20031104.htm]. It enables the automatic publishing of WSDL documents to UDDI, enables precise and flexible UDDI queries based on specific WSDL artifacts and metadata, and provides a consistent mapping for UDDI v2.

Publish WSDL

To publish a WSDL document:

1. Click on the **WSDL** link under the **Publish** main menu tab.
2. The page shown at [Figure 81](#) will appear.

Figure 81. Publish WSDL

Publish WSDL document

You can either use existing business entity by selecting its key or create a new business entity which will be used for publishing.

★ Business key	uddi:systinet.com:demo:hr
	Find business key Create new business
★ WSDL location (URI)	http://10.0.60.101/demos/EmployeeList.wsdl
Advanced mode	☐

3. Enter the **Business key** of the business where services from WSDL document will be published. You can find a business key by clicking on the **Find business key** button.
4. Enter a **WSDL location**. You can try the WSDL document from Oracle Service Registry demos from `REGISTRY_HOME/demos/conf/employeeList.wsdl`.
5. Leave the **Advanced mode** check box unchecked, then click **Publish** button.

The WSDL document will be published to Oracle Service Registry. You can review how WSDL artifacts of the document have been mapped to Oracle Service Registry at [Figure 82](#).

Figure 82. Publish WSDL Summary

Publishing summary

WSDL <http://10.0.60.101/demos/EmployeeList.wsdl> has been successfully processed and the following entities have been published to the Oracle Registry:

WSDL service EmployeeList mapped to UDDI business service EmployeeList
(uddi:systinet.com:demo:hr:employeesList)

WSDL ports have been mapped to UDDI binding templates:

Name	Binding key
EmployeeList	uddi:5c546520-78b8-11d8-bec4-123456789012

WSDL bindings have been mapped to UDDI tModels:

Name	Namespace	tModel
EmployeeList_binding	http://systinet.com/wsdl/demo/uddi/services/	EmployeeList_binding (uddi:systinet.com:demo:employeeList:binding)


WSDL portTypes have been mapped to UDDI tModels:

Name	Namespace	tModel
EmployeeList_portType	http://systinet.com/wsdl/demo/uddi/services/	EmployeeList_portType (uddi:systinet.com:demo:employeeList:portType)

Ok

Publishing WSDL Documents (Advanced Mode)

The advanced publishing mode allows you to specify certain details of how the WSDL document will be mapped to the UDDI registry. To publish in this mode, follow the steps from the previous section, and toggle the **Advanced mode** check box on. Once you click on the button **Publish** the Advanced Mode Publish page shown in [Figure 83](#) will appear.

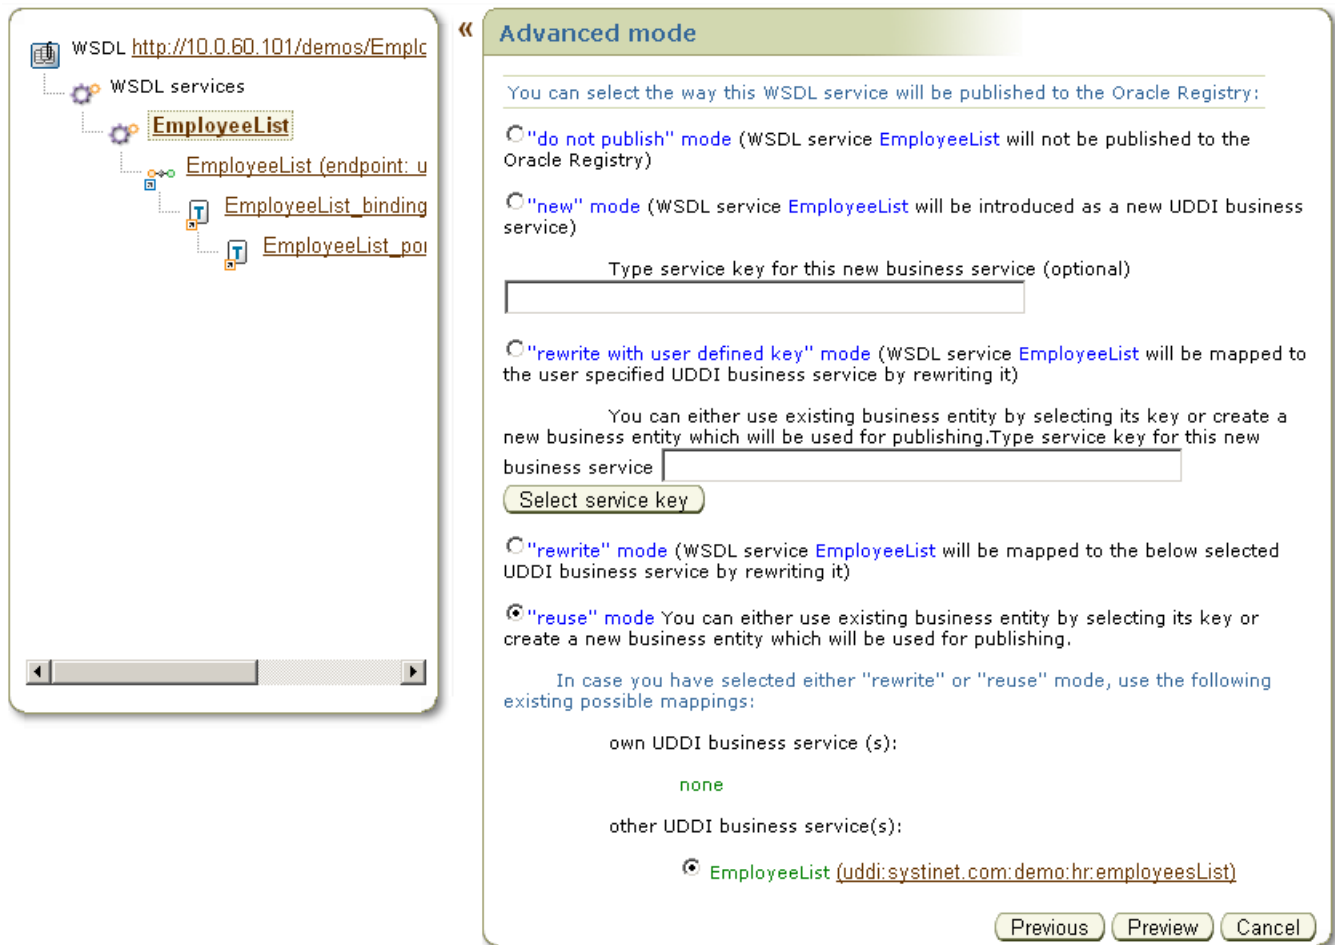Figure 83. Publish WSDL (Advanced Mode)

In the left tree panel, you can see how artifacts of the WSDL document will be published. Click on a tree branch to edit how WSDL artifacts will be mapped to Oracle Service Registry. Explanatory instructions in the right panel describe the mapping options. Click **Preview** to see how each part of the WSDL document will be mapped to the registry. From the Preview page, you can go back to adjust the WSDL mapping.

The wizard's default selection in [Figure 83](#) is based on the following rules:

- If a possible mapping of a WSDL artifact already exists in the registry, and the user owns this UDDI structure, the wizard will suggest rewriting that mapping in the registry.
- If a possible mapping of a WSDL artifact already exists in the registry, and the user does not own this UDDI structure, the wizard will suggest reusing that UDDI entity.
- If no mapping of the WSDL artifact exists in the registry, the wizard will suggest creating a new UDDI entity to represent the mapping.

Oracle Service Registry applies these rules automatically when you publish a WSDL document without the **Advanced mode** option.



Note

Publishing of WSDL operations and WSDL messages is not implemented in this Oracle Service Registry release.

Unpublish WSDL

To unpublish a WSDL definition:

1. [Search for the WSDL document](#) in the registry.
2. In the result view, click on a business service.
3. The page with business service details will appear, click the **Unpublish** button at the page.
4. The **Unpublish WSDL document** wizard will appear.

Publish XML

Oracle Service Registry XML to UDDI (XML2UDDI) mapping enables the automatic publishing of XML documents to UDDI, enabling precise and flexible UDDI queries based on specific XML artifacts and metadata

If you want to unpublish an XML document, use the **Find XML** button, then click the **Unpublish** button in the search result page.

Publishing an XML Document

To publish an XML document:

1. Click on the **XML** link under the **Publish** main menu tab.
2. The page shown in [Figure 84](#) will appear.

Figure 84. Publish XML Document

Publish XML resource

Enter location of your XML resource and press Publish. If you want fine-grained control over publishing process, then select Advanced mode first.

XML location (URI)	http://10.0.60.101/demos/employees.xml
Advanced mode	☐

Publish **Cancel**

3. Enter an **XML location**. To demonstrate, choose the file `REGISTRY_HOME/demos/conf/employees.xml` from the Oracle Service Registry demos.
4. Leave the **Advanced mode** check box unchecked, and click **Publish**.

The XML document will be published to Oracle Service Registry. You can review how the XML document has been mapped to Oracle Service Registry at [Figure 85](#).



Note

The content of the XML document is not copied into the registry.

Figure 85. Publish XML Document Summary


XML resource	
Resource name	employees.xml
Location	http://10.0.60.101/demos/employees.xml
Technical model	uddi:ab6693a0-e495-11de-9ec5-00f7dae19ec3
Namespaces	Namespace URI: http://systinet.com/uddi/demo/employeeList
	Schema location: not defined
	Technical model: employees.xsd

Unpublish

Back View as XML Delete Edit

Publishing an XML Document - Advanced Mode

The advanced publishing mode allows you to specify certain details of how the XML document will be mapped to the UDDI registry. To publish in this mode, follow the steps from the previous section, check the box labeled **Advanced mode**, and click **Publish**. This returns the Advanced Mode Publish page shown in [Figure 86](#) will appear.

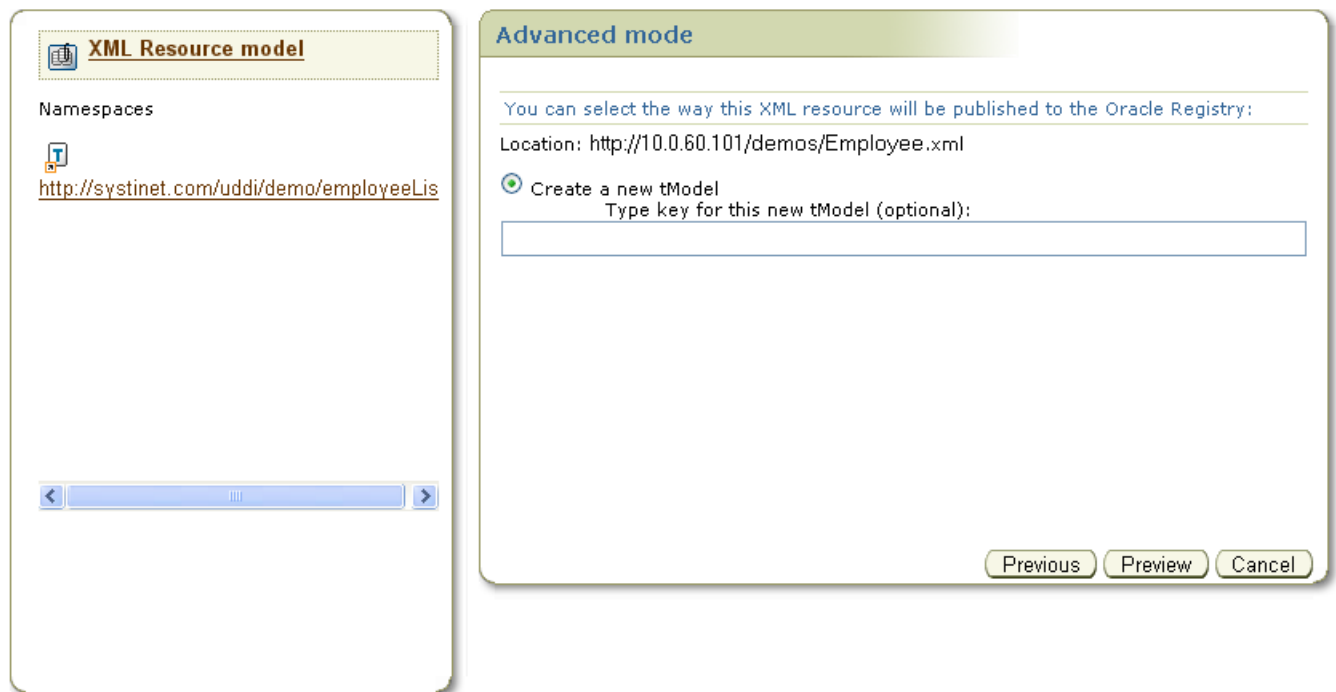Figure 86. Publish XML Document - Advanced

In the left tree panel, you can see how Namespaces of the XML document will be published. Click on a Namespace to edit how the Namespace will be mapped to Oracle Service Registry. Explanatory instructions in the right panel describe the mapping options. Click **Preview** to see how the XML document and its Namespaces will be mapped to Oracle Service Registry. From the Preview page, you can go back to edit the XML mapping.

Figure 87. Publish XML Document - Preview

Unpublish an XML Document

The Unpublish XML operation allows you to delete an XML mapping from Oracle Service Registry. To unpublish an XML document, you must search for the XML document first.

Publish XSD

Oracle Service Registry XSD to UDDI (XSD2UDDI) mapping enables the automatic publishing of XML schema documents to UDDI, enabling precise and flexible UDDI queries based on specific XML schema artifacts and metadata.

If you want to unpublish an XML schema document, use the **Find XSD** button and click the **Unpublish** button in the search result page.

Publishing an XML Schema

To publish an XML Schema document:

1. Click on the **XSD** link under the **Publish** main menu tab.
2. The page shown in [Figure 88](#) will appear.

Figure 88. Publish XSD

Publish XSD resource

Enter location of your XSD resource and press Publish. If you want fine-grained control over publishing process, then select Advanced mode first.

✱ XSD location (URI)

Publish elements and types ☐

Advanced mode ☐

3. Enter an **XML Schema location**. To demonstrate, use the file `REGISTRY_HOME/demos/conf/employees.xsd` from the Oracle Service Registry demos.
4. Leave the **Advanced mode** check box unchecked, then click **Publish**.
5. The XML Schema document will be published to the registry. You can review mappings of the XML Schema document itself and its elements at [Figure 89](#).

Figure 89. Publish XSD Summary

XSD resource		
XML schema resource		
Resource name		employees.xsd
Location		http://10.0.60.101/demos/employees.xsd
Technical model		uddi:systinet.com:demo:xsd:employees
Target namespace		http://systinet.com/uddi/demo/employeeList
Elements	Local name	persons
	Element model	persons
	Local name	person
	Element model	person
	Local name	department
	Element model	department
Types	Local name	persons
	Type model	persons
	Local name	person
	Type model	person
	Local name	department

Publishing an XML Schema (Advanced Mode)

The advanced publishing mode allows you to specify certain details of how the XML Schema document will be mapped to the UDDI registry. To publish in this mode:

1. Follow the steps from the previous section, but check the **Advanced mode** box
2. Click **Publish**. This returns the Advanced Mode Publish page shown in [Figure 90](#).

Figure 90. Publish XSD - Advanced

Advanced mode

You can select the way this XSD resource will be published to the Oracle Registry:

Location: <http://10.0.60.101/demos/employees.xsd>

☐ Create a new tModel
 Type key for this new tModel (optional):

☒ Rewrite the existing tModel
 your own tModel(s)
 ☒ employees.xsd uddi:7788ad30-e4d0-11de-a2b0-90a03e30a2af

other tModel(s)
 none

☒ Publish element and types in the XSD

3. In the left tree panel, you can see how the XML Schema and its possible XML Schema imports will be published. Click on an XML Schema model node to edit how the parts of the XML Schema will be mapped to the Oracle Service Registry. The explanatory instructions in the right panel describe the mapping options.
4. Click the **Preview** to see how the XML Schema document will be mapped to Oracle Service Registry. From the Preview page, you can go back to edit the XML Schema mapping.

Unpublish an XML Schema

The Unpublish XML operation allows you to delete the XML Schema mapping from Oracle Service Registry. To unpublish an XML Schema document, you must search for the XML Schema document first.

Publish XSLT

Oracle Service Registry XSLT to UDDI (XSLT2UDDI) mapping enables the automatic publishing of XSL Transformations to UDDI, enabling precise and flexible UDDI queries based on specific XSLT artifacts and metadata.

If you want to unpublish an XSL transformation, click the **Find XSLT** button, then click the **Unpublish** button in the search result page.

Publishing an XSL Transformation

To publish an XSL transformation:

1. Click on the **XSLT** link under the **Publish** main menu tab.
2. The page shown in [Figure 91](#) will appear.

Figure 91. Publish XSLT

Publish XSLT resource

Enter location of your XSLT resource and press Publish. If you want fine-grained control over publishing process, then select Advanced mode first.

XSLT location (URI)

Advanced mode ☐

Publish **Cancel**

3. Enter an **XSLT location**. To demonstrate, use the `REGISTRY_HOME/demos/conf/employeesToDepartments.xsl` file from the Oracle Service Registry demos.
4. Leave the **Advanced mode** check box unchecked, then click **Publish**.

The XSL transformation will be published to Oracle Service Registry. You can review how XSLT artifacts have been mapped to Oracle Service Registry at [Figure 92](#)

Figure 92. Publish XSLT Summary

XSLT resource		
XSL transformation resource		
Resource name	employeesToDepartments.xsl	
Location	http://10.0.60.101/demos/employeesToDepartments.xsl 	
Technical model	uddi:f7848250-80ea-11da-bb84-03ae4641bb7d	
XSLT output method	xml	
Input XML schemas	XML schema name	employees.xsd
	Namespace	http://systinet.com/uddi/demo/employeeList
	Location	http://10.0.60.101/demos/employees.xsd 
	Technical model	uddi:systinet.com:demo:xsd:employees
	XML schema name	departments.xsd
	Namespace	http://systinet.com/uddi/demo/companyDepartments
	Location	http://10.0.60.194:8080/uddi/doc/demos/departments.xsd 
	Technical model	uddi:systinet.com:demo:xsd:departments

Publishing an XSL Transformation (Advanced Mode)

The advanced publishing mode allows you to specify certain details of how the XSL transformation will be mapped to the UDDI registry. To publish in this mode:

1. Follow the steps from the previous section, but check the **Advanced mode** box.
2. Click **Publish**. This returns the Advanced Mode Publish page shown in [Figure 86](#).

Figure 93. Publish XSLT- Advanced

XML Resource model

Namespaces

<http://systinet.com/uddi/demo/employeeList>

Advanced mode

You can select the way this XML resource will be published to the Oracle Registry:

Location: <http://10.0.60.101/demos/conf/employees.xml>

☐ Create a new tModel
Type key for this new tModel (optional):

☒ Rewrite the existing tModel
your own UDDI tModel(s)
☒ employees.xml uddi:a0b71b10-80ed-11da-bb85-03ae4641bb7d
other UDDI tModel(s)
none

Previous Preview Cancel

In the left tree panel, you can see how XSLT and its input and output schemas will be published.

3. Click on an XSLT node itself, its input XML Schemas, and types of XSLT output to edit how these artifacts will be mapped to Oracle Service Registry. Explanatory instructions in the right panel describe the mapping options.
4. Click **Preview** to see how the XSLT will be mapped to Oracle Service Registry. From the Preview page, you can go back to edit the mapping.

5.6. Signer Tool

One of the most important advantages of UDDI version 3 is its support for digital signatures. Without signatures you cannot verify whether the publisher of a business entity is really who that publisher claims to be. But if the publisher has signed the UDDI structure, anyone can verify that the information is unmodified by any means (including by UDDI registry operators) and to confirm the publisher's identity.

The Oracle Service Registry Signer tool simplifies signature manipulation. You can find this tool's script in the bin directory of your Oracle Service Registry installation. The Signer is a graphical application that can be used to add, remove, and verify the signatures of UDDI structures you have published.



Note

If you are using IBM Java, you must install Bouncy Castle security provider. See Installation Guide, [Section 1, System Requirements](#)


5.6.1. Starting the Signer

1. To start the Signer tool, first ensure that Oracle Service Registry is running, then execute the following script from the bin subdirectory of your Oracle Service Registry installation:

Windows:	signer.bat
UNIX:	./signer.sh


- When the tool starts, you must first authenticate yourself against the selected UDDI version 3 registry. Simply provide your user name and password. If your registry is not running on a local machine, you must configure its endpoints. This can be accomplished via the **Configure UDDI** button.

Figure 94. Login Dialog

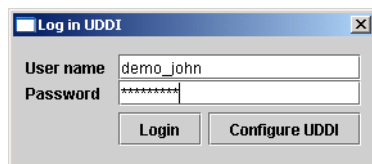

- On the returned screen, set the endpoints of the Security, Inquiry, and Publishing Web services. For help, ask the administrator of your registry.

Figure 95. Configure Dialog

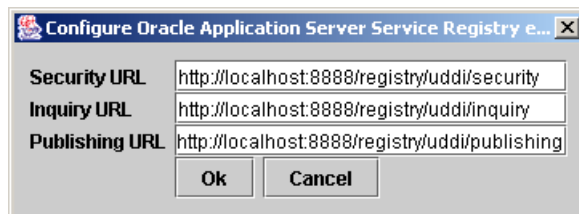


- Once you have entered your user name and password, click the **Login** button. The Signer tool will attempt to authorize you at the selected registry. If authorization fails, you can correct your login information. Once it succeeds, the **Login dialog** disappears and the Signer tool asks Oracle Service Registry for your registered information (businessEntities and tModels that you have published).

5.6.2. Main Screen

In the Signer tool's interface, the left part of the main screen consists of a tree containing all your businessEntities and tModels. If you wish to add or remove a digital signature, select the structure to sign from this tree. The Signer will fetch it from the registry. When the structure is fetched, its XML representation is displayed in the right panel. The **Sign** button is unblocked. If the structure has been already signed, the **Remove signatures** button is unblocked as well.

Figure 96. Signature Tool - Main Screen

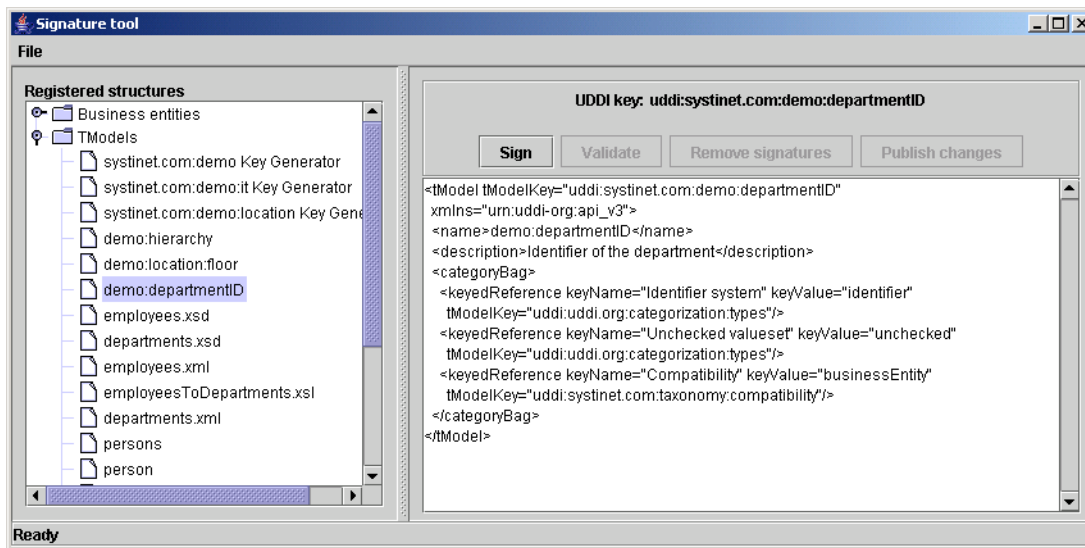

The status bar at the bottom of the application informs the user of current action progress and results.

5.6.3. Sign

To sign a UDDI structure, you must set up the Java keystore. Use JDK tool **keytool** to generate the keystore. Please, see your JDK documentation for more information how to use **keytool**. The Signer tool has been tested with keystores in JKS and PKCS12 formats.



Note

To generate the certificate issue the following command

```
keytool -genkey -keyalg RSA -storetype JKS -alias demo_john -keystore test_certificate.jks
```

Example of the dialog:

```
Enter keystore password: changeit
What is your first and last name?
[Unknown]: John Johnson
What is the name of your organizational unit?
[Unknown]: UDDI
What is the name of your organization?
[Unknown]: Myorg
What is the name of your City or Locality?
[Unknown]: San Diego
What is the name of your State or Province?
[Unknown]: California
What is the two-letter country code for this unit?
[Unknown]: CA
Is CN=John Johnson, OU=UDDI, O=Myorg, L=San Diego, ST=California, C=CA correct?
[no]: yes
Enter key password for <demo_john>
```


(RETURN if same as keystore password):


To sign a UDDI structure, you must set the Java keystore file, alias, and password as follows:

1. Click on the **Sign** button. This returns the **Select identity** dialog.
2. In the box labeled **Select identity**, type the path to the file with your Java keystore.
3. In the box labeled **Alias**, type the alias located in the identity.
4. In the box labeled **Password**, type the password used to encrypt the private key.




Important

If you enter the wrong value for the alias or the password, the tool will not be able to open the identity.

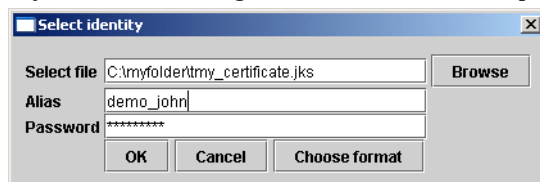

5. If the keystore is in the Sun JKS format, you do not have to click on **Choose format** button. You can leave default values there. If the keystore is not in the Sun JKS format, you can specify the format by clicking the **Choose format** button. In the returned dialog window, set the keystore format and its provider. For example, to use the PKCS12 format, set the format to PKCS12 and the provider to SunJSSE.

Figure 97. KeyStore Format Dialog



6. When the signing operation succeeds, the selected UDDI structure will have a digital signature and its XML representation will be updated. For security reasons, the signing process takes place on your computer so as not to risk compromise to your private key.
7. Finally the **Publish changes** and **Remove signatures** buttons are enabled.

5.6.4. Validation

The **Validate** button is used to perform validity check of UDDI structures that contain XML digital signatures. The result of this operation is displayed in the status bar.

5.6.5. Remove Signatures

The **Remove signatures** button is used to remove all digital signatures from the selected UDDI structure. When this operation is complete, the XML representation of the UDDI structure is updated. If the **Publish changes** button had been disabled, it is enabled.

5.6.6. Publish Changes

If you have signed the selected UDDI structure or removed digital signatures from it, you can select the **Publish changes** button to publish the changes to the registry. Its invocation uses standard UDDI publishing methods (`save_tModel`, etc.) to update this UDDI structure on the registry. The private key is not used during this operation.

5.6.7. Signer Configuration

The Signer tool automatically remembers the actual configuration such as registry endpoints or keystore location and format. The config file is saved in the user's home directory with the name `signer.conf`. You can change the location (and filename) by using the signer script's `-c` option. If you do not want this feature, use `-n`. The list of valid options can be obtained with `-h` option.

The Signer tool performs signing and verification via an XML digital security provider. The distribution comes with 2 digital signature providers

ssj

Uses the XML digital security implementation of Systinet Server for Java.

oracle

Uses the Oracle XML digital security implementation.

`ssj` is the default. If you want to switch to `oracle`, modify the command that runs the Signer tool in the associated script.

- Add system property `-Dregistry.xml.dsig.providerName=oracle`.
- Prepend Oracle XML security libraries to classpath.

Integration Guide

Oracle provides specific integration points between Oracle Service Registry and several other Oracle Fusion Middleware components. The following sections provide instructions on this integration.

Oracle SOA Suite 11g

This section describes how to integrate Oracle Service Registry with Oracle SOA Suite 11g.

- [Section 1.1, Integrating with Oracle JDeveloper](#)

This section describes how to create a connection between JDeveloper and the Oracle Service Registry.

- [Section 1.2, Configuring Oracle Service Registry at Runtime](#)

This section describes how to configure Oracle Service Registry with Oracle SOA Suite 11g at runtime.

Integrating with Oracle Enterprise Repository

By integrating Oracle Service Registry with Oracle Enterprise Repository, you can query Oracle Service Registry to find a service to register as a gateway enforcement component.

Integrating with Service Bus

Service Bus is the enterprise service bus for use with Oracle WebLogic Server. By integrating Oracle Service Registry with Service Bus, you can query Oracle Service Registry to find a service to register as a gateway enforcement component for SOA composite applications deployed to Oracle WebLogic Server.

1. Oracle SOA Suite 11g

Oracle SOA Suite provides a complete set of service infrastructure components for designing, deploying, and managing composite applications. Oracle SOA Suite enables services to be created, managed, and orchestrated into composite applications and business processes. Composites enable you to easily assemble multiple technology components into one SOA composite application. Oracle SOA Suite plugs into heterogeneous IT infrastructures and enables enterprises to incrementally adopt SOA.

For more information about Oracle Service Registry, visit the following URL:

<http://www.oracle.com/technetwork/middleware/registry>



Note

- This section does not describe how to configure OSR against the embedded Oracle WebLogic Server in Oracle JDeveloper.
- OSR 11g deploys to WebLogic Server 11 (10.3.1 or later)

This section describes how to integrate Oracle Service Registry with Oracle SOA Suite 11g. It contains the following topics:

- [Section 1.1, Integrating with Oracle JDeveloper](#)
- [Section 1.2, Configuring Oracle Service Registry at Runtime](#)

1.1. Integrating with Oracle JDeveloper

To create a connection between the Oracle Service Registry and JDeveloper:

1. Go to Oracle JDeveloper.
2. Select **File > New > Connections > UDDI Registry Connection** to create a UDDI connection.
3. Enter a connection name.
4. Enter an inquiry endpoint URL. For example: <http://myhost.us.oracle.com:7001/registry/uddi/inquiry>
5. Ensure that the **Business View** option is selected.
6. Click **Next**.
7. Click **Test Connection**.
8. If successful, click **Finish**. Otherwise, click the **Back** button and correct your errors.

1.2. Configuring Oracle Service Registry at Runtime

Oracle SOA Suite uses the SCA standard as a way to assemble service components into a SOA composite application. SCA provides a programming model for the following:

- Creating service components written with a wide range of technologies, including programming languages such as Java, BPEL, C++, and declarative languages such as XSLT. The use of specific programming languages and technologies (including web services) is not required with SCA.
- Assembling the service components into a SOA composite application. In the SCA environment, service components are the building blocks of applications.

SCA provides a model for assembling distributed groups of service components into an application, enabling you to describe the details of a service and how services and service components interact. Composites are used to group service components and wires are used to connect service components. SCA helps to remove middleware concerns from the programming code by applying infrastructure declaratively to composites, including security and transactions.

The key benefits of SCA include the following:

- Loose coupling
Service components integrate with other service components without needing to know how other service components are implemented.
- Flexibility
Service components can easily be replaced by other service components.
- Services Invocation
Services can be invoked either synchronously or asynchronously.
- Productivity
Service components are easily integrated to form a SOA composite application.
- Easy Maintainance and Debugging
Service components can be easily maintained and debugged when an issue is encountered.

The Oracle Service Registry (OSR) provides a common standard for publishing and discovering information about web services. This section describes how to configure OSR against a separately installed Oracle SOA Suite environment:

1.2.1. Publishing and Browsing the Oracle Service Registry

This section provides an overview of how to publish a business service. For specific instructions, see the documentation at the following URL:

<http://www.oracle.com/technetwork/middleware/registry>



Note

The best practice for publishing services is using Oracle Enterprise Repository and the Exchange Utility tool.

For more information, see [Section 2, Integrating with Oracle Enterprise Repository](#)

To Manually Publish a Business Service

1. Go to the Registry Control: <http://hostname:port/registry/uddi/web>
2. Click **Publish** > **WSDL**.
3. Log in when prompted.
4. Complete the fields on this page to specify the access point URL and publish the WSDL for the business service. The following screen provides details.

Home > Edit business > Publish WSDL document

Browse	Search	Publish	Profile	Manage

Publish :: Subscriptions :: Custody transfer :: **WSDL** :: XML :: XSD :: XSLT

Publish WSDL document

You can either use existing business entity by selecting its key or create a new business entity which will be used for publishing.

★ Business key	uddi:soa Find business
	Create new business
★ WSDL location (URI)	http://myhost.us.oracle.com:7001/soa-infra/services/default/HelloWorld/hwbpel_proc
Advanced mode	☐



Note


If you later change your endpoint location, you must also update the WSDL location in the Registry Control. Otherwise, UDDI invocation fails during runtime. To change the WSDL location:

1. Log in to the Registry Control.
2. Navigate to the service.
3. Change both URLs within the port type and binding information using the model key.

1.2.2. How to Configure a SOA project to Invoke a Service from the Registry

To configure a SOA project to invoke a service from the registry:


1. Open the SOA project in which to create a reference to the business service.
2. Drag a Web Service icon into the External Services swimlane. The Create Web Service dialog appears.
3. To the right of the WSDL URL field, click the icon to select a WSDL.
4. From the list at the top, select Resource Palette.
5. Expand the navigational tree.
6. Expand UDDI Registry > Business Services.
7. Select the published business service, and click **OK**. The following screen provides details.

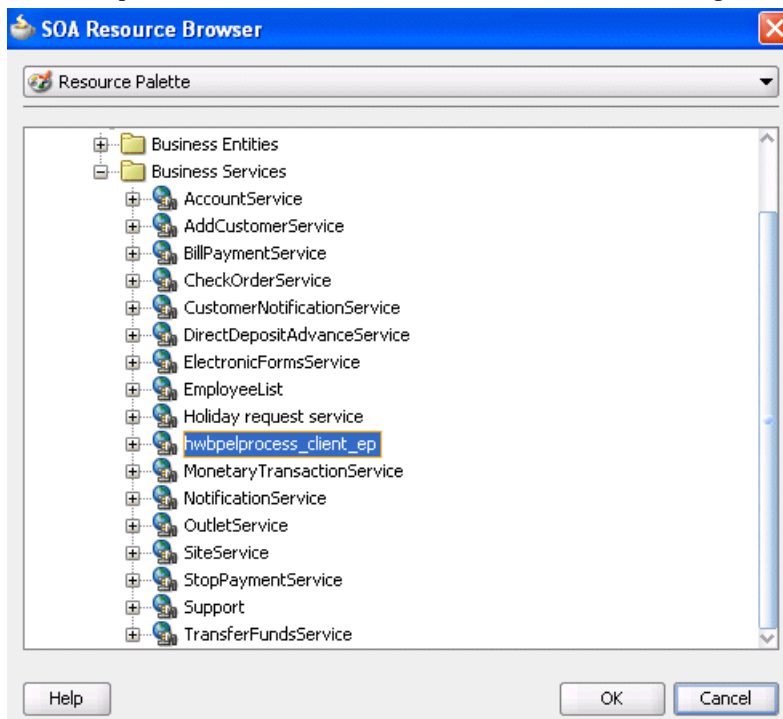

The UDDI Deployment Options dialog appears.

8. Select one of the following deployment options:
 - Dynamically resolve the SOAP endpoint location at runtime.
 - Dynamically resolve the concrete WSDL location at runtime.


The following screen provides details.

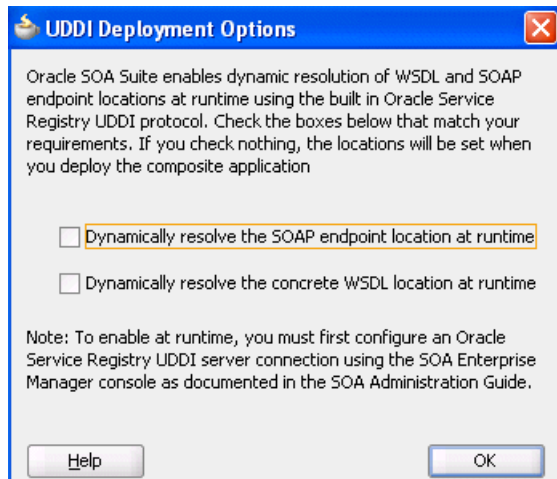

9. Click **OK**. You are returned to the Create Web Service dialog.
10. See the following section based on your selection in the UDDI Deployment Options dialog.

Dynamically Resolving the SOAP Endpoint Location


1. Complete the remaining fields in the Create Web Service dialog, and click OK. The Create Web Service dialog looks as shown in the following screen.

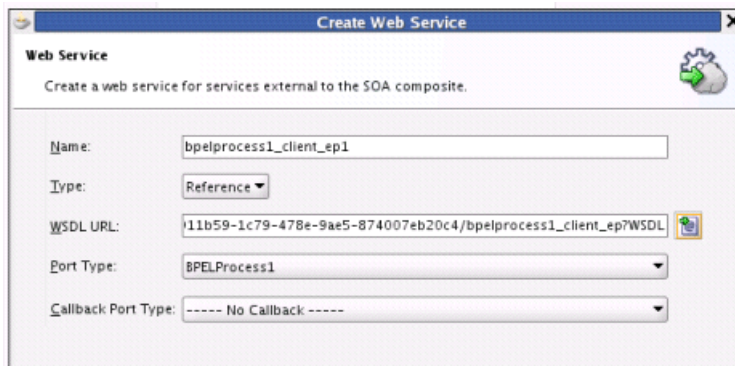

2. Verify the wiring of the reference with the appropriate service component.

Dynamically Resolving the WSDL Endpoint Location

1. Complete the remaining fields in the Create Web Service dialog, and click **OK**. The Create Web Service dialog looks as shown in the following screen.

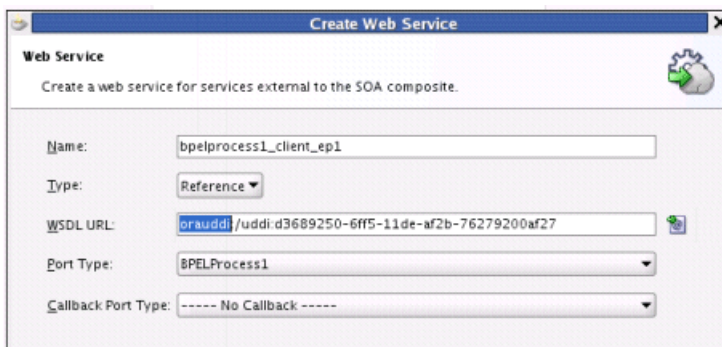


2. Verify the wiring of the reference with the appropriate service component.

1.2.3. How To Configure the Inquiry URL, UDDI Service Key, and Endpoint Address for Runtime

You can set the inquiry URL, UDDI service key, and endpoint address during runtime in Oracle Enterprise Manager Fusion Middleware Control Console.

To configure the inquiry URL, service key, and endpoint reference for runtime:

1. Log in to Oracle Enterprise Manager Fusion Middleware Control Console and navigate to Common Properties, as shown in the following screen.

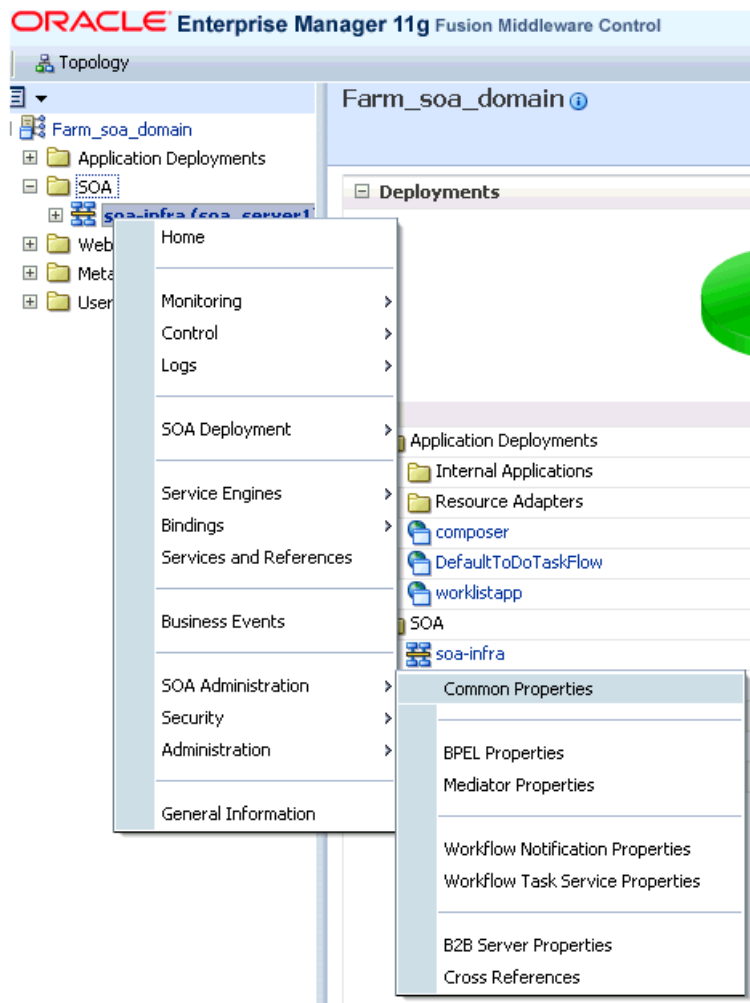

2. Specify values for the following properties:
 - In the SOA Infrastructure Common Properties page, specify the same UDDI inquiry URL in the Inquiry URL text box, as shown in the following screen, that you specified in the Create UDDI Registry Connection wizard. For example, <http://TST.myhost.com:7101/registry/uddi/inquiry>.

SOA Infrastructure Home > Common Properties

SOA Infrastructure Common Properties ?

The properties set at this level will impact all deployed composites, except those

Audit Level

Capture Composite Instance State ☐

Payload Validation ☐

UDDI Registry Properties

Inquiry URL 

User

Password

For information, see section "Administering the SOA Infrastructure, Configuring the SOA Infrastructure" in the Oracle Fusion Middleware Administrator's Guide for Oracle SOA Suite and Oracle Business Process Management Suite http://download.oracle.com/docs/cd/E21764_01/integration.1111/e10226/toc.htm.

- In the Properties page of the reference binding component, you can change the endpoint reference and service key values created during design time. For information, see section "Administering Binding Components, Configuring Service and Reference Binding Components" in the Oracle Fusion Middleware Administrator's Guide for Oracle SOA Suite and Oracle Business Process Management Suite http://fmwdocs.us.oracle.com/doclibs/fmw/11gr1ps1_final/integration.1111/e10226/toc.htm.
3. Restart the SOA Infrastructure.
 4. Exit Oracle Enterprise Manager Fusion Middleware Control Console.
 5. To see endpoint statistics, return to the Registry Control.
 6. Go to the Manage page and check statistics to see the increase in the number of invocations when not cached (the first time).

Caching of WSDL URLs occurs by default during runtime. If a WSDL URL is resolved using the orauddi protocol, subsequent invocations retrieve the WSDL URLs from cache, and not from OSR. When an endpoint WSDL obtained from cache is no longer reachable, the cache is refreshed and OSR is contacted to retrieve the new endpoint WSDL location. As a best practice, Oracle recommends that you undeploy services that are no longer required in Oracle Enterprise Manager Fusion Middleware Control Console and used by the SOA Infrastructure. Endpoint services that are shut down or retired (but not undeployed) are still reachable. Therefore, the cache is not refreshed.

If you move the business service WSDL from one host to another, ensure that you change the location in the Registry Control. No change is required in Oracle JDeveloper or Oracle Enterprise Manager Fusion Middleware Control Console.

You can optionally increase the amount of time that the WSDL URL is available in cache for inquiry by the service key. For more information, see "Configuring Service and Reference Binding Component Properties" of Oracle Fusion Middleware Administrator's Guide for Oracle SOA Suite.



Note

In 11g, caching occurs automatically.

2. Integrating with Oracle Enterprise Repository

The Oracle Enterprise Repository provides a flexible meta model for cataloguing all assets within the SOA ecosystem and their dependencies. It is primarily used during the plan, design, and build phase of the lifecycle as a single source of truth for service and composite application development.

The Oracle Service Registry is a reference point for services that have been deployed into the runtime environment. It is primarily used for programmatic, dynamic discovery and binding by elements of the SOA infrastructure. The Oracle Service Registry typically contains a subset of the metadata from the Oracle Enterprise Repository for runtime discovery.

A major use case for Oracle Service Registry is to provide a UDDI interface by which selected Oracle Enterprise Repository content may be accessed or published. The Oracle Service Registry also serves as an integration point for runtime tooling such as Service Bus, Oracle SOA Suite 11g and JDeveloper. Service Bus can automatically publish and subscribe to new or modified assets. Registries can also be federated - configurations of systems with single logical repository, and multiple registries (one for each major environment or stage in the lifecycle) are common. The Oracle Enterprise Repository and the Oracle Service Registry are synchronized using the Oracle Registry Repository Exchange Utility.

The enterprise metadata repository capabilities of Oracle Enterprise Repository together with the comprehensive support for UDDI v3 in Oracle Service Registry provide customers with the capability for managing and governing the full SOA lifecycle. Together, Oracle Enterprise Repository and Oracle Service Registry provide organizations with a system of record for managing their enterprise assets in order to provide visibility, reusability, and traceability throughout the enterprise.

For more information about integrating Oracle Enterprise Repository with OER Exchange Utility and Oracle Service Registry, see their OTN pages <http://www.oracle.com/technetwork/middleware/repository> and <http://www.oracle.com/technetwork/middleware/registry> respectively.

3. Integrating with Service Bus

Service Bus is the enterprise service bus for use with Oracle WebLogic Server.

Service Bus is part of the Oracle family of service-oriented architecture (SOA) products. Service Bus manages the routing and transformation of messages in an enterprise system. Combining these functions with its monitoring and administration capability, Service Bus provides a unified software product for implementing and deploying your Service-Oriented Architecture.

You can use Service Bus to import services from Oracle Service Registry and then publish Service Bus proxy services back to Oracle Service Registry. Service Bus imports business services from Oracle Service Registry. Proxy services are configured to communicate with the business services in the proxy service message flow. The proxy services can then be published back to Oracle Service Registry and made available for use by other domains.

For more information on integrating Oracle Service Registry with the Service Bus, see:

- "UDDI" in the [Oracle Fusion Middleware Administrator's Guide for Service Bus](#) [www.oracle.com/pls/as1111/lookup?id= OSBAG392]
- "UDDI" in the [Oracle Fusion Middleware Administrator's Guide for Service Bus](#) [www.oracle.com/pls/as1111/lookup?id= OSBAG1322]
- "Working with UDDI Registries" in the [Oracle Fusion Middleware Developer's Guide for Service Bus](#) [http://download.oracle.com/docs/cd/E13159_01/osb/docs10gr3/eclipsehelp/tasks.html#wp1129462]
- "UDDI" in the [Oracle Fusion Middleware Deployment Guide for Service Bus](#) [www.oracle.com/pls/as1111/lookup?id= OSBDG248]

Administrator's Guide

The Oracle Service Registry Administrator's Guide contains information necessary for the management of Oracle Service Registry. It is aimed at the user responsible for configuring the registry and managing permissions, approval, and replication. This guide is divided into the following sections:

[Section 1, Registry Management](#) Registry management includes also management of user accounts and permissions, taxonomy management, and management of the approval process.

[Section 2, Registry Configuration](#) How to configure the Registry Control.

[Section 4, Business Service Control Configuration](#) How to configure the Business Service Control.

[Section 5, Registry Control Configuration](#) This section covers setting the URLs, directories, contexts, timeouts and limits associated with the Oracle Service Registry interface.

[Section 6, Permissions: Principles](#) This section discusses the mechanism Oracle Service Registry provides for the management of users' rights; permissions allow the administrator to manage or make available different parts of the registry to different users.

[Section 7, Approval Process Principles](#) This section describes Approval, a process by which control is exercised over the data published to Oracle Service Registry.

[Section 8, PStore Tool](#) Describes a tool for management of protected stores for certificates and security identities.



Note

Make sure Oracle Service Registry is running before attempting to use its consoles for configuration.

The Registry Control can be found at `http://<hostname>:<port>/<context>/uddi/web` and the Business Service Control can be found at `http://<hostname>:<port>/<context>/uddi/bsc/web`.



Note

The *context* is specified during installation, default is *registry*.

Hostname and port are defined when Oracle Service Registry is installed. The default HTTP port is usually 8888.

Log on as administrator. Initially, the administrator's user name is set to *admin* and the password to *changeit*.



Note

We strongly advise you to change the password for user admin once you have logged in.



Important

Be very careful when editing the Operational business entity, or editing the taxonomy `uddi-org:types`. Modification of these structures can lead to registry instability.

1. Registry Management

1.1. Accessing Registry Management

Registry Management is a set of tasks that the administrator can address through the Registry Control. These tasks are listed in [Figure 1](#)

To access the Registry Management console:

1. Log on as administrator or as a user with privilege to display **Manage** tab as described in [Rules to Display the Manage Tab](#).
2. Click the **Manage** main menu tab.
3. Select the **Registry management** link under **Manage** tab. This returns the screen shown in [Figure 1](#).



Rules to Display the Manage Tab

The **Manage** tab is available if at least one of the following conditions is satisfied:

- You have ApiManagerPermission to all methods (*) of one or more APIs (Account,Group,Permission,Taxonomy,ApprovalManagement,Statistics,Administration Utils).
- You have ConfiguratorManagerPermission to all operations (*) and all configurations (*).
- You have ApiManagerPermission to all methods (*) of ReplicationApi and ConfiguratorManagerPermission to all operations (*) for replication configuration.
- You have ConfiguratorManagerPermission to all operations (*) for web configuration.

Figure 1. Registry Management

- [Account Management](#) - Create, edit, and delete user accounts.
- [Group Management](#) - Create, edit, and delete accounts groups.
- [Permissions](#) - Set up permissions using the Registry Control
- [Taxonomy Management](#) - Build and maintain taxonomies via the Registry Control.
- [Replication Management](#) - Set up a subscription-based replication mechanism under which a slave registry receives notification from a master registry regarding updates and changes. (For more information on replication, please see [Section 1.6, Replication Management](#).)
- [Approval Management](#) - set up requestors and approvers. This button is available only if the approval process is installed. See Installation Guide, [Section 5, Approval Process Registry Installation](#)
- [Replace UDDI keys](#) - Replace the UDDI keys of businessEntities, businessServices, tModels, and bindingTemplates.
- [Replace URLs](#) - Replace URL prefixes of accessPoint URL, OverviewDoc URL
- **Delete deprecated tModels** - This option lets the administrator permanently delete deprecated tModels. A tModel is considered deprecated when it is marked as deleted by its owner. By default, tModels are deleted permanently by users. See [Section 2.7, Node](#) how to change this behavior.
- **Transform keyed references** - This operation is necessary when the type of taxonomy keyValues or the implementation of the taxonomy transformation service have been changed. For more information see, User's Guide, [Section 5.4, Taxonomy: Principles, Creation and Validation](#).
- [Statistics](#) - This option displays two statistics tabs:

- The first tab displays information about the number of accesses made to the various UDDI interface methods. One column displays the total request counts and a count of calls that fail and therefore return exceptions.
- The second one contains counts of the main data structures (businessEntities, businessServices, tModels, bindingTemplates) in the database.

1.2. Account Management

The Oracle Service Registry administrator manages user accounts using the Registry Control. Use this console whenever you want to disable an account, change limits for a particular account, or take care of general housekeeping.

To access the Account management console:

1. Log on as administrator.
2. Click the **Registry management** link under the **Manage** tab.
3. Click the **Account management** button.

This displays a list of all accounts, as shown in [Figure 2](#). You can search accounts using the **Find users** button.

Figure 2. Find Account

The screenshot shows the 'Find account' interface. At the top, there is a 'Filter:' section with a dropdown menu set to 'Login name:' and a text input field containing '%'. To the right of this are checkboxes for 'Blocked:' and 'caseSensitive', and a 'Find users' button. Below the filter section, it says 'Display Full name: of 5'. The main part of the interface is a table with the following columns: 'Login name:', 'Full name:', and 'Email address'. There are five rows of data, each with a checkbox in the first column and a pencil icon in the last column.

	Login name:	Full name:	Email address	
☐	admin	administrator	[admin e-mail]	
☐	demo_corporate	Corporate Demo User	demo_corporate@localhost	
☐	demo_jane	Jane Demo	demo_jane@localhost	
☐	demo_john	John Demo	demo_john@localhost	
☐	oracleapplication	administrator	email@hostname	

At the bottom of the table, there is a page indicator showing '1'.

1.2.1. Create Account

To create an account:

1. On the **Find Account** page, click **Create Account** button. This returns the Create account page shown in [Figure 3](#).

Figure 3. Create Account

Create account

Required fields are marked *

* Login name:	john
* Email:	john@company.com
* Password:	*****
* Retype password:	*****
* Full name:	John Johnson
Default language:	English ▼
Description:	
Business Name:	
Phone:	
Alternate phone:	
Address:	
City:	
State/Province:	
Country:	
Zip/Postal Code:	
* User profile:	Developer Profile ▼
Blocked:	☐
Assertions limit:	10
Bindings limit:	2
Businesses limit:	1
Services limit:	4
Subscriptions limit:	5
TModels limit:	100

Create account Cancel

- Provide the information shown in . Fields marked with a red asterisk (*) are required.

Figure 4. New Account - All Fields

Create account	
Required fields are marked *	
* Login name:	
* Email:	
* Password:	
* Retype password:	
* Full name:	
Default language:	English v
Description:	
Business Name:	
Phone:	
Alternate phone:	
Address:	
City:	
State/Province:	
Country:	
Zip/Postal Code:	
* User profile:	Developer Profile v
Blocked:	☐
Assertions limit:	10
Bindings limit:	2
Businesses limit:	1
Services limit:	4
Subscriptions limit:	5
TModels limit:	100

Field descriptions (self-explanatory fields are omitted):

Default Language Code

Set the default language to be used during publishing when the language code associated with a particular field is not specified.

Use the following profile

Profile preference - Select your [preferred predefined user profile](#) from this drop down list

Blocked

Here you can enable/disable a user account. This is the account flag which prevents/permits a user from successfully logging onto the server.

Limits

These fields (**Assertions limit**, **Bindings limit**, **Businesses limit**, **Services limit**, **Subscriptions limit**, and **TModels limit**) indicate the number of these items allowed by the user. Changing default user limits is discussed in the [Accounts](#) section of Registry Configuration.



Note

If you are using approval process (you create account in *publication* or *intermediate* registry), you can set fields for Approver request transformation and Approver message transformation. Both fields determines XSL transformation for approval process mail notifications. XSL transformation is specified by the key of appropriate tModel. Approver request transformation determines transformation for mail notification about newly created approval request. Approver message transformation is used for mail notification about request's cancellation, approval or rejection. Both transformations are taken into account only for approval process called from the Registry Control

3. When finished, click **Create account**. This returns the Find account page. Note that the list of accounts now includes the account you have just created.

Account Limits

Each user account has the following limits for data saved under the account:

- Businesses limit - maximum number of businessEntities the account can hold. (1 by default).
- Services limit - maximum number of businessServices in the same businessEntity (4 by default).
- bindings limit - maximum number of bindingTemplates in the same businessService (2 by default).
- tModels limit - maximum number of tModels the account can hold. (100 by default).
- Assertions limit - maximum number of publisherAssertions the account can hold (10 by default).
- Subscriptions limit - maximum number of subscriptions an account can hold. (5 by default)

Common users can not change these limits. Only the administrator can change limits for a user or change default limits for newly created users.

The number of businessServices/bindingTemplates are checked against the limit on the user account owning the parent structure, not against the limit of the user processing the save_XXX call. For example, a user U1 owns a businessEntity BE_U1 and provides create ACL right to the user U2. The user U2 saves a new businessService under the BE_U1, total count of businessServices under the BE_U1 (no matter who is the owner) is checked against the service limit of the BE account.

Limit checking is skipped if a user who performs the operation has an ApiManagerPermission with the appropriate permission name and action:

- API (permission name)
 - `org.systinet.uddi.client.v3.UDDI_Publication_PortType` for skipping limit tests on Publishing V3 API.
 - `org.systinet.uddi.client.v2.Publish` for skipping limit tests on Publishing V2 API.
 - `org.systinet.uddi.client.v1.PublishSoap` for skipping limit tests on Publishing V1 API.
 - `org.systinet.uddi.client.subscription.v3.UDDI_Subscription_PortType` for skipping limit tests on Subscription API.
- operation (action)
 - `save_business` for skipping businesses limit test on Publishing V1/V2/V3 API

- `save_service` for skipping services limit test on Publishing V1/V2/V3 API
- `save_binding` for skipping bindings limit test on Publishing V1/V2/V3 API
- `save_tModel` for skipping tModels limit test on Publishing V1/V2/V3 API
- `add_publisherAssertions` for skipping assertions limit test on Publishing V2/V3 API
- `set_publisherAssertions` for skipping assertions limit test on Publishing V2/V3 API
- `save_subscription` for skipping subscriptions limit test on Subscription API

For more information see [Section 6, Permissions: Principles](#). By default, only the administrator has these permissions, and therefore the administrator has an *unlimited* account.

1.2.2. Edit Account

To edit an account:

1. On the **Find account** page shown in [Figure 2](#), click the **Edit Account** icon () associated with the account you want to edit.

This returns the Edit account page.

2. On the Edit account page, provide or change the information in the various fields. These are the same as the fields shown in [Figure 4](#).

Field descriptions (self-explanatory fields are omitted):

Default Language Code

Set the default language to be used during publishing when the language code associated with a particular field is not specified.

Blocked

Here you can enable/disable a user account. This is the account flag which prevents/permits a user from successfully logging onto the server.

Limits

These fields (**Assertions limit**, **Bindings limit**, **Businesses limit**, **Services limit**, **Subscriptions limit**, and **TModels limit**) indicate the number of these items allowed by the user. These are described in detail in the [Accounts](#) section of Registry Configuration.

3. When finished, click the button labeled **Save Changes**. This returns the Find account page.

1.2.3. Delete Account

To delete an account:

1. On the Find account page, check the box next to the **Login name** of the account you want to delete.
2. Click the **Delete Selected** button.
3. If you are certain you want to delete the account, click **Yes** when prompted. Note that on publication registries and standard installations of Oracle Service Registry, all published information associated with the user will be lost.

**Note**

If you are using LDAP for storing users, the user account will not be deleted from the LDAP store, because LDAP stores are treated as read-only. The delete account operation will delete an account only from the registry database.

1.3. Group Management

User groups simplify management of access rights to each UDDI data structure. You can use groups to group users with similar rights.

The administrator can:

- Create and manage user groups
- Manage group membership

Figure 5. View User Groups

Group management

Filter: Filter:

Displaying results 1 - 4 of 4

Group name	Owner	Description	Visibility		
demo_group	admin	demo group	public		
system#everyone	system	The special group that contains all users.	public		
system#intranet	system	The special group that contains users who are part of intranet domain.	public		
system#registered	system	The special group that contains all users who are logged in the UDDI registry.	public		

1

1.3.1. Create and Manage Groups

To create a new group:

1. Click on the **Manage** menu tab. On the Manage tab, select the **Registry management** link, and then click the **Group management** button. This returns the Group Management page.
2. To display all groups on the registry, click **Filter**. This returns a Group list like the one shown in [Figure 5](#).
3. Click the **Add Group** button. This returns a blank Add group page much like the one shown in [Figure 6](#).

Figure 6. Add Group Page

Add group

* **Group name:**

* **Group owner:**

Group visibility: ☐ **public** ☒ **private**

Description:

This group does not exist yet. Save its properties to be able to add group members.

Save group properties

Back

4. In the edit box labeled **Group name**, type the name of your group. In the edit box labeled **Group owner**, type the owner of the group. The default owner is Admin. These two fields are required.
5. Use the radio buttons labeled **public** and **private** to set group visibility.

Both public and private groups are visible to all users in the registry, meaning that all users are able to see which groups exist. Public and private groups differ in that members of public groups are visible to all users of the registry whereas members of private groups are visible only to the owner of the group.
6. Optionally, Enter a description of the group in the box labeled **Description**.
7. Click the **Save group properties** button. This returns the **Users list** and **Group members** sections shown in [Figure 5](#).

Figure 7. Edit Group Membership

The screenshot shows the 'Add group' web interface. At the top, there's a header 'Add group'. Below it, a form contains the following fields:

- Group name:** demo_group
- Group owner:** admin
- Group visibility:** Radio buttons for 'public' (selected) and 'private'.
- Description:** demo group

A 'Save group properties' button is located to the right of the description field.

Below the form, there are two main sections:

- Users List:**
 - Filter: Login name (dropdown) demo% (text box) [Filter]
 - Displaying results 1 - 3 of 3

	Login name	Full name
☐	demo_corporate	Corporate Demo User
☐	demo_jane	Jane Demo
☐	demo_john	John Demo

 - Navigation: [1] (highlighted), [Select all], [Select none]
- Group members:**
 - Filter: Login name (dropdown) [] (text box) [Filter]
 - Displaying results 1 - 2 of 2

	Login name	Full name
☐	demo_jane	Jane Demo
☐	demo_john	John Demo

 - Navigation: [1] (highlighted), [Select all], [Select none]

Between the two tables are navigation arrows: a right-pointing arrow (>) and a left-pointing arrow (<).

A 'Back' button is located at the bottom right of the interface.

8. In the **Users list** section, click **Filter** to display a list of all of the registry's users.
 Use the drop down list in this section to sort users by **Login name** or **Full name**.
 Use the text box to further filter users. You can use % as wildcard in this field.
9. Check the boxes next to all members you wish to include, and click the right-pointing arrow (>) to move them to the **Group members** table.
 Group members are updated in the database once you click the arrow buttons.

1.3.2. Manage Group Membership

To add or remove members from a group:

1. Click on the **Manage** main menu tab.
2. Click on the **Registry management** link. This returns the main Registry Management page.
 Click the **Group management** button. This returns the Group list shown in [Figure 5](#).
3. Enter your search criteria, then click the **Filter** button. Click **Filter** without search criteria to return a list of all groups.
4. Click the **Edit** button () in the row with the group you want to manage. This returns the Edit Group page. Specify search criterion for user accounts, then click the **Filter** button.

5. Use the arrow buttons ( and ) to add and remove users as shown in [Figure 7](#)

1.4. Permissions

This chapter describes how you can set permissions using the Registry Control. Before you start to work with permissions, we recommend reading [Section 6, Permissions: Principles](#) to become familiar with permissions principles.

Oracle Service Registry uses the same interface for managing both user permissions and group permissions. In this section we discuss user permissions, but group permissions are handled the same way.

1.4.1. Accessing Permission Management

To access permission management:

1. Log on as Administrator or as a user who has permission to set permissions, as described in [Section 6.1, Permissions Definitions](#).
2. Click the **Manage** main menu tab. On the **Manage** tab, select the **Registry management** link, and then click the **Permissions** button.
3. On the initial Select Principal screen, click **Filter**, without changing the default settings, to view a list of all users (principals).



Tip

Use the drop down list in this section, labeled **Filter:** to sort users by **Login name** or **Full name**.


Use the text box to further filter users by name. You can use % as wildcard in this field.

Select the radio button labeled **User** to manage permissions for individual users. Select the button labeled **Group** to manage group permissions.

Check the box labeled **Show only users/groups with some permission** to filter out principals who have not already been granted permissions.

This returns the list of users shown in [Figure 8](#).

Figure 8. Select Principal

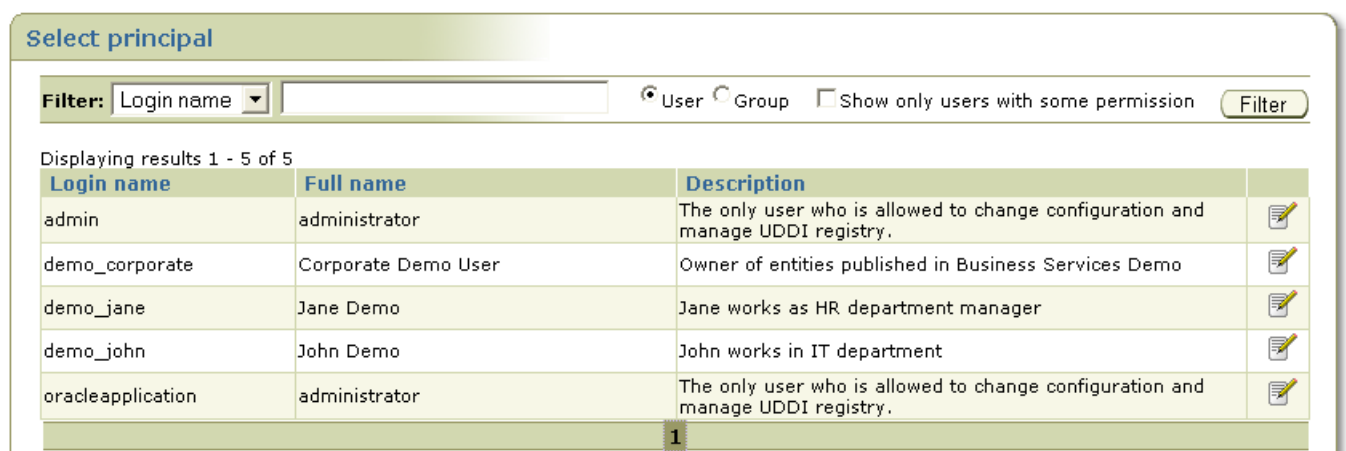

Login name	Full name	Description
admin	administrator	The only user who is allowed to change configuration and manage UDDI registry.
demo_corporate	Corporate Demo User	Owner of entities published in Business Services Demo
demo_jane	Jane Demo	Jane works as HR department manager
demo_john	John Demo	John works in IT department
oracleapplication	administrator	The only user who is allowed to change configuration and manage UDDI registry.


- Click the **Edit** icon () associated with the user or group whose permissions you wish to set.

1.4.2. Add Permission

To add permissions:

- Access permission management as described above in [Section 1.4.1, Accessing Permission Management](#).
- On the principal list page shown in [Figure 8](#), click the **Edit** icon () associated with the group or user to whom you wish to add permissions. On the returned Permissions page, click **Add permission**.
- An Add permissions page much like the one shown in [Figure 9](#) will appear.

Figure 9. Add Permission

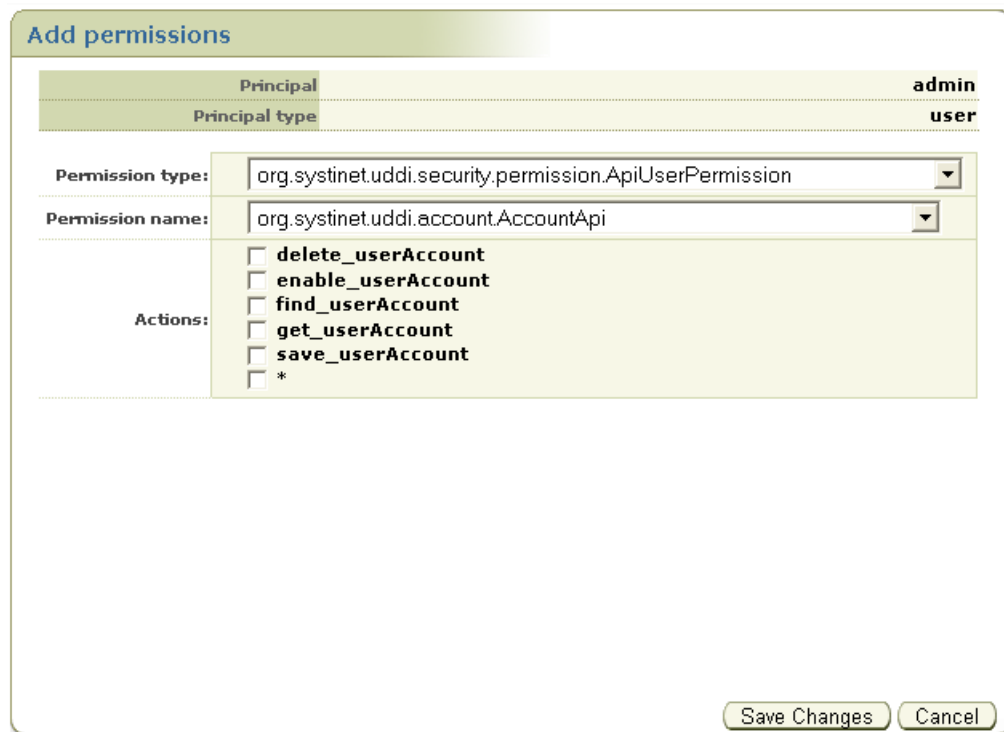

Principal	admin
Principal type	user

Permission type:

Permission name:

Actions:

- ☐ delete_userAccount
- ☐ enable_userAccount
- ☐ find_userAccount
- ☐ get_userAccount
- ☐ save_userAccount
- ☐ *

Save Changes Cancel

- Select the type of permission from the drop down list labeled **Permission type**.
 - From the drop down list labeled **Permission name**, select the name of the permission to add.
 - Check the box(es) next to the actions associated with the permission name in order to grant permission to perform those actions. Check the box next to the asterisk (*) to permit all the actions on the list.
- Click **Save Changes** to save the permission.

1.4.3. Editing and Deleting Permissions

To edit a permission:

1. On the principal list page shown in [Figure 8](#), click the **Edit** icon () associated with the user whose permissions you want to edit or delete.
2. If the principal has permissions defined, a permission list like the one shown in [Figure 10](#) will appear.

Figure 10. Permissions List

Permissions				
Principal	demo_jane			
Principal type	user			
Permission type	Api name	Actions		
org.systinet.uddi.security.permission.ConfigurationManagerPermission	account	get , set		

3. Click the **Edit** or **Delete** icon () associated with the permission you want to address.

1.4.4. Assigning Administrator's Permission

If you want to give administrator's permissions to an existing user, you must assign the following permissions types to the user:

- org.systinet.uddi.security.permission.ApiManagerPermission
- org.systinet.uddi.security.permission.ApiUserPermission
- org.systinet.uddi.security.permission.ConfigurationManagerPermission

For each **Permission type** set all **Permission names** and all **actions** using the asterisk (*)

1.5. Taxonomy Management

This chapter describes how administrators can build and maintain taxonomies using the Registry Control. Before you start to manage taxonomies, we recommend reading User's Guide, [Section 5.4, Taxonomy: Principles, Creation and Validation](#) to become familiar with taxonomy principles.

The following tasks are described in this chapter:

- [Adding a taxonomy](#) - How to add taxonomies Oracle Service Registry.
- [Finding taxonomies](#) - How to locate taxonomies in Oracle Service Registry.
- [Editing taxonomies](#) - How to change taxonomy categorization, compatibilities, and a taxonomy type that is important in range queries comparison.
- [Editing a taxonomy structure](#) - How to add categories, disable nodes, edit node values, and delete nodes.
- [Uploading a taxonomy](#)
- [Downloading a taxonomy](#)

To view the Taxonomy management page:

1. Log on as administrator.
2. Click the **Manage** tab under the Main menu, and then click on the **Registry management** link under the **Manage** menu tab.
3. Click **Taxonomy management**. This returns a blank Taxonomy management page. To view a selection of taxonomies, select a filter from the drop down list labeled **Show**. Possible filters are:
 - Favorite taxonomies
 - Enterprise taxonomies
 - All taxonomies hide system
 - All taxonomies including system

This returns a list of taxonomies similar to that shown in [Figure 11](#).

Figure 11. Find Taxonomy (Enterprise Taxonomies)

Find taxonomy

Show:

enterprise taxonomies

enterprise taxonomies

all taxonomies hide system

all taxonomies including system

Displaying results 1 - 13 of 13

Name	Description	Checked	Edit	Delete	Edit Structure	Download
ntis-gov:naics:2002	Business Taxonomy: NAICS (2002 Release)	✓				
thomasregister-com:supplierID	Thomas Registry Suppliers	✗				
ubr-uddi-org:iso-ch:3166-2003	ISO 3166 Codes for names of countries and their subdivisions. Updated with newsletters ISO 3166-1 V-1, V-2, V-3, V-4, V-5, V-6, V-7.	✓				
uddi-org:general:keywords	Category system consisting of namespace identifiers and the keywords associated with the namespaces.	✓				
uddi-org:isReplacedBy	Identifier system used to point to the UDDI entity, using UDDI keys, that is the logical replacement for the one in which isReplacedBy is used.	✓				
uddi-org:resource:reference	A checked category system used to refer to the tModel of another resource.	✓				
uddi-org:resource:type	An checked category system used to indicate the type of resource	✓				
uddi-org:types	UDDI Type Category System	✓				
uddi-org:wsdl:categorization:protocol	Category system used to describe the protocol supported by a wsdl:binding	✓				
uddi-org:wsdl:categorization:transport	Category system used to describe the transport supported by a wsdl:binding.	✓				
uddi-org:wsdl:portTypeReference	TA category system used to reference a wsdl:portType tModel	✓				
uddi-org:wsdl:types	WSDL Type Category System	✓				
unspsc-org:unspsc:v6.0501	Product and Service Category System: United Nations Standard Products and Services Code (UNSPSC)	✓				

Enterprise Taxonomies

Upload Taxonomy

Status of Upload

Add Taxonomy

Use the page shown in [Figure 11](#) to search enterprise taxonomies. You can classify taxonomies according to the following overlapping groups:

- Enterprise taxonomies - The Oracle Service Registry administrator can define which taxonomies will be present in the enterprise taxonomies list. The **Enterprise taxonomies** button located in the bottom part of [Figure 11](#) allows you to manage a list of enterprise taxonomies for all registry user accounts.
- Favorite taxonomies - All registry users can define their list of favorite taxonomies. See User's Guide, [Section favorite Taxonomies](#) for more information on how to manage your list of favorite taxonomies.
- System taxonomies - When you edit a taxonomy you can assign whether the taxonomy is a system taxonomy using the check box **System taxonomy**.

The reason for this taxonomy classification is to make taxonomy management and UDDI entity categorization easier.

If you want to manage taxonomies which are not in the enterprise taxonomy list, select **see all taxonomies including system taxonomies** from the drop down list labeled **Show**. The page shown in [Figure 12](#) will appear. You can search taxonomies using the following criteria: taxonomy name, type, compatibility, and validation.

Figure 12. Find Taxonomy

Find taxonomy

Show:

Name:

Type: ☒ categorization ☒ identifier ☒ relationship ☒
☒ categorizationGroup

Compatibility: ☒ businessEntity ☒ businessService ☒ bindingTemplate
☒ tModel

Validation: ☒ all ☐ Checked ☐ unchecked

Displaying results 1 - 10 of 74

Name	Description	Checked	Edit	Delete	Edit Structure	Download
Shippers	Shippers taxonomy	✓				
Test		✓				
demo:departmentID	Identifier of the department	✗				
demo:hierarchy	Business hierarchy taxonomy	✗				
demo:location:floor	Specifies the floor on which the department is located	✗				
dnb-com:D-U-N-S	Thomas Registry Suppliers	✗				
ebxml-org:specifications	ebXML Specifications Taxonomy	✗				
http://schemas.xmlsoap.org/ws/2003/03/localpolicyreference	Category system used for UDDI entities to point to a WS-Policy Policy Expression tModel that describes their characteristics. See WS-Policy Attachment specification for further details.	✓				
http://schemas.xmlsoap.org/ws/2003/03/policytypes	WS-Policy Types category system used for UDDI tModels to characterize them as WS-Policy - based Policy Expressions.	✓				
http://schemas.xmlsoap.org/ws/2003/03/remotepolicyreference	Category system used for UDDI entities to point to an external WS-Policy Attachment Policy Expression that describes their characteristics. See WS-Policy Attachment specification for further details.	✗				

1 2 3 4 5 6 7 8 >

1.5.1. Adding Taxonomies

You can also add a root for a taxonomy by hand and build it through the Registry Control.

To add a taxonomy:

1. Click the **Add taxonomy** button shown in [Figure 12](#).
2. Fill in as many of the fields on the Add taxonomy page, shown in [Figure 13](#), as you require. Only two fields are required to create a taxonomy: **Name** and **Categorization**, however the more information you provide, the more useful your taxonomy will be.

Figure 13. Add Taxonomy

Add taxonomy

Name: Shippers

tModel key:

Description: Shippers taxonomy

Categorization: ☒ categorization ☐ categorizationGroup ☐ identifier ☐ relationship

Compatibility: ☐ bindingTemplate ☒ businessEntity ☐ businessService ☐ tModel

Validation: ☒ checked internal
☐ checked external
☐ unchecked
 Validation service endpoints:
 Version 3:
 Version 2:
 Version 1:

Unvalidatable: ☐

System taxonomy: ☐

3. In the field labeled **Name**, name your taxonomy.
4. Skip the field labeled **tModel key**. This key is generated when you save the taxonomy.
5. In the field labeled **Description**, briefly describe the use of the taxonomy.
6. Check one or more of the boxes in the section labeled **Categorization**. Categorizations are discussed in [Section 5.4.2, Taxonomy Types](#).
7. You may enforce that your taxonomy can be used only within the UDDI structures of your choice. Select one or more of the main UDDI structure types in the section labeled **Compatibility**.
8. **Validation** In this section, specify whether the values in keyedReferences within the taxonomy will be checked or not.
 - Select **checked internal** if you want Oracle Service Registry to check keyedReferences in which the taxonomy is used against a validation service deployed within Oracle Service Registry.
 - Select **checked external** if you want Oracle Service Registry to check keyedReferences in which the taxonomy is used against a validation service deployed on a remote SOAP stack.

If you are using an external validation service, provide at least one **Validation service endpoint**.

 - Select **unchecked** if you do not want Oracle Service Registry to perform any checks on values used in keyedReferences in which the taxonomy is used.
9. Use the box labeled **Unvalidatable** to mark taxonomies as temporarily unavailable.

10. Check the box labeled **System taxonomy** if you want to mark the taxonomy for internal use. Users and administrators can filter System taxonomies easily when searching in the Business Service Control.
11. Select a **Value type** for keyValues. You can choose from three existing comparators or create a custom comparator. Existing comparators are:

- **string** - keyValues are treated as string values. If keyValues type is unknown then keyValues are treated as strings. The maximum length is 255 characters.
- **numeric** - keyValues are treated as decimal numbers. The value can have maximum 19 digits before the decimal point and maximum 6 digits after the decimal point.
- **date** - keyValues are treated as dates.

If you want to categorize using a custom comparison, you must create a new comparator tModel and implement a transformation service. The **Transformation service endpoint** must start with the `class:` prefix. Please see the [Section 5.4.4, Types of keyValues](#) and [Section Custom Ordinal Types](#) for more information.

12. Use the box labeled **Add to favorites** to mark the taxonomy as either a personal favorite. This is an option available to all users.

Check the box labeled **Add to enterprise** to mark the taxonomy specific to the particular enterprise or application. For more information, see [Section Enterprise Taxonomies](#)

13. Click **Save taxonomy**.



Note

Later, you will be able to modify all taxonomy attributes except the validation type. See [Section 1.5.3, Editing Taxonomies](#) for attribute descriptions.

1.5.2. Finding Taxonomies

To locate a taxonomy in Oracle Service Registry:

1. Log on as administrator.
2. Click the **Manage** tab under the Main menu, and then click on the **Registry management** link under the **Manage** menu tab.
3. Click **Taxonomy management**. This returns a blank Taxonomy management page. Select a filter from the drop down list labeled **Show**. Possible filters are:
 - Favorite taxonomies
 - Enterprise taxonomies
 - All taxonomies hide system
 - All taxonomies including system

This returns a list of taxonomies similar to that shown in [Figure 11](#).

4. On the returned Find taxonomy page, you can further filter the results by
 - a. name

- b. type - Types are discussed in [Section 5.4.2, Taxonomy Types](#)
 - c. compatibility
 - d. validation
5. From the list of taxonomies the fit the filter criteria, select the taxonomy you wish to view by clicking on its name.

1.5.3. Editing Taxonomies

The Registry Control makes it possible to change any taxonomy attribute except the validation type attribute. To edit a taxonomy:

1. Identify the taxonomy you want to edit as described in [Section 1.5.2, Finding Taxonomies](#).
2. Click on the **Edit Taxonomy** icon in the Find Taxonomy page shown in [Figure 12](#). This loads the Edit taxonomy page shown in [Figure 14](#).

Figure 14. Edit Taxonomy

Edit taxonomy

Name: demo:location:floor

Description: Specifies the floor on which the department is located

Categorization: ☒ categorization ☐ categorizationGroup ☐ identifier ☐ relationship

Compatibility: ☐ bindingTemplate ☒ businessEntity ☐ businessService ☐ tModel

Validation: ☐ checked internal ☐ checked external ☒ unchecked

Validation service endpoints:

Version 3:

Version 2:

Version 1:

Unvalidatable: ☐

System taxonomy: ☐

Reference to: ☐ entityKey ☐ businessKey ☐ serviceKey ☐ bindingKey ☐ tModelKey ☒ subscriptionKey

Value type: ☒ existing comparator ☐ new comparator

existing comparator: systinet-com:comparator:string

new comparator: Comparator name:
Transformer service:
endpoint:

Save taxonomy Cancel

3. In the field labeled **Name**, edit the taxonomy's name.
4. In the field labeled **Description**, briefly describe the use of the taxonomy.

5. Check one or more of the boxes in the section labeled **Categorization**. Categorizations are discussed in [Section 5.4.2, Taxonomy Types](#).
6. You may enforce that your taxonomy can be used only within the UDDI structures of your choice. Select one or more of the main UDDI structure types in the section labeled **Compatibility**.
7. **Validation** In this section, specify whether the values in keyedReferences within the taxonomy will be checked or not.
 - Select **checked internal** if you want Oracle Service Registry to check keyedReferences in which the taxonomy is used against a validation service deployed within Oracle Service Registry.
 - Select **checked external** if you want Oracle Service Registry to check keyedReferences in which the taxonomy is used against a validation service deployed on a remote SOAP stack.

If you are using an external validation service, provide at least one **Validation service endpoint**.

 - Select **unchecked** if you do not want Oracle Service Registry to perform any checks on values used in keyedReferences in which the taxonomy is used.
8. Check the box labeled **Unvalidatable** to mark the taxonomy as temporarily unavailable. When you save a checked taxonomy without a validation service, the taxonomy will be saved with **Unvalidatable** toggled on.
9. Select a **Value type** for keyValues. You can choose from three existing comparators or create a custom comparator. Existing comparators are:
 - **string** - keyValues are treated as string values. If keyValues type is unknown then keyValues are treated as strings. The maximum length is 255 characters.
 - **numeric** - keyValues are treated as decimal numbers. The value can have maximum 19 digits before the decimal point and maximum 6 digits after the decimal point.
 - **date** - keyValues are treated as dates.

If you want to categorize using a custom comparison, you must create a new comparator tModel and implement a transformation service. The **Transformation service endpoint** must start with the `class:` prefix. Please see the [Section 5.4.4, Types of keyValues](#) and [Section Custom Ordinal Types](#) for more information.

1.5.4. Editing a Taxonomy Structure

While the fields in the Edit Taxonomy page are used for controlling global attributes, the management of nodes within the taxonomy itself is handled by categories. Here you can add nodes, edit node values, and enable or disable them.



Note

Changing taxonomy structure is allowed only for checked taxonomies which are validated by the internal validation service.

Adding Categories to a Taxonomy



Note

Before we begin assigning names to a taxonomy it is important to consider how the naming system will function.

Taxonomy values in UDDI consist of name and value pairs, like entries in a hash table. As with hash table values, the trade-off between economy of space and extensibility must be taken into consideration. Too long a Value string will be wasteful; too small and it will not be extendable.

To add a node to a branch or root:

1. Identify the taxonomy you want to edit as described in [Section 1.5.2, Finding Taxonomies](#).
2. Click the **Edit taxonomy structure** icon () in the **Find taxonomy** page as shown in [Figure 12](#).



Important

This icon is only available for checked taxonomies that are validated by the internal validation service. You cannot edit the structure of unchecked taxonomies and checked taxonomies that are validated by other services.

3. The **Edit taxonomy structure** page will appear.
4. On this page, right-click on the taxonomy's folder icon to display its context menu, and select the **Add category** action or click the **Add child category to ...** icon next to the item.
5. This displays the Add category page. Provide the required **Key name** and **Key value**, and click **Save category**.

In the shipping taxonomy example shown in [Figure 15](#), we use a value algorithm that employs an array of six alphanumeric characters:

- The first element in the array signifies the first geographic division.
- The second and third elements signify further geographic subdivisions where necessary.
- The fourth character indicates transport mode.
- The fifth character is reserved for an extension to the system allowing a coded category containing a maximum of thirty-six divisions.
- The sixth can be used for a weight coding system.

Figure 15. Add Category

Add category

Taxonomy: **Shippers**

Parent category: **none** [Change parent](#)


Key name:

Key value:

Disabled: ☐

[Save category](#) [Cancel](#)

6. Check the box labeled **Disabled** to mark the category as either helper or deprecated. Note that disabled categories cannot be used as valid options in keyedReferences.
7. Click the **Save category** button. This builds the taxonomy as shown in [Figure 16](#).

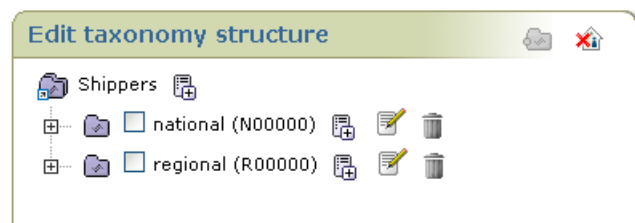Figure 16. Edit Shippers Taxonomy 1


Moving categories

To demonstrate category moving, we will extend the Shippers taxonomy from previous section.

Add four non-disabled categories with the following attributes:


- a. Key name: **national**; Key value: **N00000**.
- b. Key name: **regional**; Key value: **R00000**
- c. Key name: **american**; Key value: **A00000**.
- d. Key name: **european**; Key value: **E00000**.

The result is shown in [Figure 17](#).

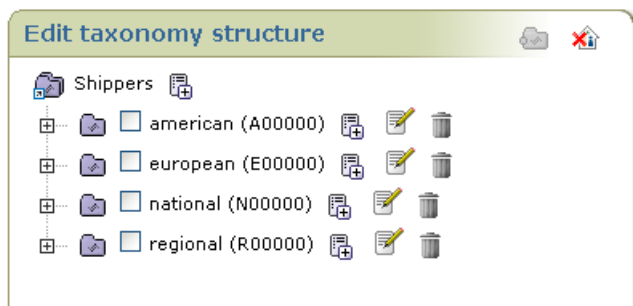Figure 17. Edit Shippers Taxonomy 2

Add a new category {world-wide,W000000} to the same level as all previous taxonomies.

We want to put both the european and american categories under the world-wide category as shown in [Figure 18](#).

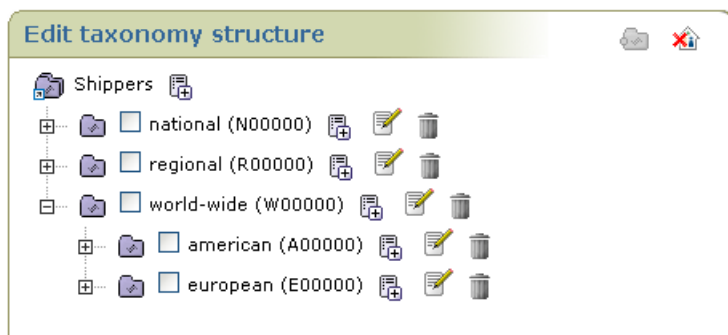Figure 18. Edit Shippers Taxonomy 3


To do so, select both the european and american categories and click **Reparent selected**. A dialog for the target category should appear. Choose the world-wide category node. The structures will be displayed as shown in [Figure 18](#).



Note

Child nodes are moved along with the parent.

The Edit taxonomy structure also allows you to see UDDI entities categorized with a category from the taxonomy tree. An example of displayed business entities categorized with the Shippers taxonomy is shown in [Figure 19](#). To switch to the view of categorized UDDI entities, click the house icon (🏠).

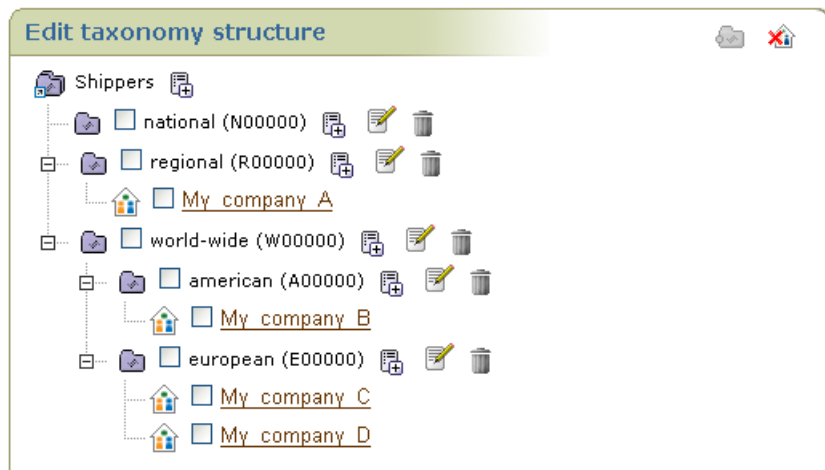Figure 19. Edit Shippers Taxonomy 3

Deleting and Disabling Nodes

There are two policy choices for dealing with categories of entities that cease to be active. Either:

- They can be marked as disabled.
- They can be deleted entirely from the taxonomy.

To delete a taxonomy node,

1. Navigate through the taxonomy tree via the Edit taxonomy page.
2. Right-click on the category node's icon and select the **Delete** option from its context menu.



Important

Because this process is irreversible you will be asked to confirm.

To disable a taxonomy node:

1. Navigate through the taxonomy tree via the Edit taxonomy page.
2. Right-click on the category node icon to display its context menu.
3. Select the **Edit category** option from the context menu. This returns the Edit category page.
4. On the Edit category page, check the option labeled **Disable**.
5. Click the **Save category** button.

1.5.5. Uploading Taxonomies

To upload a taxonomy:

1. Log on as administrator.
2. Click **Manage** main menu tab, then click on the link **Registry management** under the **Manage** menu tab.

3. Click the **Registry management** button. A list of taxonomies like the one shown in [Figure 12](#) will appear.
4. Click the **Upload taxonomy** button.



Note

The format of data on this page is described in the [Section Persistence Format](#) of the Developer's Guide.

1.5.6. Downloading Taxonomies

There are two obvious cases in which you will want to download a taxonomy from the database:

1. If you are planning to edit the taxonomy, it is good to keep a safe copy for version control. You can either edit the downloaded copy directly, and even manage it through a versioning system, or keep the downloaded copy as the safety copy and edit the taxonomy directly through the Registry Control and save changes directly to the database.
2. You may wish to replicate the taxonomy for other systems in other departments of your organization. These departments or branches may even tailor the taxonomy for their own purposes.

To download the taxonomy, click the **Download** (📄) icon. This returns the system **Save file** dialog. The default name for the destination file is the taxonomy name with a .xml extension appended. Rename the file if you choose, then save the taxonomy file as you would any other.

1.5.7. Deleting Taxonomies

If at any point you decide that a taxonomy is no longer necessary, you can delete it by clicking the **Delete taxonomy** icon (🗑️) in the **Find Taxonomy** page.



Important

Because this procedure is irreversible you will be asked to confirm your deletion.

1.6. Replication Management

Selective One-way Replication is a subscription-based replication mechanism under which a slave registry retrieves update and change notifications from a master registry. The slave registry then applies these to its own data.

Replication is set up by a set of subscriptions, each defining the set of businessEntities, businessServices or tModels being replicated. The subscription filter is a find_business, find_service or find_tModel query with no special requirements.

Each time replication is invoked, the slave registry retrieves a set of changed entities from all subscriptions. The changes are then filtered and saved to the slave registry. The filtering part does not allow changes to the operator business entity, system tModels, checked taxonomies or structures that were originally created at the slave registry; that is, it disallows replication cycling when there is also a replication from the slave to the master registry. Finally, the filtering part also changes the ACLs of published data according to the configuration of the replication. These ACLs are configurable and should be designed in a way that disallows changes to replicated data.



Important

Replicated data should not be changed because such changes in the slave registry will be lost when someone changes these entities in the master registry and the replication is automatically processed.

Replication may fail or produce warning messages. The failure may occur for one of the following reasons:

- The master registry is not accessible or the connection is broken during data replication;

- Saving/Deleting of a subscribed businessEntity on the slave registry fails.
- A replicated structure (businessEntity, businessService or tModel) references another structure that is not known at the slave registry and is not in the list of changes for the executed replication. (Unlike in version 10.3 of registry the referenced tModels need an extra subscription to retrieve them.)

A warning is produced when:

- The subscribed businessEntity is not accessible on the master registry. For example because of ACL GET denied permission;
- Referenced tModels are not accessible on the master registry;
- Referenced tModels are saved/deleted.

Replication tries to obtain all changes to subscribed data since the last successful replication.

Replication process logs can be found in the REGISTRY_HOME/log/replicationEvents.log file. You can edit the REGISTRY_HOME/conf/log4j.config and make replication logging more detailed by uncommenting the following statement:

```
log4j.category.replication_v3.com.systinet.uddi.replication.v3.ReplicatorTask=DEBUG,replicationLog
```




Important

Each registry must have a unique Operator Name. This value is set in the SMTP Configuration step during Registry installation. The Operator Names for the master registry and for any slave registry must not be the same.

1.6.1. Understanding Replication

Selective One-way Replication is a subscription-based replication mechanism under which a slave registry retrieves update and change notifications from a master registry. The slave registry then applies these to its own data.

Replications are simply a set of subscriptions created on the Master Registry that are then invoked from the Slave Registry. Registry replication is designed to propagate a set of information from one or more Master Registry instances to a Slave Registry instance, as depicted in the figure below.

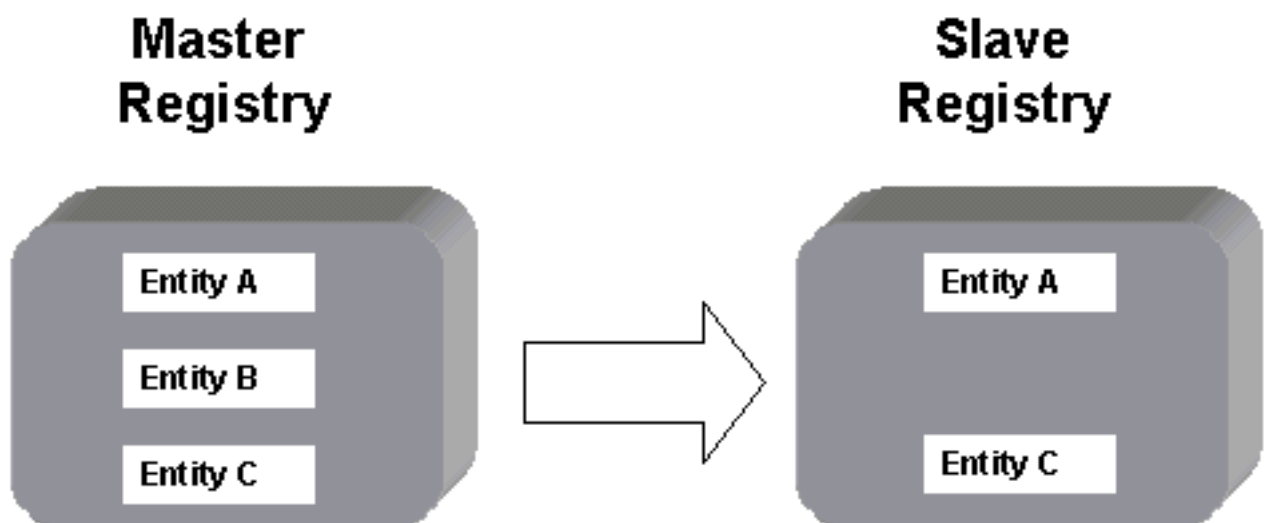

The registry administrator creates a Subscription on the Master Registry, which determines the set of information that is propagated from the Master into the Slave. The Replication is then in the Slave Registry, and determines how frequently the replication is performed.

By default, all new or updated businessEntities are copied to the Slave Registry. However it is possible to limit the data that is replicated using subscription filters configured on the Slave Registry. Note in the image above that not all entities that exist on the Master have been replicated to the Slave. In addition, the Slave can have its own data which does not exist in the Master.

At the time of execution, the Slave Registry performs a `get_subscriptionResults` call on the Master Registry based on the subscription key and time range (interval) specified in the replication. For the purposes of this introductory section, keep in mind that the subscription on the Master must be a `find_business` subscription. When the Slave runs the subscription, it gets back a set of keys corresponding to new or changed businessEntities. A businessEntity is considered to be changed if:

- Any of its businessServices or bindingTemplates have been modified.
- A new businessService or bindingTemplate was created within it.

The Slave registry will then retrieve the complete businessEntity, and store it in the Slave Registry. If an instance of the businessEntity already exists on the Slave, it will be overwritten with the replicated data. As such, the Master is the "source of truth".

Replication is set up by a subscription defining the set of businessEntities or tModels being replicated. The subscription filter is a `find_business` or `find_tModel` query with no special requirements.

Each time replication is invoked, the slave registry retrieves a set of changed businessEntities and referenced tModels. The tModels are referenced in tModelKeys of either tModelInstanceInfos or keyedReferences. These changes are then saved.

New features of replication

This release adds the following replication features:

- A Replication Definition can hold several subscriptions. tModel dependencies are resolved automatically.
- Programatic filtering of transferred entities can be configured (not documented, but available, we use it to filter some undesirable entities from replications).
- Replication time specifications are more flexible (like unix cron scheduler).
- Reports have also been improved.

Table 1. Replication feature issues

Replication feature issue		Descriptions
Number of subscriptions in replication item.		Multiple subscriptions are possible. Typical use is one for business entities, other tModels.
Failure modes.		Transactional – either fully replicated or nothing.
Some tModels are not a part of a subscription yet referenced from other replicated entities.	The tModel of the same key is missing in target registry.	The tModel will not be replicated. This will cause failure when the referencee entity is replicated. Causing a rollback of the replication.
	The tModel of the same key is present in target registry.	The tModel will not be replicated. It may contain different data.
	What happens when the tModel was originally missing and replication is run for second time. (Combination of two rows above).	The tModel will not be replicated. This will cause failure when the referencer entity is replicated. Causing a rollback of the replication. Second replication will start in same state and for same reason it will also roll back.
Some tModels are referenced from other replicated entities. But another subscription which is part of replication covers them.	The tModel of the same key is missing in the target registry.	The other subscription which covers the tModel must be part of same replication item (other wise transactional processing will end with roll back). The tModel will be replicated correctly.
	The tModel of the same key is present in target registry.	The tModel is covered by a subscription that is part of the replication. It will be replicated correctly even when it changes on source registry.
Specification of time when the replication is run.		Time is specified in format similar to the UNIX cron scheduler. This allows definition patterns like: every day at 2:00am, every hour at :15, every Saturday 1:00am.
Correctness when used in a cluster of Registries		Yes.
SSL certificate fetch in a replication item edit page.		Yes.
Reports		A colored HTML report is written to the log directory and the report is presented when replication is run directly from Web UI.
Replicate on behalf of original user (instead of fixed user) of entity.		Yes - in Tibco 2.1, Oracle 11g. No - in HP SOA Registry Foundation (probably until next version is released).

Replication feature issue	Descriptions
Replicated entities carry identification of source Registry.	Yes. Also the mark called Node or Operational Id has the effect that non-admin users cannot edit the entities on the target Registry that come from another Registry. This assures that no ordinary user can change entities so that they are out of synchronization yet not tracked by subscription (which is on the source Registry).
Configuration in database feature interaction.	Yes. No known issues.

Limitations



Important

Selective One-way Replication is *not* an implementation of the UDDI v3 Inter-Node Replication APIs as defined in the UDDI specification, which is not supported by Oracle Service Registry. The Inter-Node replication is intended to solve a different problem. Instead, the replication mechanism in Oracle Service Registry is based on a UDDI subscription-based "pull" model.

Selective One-way Replication does *not* provide Federation capabilities, such as for a federated search where one registry propagates queries to other registries and consolidates the results.



Important

Replicated data should not be changed because such changes in the slave registry will be lost when someone changes these entities in the master registry and then replication is automatically processed. Note also that replicated data should be stored under an account having administrator privileges (admin).

1.6.2. Master Registry Setup

To set up the master registry:

1. If you do not have an account on the master registry, you must create one. It can be a standard account.



Note

The default subscription limit for a new user is five. The Oracle Service Registry Administrator may increase the subscriptions limit for the user.

2. Log into the master registry account.
3. Create a subscription for the replication with the following details:
 - The subscription filter must be a `find_business` or `find_tModel` query.
 - Set the **Notification listener type** drop down list to None
 - The brief option is recommended to reduce the amount of transferred data.

For more information, please see [Section Publishing Subscriptions](#).

1.6.3. Slave Registry Setup



Note

Only the administrator of the slave registry should do this.

There are two parts to the slave registry configuration:

- Master registry information including the location of master registry endpoints for inquiry, subscription and security APIs, and the username/password pair on the master registry are needed to obtain notifications;
- Slave registry information including the username/password pair on the slave registry for the user who will own the replicated data, and the notification interval.

To set up replication:

1. Log on as Administrator to the slave registry.
2. Click the **Manage** main menu tab, then click on the link **Registry management** under the **Manage** menu tab.
3. Click **Replication management**. This returns a list of replications.
4. Click **Add replication**.
5. Fill in the form under the **Master** tab as described in [Figure 20](#).
6. Fill in the form under the **Slave** tab as described in [Figure 21](#).
7. Specify permissions for replicated data under the **Permissions** tab as shown in [Figure 22](#).
8. Click **Save replication**.

Figure 20. Add Replication Master

Add replication

Master registry

User name:

Password:

Retype password:

Base URL:

Subscription key:

MASTER
SLAVE
PERMISSIONS

- **User name** - Name of the user who created the replication subscription on the master registry
- **Password** - Password of the user who created this subscription. This password is encrypted in the configuration file.

- **URL of Master registry** The URL must contain the full Master registry URL including protocol, hostname, and application server context (if deployed). It must not contain "uddi/web" which is the address of the Console. For example, for a registry deployed to context "my_context": `https://registry.example.com:8443/my_context/`. Moreover the URLs must not refer to the slave registry itself, otherwise you may lose some data.
- **Replication subscription key** - key of the `find_business` or `find_tModel` subscription from the master registry. You can input both tModel and business entity subscriptions.

Figure 21. Add Replication Slave

- **Replication name** - Name the replication for better orientation within the list of replications.
- **Disabled** - Check this box to disable replication.
- The user name of replicated entities can be selected one of the following:
 - *Fixed user name*

Uncheck **Replicate entities on behalf of original user in Master Registry**. The following field appears: **User name** - User account name under which replicated data is stored.



Important

Unlike in previous versions, the permission for generating any keys is granted during replication. Previous versions required: `ApiManagerPermission` on `org.systinet.uddi.client.v3.UDDI_Publication_PortType` API for all * actions to be able to generate keys without having the appropriate `keyGenerator`. For more information, see User's Guide, [Section 5.2.1, Generating Keys](#). By default, the only user who can do this is the admin.

- *Same user name as in the master Registry*

Keep **Replicate entities on behalf of original user in Master Registry** checked.

The replication process assigns the same user name for replicated entities as is present in the Master Registry from which the entity is gathered. This only works when a user of the same name exists in the Slave Registry. Note that the user is not able to change or delete the entity unless he owns the `ApiManagerPermission` for the given operation as this is disallowed for entities that have a foreign Operator Name.

- **Execution time** - Specify the period between replications by selecting an option from the drop-down box or select "Other" and input a period pattern. The pattern follows the UNIX Crontab format. It consists of five fields that describe the time period in the following order:

- Minute of the hour (0-59)
- Hour of the day (0-24)
- Day of the month (1-31)
- Month of the year (Jan-Dec or 1-12)
- Day of the week (Sun-Sat or 0-6, 7 is same as 0)

Instead of a number, the patterns can contain a star character which means any value. They can also contain a star, a slash, and a number N which means that only N-th occurrence of such a time would be active. A list of comma separated numbers, months or days (without spaces) is also allowed. Examples:

- 15 * * * *

every hour on 15th minute

- */10 * * * *

every 10 minutes

- 0 0 * * Sat-Sun

every weekend at midnight

- 0 18 1 *

6:00 PM on the 1st day of any month

- 0 */6 * * Fri

every sixth hour on Friday

- **Last replication time** - The date and time when the last replication occurred.

Figure 22. Add Replication Permissions

Add replication

Permissions

User/group name	Find	Get	Save	Delete	Create		
demo_corporate	✗	✗	✗	✗	✗		
demo_jane	✓	✓	✓	✓	✓		
demo_john	allowed	allowed	allowed	allowed	allowed		

Find users/groups

Filter: Login name demo% ☐ user ☐ group **Filter**

Displaying results 1 - 3 of 3

	Login name	Full name	Description
☐	demo_corporate	Corporate Demo User	Owner of entities published in Business Services Demo
☐	demo_jane	Jane Demo	Jane works as HR department manager
☐	demo_john	John Demo	John works in IT department

1

Select all Select none Add selected users

Save replication Cancel

In the page shown in [Figure 22](#), the administrator can set up permissions for replicated data. If you do not enter any data on this page, all users from the slave registry have find and get permissions on replicated data.

To specify permissions on replicated data:

1. Enter a filter criteria for users or groups, and click **Filter**.
2. Check the box in front of users or groups. Then, click the **Add selected users** button. Selected users or groups will be added to the permissions list.
3. Click the **Edit** icon to change permissions for Find, Get, Save and Delete operations
4. Click the **Save replication** button.



Tip

Use the button **Replicate now** on the **replication** page to test the replication settings.

1.7. Approval Process Management

This chapter describes how administrators can manage the approval publishing process. We will show you how to set up requestors and approvers using the Registry Control. Before you start, we recommend that you read [Section 7, Approval Process Principles](#).

1.7.1. Loading the Approval Management Page

The tasks described in this section are performed from the Approval management page. To load this page:

1. Log on as administrator.
2. Click the **Manage** main menu tab, then select the **Registry management** link under the **Manage** menu tab.
3. Click **Approval management**. This returns a list of approvers similar to that shown in [Figure 23](#).

Figure 23. Approval Management

The screenshot shows the 'Approval management' page. At the top, there is a search bar and a 'Filter' button. Below this, it says 'Displaying results 1 - 3 of 3'. A table lists three approvers: 'a', 'admin', and 'autoapprover'. Each row shows the 'Approver name', 'Type' (all are 'User'), and a link 'Requestors...'. At the bottom right, there are 'Back' and 'Modify approvers' buttons.

Approver name	Type	
a	User	Requestors...
admin	User	Requestors...
autoapprover	User	Requestors...

1

Back Modify approvers

1.7.2. Create Approver

To create an approval contact:

1. Click the **Modify approvers** button on the Approval management page shown in [Figure 23](#)
2. This returns the Modify approvers page as shown in [Figure 24](#)

The left side of this page, labeled **Principal list** is a list of all users and groups on the registry. The administrator may make any name on this list into an approval contact.

The right side, labeled **Approvers** is a list of all approvers on the registry.

3. Check the box next to the login name of a user you would like to turn into an approver and click the right-facing arrow (➤). If you would like to create an approver from a group, check the group box and use the right-facing arrow.
4. Click the **Save approvers** button.



Tip

Using the left-facing arrow buttons, you can deselect approvers in the same way.

Figure 24. Modify Approvers

Modify approvers

Principal list

Login name ☒ user ☐ group

Displaying results 1 - 6 of 6

Login name	Full name
☐ a	a
☐ admin	administrator
☐ autoapprover	automatic approver
☐ demo_corporate	Corporate Demo User
☐ demo_jane	Jane Demo
☐ demo_john	John Demo

Approvers

Principal name	Type
☐ admin	User
☐ autoapprover	User
☐ demo_john	User

1.7.3. Create Requestor

To create a requestor from a user:

1. On the Approval management page shown in [Figure 23](#) click the link labeled **Requestors** next to an Approver type.
2. This returns the Modify requestors page shown in [Figure 25](#)

The Requestors page consists of two lists:

- A list of all users and groups on the registry labeled **principals**
 - A list of users and groups, labeled **Requestors** assigned to the selected approver
3. Select a user or group from the **Principals** column (or click **Select all** if you choose), and click the right-pointing arrow () to turn the user(s) into requestors.
 4. Click the **Save requestors** button.



Tip

Using the left-pointing arrow button, you can deselect requestors in the same way.

Figure 25. Modify Requestors

Modify requestors

Approver: demo_john
Approver type: User

Principal list

Login name: ☒ user ☐ group

Displaying results 1 - 6 of 6

	Login name	Full name
☐	a	a
☐	admin	administrator
☐	autoapprover	automatic approver
☐	demo_corporate	Corporate Demo User
☐	demo_jane	Jane Demo
☐	demo_john	John Demo

1

Requestors

Principal name	Type
☐ demo_jane	User

1.8. Replacing UDDI Keys

Replacing keys of businessEntities, businessServices, tModels, and bindingTemplates is intended to correct errors in keys before entities are commonly used by users.

To access the key replacement page:

1. Log on as administrator.
2. Click the **Registry management** link under the **Manage** tab.
3. In the row labeled **Replace UDDI keys**, click the appropriate button **tModel**, **business**, **service**, or **binding**.



Important

The replace key operation can break digital signatures on changing entity as well as on other entities which reference to the changing entity.

1.8.1. Replacing tModel keys

When you replace a tModel key, the key will be updated in the following data structures:

- tModel
- keyedReferenceGroups
- keyedReferences
- tModelInstanceInfos
- publisherAssertions
- addresses

- taxonomies

1.8.2. Replacing businessEntity keys

When you replace a businessEntity key, the key will be updated in the following data structures:

- businessEntity
- services
- keyedReferences

1.8.3. Replacing businessService keys

When you replace a businessService key, the key will be updated in the following data structures:

- businessService
- bindingTemplates
- keyedReferences

1.8.4. Replacing bindingTemplate keys

When you replace a bindingTemplate key, the key will be updated in the following data structures:

- bindingTemplate
- keyedReferences
- subscriptions
- hostingRedirector
- accessPoint with bindingTemplate useType

1.9. Replace URLs

Replace URL prefixes of accessPoint URL in binding template, OverviewDoc URL in tModelInstanceInfo and tModel to correct wrong or obsolete accessPoint URLs, OverviewDoc URLs. Of course, you can edit these values by editing those entities. However, in case many URLs have the same obsolete prefix, this feature will replace all URLs matched with the prefix entered by user.

To access the URLs replacement page:

1. Log on as administrator.
2. Click the **Registry management** link under the **Manage** tab.
3. Click the button **Replace URLs**.

Figure 26. Replace URLs

The screenshot shows a web-based dialog box titled "Replace URLs". It features two text input fields. The first field is labeled "Old URL prefix:" and the second is labeled "New URL prefix:". Both fields are currently empty. At the bottom right of the dialog, there are two buttons: "Replace URLs" and "Cancel".

- Old URL prefix: URL prefix of the following entities
 - tModel - OverviewDoc URL
 - tModelInstanceInfo - overviewDoc URL and DiscoveryURL
 - binding template - accessPoint URL
- New URL prefix: the URL prefix will be used to replace URLs matching the Old URL prefix

1.10. Registry Statistics

Registry statistics include statistics on:

- invocations of registry APIs;
- UDDI structure counts generally;

To access the registry statistics page:

1. Log on as administrator.
2. Click the **Registry management** link under the **Manage** tab.
3. Click the **Statistics** button.
4. Click the **API Usage** tab and you will see a page as in [Figure 27](#) showing the number of requests for each API, number of unsuccessful requests and datetime of last API call. You can reset count separately for each API by clicking the **Reset** button or reset counts for all API by clicking on the **Reset all statistics**.

Figure 27. Statistics - API usage


Oracle Application Server Service Registry statistics

UDDI API usage

Name	Requests	Errors	Last call
org.systinet.uddi.client.v3.UDDI_Inquiry_PortType	346	1	Apr 24, 2006 2:44:01 PM
find_tModel	79	0	Apr 24, 2006 2:44:01 PM
get_businessDetail	16	0	Apr 24, 2006 2:28:11 PM
find_binding	63	0	Apr 24, 2006 2:44:01 PM
get_operationalInfo	60	0	Apr 24, 2006 2:28:17 PM
find_service	63	0	Apr 24, 2006 2:44:01 PM
find_business	65	1	Apr 24, 2006 2:44:01 PM
Reset			
org.systinet.uddi.statistics.StatisticsApi	2	1	Apr 24, 2006 2:48:45 PM
get_accessStatistics	2	1	Apr 24, 2006 2:48:45 PM
Reset			
org.systinet.uddi.configurator.ConfiguratorApi	13	0	Apr 24, 2006 2:46:03 PM
get_configuration	13	0	Apr 24, 2006 2:46:03 PM
Reset			
org.systinet.uddi.client.category.v3.CategoryApi	89	0	Apr 24, 2006 2:44:00 PM
find_category	6	0	Apr 24, 2006 2:41:20 PM
get_rootCategory	36	0	Apr 24, 2006 2:44:00 PM
get_rootPath	6	0	Apr 24, 2006 2:25:45 PM
get_category	34	0	Apr 24, 2006 2:40:14 PM
add_category	5	0	Apr 24, 2006 2:15:46 PM
move_category	2	0	Apr 24, 2006 2:16:51 PM
Reset			
org.systinet.uddi.client.v3.UDDI_Security_PortType	6	1	Apr 24, 2006 2:48:45 PM
discard_authToken	1	0	Apr 24, 2006 2:41:06 PM
get_authToken	5	1	Apr 24, 2006 2:48:45 PM
Reset			
org.systinet.uddi.client.taxonomy.v3.TaxonomyApi	167	0	Apr 24, 2006 2:44:00 PM
save_taxonomy	1	0	Apr 24, 2006 2:07:24 PM
delete_taxonomy	1	0	Apr 24, 2006 2:39:31 PM
find_taxonomy	113	0	Apr 24, 2006 2:43:55 PM
get_taxonomy	52	0	Apr 24, 2006 2:44:00 PM
Reset			
org.systinet.uddi.client.v3.UDDI_Publication_PortType	28	1	Apr 24, 2006 2:28:16 PM
save_business	13	1	Apr 24, 2006 2:28:16 PM
get_registeredInfo	15	0	Apr 24, 2006 2:28:16 PM
Reset			
org.systinet.uddi.account.AccountApi	20	0	Apr 24, 2006 2:48:45 PM
find_userAccount	16	0	Apr 24, 2006 2:28:11 PM
get_userAccount	4	0	Apr 24, 2006 2:48:45 PM
Reset			
org.systinet.uddi.group.GroupApi	4	0	Apr 24, 2006 2:48:45 PM
where_amI	4	0	Apr 24, 2006 2:48:45 PM
Reset			

[Reset all statistics](#)

5. You can click on the **Structure** tab. The page similar as shown in [Figure 28](#) appears. On that page you can see number of UDDI entities stored in Oracle Service Registry.

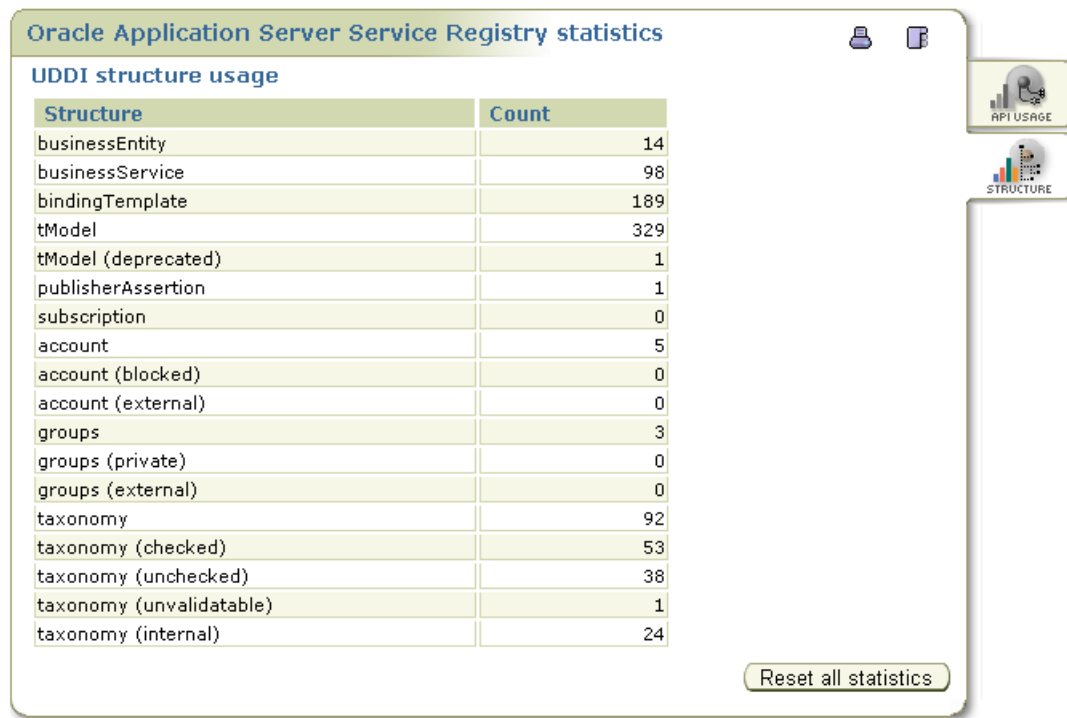Figure 28. Statistics - Structure

1.11. Management of configuration - User Interface

Configuration Management User Interface is available on the Registry Console, "Manage" tab, "Registry management" sub-tab (default), **Configuration management** button.

This management tool has two main parts designed for the following tasks:

1. Inspection of current configurations and their history.
2. Saving configuration states into collections to compare or restore them later.

1.11.1. Current configurations and their history

View configuration

Figure 29. View of current configurations

Configuration management

A list of current configurations and their history

The list contains links to current configurations. Their older versions are accessible under "View all revisions" column. Older configurations are not retained indefinitely, they are deleted according to configuration management settings. You can sort alphabetically or by time by clicking on the relevant column heading.

Configuration Name	Node ID	Time Stamp	View all revisions
account		Sep 4, 2006 1:21:27 PM	+
account_core		Sep 4, 2006 1:31:11 PM	+
account_list		Sep 4, 2006 1:21:27 PM	+
admin_utils		Sep 4, 2006 1:21:27 PM	+
application_core		Sep 4, 2006 1:45:16 PM	+
bsc		Sep 4, 2006 1:21:33 PM	+
bsc_web		Sep 4, 2006 1:21:33 PM	+
bsc_web_component		Sep 4, 2006 1:21:33 PM	+
category_v3		Sep 4, 2006 1:21:27 PM	+
component_description		Sep 4, 2006 1:21:33 PM	+
config_management		Sep 4, 2006 1:21:27 PM	+
configurator	cluster-2	Sep 4, 2006 1:24:06 PM	+
	cluster-1	Sep 4, 2006 1:21:27 PM	+
custody_v3		Sep 4, 2006 1:21:27 PM	+

Back

CONFIGURATIONS
COLLECTIONS

This view shows current configurations. You can either sort it alphabetically or by time by clicking on the relevant column heading. Configurations that are local to a cluster node are displayed for all nodes. You can switch to the named collections view with the left tab.

Two actions are available:

1. View the current configuration by clicking on the configuration name or in the case of cluster-local configurations on its Node ID.
2. View all versions of some configuration by clicking on the icon in the last column.

When the list is sorted by time the configurations with the same name but different Node IDs are not grouped together.

All versions

Figure 30. View of all versions

All versions					
A list of versions for the selected configuration					
This is the list of all versions of the configuration with name 'application_core'.					
Configuration Name	Time Stamp	Node ID	Configuration Space	File Name	Latest
application_core	Sep 4, 2006 1:45:16 PM		default	application_core.xml	yes
application_core	Sep 4, 2006 1:45:11 PM		default	application_core.xml	
application_core	Sep 4, 2006 1:45:11 PM		default	application_core.xml	
application_core	Sep 4, 2006 1:40:31 PM		default	application_core.xml	
application_core	Sep 4, 2006 1:40:27 PM		default	application_core.xml	
application_core	Sep 4, 2006 1:40:27 PM		default	application_core.xml	
application_core	Sep 4, 2006 1:31:21 PM		default	application_core.xml	
application_core	Sep 4, 2006 1:31:18 PM		default	application_core.xml	
application_core	Sep 4, 2006 1:31:18 PM		default	application_core.xml	
application_core	Sep 4, 2006 1:31:11 PM		default	application_core.xml	

This view shows all versions of a specified configuration. If such a configuration is local, multiple entries may be marked as latest, one for each node. Latest nodes are also highlighted. The Length of this list is limited by rules for retaining older configurations (see Configuration in database section).

Clicking on a configuration name will show the configuration which is described in the row.

Configuration view

Figure 31. Configuration view

View Configuration

Configuration View

The configuration shown below is for configuration name 'application_core', node ID '', space 'default', and file name 'application_core.xml' from Sep 4, 2006 1:45:11 PM.

Relation	Time Stamp	Differences	View
Latest (Later)	Sep 4, 2006 1:45:16 PM		
This	Sep 4, 2006 1:45:11 PM		This
Older	Sep 4, 2006 1:45:11 PM		
Oldest	Sep 4, 2006 1:31:11 PM		

```

<?xml version="1.0" encoding="UTF-8"?>
<config name="application_core">
  <!-- configuration of jobExecutor -->
  <key>sYg$gmpqnMZcqpbgZMY/H1/zFPw2TcxI</key>
  <limits>
    <notification>
      <emails unit="percent">
        <mail limit="100" type="businessEntity"/>
        <mail limit="100" type="businessService"/>
        <mail limit="100" type="bindingTemplate"/>
        <mail limit="100" type="businessService"/>
      </emails>
      <defaultMessageXSLTransformationTModel>uddi:systinet.com:limit:defaultMessageEmailXSLT</defaultMessageXSLTransformationTModel>
    </notification>
  </limits>
</config>

```

Back

Back to Management


Reactivate

This view shows specified configuration information including the content. There are also links to related versions of the configurations (such as latest, later, older, or oldest). You can see these related configurations by clicking on the view icon or compare differences between the displayed version and a selected version by clicking the differences icon in the selected row.

If the displayed configuration is not the latest, a **Reactivate** button appears in the window. Its function is to make the displayed configuration active (after confirmation). It does so by adding it as a new configuration entry with the latest time stamp.

Differences

Figure 32. Differences

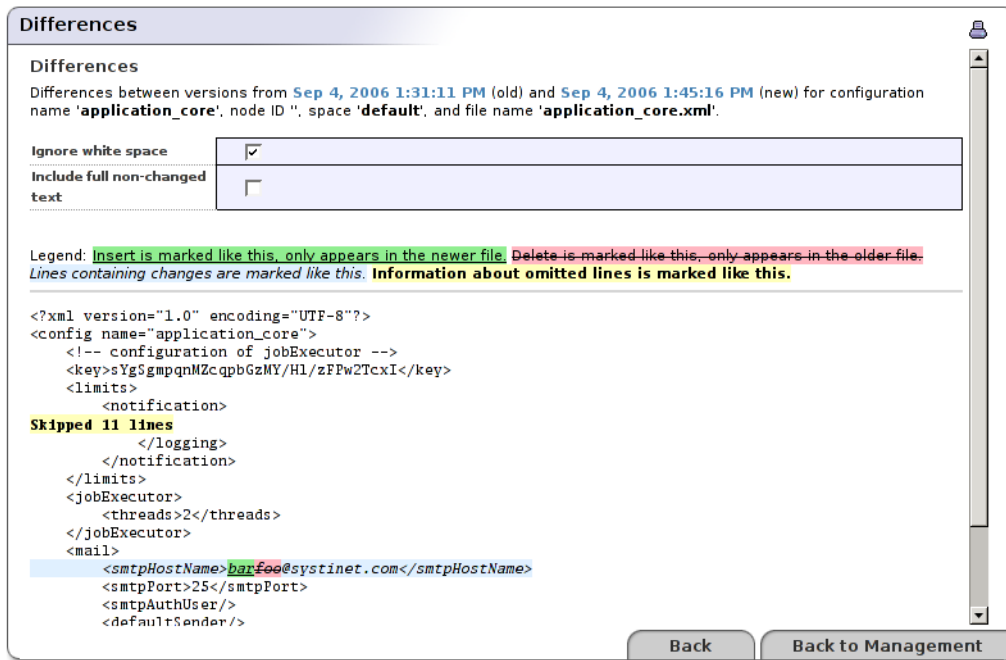

This view can be invoked from the configuration view. It shows a comparison between two versions of the configuration. You can alter the options for differences comparison: whether it is case sensitive and whether the full text is shown or omitted.

1.11.2. Named collections of configuration

List of named collections

Figure 33. List of named collections

The screenshot shows a web application titled "Configuration management". It features a sidebar with "CONFIGURATIONS" and "COLLECTIONS" tabs. The main content area is titled "Named Collections of Configurations" and includes a descriptive paragraph. Below this is a table with two rows of named collections. At the bottom, there is a form to create a new collection with fields for "Name" and "Description", and a "Make a snapshot" button. A "Back" button is located at the bottom right of the main content area.

Name	Description	Time Stamp	Delete	All Differences	Activate
Version from 20060904	this version was tested to work ok	Sep 4, 2006 1:33:33 PM			
Version from 20060904 (2)	this version works too	Sep 4, 2006 1:42:18 PM			

Fill-in a name and press the button below to create a collection and populate it with the current set of configurations.

Name:

Description:

This view shows named collections of configurations which are stored in the database. It also allows you to capture the current state of configurations into such a collection so that you can later compare or restore them.

Creating new collections is easy. Just fill in the name and optionally the description of the collection and press the **Make a snapshot** button.

Once some collections are created, you can view their contents (by clicking the name) and compare them to the current set of configurations (by clicking the differences icon).

Activation of a collection means that all configurations that the collection holds will be added as new current configurations. Activation can be done on the collection as a whole (by clicking the icon in this view) or selectively on specified configurations (by button in the collection configuration view). Before activation proceeds a confirmation is required.

All Differences

Figure 34. All Differences

All Differences

This is view of differences between named collection and current active (latest) configurations.

Ignore white space ☒

Include full non-changed text ☐

Legend: Insert is marked like this, only appears in the newer file. Delete is marked like this, only appears in the older file. Lines containing changes are marked like this. Information about omitted lines is marked like this.

Configuration from collection (old):

Configuration Name	Node ID	Configuration Space	File Name	Time Stamp
security		default	security.xml	Sep 4, 2006 1:31:08 PM

Current active configuration (new):

Configuration Name	Node ID	Configuration Space	File Name	Time Stamp
security		default	security.xml	Sep 4, 2006 1:45:12 PM

Differences:

```
<?xml version="1.0" encoding="UTF-8"?>
<config name="security" savingPeriod="5000">
  <!-- mapping of common interface to relational-database implementation -->
  <backendMapping name="backendMapping">
    <interfaceMapping
      className="com.systinet.uddi.security.database.DBSecurityApiImpl"
      interfaceName="com.systinet.uddi.security.SecurityBackendApi"/>
  </backendMapping>
  <security>
    <authInfoTimeOut>1800</authInfoTimeOut>
    <keyIdentity>authTokenIdentity</keyIdentity>
    <keyPassword_coded>vcV1lo4QBpY9oEDgfgqAfw==</keyPassword_coded>
    <tokenCreationTimeTolerance>5000</tokenCreationTimeTolerance>

    <tokenFactory>com.systinet.uddi.security.token.NonSSOTokenFactory</tokenFactory>
  </security>
</config>
```

Configuration from collection (old):

Back Back to Management

This is what a comparison between a collection and the current set of configurations looks like. It shows the differences of matching pairs of all configurations. Matching configurations where no differences appear are listed below. Non-matching configurations (when the configuration appears in the collection only or in the current set only) are also listed below.

You can alter the options for differences comparison: whether it is case sensitive and whether the full text is shown or omitted. It is not recommended to show full text in all differences because the resulting page might get very long.

View collection

Figure 35. View collection

View Collection

This is a named collection. It is persistent and will not be automatically deleted when it is old. You can delete it manually.

Collection name	Collection Time Stamp	Collection Description
Version from 20060904	Sep 4, 2006 1:33:33 PM	this version was tested to work ok

This collection contains these configurations:

Configuration Name	Node ID	Configuration Space	File Name	Time Stamp
account		default	account.xml	Sep 4, 2006 1:21:27 PM
account_core		default	account_core.xml	Sep 4, 2006 1:31:11 PM
account_list		default	account_list.xml	Sep 4, 2006 1:21:27 PM
admin_utils		default	admin_utils.xml	Sep 4, 2006 1:21:27 PM
application_core		default	application_core.xml	Sep 4, 2006 1:31:21 PM
bsc		BSC	bsc.xml	Sep 4, 2006 1:21:33 PM
bsc_web		BSC	web.xml	Sep 4, 2006 1:21:33 PM
bsc_web_component		BSC	web_component.xml	Sep 4, 2006 1:21:33 PM
category_v3		default	category_v3.xml	Sep 4, 2006 1:21:27 PM
component_description		BSC	component_description.xml	Sep 4, 2006 1:21:33 PM
config_management		default	config_management.xml	Sep 4, 2006 1:21:27 PM
configurator	cluster-1	default	configurator.xml	Sep 4, 2006 1:21:27 PM
configurator	cluster-2	default	configurator.xml	Sep 4, 2006 1:24:06 PM

Back Back to Management

Collection content usually looks like this. When you click on the configuration name its view with actions is displayed.

View configuration

Figure 36. View configuration

View Configuration

View Configuration

Collection name	Collection Time Stamp	Collection Description
Version from 20060904	Sep 4, 2006 1:33:33 PM	this version was tested to work ok

Configuration Name	Node ID	Configuration Space	File Name	Time Stamp
application_core		default	application_core.xml	Sep 4, 2006 1:31:21 PM

```
<?xml version="1.0" encoding="UTF-8"?>
<config name="application_core">
  <!-- configuration of jobExecutor -->
  <key>sYgSgmpqnMZcqpbgZMY/H1/zFPw2TcxI</key>
  <limits>
    <notification>
      <emails unit="percent">
        <mail limit="100" type="businessEntity"/>
        <mail limit="100" type="businessService"/>
        <mail limit="100" type="bindingTemplate"/>
        <mail limit="100" type="businessService"/>
      </emails>
      <defaultMessageXSLTransformationTModel>uddi:systinet.com:limit:defaultMessageEmailXSLT</defaultMessageXSLTransformationTModel>
    </notification>
    <logging>
      <startupMsg>true</startupMsg>
      <msgAfterPublishing>false</msgAfterPublishing>
    </logging>
  </limits>
</config>
</jobExecutor>
```

Back Back to Management Differences Activate

This view shows a configuration stored inside a collection. You can see the comparison between this configuration and the current configuration by clicking on button **Differences**. You can also make this configuration the current with the **Activate** button (after confirmation).

2. Registry Configuration

Registry configuration is used whenever you want to set up the database, registry parameters, or account properties.

To access Registry configuration:

1. Log on as administrator or as a user with privilege to display the **Manage** tab. For more information, see [Rules to Display the Manage Tab](#).
2. Click the **Manage** main menu tab.
3. Select the **Registry configuration** link under **Manage** tab. This returns the Registry configuration panel shown in [Figure 37](#).

Figure 37. Registry Configuration

The screenshot shows the 'Registry configuration' window. It has a title bar with a printer icon and a close icon. On the right side, there is a vertical sidebar with icons and labels for different configuration sections: CORE CONFIG (selected), DATABASE, SECURITY, ACCOUNT, GROUP, SUBSCRIPTION, and NODE. The main area is divided into two tabs: 'Job Executor' and 'Mail'. The 'Job Executor' tab is active, showing a 'Threads' input field with the value '2'. The 'Mail' tab is also visible, showing fields for SMTP Host Name, SMTP Host Port, SMTP Auth User, SMTP Auth Password, Retype password, Default sender email, and Default sender name. At the bottom right, there are 'Save configuration' and 'Cancel' buttons.

Application Core	
Job Executor	
Threads:	2

Mail	
SMTP Host Name:	smtp.mycomp.com
SMTP Host Port:	25
SMTP Auth User:	smtpuser
SMTP Auth Password:	*****
Retype password:	*****
Default sender email:	uddiadmin@mycomp.com
Default sender name:	uddiadmin

Save configuration Cancel

The Registry configuration panel includes the following tabs:

- [Core Config](#)
- [Database](#)
- [Security](#)

- [Account](#)
- [Group](#)
- [Subscription](#)

In this part of the chapter, each of these sections settings is described in detail. Fields marked with an asterisk (*) are the most important.

2.1. Core Config

Threads

Maximum number of threads used in statement execution

The default is 2.

Mail

SMTP Host Name, SMTP Host Port, SMTP Auth User, SMTP Auth Password, Default sender email, and Default sender name are used to set up the entity that sends emails on behalf the registry administrator.

Retries in case of DB deadlock

The maximum number of retries in case of DB deadlocks. This option doesn't appear in the Registry Configuration, you can edit the option manually in the configuration file `REGISTRY_HOME\app\uddi\conf\application_core.xml`. After editing, add the attribute `updateDB="true"` to the top level config tag to update the database from the edited configuration file. See more at [Section 3. Configuration in Database](#)

2.2. Database

This section details how to set up the database connection. The default values are set according to the database chosen at installation.



Note

Database installation, that is, creating the database schema and loading basic data, is described in [Section 4. Database Installation](#).

Figure 38. Registry Configuration - Database

Registry configuration

Database

Driver Settings

Connection provider:	Direct database connection
Backend type:	MS SQL
Host name:	10.0.60.150
Port:	1433
Database name:	thang121_Or52311
User name:	tmthang
User password:	••••••
Retype password:	••••••

Connection Pool

Default pool size:	2
Maximum pool size:	4
Pool cleaning interval:	10

Database cache

Enabled:	☒

Pessimistic Locking

Enabled:	☐

Save configuration Cancel

Backend type *

A menu of databases from which to select the vendor of your database.

Hostname *

Database host name or IP address, for example, dbserver.mycompany.com

Port *

Database port number.

Database Name *

Database name; for example, uddinode

User Name *

User name; uddiuser by default

User Password *

Database user password; uddi by default

Default pool size

Count of concurrent database connections initialized at start time

Max pool size

Maximum count of concurrent database connections. Each request books one connection until the request is served. If all connections are booked and new request comes in, the connection pool creates a new connection till the maximum count is reached. If this maximum is reached and new request comes in, this request must wait for a free connection to be released by a previous request.

Pool cleaning interval

How often database connections are closed over the default count. This value represents time in hours.

Database cache

This is used for performance optimization.


Pessimistic Locking

This option is not recommended unless there are excessive deadlock recovery messages in the log. It affects performance.

2.3. Security

On the **Security** tab, you can configure your digital signature token and key properties.

Figure 39. Registry Configuration - Security

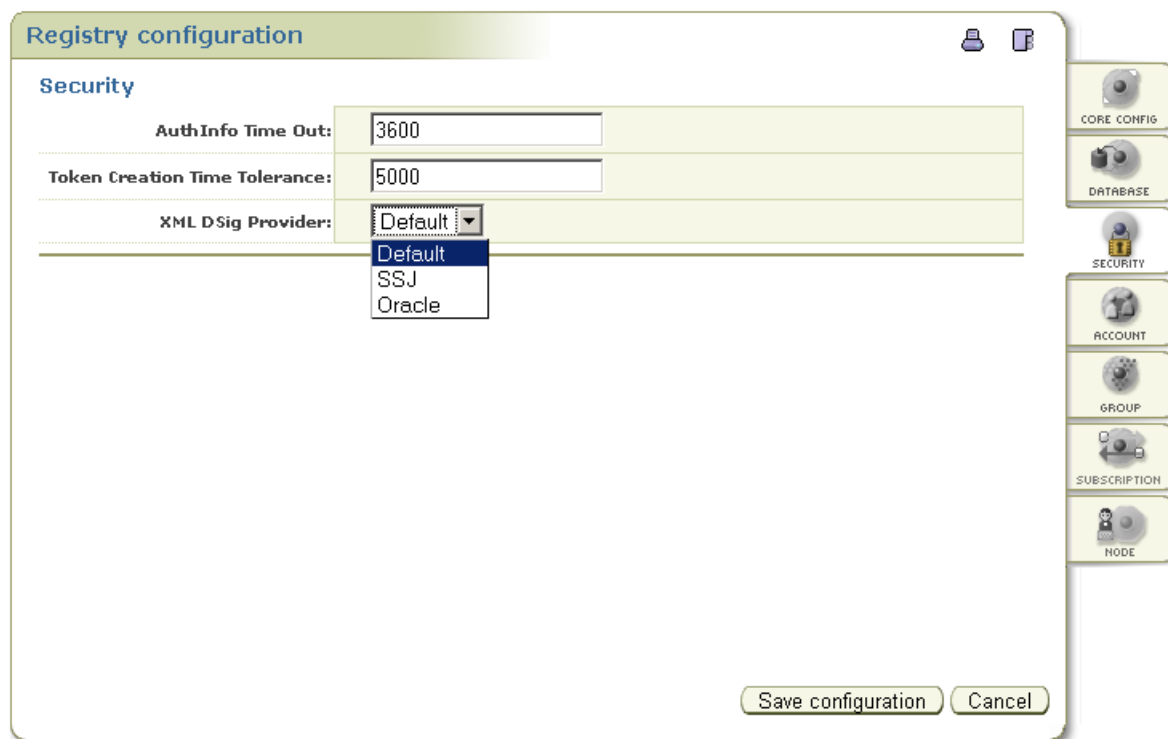

The image shows a 'Registry configuration' dialog box with a 'Security' tab selected. The dialog has a sidebar on the right with icons for CORE CONFIG, DATABASE, SECURITY (selected), ACCOUNT, GROUP, SUBSCRIPTION, and NODE. The main area contains three configuration fields: 'AuthInfo Time Out' with a text box containing '3600', 'Token Creation Time Tolerance' with a text box containing '5000', and 'XML DSig Provider' with a dropdown menu showing 'Default', 'SSJ', and 'Oracle'. At the bottom right are 'Save configuration' and 'Cancel' buttons.

Property	Value
AuthInfo Time Out:	3600
Token Creation Time Tolerance:	5000
XML DSig Provider:	Default

AuthInfo Time Out

Authorization token is obtained by invoking the `get_authToken` method. This token is used for each operation on the publishing port. Here you can set up the authorization token time-out in seconds. The default value is one hour.

Token Creation Time Tolerance

Tolerance interval of token validity, expressed in milliseconds.

XML DSig Provider

Registry performs XML digital security operations via an XML digital security provider. There are two XML digital security providers in the distribution.

ssj

Uses the XML digital security implementation of Systinet Server for Java.

oracle

Uses the Oracle XML digital security implementation.

Registry Console offers the following options:

Default

XML digital security provider specified by the value of the `registry.xml.dsig.providerName` system property. The default when no such property is set is `ssj`.

SSJ

`ssj` XML digital security provider.

Oracle

`oracle` XML digital security provider.

**Note**

Oracle XML digital security libraries are bundled in Oracle Application Server since version 10.1.3. Oracle XML digital security provider does not work in previous releases of Oracle Application Server unless Oracle XML digital security libraries are installed.

2.4. Account

On this tab, you can specify accounts properties applicable for all Oracle Service Registry user accounts.

Figure 40. Registry Configuration - Account

Registry configuration

Account

Account Settings

Backend type:	database
Default result size:	10
Confirm registration by email:	☐
Confirmation URL:	/web/confirmAccount?userName=%u&enableCode=%c

Default User Limits

Business entities:	1
Business services:	4
Binding templates:	2
TModels:	100
Publisher assertions:	10
Subscriptions:	5

Save configuration Cancel

Backend type

This field is not editable. Its value is specified during installation.

Default result size

Number of items returned in search results when querying accounts

Confirm registration by email

Check this box if you would like new users to confirm account creation.

Confirmation URL

URL where new users can confirm registration

Default User Limits Limits are used as default values only when creating a new account. Accounts that exist at the time of change are exempt from new limit values. Limits for existing accounts can be updated with the Account Management tool.

Business entities

Business entity limit; default is 1.

Business services

Number of allowed business services per business entity; default is 4.

Binding templates

Number of allowed bindingTemplates per businessService; default is 2.

TModels

Number of allowed tModels; default is 100.

Publisher assertions

Number of allowed relationship assertions; default is 10.

Subscriptions

Number of allowed subscriptions saved by user. Default is 5.

2.5. Group

On this tab, you can specify the properties of the group API.

Backend type

Not editable, this field's value is specified during installation.

Default result size

Number of items returned in search results when querying groups; the default value for this field is 10.

2.6. Subscription

On the **Subscription** tab, you can configure server limits for subscriptions. If a user saves a subscription which does not match these limits, the registry automatically adjusts the user's values.

Figure 41. Registry Configuration - Subscriptions

Registry configuration

Subscription

Minimal Notification Interval: 0 years 0 months 0 days 0 hours 0 minutes 30 seconds

Sender Pool Size: 3

Transformer Cache Size: 31

Save configuration Cancel

CORE CONFIG
DATABASE
SECURITY
ACCOUNT
GROUP
SUBSCRIPTION
NODE

There are three fields to configure on this tab:

Min. notification interval

Minimal interval between notifications provided to a subscriber

Sender Pool size

Number of stubs ready for notification


Transformer Cache Size

Number of cached XSLT transformations

2.7. Node

On the **Node** tab, you can configure UDDI node properties.

Figure 42. Registry Configuration - Node

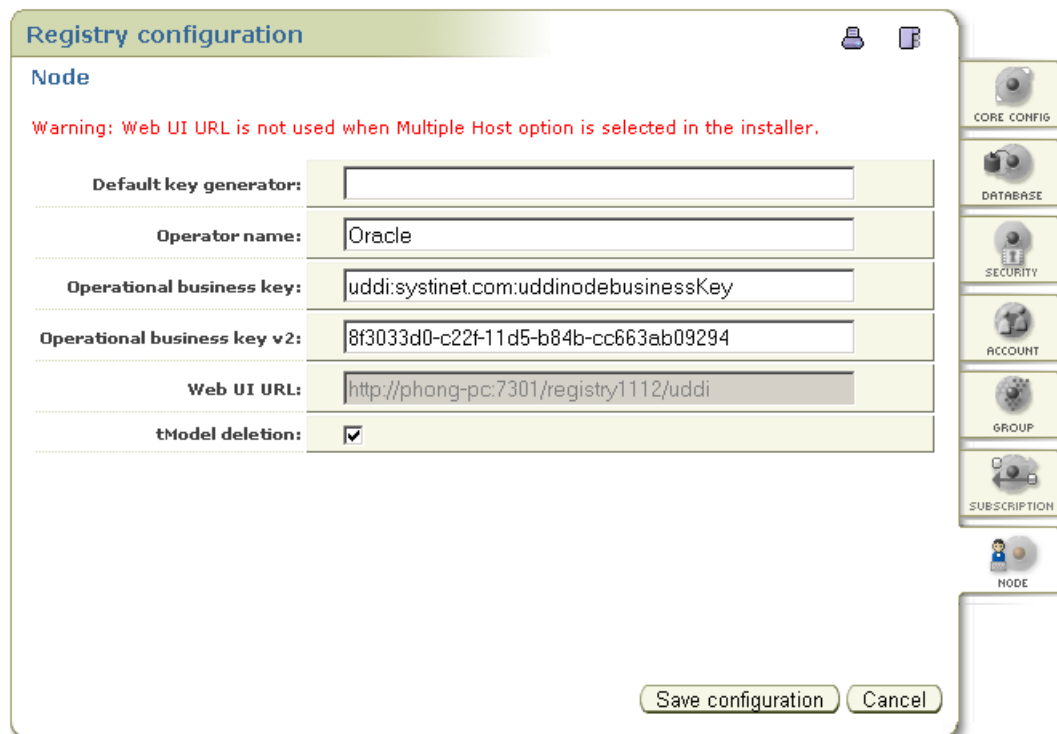

The image shows a 'Registry configuration' window with a 'Node' tab selected. A warning message states: 'Warning: Web UI URL is not used when Multiple Host option is selected in the installer.' The configuration fields are as follows:

Default key generator:	
Operator name:	Oracle
Operational business key:	uddi:systinet.com:uddinodebusinessKey
Operational business key v2:	8f3033d0-c22f-11d5-b84b-cc663ab09294
Web UI URL:	http://phong-pc:7301/registry1112/uddi
tModel deletion:	☒

At the bottom right, there are 'Save configuration' and 'Cancel' buttons. On the right side of the window, there is a vertical navigation pane with icons for CORE CONFIG, DATABASE, SECURITY, ACCOUNT, GROUP, SUBSCRIPTION, and NODE (which is currently selected).

Default key generator

The Default Key generator tModel allows the Registry to generate keys in the form domain:string instead of only in the form uuid. For example, uddi:mycompany.com:myservice:61c08bf0-be41-11d8-aa33-b8a03c50a862 instead of only 61c08bf0-be41-11d8-aa33-b8a03c50a862. Enter the key of the tModel that is the key generator. For example, if you enter uddi:mycompany.com:myservice:keyGenerator, keys will be generated with the prefix uddi:mycompany.com:myservice:. For more information, please see [Section 5.2, Publisher-Assigned Keys](#) in the User's Guide.

Operator name

The name of the operator of the UDDI node. The default entry for this field is configured during installation.

Operational business key

The key of the Operational business entity. This entity holds miscellaneous registry settings such as the validation service configuration.

Operational business key v2

The key of the Operational business entity in UDDI v2 format.

Web UI URL

The URL of the Registry Control.

Web UI URL is not used when Multiple Host option is selected in the installer.

tModel deletion

If this box is checked then deleted tModels are deleted permanently. Otherwise, tModels are marked as deprecated. (Deprecated tModels are visible by direct get tModel call, but do not appear in any search results.)

3. Configuration in Database

Oracle Service Registry uses many configuration files. They are stored in `REGISTRY_HOME\app\uddi\conf` and `REGISTRY_HOME\work\uddi\bsc.jar\conf` directories. Some of them may be changed during setup or with web interfaces.

Each such configuration file is an XML file containing tag `config` with some information about how the configuration file is used.

These attributes are generally recognized:

Table 2. Attributes of config tag

Attribute	Meaning	Optional	Default value
name	configuration name	no	
local	true when the file is local to the cluster node	yes	false
updateDB	when true the file is stored in the database on Oracle Service Registry start	yes	false
history	when false configuration history is not logged	yes	true
savingPeriod	delay before changes in memory are written to file in milliseconds	yes	2000

The most important attribute is `name` which is the identifier by which Oracle Service Registry tries to find the configuration. Some configuration files have attribute `local` set to true. That means that the configuration is only used by this Oracle Service Registry and other Registries in the cluster will not share it. Other nodes will have their own independent versions. These cluster nodes are distinguished by the Node ID which is specified inside `nodeid.xml`. If its value is empty, a unique ID will be generated at Oracle Service Registry startup.

The configuration files are always present in the directories, however their copy is in the database. If a configuration file is present in both database and file-system, the one in the database has priority. After the initial startup of Oracle Service Registry all configurations are put into the database. When Oracle Service Registry needs to change some configuration settings it does so in the both the database and file-system.

If a user or another program like Oracle Service Registry setup wants to edit the configuration file the priority of the configuration in database has to be overridden. This can be done in two ways:

1. By setting attribute `updateDB` to true in the top-level tag `config` in all configuration files where modifications have been done. Once Oracle Service Registry starts, the attribute will be automatically removed.
2. By setting attribute `updateDBAll` (see in table below) to true in tag `dbconfig` in `database.xml` Once Oracle Service Registry starts the attribute will be automatically cleared. There can be time stamp in this attribute in format like 20070321133058 where digits denote year, month, day of month, hour, minute, and second in GMT time zone. Such time stamp is compared to time stamp in database. When config files have more recent time, they will be put

in database on Oracle Service Registry start. When stamp in database is more recent, database version will be used. In both cases the attribute will be cleared.

Time stamp in `updateDBAll` is used by setup. Each time setup task is run it updates time stamp except for task that do not modify configuration files like drop database and backup. Purpose of the time stamp is to prevent overwriting current configuration with old one while redeploying same EAR/WAR file to application server.

When Oracle Service Registry operates in cluster mode the other means than the time stamp is used for synchronization. Clocks on cluster nodes are assumed to be not enough precise for that, but enough precise for redeployment and configuration changes. There is only one time stamp in `database.xml`, individual configuration files allow only true/false values in `updateDB` attribute.

The other important configuration setting for configurations is inside the `database.xml` file, in the `dbconfig` tag. The tag has following attributes:

Table 3. Attributes of `dbconfig` tag

Attribute	Meaning	Optional	Default value
<code>configRetainCount</code>	number of latest configuration versions that are not deleted	yes	10
<code>configRetainMinutes</code>	age of configuration version before it can be deleted	yes	10
<code>eventRetainMinutes</code>	age of event information before it can be deleted	yes	5
<code>updateDBAll</code>	when true all configuration files will be stored in the database at Oracle Service Registry startup, can be also a time stamp	yes	false



Note

Oracle Service Registry setup automatically sets the `updateDBAll` attribute when its operation has been successful so that all changed configurations will be stored in the database at Oracle Service Registry startup. This is usually desirable behavior.



Note

When Oracle Service Registry encounters an identical configuration in the database to the one that is being stored (e.g. when set `updateDB` or `updateDBAll` is encountered) then the store operation is ignored. This may be surprising as there would be no entry in the log of configurations, however the resulting state of the configurations is correct.

The database not only holds the current set of configurations but also their history in a log. You can monitor configuration changes, what the previous content was, or let Oracle Service Registry show you differences between versions. This configuration history log is purged every few minutes. Old configurations are not retained indefinitely. There are rules on how many older versions are left there and the age of a configuration before it can be deleted. The purpose of these rules is to avoid running out of space in the database and yet still have information about recent changes. Rules can be configured inside tag `dbconfig` in `database.xml`. Their defaults are in the table above. Default settings specify that there must be at least `configRetainCount` new versions of the configuration before it can be deleted automatically. Also, the configuration has to be older than `configRetainMinutes` before it can be deleted automatically. This allows the correction of most non-fatal configuration errors after an invalid change or to track which configuration change might have caused unexpected behavior.

To allow easy comparison of current and older configurations or try-then-rollback scenarios, the current set of configurations can be stored into a named collection of configurations. These collections are not deleted automatically. They allow you to store a configuration that works correctly and compare it with the current version if something breaks later. You can then activate the old one if needed or change the incorrect setting manually.

**Note**

Backup tool in setup can store both file and database configurations. You can select which you want to backup.

Configurations in the database can be managed with the "Configuration Management" component of Oracle Service Registry Administration Console. You can find it under tab Manage, then Registry management sub-tab (default), then Configuration Management button.

4. Business Service Control Configuration

Under the **Configuration** tab of the Business Service Control the administrator can configure the following:

- The [tabs that will be displayed](#) for users who have a specific user profile
- [Types of result view](#) for each user profile
- [Browsable Taxonomies](#)
- [Result paging limits](#)
- [Configuration of the Business Service Control User Interface](#)
- [Customizable Taxonomies](#) providing for user input when creating, editing or searching entities

The **Configuration** tab is available if both of the following conditions are satisfied:

- The user belongs to a user profile that has the visible **Configuration** tab
- The user has ConfiguratorManagerPermission to all operations (*) and all configurations (*). See Administrator's Guide, [Section 1.4, Permissions](#) for more information on how to set up permissions.

Furthermore, administrators can [customize individual pages](#) wherever a **Customize** button appears.

4.1. Tabs Displayed

Figure 43. Business Service Control Configuration - Tabs Displayed

Business Service Control Configuration

[Home](#) > [Business Service Control Configuration](#)

Tabs
Views
Browsable Taxonomies
Paging
User Interface
Customizable Taxonomies

This page defines which tabs are available to each user profile, and which is the default page displayed upon login. The Default User Profile list allows you to which user profile is assigned to new user accounts. You can also control whether users are allowed to change their user profile, through the Allow User to Select Profile checkbox.

	Home	Search	Catalog	Tools	Reports	Default
Anonymous User Profile	☒	☒	☐	☐	☒	Home ▾
Business Profile	☒	☒	☐	☐	☒	Home ▾
Developer Profile	☒	☐	☒	☒	☒	Home ▾
Architect Profile	☒	☐	☒	☒	☒	Catalog ▾
Operator Profile	☒	☐	☒	☐	☒	Reports ▾
Administrator Profile	☒	☐	☒	☒	☒	Home ▾

Default User Profile:

Developer Profile ▾

Allow User to Select Profile:

☒

Reload Configuration
Save Configuration
Cancel

On the page shown in [Figure 43](#), you can define which tabs will be available for specific user profiles. The **Default User Profile** drop down list allows you to specify the default user profile when [creating a new user account](#). If the checkbox **Allow User to Select Profile** is checked, users are allowed to select a user profile when creating a new account, later users can switch profiles.

4.2. Search Result View

Figure 44. Business Service Control Configuration - Search Result View

Business Service Control Configuration

[Home](#) > [Business Service Control Configuration](#)

Tabs
Views
Browsable Taxonomies
Paging
User Interface
Customizable Taxonomies

This tab controls the format in which List, Search, and Reports are displayed. You can control the view by user profile and by element type.

	Providers	WSDL Services	Endpoints	Interfaces	Bindings
Anonymous User Profile	Default View ▼	Default View ▼	Default View ▼	Default View ▼	Default View ▼
Business Profile	Summary View ▼	Summary View ▼	Default View ▼	Default View ▼	Default View ▼
Developer Profile	Default View ▼	Technical View ▼	Technical View ▼	Technical View ▼	Technical View ▼
Architect Profile	Default View ▼	Technical View ▼	Technical View ▼	Technical View ▼	Technical View ▼
Operator Profile	Default View ▼	Default View ▼	Operational View ▼	Default View ▼	Default View ▼
Administrator Profile	Default View ▼	Default View ▼	Default View ▼	Default View ▼	Default View ▼

Reload Configuration
Save Configuration
Cancel

On the page shown in [Figure 44](#), you can configure default result views for user profiles.

4.3. Browsable Taxonomies

Figure 45. Business Service Control Configuration - Browsable Classifications

Business Service Control Configuration [Home > Business Service Control Configuration](#)

[Tabs](#)
[Views](#)
[Browsable Taxonomies](#)
[Paging](#)
[User Interface](#)
[Customizable Taxonomies](#)

Browsable taxonomies control which taxonomies appear in the Reports tree, and in the entity details. The Available Taxonomies pane on the left displays all taxonomies in the system. The Selected Taxonomies pane on the right displays all taxonomies that are currently configured as 'browsable'. You may add and remove taxonomies from the Selected list, by checking the checkbox and using the arrow buttons. You may also edit the Display Name for selected taxonomies. Click "Save Configuration" to make your changes permanent.

All Taxonomies

Taxonomy name	Checked
Filter	
☐ Shippers	Yes
☐ demo:hierarchy	No
☐ demo:location:floor	No
☐ ebxml-org:specifications	No
☐ http://schemas.xmlsoap.org/ws/2003/03/localpolicyreference	Yes
☐ http://schemas.xmlsoap.org/ws/2003/03/policytypes	Yes
☐ http://schemas.xmlsoap.org/ws/2003/03/remotepolicyreference	No
☐ microsoft-com:gaoweb:2000	No
☐ ntlis-gov:naics:1997	Yes
☐ ntlis-gov:naics:2002	Yes

Displaying results 1 - 10 of 64

1 2 3 4 5 6 7 [Next](#)

[Select all](#) [Select none](#)

[Add >](#) [< Remove](#)

Selected Taxonomies

Taxonomy name	Display name
☐ systinet-com:taxonomy:usage	Usage
☐ systinet-com:taxonomy:endpoint:status	Endpoint status
☐ systinet-com:taxonomy:interface:status	Interface status
☐ uddi-org:xmit:namespace	Namespace
☐ uddi-org:xmit:localName	Local Name
☐ systinet-com:taxonomy:service:certification	Certification
☐ systinet-com:taxonomy:endpoint:availability	Availability
☐ ws-i-org:conformsTo:2002_12	WS-I Compliance
☐ systinet-com:versioning:milestone	Milestone
☐ systinet-com:versioning:releaseDate	Release date
☐ systinet-com:versioning:version	Version

[Select all](#) [Select none](#)

[Reload Configuration](#)
[Save Configuration](#)
[Cancel](#)

On this panel, you can choose which classifications (taxonomies) are *browsable*. Browsable taxonomies appear on the reports tree on the [Reports](#) tab, and also show up when viewing an entity's classification details.

Each browsable classification is displayed as a node in the Reports tree, using the **Display name** configured on the panel. If the taxonomy classification is [internally checked](#) - meaning it has a predefined set of values - a sub-node is displayed in the Reports tree for each possible value.

For example, the selected classification `systinet-com:taxonomy:service:certification` represents a node **Certification** in the **Report** tree. If you click on the **Certification** node in the report tree, the result view will contain all entities categorized by this taxonomy. Since the `systinet-com:taxonomy:service:certification` is internally checked, having the value set (Certified, Pending), the **Certification** node will contain two subnodes (Certified and Pending) representing a report of certified and pending services.

4.4. Paging Limits

Figure 46. Business Service Control Configuration - Paging Limits

Business Service Control Configuration

[Home](#) > [Business Service Control Configuration](#)

[Tabs](#)
[Views](#)
[Browseable Taxonomies](#)
Paging
[User Interface](#)
[Customizable Taxonomies](#)

This tab controls how results are displayed -- limiting the number of records and maximum page count, for each type of component.

Component	Page Row Count	Maximum Page Count
servicesCommonResults	25	20
endpointsCommonResults	25	20
providersCommonResults	25	20
interfacesCommonResults	25	20
bindingsCommonResults	25	20
endpointsTechnicalResults	25	20
servicesTechnicalResults	25	20
interfacesTechnicalResults	25	20
bindingsTechnicalResults	25	20
endpointsOperationResults	25	20
providersBusinessResults	25	20
servicesBusinessResults	25	20
resourcesXmlResults	25	20
resourcesXsdResults	25	20
resourcesXsltResults	25	20
resourcesWsdIResults	25	20
customizableTaxonomies	10	20
taxonomyList	10	20
default	25	20

[Home](#)
[Catalog](#)
[Tools](#)
[Reports](#)
Configure

On this panel, you can specify how many records and on how many pages searched data will appear. Component names from the **Components** column consist of the component name (services, endpoints, providers, interfaces, bindings) and the type of result view (common, technical, business). For example, the row with the component name `servicesTechnicalResult` contains page limits for search results of services listing technical service data.

4.5. UI Configuration

On the Web Interface tab of the Business Service Control Configuration screen, you can configure URLs, contexts, directories, and other information related to the registry's interface.

Figure 47. Business Service Control Configuration - UI Configuration

Business Service Control Configuration

Home > Business Service Control Configuration

Tabs

Views

Browseable Taxonomies

Paging

User Interface

Customizable Taxonomies

This tab configures technical information about the Business Service Console.

Warning: reference the option Registry Server URLs of Setup tool to change all URLs in the database. URL and Secure URL are not used when Multiple Host option is selected in the installer.

URL:	http://phong-pc:7301/registry1112
Secure URL:	https://phong-pc:7302/registry1112
Context:	/uddi/bsc/web
Data context:	/uddi/bsc/webdata/gui/screen
JSP directory:	jsp
Upload directory:	WASP-INF/upload
Maximum upload size:	2000000
Server session timeout:	900
Administrator's email:	admin@localhost
URL truncation limit:	35
Reports column count:	3

Field description:

- **URL** - nonsecure registry URL
- **Secure URL** - secure registry URL
- URL and Secure URL are not used when Multiple Host option is selected in the installer.
- **Context** - context of the Registry Control URL
- **Data context** - context where static objects such as JavaScript and images are stored
- **JSP directory** - location of JSP pages relative to REGISTRY_HOME/work/uddi
- **Upload directory** - upload directory used for tasks such as uploading taxonomies
- **Maximum upload size** - maximum upload size in bytes
- **Server session timeout** - session timeout (measured in seconds)
- **Administrator's email** - email address of the registry administrator.

- **URL Truncation Limit** - URLs displayed in reports and result views will be truncated to number of characters specified in this field. The truncated URL will not be exactly so long as the value specified here but the URL string can be a little bit longer. The truncated URL will be displayed in the following format:<protocol><server name><truncated part ...><filename>

4.6. Customizable Taxonomies

This tab controls which taxonomies are used in the **Search**, **Edit** or **Publish** pages, and how they are displayed.

Figure 48. Customizable Taxonomies

ORACLE Enterprise Manager 10g Connected to OracleAS Service Registry .
Logged in as admin (Logout)

[Home](#) [Catalog](#) [Tools](#) [Reports](#) [**Configure**](#) ?

Business Service Control Configuration

[Home > Business Service Control Configuration](#)

[Tabs](#) [Views](#) [Browsable Taxonomies](#) [Paging](#) [User Interface](#) [**Customizable Taxonomies**](#)

This tab controls which taxonomies are used in the Search, Edit or Publish pages, and how they are displayed. To add a new taxonomy, you click the "Add New Taxonomy" button at the bottom of the screen. To change how a taxonomy is currently displayed, click the Edit icon in the right-hand column.

Display as a Table ▾ Sort by Taxonomy ▾ in A-Z ▾ order

 Filter by Taxonomy ▾ which starts with
Apply

Displaying items 1 - 5 of 14 : ([Single page](#))

	Taxonomy ▲	Pages	Edit
☐	systinet-com:taxonomy:endpoint:availability	Create WSDL service, Search Endpoints, Edit endpoint	
☐	systinet-com:taxonomy:endpoint:status	Create WSDL service, Search Endpoints, Edit endpoint	
☐	systinet-com:taxonomy:interface:status	Create WSDL service, Search Interfaces, Edit interface, Create interface	
☐	systinet-com:taxonomy:service:certification	Search services, Edit service, Create service, Search WSDL Services, Edit WSDL service, Create WSDL service	
☐	systinet-com:taxonomy:usage	Search services, Edit service, Create service, Search WSDL Services, Edit WSDL service, Create WSDL service, Search Interfaces, Edit interface, Create interface, Search Endpoints, Edit endpoint	

1 2 3 [Next ▶](#)

[Select Page](#) [Select All](#)
[Clear Page](#) [Clear All](#)

Add New Taxonomy

Delete ▾

Go

Reload Configuration
Save Configuration
Cancel

[Home](#) [Catalog](#) [Tools](#) [Reports](#) [**Configure**](#)

To add a new taxonomy, click **Add New Taxonomy** at the bottom of the screen. To change how a taxonomy is currently displayed, click the **Edit** icon in the right-hand column.

The wizards for adding and editing a taxonomy (its representation) are similar. Here we describe the procedure for editing a taxonomy:

1. Click the icon in the **Edit** column for a taxonomy and you will be presented with a page as shown in [Figure 49](#).

Figure 49. Configuring a customized taxonomy's representation

Edit Taxonomy

[Home](#) > [Business Service Control Configuration](#) > [Edit Taxonomy](#)

Cancel
Step 1 of 3
Next

Taxonomy properties

Taxonomy
uddi-org:wsdl:category:transport

Select representation

☒ Select mode
 ☐ Input mode
 ☐ Hidden value

Representation Properties

Label

Mandatory

Display mode

★ List of categories

☐ Required
 ☒ Optional

☐ radio
 ☒ checkbox
 ☐ combobox
 ☐ listbox
 ☐ tree

☐ Fetch from taxonomy

☒ Specify

Key name	Key value	Action
http	uddi:uddi.org:transport:http	

Add category

This step will be used to select taxonomy filter and its properties. Please choose taxonomy filter and select its properties.

Cancel
Step 1 of 3
Next

2. The details in the lower half of this page depend on the selection labeled **Select representation**:

Select mode Users select a value from a predefined set of valid values. This set can be displayed using one of the supported UI controls - checkboxes, radio buttons, listbox, etc. For checked taxonomies, the UI can fetch the valid values from the taxonomy itself - so providing values here is optional. Doing so allows you to limit users to a subset of values, and control the order in which they are displayed.

Input mode Users *input* a value in a text box.

Hidden value In this case it is not appropriate for the user to edit the value.

3. The next screen allows you to specify the pages to which this representation of the taxonomy will be added:

Figure 50. Selecting pages where a customized taxonomy appears

Edit Taxonomy [Home](#) > [Business Service Control Configuration](#) > [Edit Taxonomy](#)

[Cancel](#) [Back](#) Step 2 of 4 [Next](#)

Select pages, where to add taxonomy Status

	Search	Create	Edit
WSDL Service	☐	☐	☐
Policy	☐	☐	☐
Resource	☐	☐	☐
XSD Document	☐	☐	☐
Interface	☐	☐	☐
XSLT Transformation	☐	☐	☐
XML Document	☐	☐	☐

Following BSC objects are not compatible with this taxonomy: **Services, Endpoints, Providers**

[Cancel](#) [Back](#) Step 2 of 4 [Next](#)

This step will list table of all objects and pages. Please choose pages, where taxonomy is added.

You can make it possible for the user to enter a value when an entity is created and/or edited, or to use the taxonomy in searches.

- Click **Next** and you will be asked to specify where the representation appears on each additional page for which it is configured.

Figure 51. Specify positioning on pages

Edit Taxonomy [Home](#) > [Business Service Control Configuration](#) > [Edit Taxonomy](#)

[Cancel](#) [Back](#) Step 3 of 4 [Next](#)

Select area in pages with multiple areas

☒ Search
☐ Binding properties
☐ Common properties
☐ Operation properties
☐ Technical properties

[Cancel](#) [Back](#) Step 3 of 4 [Next](#)

Please choose composite area, where taxonomy is added, in selected page in previous step.

- If there are any conflicts between the new and existing configurations, you will be asked to resolve them.. If you are adding the representation to a page where a different representation already exists then you will be asked to choose the new or existing representation.
- Finally you will be presented with a summary of the additions.

4.7. Customizing Individual Pages

Administrators can customize individual pages of the Business Service Control wherever a **Customize** button appears. Pages sometimes have more than one composite area, in which case each can have its own **Customize** button.



Note

The **Customize** buttons on individual pages take precedence over the [Customizable Taxonomies](#) settings discussed above. This allows registry administrators to further customize individual pages to best meet their needs.

For example, [Figure 52](#) shows a page with two composite areas:

- Business Properties
- Technical Properties

The user (an administrator) has clicked the **Customize** button in the Business Properties area.

Figure 52. Customizing a Page

[Home](#) > [Services](#) > [Search Services](#) > [Edit a Composite](#)

Edit a Composite

Visual components

Usage			Edit
Certification Edit		☐ Certified ☐ Not Applicable ☐ Pending	Edit
Keywords Edit		= Add another	Edit

Component properties

Component properties

Component type	Label
Caption	Usage

The result is that the Business Properties are displayed in the customization editor, whereas the Technical Properties are displayed as usual in this page.

The customization editor displays:

- **Visual Components** in a table, one row line. In this case there are 2 components in each line but see below. One component is selected and in this case it is the label **Usage**;
- **Component Properties** shows the properties of the selected component;

Under **Visual Components** each pair of adjacent components has a number of buttons between them. In this case there is only one set of buttons per line because there are only two components per line. The tool-tip for each button shows what it does. You can:

- Swap the positions of a pair of adjacent components horizontally;
- Move the component down or up, swapping it with the component below or above;
- Link a pair of adjacent components together so that when they are moved up or down they are moved together. Or you can unlink components that are linked;

Some of the details under **Component Properties** depend on the type of component. If you click **Show expert visual properties** it is possible to change the number of rows or columns occupied by a component - its **Height** and **Width**. The last component on the line has **Remainder of the row** checked. If you check **Cells** instead then the row is joined with the following row to make one line. For example, in [Figure 53](#) the first two lines have been joined into one line of 4 components.

Figure 53. Expert visual properties

Edit a Composite

[Home](#) > [Services](#) > [Search Services](#) > [Edit a Composite](#)

Visual components

Usage		Edit
Certification Edit	☐ Certified ☐ Not Applicable ☐ Pending	Edit
Keywords Edit	= Add another	Edit

Component properties

Component type

Label

Caption

Usage

CSS class name

horizCtlTaxonomyName

HTML element id

CSS style definition

Width

☐ Remainder of row
 ☒ Cells:

Height

Cells

[Hide expert](#)
[Apply changes](#)

[Add new](#)
[Delete selected](#)

[Save design](#)
[Reset changes](#)
[Close editor](#)

It is possible to perform the following actions by clicking the buttons provided:

- Add a new component;
- Delete the selected component;
- Save the design;
- Reset the changes you have made;
- Close the customization editor;

5. Registry Control Configuration

This section provides you with a catalog of web engine parameters.

Initially almost every web engine parameter is set correctly by default.

To access the Registry Control configuration:

1. Log on as administrator.
2. Click the **Manage** menu tab.
3. Click **Registry console configuration** link under the **Manage** tab. This returns the configuration screen shown in [Figure 54](#). The Registry Console Configuration screen has two tabs:
 - On the **Web Interface** tab, you can set various parameters associated with Oracle Service Registry's interface.
 - On the **Paging** tab, configure the number of rows per page and the maximum number of pages associated with the returns of various searches.

Note that on both tabs there is a button labeled **Reload Configuration**. When you change a registry configuration file directly, and save it, use this button to put the configuration changes into effect.

5.1. Web Interface Configuration

Figure 54. Registry Console Configuration - Web Interface Tab

Registry control configuration

Warning: reference the option Registry Server URLs of Setup tool to change all URLs in the database. URL and Secure URL are not used when Multiple Host option is selected in the installer.

URL:	http://phong-pc:7301/registry1112
Secure URL:	https://phong-pc:7302/registry1112
Context:	/uddi/web
Data context:	/uddi/webdata
JSP directory:	/jsp
Upload directory:	/WASP-INF/upload
Maximum upload size:	2000000
Server session timeout:	900
Name cache timeout:	300
Entity cache enabled:	☒
Administrator's email:	admin@localhost
Automatically retrieve users and groups:	☒

Reload Configuration Save configuration Cancel

Field description:

- **URL** - nonsecure registry URL
- **Secure URL** - secure registry URL
- URL and Secure URL are not used when Multiple Host option is selected in the installer.
- **Context** - context of the Registry Control URL
- **Data context** - context where static objects such as JavaScript and images are stored
- **JSP directory** - location of JSP pages relative to \$REGISTRY_HOME/work/uddi
- **Upload directory** - upload directory used for tasks such as uploading taxonomies
- **Maximum upload size** - maximum upload size in bytes
- **Server session timeout** - session timeout (measured in seconds)
- **Name cache timeout** - cache timeout for the names of UDDI structures. If someone renames a UDDI structure, the Registry Control will load the new name after this interval has passed (measured in seconds).
- **Entity cache enabled** - If you check this check box, entities will be cached.

Click **Save configuration** when finished.

5.2. Paging Configuration

Figure 55. Registry Console Configuration - Paging Tab

Component	Page row count	Maximal page count
default	10	20
approvalManagement	10	10
findAccount	10	20
selectPrincipal	10	20
editGroup	10	20
viewGroup	10	20
groups	10	20
editPrincipalList	10	10
browseTaxonomy	20	20
collectCategories	10	15
collectAcl	10	15
findTaxonomy	10	20
findTModel	20	20
findService	20	20
findRelatedBusiness	5	20
findBusiness	20	20
findBinding	20	20
findDeprecatedTModel	20	20
favoriteTaxonomies	10	10
findXml	20	20
findXsd	20	20
findXslt	20	20
findWsdll	20	20

Reload Configuration Save configuration Cancel

Paging limits - On this tab, you can specify how many records and on how many pages searched data will appear. Click **Save configuration** when finished.

6. Permissions: Principles

Permissions in Oracle Service Registry were developed so that administrators might exercise control over users. Permissions:

- Provide a simple mechanism for the management of users' rights in Oracle Service Registry.
- Allow the administrator to manage or make available different parts of the registry to different users.
- Help Oracle Service Registry better reflect the real world where there are many roles with different responsibilities.

This chapter describes permissions in detail with some examples and a description of permission configuration.

Permission is defined as the right to perform an action on some interface. Put another way: permission is the ability to process some method on some interface. Permissions are very different from the other mechanism for rights in Oracle Service Registry, the Access Control List.

Access Control enables the user to control access to the basic UDDI data structures (businessEntity, businessService, bindingTemplate, and tModel). Access Control on Oracle Service Registry is provided by the Access Control List (ACL). The ACL is based on permissions given to a user or group. In the context of ACL, this means that a given user can access only that information in Oracle Service Registry made available to the user by the registry administrator or other users. For more information about the Access Control List, see the [Access Control](#) chapter in the User's guide.

Access Control Lists limit the visibility of entities and so restrict the access to *data* in Oracle Service Registry. Permissions on the other hand restrict access to interfaces. The ACLs restrain users by the restricting the visibility of UDDI structures. Permissions limit users through the visibility of interfaces.

6.1. Permissions Definitions

There are two basic kinds of permission:

- The first, consisting of [ApiUserPermission](#) and [ApiManagerPermission](#), is used to restrict access for some users on some interfaces.
- The second, [ConfigurationManagerPermission](#), is used to restrict the ability to change configurations in Oracle Service Registry.

ApiUserPermission

ApiUserPermission consists of the interface's name and method from the given interface. This permission provides the user common access to the specified method on the given API. ApiUserPermission enables the user to call methods on an interface as a common user. Users usually must have this permission to perform any call.

ApiManagerPermission

ApiManagerPermission also consists of the names of an interface and of a method. This permission allows the user to call a determined method on the given API. It is very similar to ApiUserPermission. The only difference is in the user's significance. If a user has ApiManagerPermission, that user is considered to be a privileged user. There are many API calls where the result depends on user's importance.

ConfigurationManagerPermission

ConfigurationManagerPermission consists of configuration files and a method's name. The name of the method is either get or set. The ConfigurationManagerPermission combined with the get method allows user to read (get) data from the configuration file. On the other hand, the ConfigurationManagerPermission combined with the set method enables the user to write to the configuration.

6.2. Oracle Service Registry Permission Rules

The following permissions' rules are always valid:

- Permission is the ability to process a method on an API.
- Permission contains the type of permission (ApiUserPermission, ApiManagerPermission, ConfigurationManagerPermission), the name (interface's or config's name) and an action (method's name).

You are allowed to use the asterisk wildcard (*) to substitute all names - names of interfaces, configurations, or actions.

- There is no hierarchy in permissions. The ability to set permission for users is also a permission (for some methods on PermissionApi).
- The Oracle Service Registry administrator has all permissions for all methods on all APIs.

- Permissions are always positive. This means that permissions say what is possible or allowed. Permissions allow user to perform an action (some method on some API). Any action that is not expressly permitted is denied.
- Permissions can be set for an individual user or for a group of members. Each user is member of the group `system#everyone`, therefore every user has the default permissions associated with this group.

For more information, see [Section 5.1, Data Access Control: Principles](#)

6.3. Setting Permissions

This section describes the configuration of permissions. The setting of permissions is written from the administrator's point of view.

There are three basic ways to set permissions for a user:

- By performing methods on `PermissionApi`. A user can call these methods only if that user has the appropriate permissions.
- By calling methods via SOAP or via the Registry Control.
- By changing permissions directly in the configuration file.

The `PermissionApi` contains several methods for managing permissions. These methods are described below:

get_permission

Used for obtaining all of a user's permissions. A user possessing the `ApiManagerPermission` can obtain permissions of other users. A user with only `ApiUserPermission`, can only discover his or her own permissions.

Note that users who have neither `ApiUserPermission` nor `ApiManagerPermission` for a method on `PermissionApi`, cannot call this method.

set_permission

Provides users the ability to set permissions for other users. It is necessary to possess `ApiManagerPermission` for this call.

get_permissionDetail

Similar to `get_permission`, this method can be called for more than one user at a time.

`get_permission` takes a principal as the input parameter. On the other hand, `get_permissionDetail` takes an array of principals as the input parameter. If you want to find out the permissions of three users, you can call `get_permission` three times or you can call `get_permissionDetail` once.

who_hasPermission

Enables a user to find out who owns a given permission.



Important

It is not recommended to change permissions directly in the configuration file. However, if the administrator wants to change default permissions for new users (meaning changing permissions for the group `system#everyone`), there is no other possibility. Before making any changes to these permissions, we strongly recommend making a reserve copy of the configuration. The permissions for special users or groups are stored in the file `permission_list.xml`.

6.4. Permissions and User Roles

Many systems use user roles in addition to permissions. A user role is usually a set of permissions; it can be predefined in the system or be user-defined. In Oracle Service Registry, the user roles mechanism is implemented by groups. The administrator is allowed to set permissions not only for individual users but also for groups. Instead of restricting the relationship to users and roles, it is possible to create groups, set permissions for them and then add users into these groups. This "group" mechanism in Oracle Service Registry is nearly the same as user role mechanism and it is used instead of user roles. For more information, see [Section 1.3, Group Management](#).

6.5. ApiManagerPermission Reference

ApiManagerPermission allow user to use operation in a privileged mode. The following tables explain what does it mean for certain APIs and operations.

Table 4. Account API (org.systinet.uddi.account.AccountApi)

operation (action)	Description
find_userAccount	Not used.
get_userAccount	Allows to get foreign account.
save_userAccount	Allows to save/update any account. Allows to set up non default limits. Allows to skip mail confirmation (if it is required).
delete_userAccount	Allows to delete any account.
enable_userAccount	Not used.

Table 5. Admin Utils API (org.systinet.uddi.admin.AdministrationUtilsApi)

operation (action)	Description
deleteTModel	Allows to call the deleteTModel operation. (ApiUserPermission is not sufficient to call the operation.)
replaceKey	Allows to call the replaceKey operation. (ApiUserPermission is not sufficient to call the operation.)
cleanSubscriptionHistory	Allows to call the cleanSubscriptionHistory operation. (ApiUserPermission is not sufficient to call the operation.)
resetDiscoveryURLs	Allows to call the resetDiscoveryURLs operation. (ApiUserPermission is not sufficient to call the operation.)
transform_keyedReferences	Allows to call the transform_keyedReferences operation. (ApiUserPermission is not sufficient to call the operation.)
rebuild_cache	Allows to call the rebuild_cache operation. (ApiUserPermission is not sufficient to call the operation.)
replaceURL	Allows to call the replaceURL operation. (ApiUserPermission is not sufficient to call the operation.)

Table 6. Category API (org.systinet.uddi.client.category.v3.CategoryApi)

operation (action)	Description
set_category	Allows to call the set_category operation. (ApiUserPermission is not sufficient to call the operation.)
add_category	Allows to call the add_category operation. (ApiUserPermission is not sufficient to call the operation.)
move_category	Allows to call the move_category operation. (ApiUserPermission is not sufficient to call the operation.)
delete_category	Allows to call the delete_category operation. (ApiUserPermission is not sufficient to call the operation.)
find_category	Not used.
get_category	Not used.
get_rootCategory	Not used.
get_rootPath	Not used.

Table 7. Custody API (org.systinet.uddi.client.custody.v3.UDDI_CustodyTransfer_PortType)

operation (action)	Description
get_transferToken	Allows to call the get_transferToken operation on foreign entities.
discard_transferToken	Allows to call the discard_transferToken operation on foreign tokens.

Table 8. Group API (org.systinet.uddi.group.GroupApi)

operation (action)	Description
find_group	Allows to find foreign private groups.
get_group	Allows to get foreign private groups.
save_group	Allows to save/update foreign groups.
delete_group	Allows to delete foreign groups.
where_amI	Not used.
find_user	Not used.
add_user	Not used.
remove_user	Not used.

Table 9. Inquiry V1 API (org.systinet.uddi.client.v1.InquireSoap)

operation (action)	Description
find_binding	Allows to find all bindingTemplates despite ACL rights.
find_business	Allows to find all businessEntities despite ACL rights.
find_services	Allows to find all services despite ACL rights.
find_tModel	Allows to find all tModels despite ACL rights.
get_bindingDetail	Allows to get any bindingTemplate despite ACL rights.
get_businessDetail	Allows to get any businessEntity despite ACL rights.
get_businessDetailExt	Not used.
get_serviceDetail	Allows to get any businessService despite ACL rights.
get_tModelDetail	Allows to get any tModel despite ACL rights.

Table 10. Inquiry V2 API (org.systinet.uddi.client.v2.Inquire)

operation (action)	Description
find_binding	Allows to find all bindingTemplates despite ACL rights.
find_business	Allows to find all businessEntities despite ACL rights.
find_relatedBusinesses	Allows to find all related businessEntities despite ACL rights.
find_services	Allows to find all services despite ACL rights.
find_tModel	Allows to find all tModels despite ACL rights.
get_bindingDetail	Allows to get any bindingTemplate despite ACL rights.
get_businessDetail	Allows to get any businessEntity despite ACL rights.
get_businessDetailExt	Not used.
get_serviceDetail	Allows to get any businessService despite ACL rights.
get_tModelDetail	Allows to get any tModel despite ACL rights.

Table 11. Inquiry V3 API (org.systinet.uddi.client.v3.UDDI_Inquiry_PortType)

operation (action)	Description
find_binding	Allows to find all bindingTemplates despite ACL rights.
find_business	Allows to find all businessEntities despite ACL rights.
find_relatedBusinesses	Allows to find all related businessEntities despite ACL rights.
find_services	Allows to find all services despite ACL rights.
find_tModel	Allows to find all tModels despite ACL rights.
get_bindingDetail	Allows to get any bindingTemplate despite ACL rights.
get_businessDetail	Allows to get any businessEntity despite ACL rights.
get_operationalInfo	Not used.
get_serviceDetail	Allows to get any businessService despite ACL rights.
get_tModelDetail	Allows to get any tModel despite ACL rights.

Table 12. Permission API (org.systinet.uddi.permission.PermissionApi)

operation (action)	Description
get_permission	Allows to call the get_permission operation on foreign accounts and groups.
set_permission	Allows to call the set_permission operation. (ApiUserPermission is not sufficient to call the operation.)
who_hasPermission	Allows to call the who_hasPermission operation. (ApiUserPermission is not sufficient to call the operation.)
find_principal	Allows to call the find_principal operation. (ApiUserPermission is not sufficient to call the operation.)

Table 13. Publishing V1 API (org.systinet.uddi.client.v1.PublishSoap)

operation (action)	Description
delete_binding	Allows deletion of any bindingTemplate despite ACL rights.
delete_business	Allows deletion of any businessEntity despite ACL rights
delete_service	Allows deletion of any businessService despite ACL rights
delete_tModel	Allows deletion of any tModel despite ACL rights
save_binding	* Allows to update any bindingTemplate or create new bindingTemplate in any businessService despite ACL rights. * Skips bindings limit checking.
save_business	* Allows to update any businessEntity despite ACL rights. * Skips businesses limit checking.
save_service	* Allows to update any businessService or create new businessService in any businessEntity despite ACL rights. * Skips services limit checking.
save_tModel	* Allows to update any tModel despite ACL rights. * Skips tModels limit checking.
get_authToken	Not used.
discard_authToken	Not used.
get_registeredInfo	Not used.
validate_categorization	Not used.

Table 14. Publishing V2 API (org.systinet.uddi.client.v2.Publish)

operation (action)	Description
delete_binding	Allows deletion of any bindingTemplate despite ACL rights.
delete_business	Allows deletion of any businessEntity despite ACL rights
delete_service	Allows deletion of any businessService despite ACL rights
delete_tModel	Allows deletion of any tModel despite ACL rights
save_binding	* Allows to update any bindingTemplate or create new bindingTemplate in any businessService despite ACL rights. * Skips bindings limit checking.
save_business	* Allows to update any businessEntity despite ACL rights. * Skips businesses limit checking.
save_service	* Allows to update any businessService or create new businessService in any businessEntity despite ACL rights. * Skips services limit checking.
save_tModel	* Allows to update any tModel despite ACL rights. * Skips tModels limit checking.
add_publisherAssertions	Skips assertions limit checking in add_publisherAssertions operation.
set_publisherAssertions	Skips assertions limit checking in set_publisherAssertions operation.
delete_publisherAssertions	Not used.
get_publisherAssertions	Not used.
get_assertionStatusReport	Not used.
get_authToken	Not used.
discard_authToken	Not used.
get_registeredInfo	Not used.

Table 15. Publishing V3 API (org.systinet.uddi.client.v3.UDDI_Publication_PortType)

operation (action)	Description
delete_binding	Allows deletion of any bindingTemplate despite ACL rights.
delete_business	Allows deletion of any businessEntity despite ACL rights
delete_service	Allows deletion of any businessService despite ACL rights
delete_tModel	Allows deletion of any tModel despite ACL rights
save_binding	* Allows to update any bindingTemplate or create new bindingTemplate in any businessService despite ACL rights. * Skips bindings limit checking.
save_business	* Allows to update any businessEntity despite ACL rights. * Skips businesses limit checking.
save_service	* Allows to update any businessService or create new businessService in any businessEntity despite ACL rights. * Skips services limit checking.
save_tModel	* Allows to update any tModel despite ACL rights. * Skips tModels limit checking.
add_publisherAssertions	Skips assertions limit checking in add_publisherAssertions operation.
set_publisherAssertions	Skips assertions limit checking in set_publisherAssertions operation.
delete_publisherAssertions	Not used.
get_publisherAssertions	Not used.
get_assertionStatusReport	Not used.
get_registeredInfo	Not used.

Table 16. Replication V3 API (org.systinet.uddi.replication.v3.ReplicationApi)

operation (action)	Description
replicate	Allows to call the replicate operation. (ApiUserPermission is not sufficient to call the operation.)

Table 17. Statistics API (org.systinet.uddi.statistics.StatisticsApi)

operation (action)	Description
get_accessStatistics	Allows to call the get_accessStatistics operation. (ApiUserPermission is not sufficient to call the operation.)
reset_accessStatistics	Allows to call the reset_accessStatistics operation. (ApiUserPermission is not sufficient to call the operation.)
get_structureStatistics	Allows to call the get_structureStatistics operation. (ApiUserPermission is not sufficient to call the operation.)

Table 18. Subscription V3 API (org.systinet.uddi.client.subscription.v3.UDDI_Subscription_PortType)

operation (action)	Description
delete_subscription	Allows to delete any subscription despite the caller is not a subscription owner.
save_subscription	* Allows to update any subscription despite the caller is not a subscription owner. * Skips subscription limit checking.
get_subscriptionResults	Allows to get result of any subscription despite the caller is not a subscription owner.
get_subscriptions	Allows to get any subscription despite the caller is not a subscription owner.

Table 19. Taxonomy API (com.systinet.uddi.taxonomy.v3.TaxonomyApi)

operation (action)	Description
get_taxonomy	Allows to obtain all categories in the taxonomy.
find_taxonomy	Not used.
save_taxonomy	Allows to call the save_taxonomy operation. (ApiUserPermission is not sufficient to call the operation.)
delete_taxonomy	Allows to call the delete_taxonomy operation. (ApiUserPermission is not sufficient to call the operation.)
download_taxonomy	Allows to call the download_taxonomy operation. (ApiUserPermission is not sufficient to call the operation.)
upload_taxonomy	Allows to call the upload_taxonomy operation. (ApiUserPermission is not sufficient to call the operation.)

7. Approval Process Principles

In this section, we will focus on approval process from the administrator's point of view. We assume you are familiar with basic principles of approval process described in the User's Guide, [Section 1.5, Approval Process in Oracle Service Registry](#).

Approval process includes two types of registries: a *publication registry* and a *discovery registry*. The *publication registry* is used for testing and verification of the accuracy of data. Users publish data to the *publication registry*. The *discovery*

registry houses approved data. It has no publishing API, but supports other Oracle Service Registry APIs including inquiry, subscriptions, accounts, and so on. (In actual fact, the administrator can publish data to the discovery registry, but this is an exception.)



Note

Both *publication* and *discovery* registries must be running so that user accounts may be synchronized. When the *discovery registry* is down, it is not possible to register a new user account on the *publication registry*.

The accounts on *publication* and *discovery registry* are nearly the same. Accounts created on the *publication registry* and also all their changes are replicated to the *discovery registry*. But accounts can exist on the *discovery registry* that do not exist on *publishing registry*. The *discovery registry* contains right read-only data and can therefore be accessible for more users. It is possible to create accounts with inquiry and subscription privileges on the *discovery registry* that do not exist on the *publishing registry*. Note again that there is no Publish API on the *discovery registry* (except for administrator); the only way to publish data to the *discovery registry* is via the approval process.

Put another way: all accounts on the *publication registry* exist on the *discovery registry*, but not all accounts on *discovery registry* exist on *publication registry*.

When promotion is requested, automatic context checking is performed to ensure the consistency of data. For example, if a business service is contained in the keys for saving in the approval request and its business entity is missing on both the *discovery registry* and in the request, then the request for approval fails. The automatic context checker checks the integrity of data. If an entity is contained in keys for saving, then the parent entity must already exist on the *discovery registry* or be contained in keys for saving to the *discovery registry*. For detailed information, please see User's Guide, [Section Context Checking](#).

7.1. Approval Process Roles

As noted above, the approval process registry has several roles associated with it:

- [Section 7.1.1, Requestor](#)
- [Section 7.1.2, Approver](#)
- [Section 7.1.3, autoApprover](#)
- [Section 7.1.4, Administrator](#)

7.1.1. Requestor

The requestor is a user on the *publication registry* who can ask for approval of data for promotion. Every user can ask for approval, but to be a requestor requires an administrator-assigned approval contact.

If a user does not have at least one assigned approval contact, an exception is thrown when this user asks for approval. There is no way for such a user to promote data to the *discovery registry*. By assigning approval contacts, the administrator determines whether to give users the opportunity to publish data to the *discovery registry*.

During the creation of users via the Oracle Service Registry console or via API, the default approver, administrator, is assigned for all newly created users on the *publication registry*. The default approval contact for all users is administrator, though this does not apply to users defined in an external repository (LDAP). Note that [demo data](#) does not come with assigned approval contact. For example, the user `demo_john` does not have an assigned approver, thus the administrator must assign this user an approval contact in order for him to make a request.

For more information on the requestor's role, see the section [Section 1.5.1, Requestor's Actions](#).

7.1.2. Approver

The approver is a person or group who approves changes to the *discovery registry*. If the approval contact is group, then all its members are may approve data for promotion.

For detailed information on the approval contact's role, see the User's Guide, [Section 1.5.2, Approver's Actions](#).

7.1.3. autoApprover

A special approval contact exists in the approval process, the autoApprover. This role is defined in the registry at installation. The administrator can set autoApprover as the approval contact for trusted users.

This means that no human approval is required and such users' data is copied to the *discovery registry* upon request for approval, as long as context checking is successful.

7.1.4. Administrator

The administrator is responsible for setting up Oracle Service Registry and is therefore also responsible for setting up the approval process. The term administrator refers to the user of Oracle Service Registry who can manage the registry. Note that all users who have permission to configure the approval process are allowed to set relationships between requestors and approval contacts.

The manager of the approval configuration assigns approval contact(s) for requestors.

For easy management of relationships between approvers and requestors, it is possible to create an approver or requestor either from an existing user or from a group. If an approver is a group then each user in this group can approve the promotion of data. When several users (requestors) are in the same group, then an approval contact can be assigned to the whole group.

7.2. Optional Content Checking Setup

Optional content checking provides an approver the ability to programmatically check data for approval. For example, the approver can set a policy that:

- Each business service must include a binding template, or
- Each business service must be categorized by some specific categories

To enforce such a policy, a developer can write an implementation of the `CheckerApi` to ensure these checks. The implementation is called automatically during the approval process when an approver presses the **Approve request** button. Therefore, the approver does not have to check it manually.

To set up optional content checking:

1. Write a class that implements the `org.systinet.uddi.approval.checker.v3.CheckerApi`
2. There are two ways to make the implementation class available:
 - Copy the `.jar` file including the implementation class to the `REGISTRY_HOME/app/uddi/services/Wasp-inf/lib`, or
 - Implement a Web service that can perform the `checkRequest()` method from `CheckerApi` interface and deploy the service to the SOAP stack of your choice. Use `http://<host_name>:<http_port>/uddi/doc/wsd1/approval_checker.wsdl` to generate a web service.
3. Register the implementation of the content checker class in the Oracle Service Registry data:

- a. Publish the WSDL of the checker service.

Publish the WSDL located at `http://<host_name>:<http_port>/uddi/doc/wsdl/approval_checker.wsdl` to a new or already existing business entity. You should reuse the existing WSDL portType (tModel's name: CheckerApi, tModel's key: `uddi:systinet.com:uddi:service:porttype:approvalchecker`).

- b. Specify the checker in the access point of a new binding template.
 - If you have put your implementation of the CheckerApi into the registry classpath, then the value of access point must start with the `class:` prefix and continue with the fully qualified class name. For example `class:com.systinet.uddi.approval.v3.approver.CheckerApiImpl`.
 - If you have deployed your checker as a SOAP Web service, then the access point is the endpoint URL of the service. For example `http://localhost:6060/ContentChecker`.

See Developer's Guide, [Section 3.6, Writing a Content Checker](#) to see the implementation example.

8. PStore Tool

The PStoreTool provides Oracle Service Registry Protected Store management. It provides functionality to:

- Import and export trusted certificates locally to or from a file.
- Create new security identities in the Oracle Service Registry configuration file.
- Copy identities between protected stores.



Note

Remote protected store management via SOAP is not supported with Oracle Service Registry.

The general usage is:

`PStoreTool [command [options]]`

You can perform operations from the command line or start up a GUI interface.

8.1. Commands Description

The PStore tool has the following commands:

- **new** - Creates a new security identity in the local protected store. The configuration file of the protected store can be specified using the `-config` parameter.
- **newServer** - Creates a new security identity on Oracle Service Registry. The location of the server is specified with the `-url` parameter.
- **copy** - Copies the existing security identity from one protected source to another or to the Oracle Service Registry protected store.
- **add** - Adds a trusted X.509 certificate to the local protected store. The X.509 certificate can be supplied as a local file.

This command can also add mapping between the security identity alias and the X.509 certificate to the user store part of the protected store. (The certificate is needed only for the server-side protected store.) This can be requested by using `-user` with the `-alias` option.

- **addServer** - Adds a trusted certificate to Oracle Service Registry. This command also adds the mapping between the security identity alias and its X.509 certificate to the user store part of the Oracle Service Registry protected store. The certificate can be given in the local file or can be fetched from the local protected store. The configuration file can be specified using the `-config` option.
- **remove** - Removes the given alias from the local protected store. This command can also remove an alias from the user store part of the protected store using the `-user` option. When removing a mapping from the user store, the X.509 certificates mapped to the given alias are also removed from the key store.
- **removeServer** - Removes a given alias from the protected store. The alias is removed from the user store part of the protected store if it is not found in the key store. When removing mapping from the user store part, the X.509 certificates mapped to the given alias are also removed from the key store.
- **IsTrusted** - Displays a list of the trusted certificate's Subject-distinguished names from the local protected store.
- **IsTrustedServer** - Displays a list of the trusted certificate's Subject distinguished names from the server.
- **list** - Displays all aliases contained in the key store part of the local protected store.
- **listServer** - Displays all aliases contained in the key store part of the Oracle Service Registry protected store.
- **export** - Exports the X.509 certificate chain stored in the key store or in the user store of the local protected store with the given alias.
- **exportServer** - Exports the X.509 certificate chain stored in the key store or in the user store of the protected store with the given alias.
- **gui** - Launches the graphical version of this tool.

The PStore tool has the following options:


- **-alias alias** - Alias to be used for the command.
- **-keyPassword password** - Password for encrypting/decrypting the security identity private key.
- **-subject subjectDN** - Subject-distinguished name to be used in the generated X.509 certificate.
- **-config configPath** - File and path to the configuration file to be used during command execution for the source of the local protected store.
- **-username username** - Username for authentication process. Not required if the Oracle Service Registry server is unsecured.
- **-password password** - Password for authentication process. Not required if the server is unsecured.
- **-secprovider provider** - Authentication mechanism used during the authentication process. Not required if the server is unsecured.
- **-certFile certPath** - File and path to the X.509 certificate stored in a local file.
- **-user** - Indicates that a command should be executed only with the contents of the user store of the protected store.

- **-config2 secondConfigPath** - Path to the second configuration file. Used for the copy command, when copying an identity from one local protected store to another.

8.2. PStore Tool - GUI Version

You can add, edit, or remove any user properties in the user store. You can also add, edit, and remove certificates and identities in the key store. You can do all of this with a local file containing the protected store.

Figure 56. PStore Tool

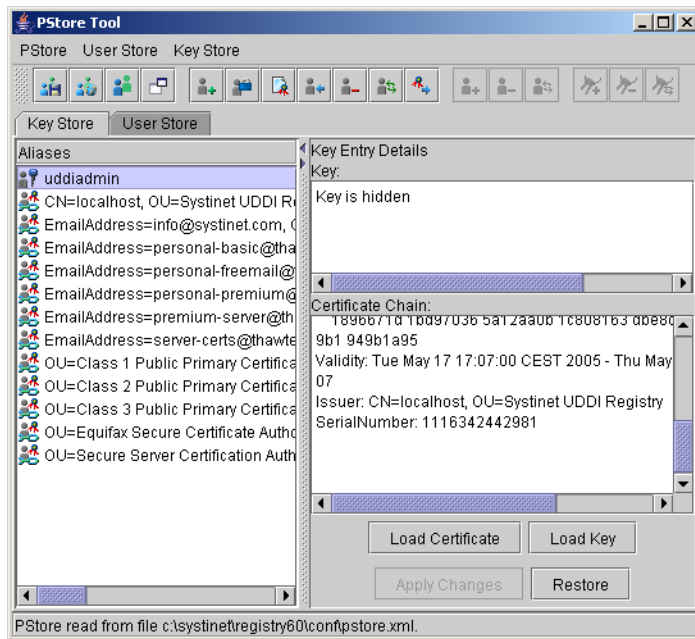

8.2.1. Running the GUI PStore Tool


To run the graphical version of this tool, use *gui* as parameter with the `PStoreTool` command.
`PStoreTool gui`

8.2.2. Opening and Closing the Protected Store

Opening Protected Store from a File

The GUI PStore Tool can manipulate every protected store in a file. To manipulate the client's protected store, open `clientconf.xml`. To open the server protected store, open `pstore.xml`.

To open protected store from file, select **Open From File...** from the PStore menu. This returns the file chooser dialog. Select the file you want to open as shown in [Figure 57](#).

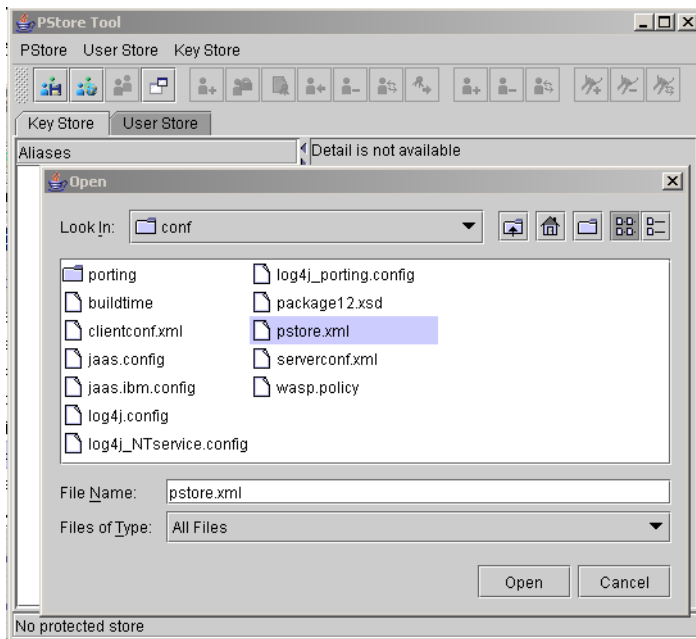Figure 57. Open Protected Store from a File

Closing Protected Store

To close the protected store, select **Close** from the **PStore** menu.

8.2.3. Open Next Protected Store

In some cases you need to work with more than one protected store at the same time. Typically you want to copy certificates from one protected store to another. To open another protected store, select the **New Window** from the **PStore** menu. New windows appear. Now you can open the protected store from a file.

8.2.4. Copy Data Between Protected Stores

With the PStore Tool, you can manipulate more than one protected store at the same time. You can simply copy identities, certificates, users, and user properties from one protected store to another using the Copy and Paste actions located in context menus of the Aliases, Users, and Properties panels.




Note

When you copy data from one area to another, the Paste action is disabled for some categories of data. This means that data may be copied, but cannot be pasted to the selected area. For example, the password property from the user store cannot be pasted to the key store.

8.2.5. Key Store

To work with the key store, select the **Key Store** tab. This tab has two panels. The left side has a list of all entries. The right has detailed information for the selected entry.

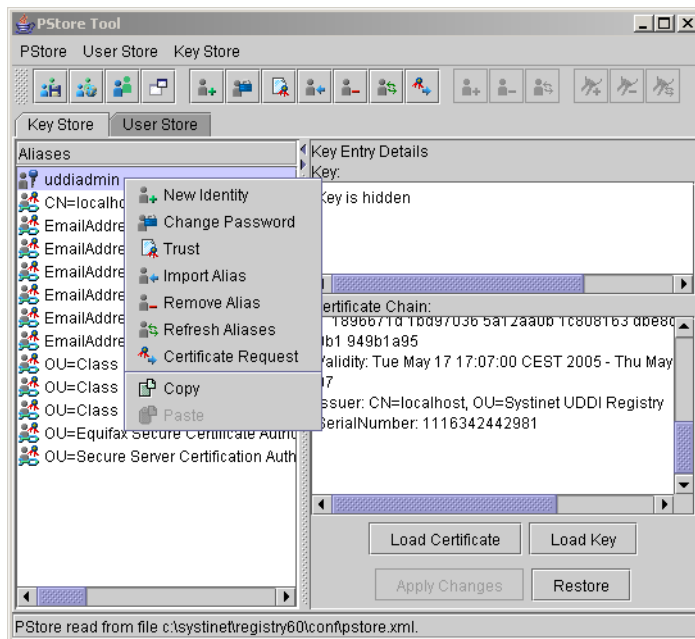Figure 58. Key Store Tab

Create New Identity

To create a new identity, select **New Identity...** from the **Key Store** menu. This opens a dialog for information such as Alias, Distinguished Name, and Password. (The Distinguished Name is not mandatory.) If the specified information is valid, the new identity will be added to the key store with the specified Alias. Otherwise an error dialog will be returned.

Key Store Trust

If you want to trust a key entry, select **Trust** from the **Key Store** menu. This action is available only for the key entry type.

Import Alias

To import a certificate from a file into the key store, select **Import Alias** from the **Key Store** menu. This opens a dialog in which you can specify Alias, Type, and value that depend on the entry type. In the current implementation, you can import only the certificate chain entry type.

Remove Alias

To remove an alias from the key store, select the alias you want to remove and select **Remove Alias** from the **Key Store** menu. You can remove several aliases at once.

Refresh Aliases

To synchronize information shown in this tool with the original key store source, perform a refresh by selecting **Refresh Aliases** from the **Key Store** menu.


Alias Details Panel

It is not surprising that the **Details** panel has more details about the selected alias. This panel shows details that depend on the entry type. You can also change this value. If you want to store a new value, press the **Apply Changes** button. To return to the original value, press **Restore**.

8.2.6. User Store

There are three panels on the User Store tab. The left side has a list of all entries. On the right top are properties available for the selected user. On the right bottom is detailed information for the selected user property.

Figure 59. User Store Tab

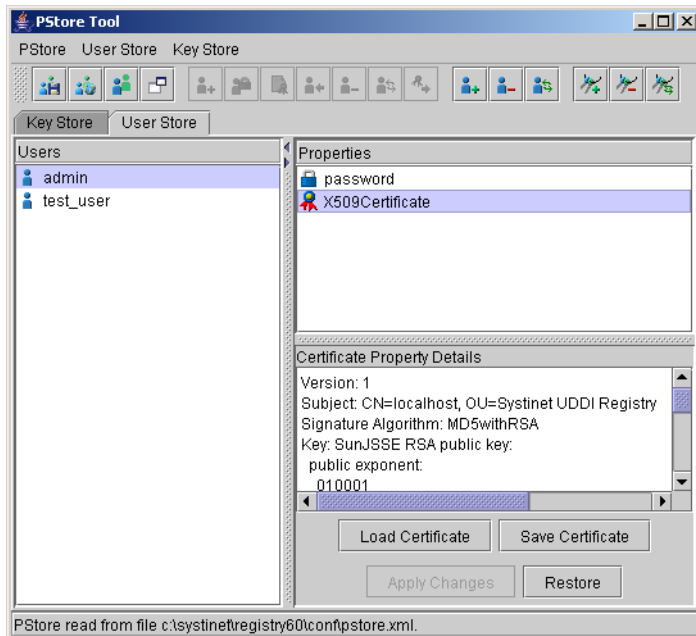

Add User

To add a new user, select **Add User** from the **User Store** menu. This opens a dialog for entering the Username. Press **OK** when done.

Remove User

To remove a user from the user store, select the user you want to remove and choose **Remove User** from the **User Store** menu. You can remove several users at once.

Refresh Users

Refresh synchronizes information shown in this tool with the original user store source. To refresh, select **Refresh Users** from the **User Store** menu.

Add Property

To add a new user property, select **Properties** and **Add Property** from the **User Store** menu. This returns a dialog for the property you want to create and its value.

Remove Property

To remove one or more user properties from the user store, select them and select **Properties** and **Remove Property** from the **User Store** menu.

Refresh Properties

To synchronize information on the Properties panel with the original user store source, perform a refresh. Select **Properties** and **Refresh Properties** from the **User Store** menu.

User Properties Details Panel

The **Details** panel has more information about user properties that depend on the property type. Select the property you want to see. You can also change this value. If you want to store a new value press **Apply Changes**.

To return to the original value, press **Restore**.

9. SSL Tool

The sslTool helps with setup of SSL on the client side of Oracle Service Registry. The general usage is:
sslTool [command [options]]

The SSL tool has the following commands:

- **serverInfo** - Prints out security requirements of an SSL server and saves a server certificate to a file.
- **encrypt** - Prints out the encrypted form of a password supplied as plain text. Encrypted passwords are used in the configuration files of Oracle Service Registry.
- **pstoreEI** - Exports and imports a java keystore to or from the Oracle Service Registry Protected Store. Both PKCS12 and JKS keystores are supported. The type of a supplied keystore is automatically detected during import.

Running the sslTool with a command followed by a **--help** option prints out a complete help for the command. See [Section 9.1, SSL Tool Examples](#) for the most typical usage.

9.1. SSL Tool Examples

To print out security requirements of an SSL server:

```
sslTool serverInfo --url https://localhost:8443
```

To print out security requirements of an SSL server and save server certificates:

```
sslTool serverInfo --url https://localhost:8443 --certFile /tmp/sever.cer
```

To print out an encrypted password for use in Oracle Service Registry configuration files:

```
sslTool encrypt --password changeit
```

To import a key entry from a java keystore to Oracle Service Registry client Protected Store:

```
sslTool pstoreEI -i --keystore /tmp/java.keystore  
--storepass changeit --alias mykey --keypass changeit  
--pstore ../conf/clientconf.xml
```

```
--pstoreAlias registryclient --pstoreKeypass changeit2
```

To export a key entry from Oracle Service Registry Protected Store to a java keystore:

```
sslTool pstoreEI -e --keystore /tmp/java.keystore2
--storepass changeit --alias mykey --keypass changeit
--pstore ../conf/clientconf.xml
--pstoreAlias registryclient --pstoreKeypass changeit2
```

9.2. Associating an SSL client identity with a registry client

Instructions on how to associate an SSL client identity with a registry client are explained in [Section 2.5.1, Example Client](#). In this case, a key entry must be imported to registry's client protected store, which is the `conf/clientconf.xml` file of the registry installation directory and a few system properties must be added to a script that runs the client application.

There are also cases where a registry acts as a client to another registry. These include:

- Communication between nodes in a clustered Oracle Service Registry.

Associating an SSL client identity with an Oracle Service Registry server can be done in the `app/uddi/conf/security.xml` file of a registry installation directory (or deployed package for a deployed registry) by adding the `destinationConfig` elements. A fragment of the `security.xml` with example `destinationConfig` elements is shown in [Example 1, Association of client identities with a registry server](#).

Example 1. Association of client identities with a registry server

```
<?xml version="1.0" encoding="UTF-8"?>
<config name="security" savingPeriod="5000">
  ...
  <security>
    ...
  </security>
  <!-- For communication with other nodes in the cluster -->
  <destinationConfig>
    <alias>clusterClient</alias>
    <password_coded>gNFDFWMNdKU=</password_coded>
    <destination proxyName="com.systinet.uddi.configurator.cluster.ConfiguratorManagerStub"/>

    <destination proxyName="com.systinet.uddi.configurator.cluster.ConfiguratorListenerStub"/>

  </destinationConfig>
  <!-- For communication via registry client to services accessible
  at URLs that start with https://pc1.example.com or https://pc2.example.com -->
  <destinationConfig>
    <alias>otherClient</alias>
    <password_coded>Vr+i+UzC2WLJXWg0ih6J+Q==</password_coded>
    <destination url="https://pc1.example.com/*"/>
    <destination url="https://pc2.example.com/*"/>
  </destinationConfig>
</config>
```

There can be more `destinationConfig` elements. A `destinationConfig` element is used to associate a particular SSL client identity with a set of destinations. It contains:

- `alias` in the server protected store. A key entry with the same name as the alias must exist in a server's Protected Store. This key entry represents security material used to establish SSL with a destination server. The Oracle Service Registry server Protected Store is in the `conf/pstore.xml` file of a registry deployment package. Use this file when importing a key entry from a java keystore, as shown in [Section 9.1, SSL Tool Examples](#).
- `password_coded` element, which contains the encrypted password that is used to access a private key stored under the alias supplied. See [Section 9.1, SSL Tool Examples](#) for an example that prints out the encrypted form of a password supplied in plain text.
- One or more `destination` elements each specify a rule. The rule can contain `url` or `proxyName` attributes. The rule matches when a client use a proxy class specified by the `proxyName` attribute or connects to a URL that is specified by the `url` attribute. The value of the `url` can end with a wildcard `*` to specify a match of all URLs that start with the string specified before the wildcard. The whole `destinationConfig` element matches if at least one rule matches.

The first matching `destinationConfig` is used.

Developer's Guide

The Developer's Guide is divided into the following main parts:

- [Mapping of Resources](#) covers registering various XML resources in Oracle Service Registry including WSDL definitions, schemas, and transformations.
- [Client-Side Development](#) describes the basic principles of using Oracle Service Registry APIs. For each client API, there is a comprehensive description of data structures and operations including links to JavaDoc, XML Schemas and WSDL documents.
- [Server-Side Development](#) discusses how to access server-side APIs, including custom modules, interceptors, external validation services, and subscription notification services. The Oracle Service Registry web framework is also described in this section.
- [UDDI From Developer Tools](#) discusses how to access UDDI from Oracle JDeveloper and Microsoft Visual Studio .NET.
- [How to debug](#) describes logging and using the SOAPSpy tool.


1. Mapping of Resources

Oracle Service Registry provides you with functionality to register the following resources:

- [WSDL definition](#)
- [XML file](#)
- [XML Schema \(XSD\)](#)
- [XSL Transformation](#)

1.1. WSDL

This describes how to publish a WSDL file to Oracle Service Registry. The implementation reflects the OASIS UDDI technical note [Using WSDL in a UDDI Registry, Version 2.0](http://www.oasis-open.org/committees/uddi-spec/doc/tn/uddi-spec-tc-tn-wsdl-v202-20040631.htm) [http://www.oasis-open.org/committees/uddi-spec/doc/tn/uddi-spec-tc-tn-wsdl-v202-20040631.htm]. As shown in [Figure 1](#), the technical note suggests a mapping between WSDL and UDDI.

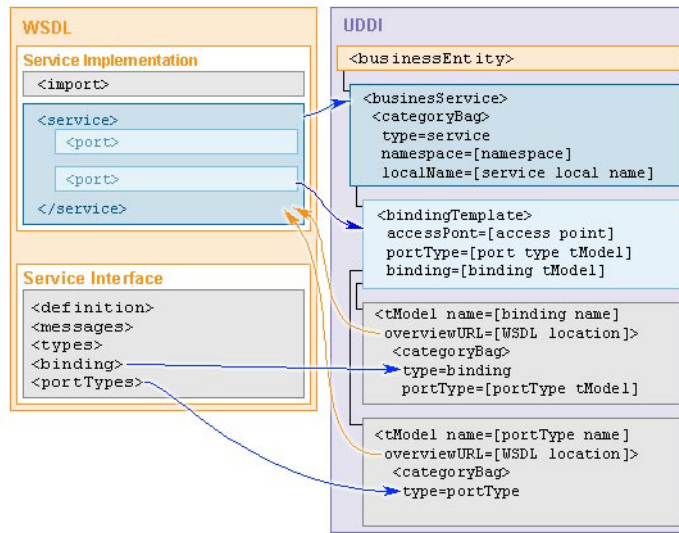Figure 1. WSDL TO UDDI

1.1.1. WSDL PortTypes

As shown in [Table 1, “WSDL portType:UDDI Mapping”](#), each WSDL portType maps to a tModel having the the same name as the local name of the portType in the WSDL specification. The overviewURL of the tModel becomes the URL of the WSDL specification. The tModel contains a categoryBag with a keyedReference for the type of WSDL artifact and the namespace of the WSDL definitions element containing the portType, as follows:

- The type is categorized as portType.
- The namespace is categorized as the WSDL binding namespace.

Table 1. WSDL portType:UDDI Mapping

WSDL	UDDI
portType	tModel (categorized as portType)
Namespace of portType	keyedReference in categoryBag
Local name of portType	tModel name
WSDL location	overviewURL

1.1.2. WSDL Bindings

In similar fashion, as summarized in [Table 2, “wsdl binding:UDDI mapping”](#), WSDL bindings are mapped to tModels created for each binding, with name of the tModel gathered from the WSDL binding local name and the overviewURL again being the URL of the WSDL specification. Again, the tModel contains a categoryBag, this time with the following keyedReferences:

- The type is categorized as binding.
- The namespace is categorized as the WSDL binding namespace.
- A portType category on the binding is used to refer to the portType tModel that was created for the WSDL portType (as described above).

- The protocol and transport categories are set to the same attributes as described in the WSDL binding, such as SOAP and HTTP, respectively.

Table 2. wsdl binding:UDDI mapping

WSDL	UDDI
Binding	tModel (categorized as binding and wsdlSpec)
Namespace of binding	keyedReference in categoryBag
Local name of binding	tModel name
WSDL location	overviewURL
portType binding	keyedReference in categoryBag
Protocol	keyedReference in categoryBag
Transport	keyedReference in categoryBag

1.1.3. WSDL Service

WSDL services are represented as UDDI businessServices. The name is a human readable name. The tModel again contains a categoryBag which this time contains the following keyedReferences:

- The type is categorized as service
- The namespace is again categorized as the WSDL binding namespace.
- The local name is categorized as the local name of the service.

The businessService also contains a bindingTemplate:

- The access type is categorized as the access point of the service.
- The portType is categorized as the tModel of the portType.
- The binding is categorized as the tModel of the binding information.
- The local name is categorized as the local name of the port.

Table 3. wsdl service:UDDI mapping

WSDL	UDDI
Service	businessService (categorized as service)
Namespace of service	keyedReference in categoryBag
Local name of service	keyedReference in categoryBag; optionally used name of service

1.1.4. Use Cases

Oracle Service Registry supports the following use cases:

- **Publishing a WSDL file** You can also specify how artifacts of the WSDL file will be mapped to the existing UDDI structures.
- **Search for a WSDL** You can search for the WSDL file by WSDL location (URI).

- **Unpublish and republish the WSDL** You can unpublish and republish the WSDL

For more information, also see:

- User's Guide, [Section Publishing WSDL Documents](#)
- User's Guide, [Section Find WSDL](#)
- Developer's Guide, [Section 2.2.8, WSDL Publishing](#)

1.2. XML

As shown in [Figure 2](#), an XML file is mapped to a tModel. The location of the XML file is added to the tModel's overviewURL element. Namespaces are mapped to keyedReferences in the tModel categoryBag. Each namespace is mapped to a tModel.

Figure 2. XML TO UDDI



1.2.1. Use Cases

Oracle Service Registry supports the following use cases:

- **Publish an XML document** You can also specify how artifacts of the XML file will be mapped to the existing UDDI structures.
- **Search for an XML file**
 - Search for an XML file containing data of certain type (XSD) .

- Search for an XML file from a specified server or folder, using search criteria, URI prefix, and wild card characters.
- Search for an XML file that is input or output of a specified XSLT.
- Search for a generator of a specified output XML file.
- Search for a processor of a specified input XML file.
- Unpublish and republish the XML file.

For more information, also see:

- User's Guide, [Section Publish XML](#)
- User's Guide, [Section Find XML](#)
- Developer's Guide, [Section 2.2.9, XML Publishing](#)

1.3. XSD

As shown in [Figure 3](#), an XML Schema file is mapped to a tModel. The location URI of the XSD file is put to the tModels overviewURL element and the target namespace is mapped to a keyedReference in the tModel category bag. xsd:types, xsd:elements and xsd:imports are mapped to the tModel keyedReferences. For each type, element or import, a new tModel is created.

Figure 3. XSD to UDDI



1.3.1. Use Cases

Oracle Service Registry supports the following use cases:

- **Publish an XML Schema** You can also specify how artifacts of the XML Schema file will be mapped to existing UDDI structures
- **Search for an XML schema:**
 - Search for an XML Schema that imports artifacts declared in the specified XSD file.
 - Search for an XML Schema located in a specified server or folder.
 - Search for all XSL transformations that can process documents using a specified XSD.
 - Search for all XSL transformations producing documents that use the specified XSD.
- **Unpublish and republish the XML Schema** You can unpublish and republish the XML Schema

For more information, also see:


- User's Guide, [Section Find XSD](#)
- User's Guide, [Section Publish XSD](#)
- Developer's Guide, [Section 2.2.10, XSD Publishing](#)

1.4. XSLT

As shown in [Figure 4](#) an XSL Transformation is mapped to a tModel:

- The location URI of the XSLT file is added to the tModel's overviewURL element.
- Namespaces are mapped to keyedReferences in the tModel's categoryBag.
- The `xsl:import` elements are also mapped to keyedReferences in the tModel's categoryBag.

For each import and namespace, a new tModel is created.

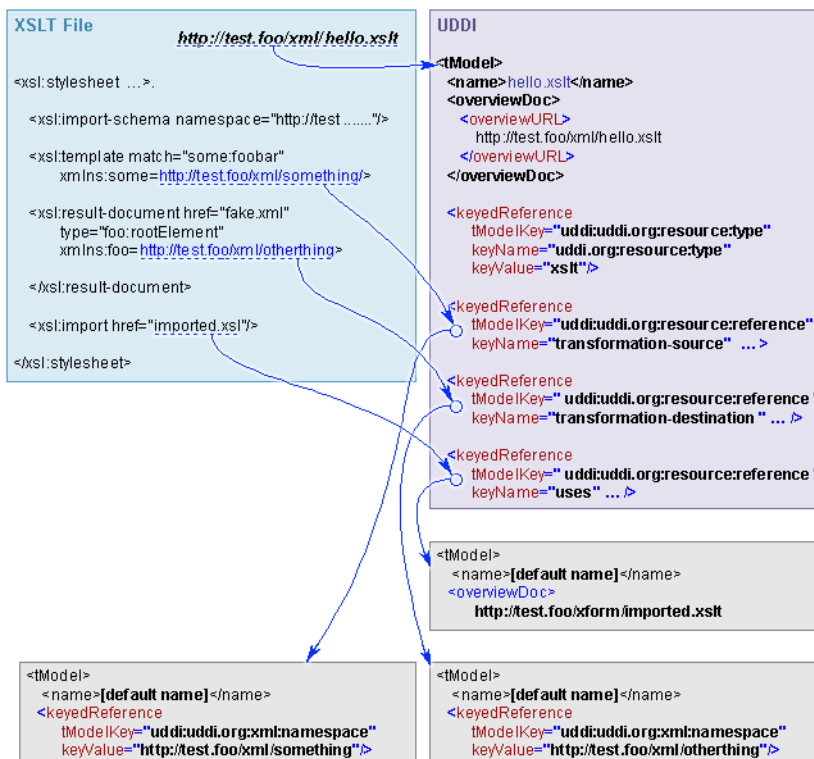Figure 4. XSLT TO UDDI

1.4.1. Use Cases

Oracle Service Registry supports the following use cases:

- **Publish an XSL Transformation** You can also specify how artifacts of the XSLT file will be mapped to the existing UDDI structures.
- **Search for an XSL Transformation**
 - Search for inputs and outputs of the specified XSLT.
 - Search for compatible XSDs.
- **Unpublish and republish the XSL transformations** You can unpublish and republish the XSL transformations

For more information, also see:

- User's Guide, [Section Find XSLT](#)
- User's Guide, [Section Publish XSLT](#)
- Developer's Guide, [Section 2.2.11, XSLT Publishing](#)

2. Client-Side Development

Client-Side Development includes the following sections:

- [UDDI APIs](#) - Describes the principles of how to use Oracle Service Registry APIs. The UDDI API set can be split by typical use case into two parts. The **Inquiry API** set is used to locate and obtain details on entries in the UDDI registry. For example to find out endpoint of given web service. The **publication API** set is used to publish and update information in the UDDI registry.
- [Advanced APIs](#) - Advanced APIs cover the following APIs: [Validation API](#), [Taxonomy API](#), [Category APIs](#), [Approval API](#), [Administration Utilities API](#), [Replication API](#), [Statistics API](#), [Inquiry UI API](#), [Subscription Ext Api](#), and Publishing API for resources:
 - [WSDL Publishing](#)
 - [XML Publishing](#)
 - [XSD Publishing](#)
 - [XSLT Publishing](#)
- [Security APIs](#) - Security APIs cover the following APIs: [Account API](#), [Group API](#), [Permission API](#).
- [Registry Client](#) - This section describes how to prepare your own client distribution. A client created this way allows you to access the Oracle Service Registry API through a SOAP interface.
- [Client authentication](#) - describes how to create a client that authenticates thru HTTP Basic.

2.1. UDDI APIs

UDDI (Universal Description Discovery and Integration) is set of Web service that supports the description and discovery of Web service providers, Web services and technical fingerprints of those Web service.

The UDDI API set can be split by typical use case into two parts. The Inquiry API set is used to locate and obtain details on entries in the UDDI registry. For example to find out endpoint of given web service. The publication API set is used to publish and update information in the UDDI registry.

2.1.1. Principles To Use UDDI API

This section will show you how to use the Oracle Service Registry API. Examples are based on [UDDI version 3 Specification](#) [<http://uddi.org/pubs/uddi-v3.00-published-20020719.htm>].

To use Inquiry APIs you can follow these steps. The complete code fragment is shown in [Example 1, FindBinding v3](#).

1. Get API implementation from stub

```
String url = "http://localhost:8888/registry/uddi/inquiry";
UDDI_Inquiry_PortType inquiry = UDDIInquiryStub.getInstance(url);
```

2. Collect inquiry parameters

```
String serviceKey = "uddi:systinet.com:demo:hr:employeesList";
String tModelKey = "uddi:systinet.com:demo:employeeList:binding";
Find_binding find_binding = new Find_binding();
find_binding.setServiceKey(serviceKey);
```

```
find_binding.addTModelKey(tModelKey);
find_binding.setMaxRows(new Integer(10));
```

3. Call inquiry method

```
BindingDetail bindingDetail = inquiry.find_binding(find_binding);
```

4. Operate with inquiry result

```
ListDescription listDescription = bindingDetail.getListDescription();
if (listDescription != null) {
    int includeCount = listDescription.getIncludeCount();
    int actualCount = listDescription.getActualCount();
    int listHead = listDescription.getListHead();
    System.out.println("Displaying " + includeCount + " of " +
        actualCount + ", starting at position " + listHead);
}
```



Note

If you get the `java.lang.reflect.UndeclaredThrowableException` exception, check whether Oracle Service Registry is running.

To use the publishing API, follow these steps. The complete code fragment is shown in [Example 2, SaveService v3](#).

1. Get API of security stub

```
String securityUrl = "http://localhost:8888/registry/uddi/security";
UDDI_Security_PortType security = UDDISecurityStub.getInstance(securityUrl);
String publishingUrl = "http://localhost:8888/registry/uddi/publishing";
UDDI_Publication_PortType publishing = UDDIPublishStub.getInstance(publishingUrl);
```

2. Get authentication token

```
AuthToken authToken = security.get_authToken(new Get_authToken(userName, password));
String authInfo = authToken.getAuthInfo();
```

3. Create save object

```
String businessKey = "uddi:systinet.com:demo:it";
String serviceKey = ""; // serviceKey is optional
int count = 1;
String[] serviceNames = new String[count];
String[] languageCodes = new String[count];
languageCodes[0] = null; // can set an array of language codes
serviceNames[0] = "Requests Service"; //service name
String serviceDescription = "Saved by Example"; //service description
BusinessService businessService = new BusinessService();
businessService.setBusinessKey(businessKey);
if (serviceKey != null && serviceKey.length() > 0)
    businessService.setServiceKey(serviceKey);
businessService.addName(new Name(serviceNames[0], languageCodes[0]));
```

```
businessService.addDescription(new Description(serviceDescription));  
Save_service save = new Save_service();  
save.addBusinessService(businessService);  
save.setAuthInfo(authInfo);
```

4. Call publishing method

```
ServiceDetail serviceDetail = publishing.save_service(save);
```

5. Operate with publishing result

```
BusinessServiceArrayList  
    businessServiceArrayList = serviceDetail.getBusinessServiceArrayList();  
int position = 1;  
for (Iterator iterator = businessServiceArrayList.iterator();  
    iterator.hasNext();) {  
    BusinessService service = (BusinessService) iterator.next();  
    System.out.println("Service " + position + " : " + service.getServiceKey());  
    System.out.println(service.toXML());  
    position++;  
}
```

6. Discard the authentication token

```
security.discard_authToken(new Discard_authToken(authInfo));
```


Example 1. FindBinding v3

```
package example.inquiry;

import org.systinet.uddi.client.v3.UDDIInquiryStub;
import org.systinet.uddi.client.v3.UDDI_Inquiry_PortType;
import org.systinet.uddi.client.v3.struct.*;

import java.util.Iterator;

public class PrincipleFindBinding {

    public static void main(String args[]) throws Exception {

        //1. Get API implementation from stub
        String url = "http://localhost:8888/registry/uddi/inquiry";
        System.out.print("Using Inquiry at url " + url + " ..");
        UDDI_Inquiry_PortType inquiry = UDDIInquiryStub.getInstance(url);
        System.out.println(" done");

        //2. Collect inquiry parameters
        String serviceKey = "uddi:systinet.com:demo:hr:employeesList";
        String tModelKey = "uddi:systinet.com:demo:employeeList:binding";
        Find_binding find_binding = new Find_binding();
        find_binding.setServiceKey(serviceKey);
        find_binding.addTModelKey(tModelKey);
        find_binding.setMaxRows(new Integer(10));

        //3. Call inquiry method
        System.out.print("Search in progress ..");
        BindingDetail bindingDetail = inquiry.find_binding(find_binding);
        System.out.println(" done");

        //4. Operate with result
        ListDescription listDescription = bindingDetail.getListDescription();
        if (listDescription != null) {
            int includeCount = listDescription.getIncludeCount();
            int actualCount = listDescription.getActualCount();
            int listHead = listDescription.getListHead();
            System.out.println("Displaying " + includeCount + " of " + actualCount
                + ", starting at position " + listHead);
        }

        BindingTemplateArrayList bindingTemplateArrayList
            = bindingDetail.getBindingTemplateArrayList();
        if (bindingTemplateArrayList == null) {
            System.out.println("Nothing found");
            return;
        }

        int position = 1;
        for (Iterator iterator = bindingTemplateArrayList.iterator();
            iterator.hasNext();) {
            BindingTemplate bindingTemplate = (BindingTemplate) iterator.next();
```

```
        System.out.println("Binding " + position + " : " +  
            bindingTemplate.getBindingKey());  
        System.out.println(bindingTemplate.toXML());  
        position++;  
    }  
}
```

Example 2. SaveService v3

```

package example.publishing;

import org.systinet.uddi.InvalidParameterException;
import org.systinet.uddi.client.v3.UDDIException;
import org.systinet.uddi.client.v3.UDDIPublishStub;
import org.systinet.uddi.client.v3.UDDISecurityStub;
import org.systinet.uddi.client.v3.UDDI_Publication_PortType;
import org.systinet.uddi.client.v3.UDDI_Security_PortType;
import org.systinet.uddi.client.v3.struct.AuthToken;
import org.systinet.uddi.client.v3.struct.BusinessService;
import org.systinet.uddi.client.v3.struct.BusinessServiceArrayList;
import org.systinet.uddi.client.v3.struct.Description;
import org.systinet.uddi.client.v3.struct.Discard_authToken;
import org.systinet.uddi.client.v3.struct.DispositionReport;
import org.systinet.uddi.client.v3.struct.Get_authToken;
import org.systinet.uddi.client.v3.struct.Name;
import org.systinet.uddi.client.v3.struct.Save_service;
import org.systinet.uddi.client.v3.struct.ServiceDetail;

import javax.xml.soap.SOAPException;
import java.util.Iterator;

public class PrincipleSaveService {

    public static void main(String[] args) throws UDDIException,
        InvalidParameterException, SOAPException {

        String userName = "demo_john";
        String password = "demo_john";

        //1. Get API implementation from stub
        String securityUrl = "http://localhost:8888/registry/uddi/security";
        System.out.print("Using Security at url " + securityUrl + " ..");
        UDDI_Security_PortType security = UDDISecurityStub.getInstance(securityUrl);
        System.out.println(" done");
        String publishingUrl = "http://localhost:8888/registry/uddi/publishing";
        System.out.print("Using Publishing at url " + publishingUrl + " ..");
        UDDI_Publication_PortType publishing = UDDIPublishStub.getInstance(publishingUrl);
        System.out.println(" done");

        //2. Get authentication token
        System.out.print("Logging in ..");
        AuthToken authToken =
            security.get_authToken(new Get_authToken(userName, password));
        System.out.println(" done");
        String authInfo = authToken.getAuthInfo();

        //3. Create save object
        String businessKey = "uddi:systinet.com:demo:it";
        String serviceKey = ""; // serviceKey is optional
        int count = 1;
        String[] serviceNames = new String[count];
    }
}

```

```

String[] languageCodes = new String[count];
languageCodes[0] = null; // can set an array of language codes
serviceNames[0] = "Requests Service"; //service name
String serviceDescription = "Saved by Example"; //service description
BusinessService businessService = new BusinessService();
businessService.setBusinessKey(businessKey);
if (serviceKey != null && serviceKey.length() > 0)
    businessService.setServiceKey(serviceKey);
businessService.addName(new Name(serviceNames[0], languageCodes[0]));
businessService.addDescription(new Description(serviceDescription));

Save_service save = new Save_service();
save.addBusinessService(businessService);
save.setAuthInfo(authInfo);

//4. Call publishing method
System.out.print("Save in progress ...");
ServiceDetail serviceDetail = publishing.save_service(save);
System.out.println(" done");

//5. Operate with publishing result
BusinessServiceArrayList businessServiceArrayList =
    serviceDetail.getBusinessServiceArrayList();
int position = 1;
for (Iterator iterator = businessServiceArrayList.iterator();
    iterator.hasNext();) {
    BusinessService service = (BusinessService) iterator.next();
    System.out.println("Service " + position + " : "
        + service.getServiceKey());
    System.out.println(service.toXML());
    position++;
}
//6. Discard authentication token
System.out.print("Logging out ..");
security.discard_authToken(new Discard_authToken(authInfo));
System.out.println(" done");
}
}

```

2.1.2. UDDI Version 1

The [UDDI version 1 Specification](http://www.oasis-open.org/committees/uddi-spec/doc/contribs.htm#uddiv1) [http://www.oasis-open.org/committees/uddi-spec/doc/contribs.htm#uddiv1] has provided a foundation for next versions.

Inquire

- WSDL: [inquire_v1.wsdl](http://www.systinet.com/doc/sr-65/wsdl/inquire_v1.wsdl) [http://www.systinet.com/doc/sr-65/wsdl/inquire_v1.wsdl]
- API endpoint: http://<host name>:<port>/<context>/uddi/inquiry
- Java API: [org.systinet.uddi.client.v1.InquireSoap](#)
- Demos: [Inquiry demos v1](#)

Publish

- WSDL: [publish_v1.wsdl](http://www.systinet.com/doc/sr-65/wsdl/publish_v1.wsdl) [http://www.systinet.com/doc/sr-65/wsdl/publish_v1.wsdl]
- API endpoint: http://<host name>:<port>/<context>/uddi/publishing
- Java API: [org.systinet.uddi.client.v1.PublishSoap](#)
- Demos: [Publishing demos v1](#)

2.1.3. UDDI Version 2

The [UDDI version 2 Specification](http://uddi.org/pubs/ProgrammersAPI-V2.04-Published-20020719.htm) [http://uddi.org/pubs/ProgrammersAPI-V2.04-Published-20020719.htm] has introduced many improvements of existing concepts and new features like service projections.

Inquiry

- Specification: [Inquiry API functions](#) [http://uddi.org/pubs/ProgrammersAPI-V2.04-Published-20020719.htm#_Toc25137711]
- WSDL: [inquire_v2.wsdl](http://www.systinet.com/doc/sr-65/wsdl/inquire_v2.wsdl) [http://www.systinet.com/doc/sr-65/wsdl/inquire_v2.wsdl]
- API endpoint: http://<host name>:<port>/<context>/uddi/inquiry
- Java API: [org.systinet.uddi.client.v2.Inquire](#)
- Demos: [Inquiry demos v2](#)

Publish

- Specification: [Publishing API Function](#) [http://uddi.org/pubs/ProgrammersAPI-V2.04-Published-20020719.htm#_Toc25137730]
- WSDL: [publish_v2.wsdl](http://www.systinet.com/doc/sr-65/wsdl/publish_v2.wsdl) [http://www.systinet.com/doc/sr-65/wsdl/publish_v2.wsdl]
- API endpoint: http://<host name>:<port>/<context>/uddi/publishing
- Java API: [org.systinet.uddi.client.v2.Publish](#)
- Demos: [Publishing demos v2](#)

2.1.4. UDDI Version 3

The [UDDI version 3 Specification](http://uddi.org/pubs/uddi-v3.00-published-20020719.htm) [http://uddi.org/pubs/uddi-v3.00-published-20020719.htm] is a major step in providing industry standard for building and querying XML web services registries useful in both public and private deployments.

Inquiry

- Specification: [Inquiry API set](http://uddi.org/pubs/uddi-v3.00-published-20020719.htm#_Toc42047277) [http://uddi.org/pubs/uddi-v3.00-published-20020719.htm#_Toc42047277]
- API endpoint: http://<host name>:<port>/<context>/uddi/inquiry
- Java API: [org.systinet.uddi.client.v3.UDDI_Inquiry_PortType](#)
- Demos: [Inquiry demos v3](#)

Publication

- Specification: [Publication API set](http://uddi.org/pubs/uddi-v3.00-published-20020719.htm#_Toc42047296) [http://uddi.org/pubs/uddi-v3.00-published-20020719.htm#_Toc42047296]
- API endpoint: http://<host name>:<port>/<context>/uddi/publishing
- Java API: [org.systinet.uddi.client.v3.UDDI_Publication_PortType](#)
- Demos: [Publishing demos v3](#)

Security

- Specification: [Security API set](http://uddi.org/pubs/uddi-v3.00-published-20020719.htm#_Toc42047316) [http://uddi.org/pubs/uddi-v3.00-published-20020719.htm#_Toc42047316]
- API endpoint: http://<host name>:<port>/<context>/uddi/security
- Java API: [org.systinet.uddi.client.v3.UDDI_Security_PortType](#)

Custody

The Custody and Ownership Transfer API is used to transfer UDDI structures between UDDI nodes and to change their ownership. One use case is when the publisher wishes to transfer responsibility for a selected UDDI structure to another user, typically after a business reorganization.

- Specification: [Custody and Ownership Transfer API Set](http://uddi.org/pubs/uddi-v3.00-published-20020719.htm#_Toc42047319) [http://uddi.org/pubs/uddi-v3.00-published-20020719.htm#_Toc42047319]
- API endpoint: http://<host name>:<port>/<context>/uddi/custody
- Java API: [org.systinet.uddi.client.custody.v3.UDDI_CustodyTransfer_PortType](#)
- Demos: [Custody Demos](#)

Subscription

The Subscription API is a service that asynchronously sends notification to users who have registered an interest in changes to a registry. These users have a range of options in specifying matching criteria so that they receive only the information in which they are interested.

- Specification: [Subscription API Set](http://uddi.org/pubs/uddi-v3.00-published-20020719.htm#_Toc42047327) [http://uddi.org/pubs/uddi-v3.00-published-20020719.htm#_Toc42047327]
- API endpoint: http://<host name>:<port>/<context>/uddi/custody
- Java API: [org.systinet.uddi.client.subscription.v3.UDDI_Subscription_PortType](#)
- Demos: [Subscription Demos](#)

2.1.5. UDDI Version 3 Extension

UDDI Version 3 Extensions are extensions of the [UDDI Version 3 Specification](http://www.oasis-open.org/committees/uddi-spec/doc/tcspecs.htm#uddiv3) [http://www.oasis-open.org/committees/uddi-spec/doc/tcspecs.htm#uddiv3]. The following data structures are used by APIs for the Registry Control and APIs that will be approved as official technical notes of the UDDI specification.

Data Structures

businessEntityExt

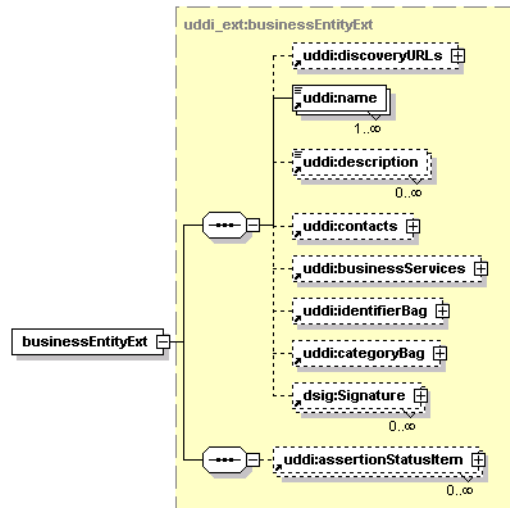


Table 4. Attributes

Name	Required
businessKey	Optional

This structure is used by the Registry Control for performance enhancements. The structure is an extension of [businessEntity](http://uddi.org/pubs/uddi-v3.0.1-20031014.htm#_Toc53709226) [http://uddi.org/pubs/uddi-v3.0.1-20031014.htm#_Toc53709226], the added element is [uddi:assertionStatusItem](http://uddi.org/pubs/uddi-v3.0.1-20031014.htm#_Toc53709302) [http://uddi.org/pubs/uddi-v3.0.1-20031014.htm#_Toc53709302] that points to the related businessEntity,

businessInfoExt

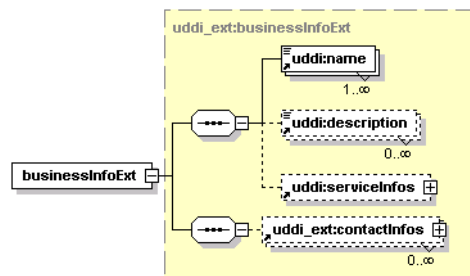


Table 5. Attributes

Name	Required
businessKey	Optional

This structure is an extension of the `businessInfo` structure; the added element is `uddi_ext:contactInfos`.

contactInfo





Table 6. Attributes


Name	Required
useType	Optional

This structure represents a person name for the [businessInfoExt](#).

contactInfos**Table 7. Attributes**

Name	Required
useType	Optional

This structure holds a list of [contactInfos](#).

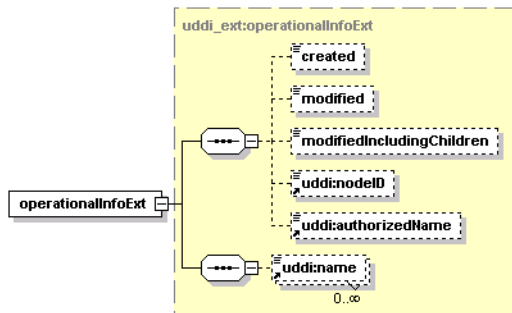operationalInfoExt**Table 8. Attributes**

Name	Required
entityKey	Required
entityKeyV2	Optional

This structure is an extension of the [operationalInfo](#) [http://uddi.org/pubs/uddi-v3.0.1-20031014.htm#_Toc53709242] structure, the added element is `uddi:name`. The `entityKeyV2` holds UDDI v2 key values.


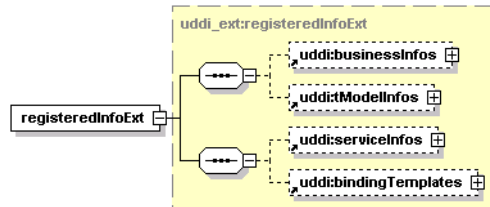
qualifiedKeyedReference

Table 9. Attributes


Name	Required
tModelKey	Required
keyName	Optional
keyValue	Required

This structure holds findQualifiers that are used in [Range Queries](#).

registeredInfoExt**Table 10. Attributes**

Name	Required
truncated	Optional

This structure is used by ACL functionality. The added elements are `uddi:serviceInfos` and `uddi:bindingTemplates` that point to UDDI entities the user does not own but has privileges to modify.

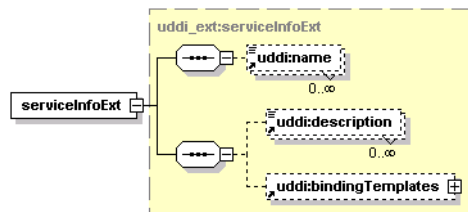serviceInfoExt**Table 11. Attributes**

Name	Required
serviceKey	Required
businessKey	Required

This structure is an extension of `serviceInfo`. It is used by the web interface for performance enhancements. The added elements are `uddi:description` and `uddi:bindingTemplates`.

Find Qualifiers

[UDDI V3 Specification](http://uddi.org/pubs/uddi-v3.0.1-20031014.htm#_Toc53709434) [http://uddi.org/pubs/uddi-v3.0.1-20031014.htm#_Toc53709434] permits vendors to define new find qualifiers. [Table 12, “Summary of Additional Find Qualifiers in Oracle Service Registry”](#) summarizes the additional find qualifiers in Oracle Service Registry and the `find_xx` operations that support them. See [Section Inquiry](#) for more information on inquiry API operations.

Each short name in [Table 12, “Summary of Additional Find Qualifiers in Oracle Service Registry”](#) links to a subsection that follows. Note that the tModel key is the short name prefixed with `uddi:systinet.com:findQualifier:.`

Table 12. Summary of Additional Find Qualifiers in Oracle Service Registry

Short Name	Supporting Operations				
	find_business	find_service	find_binding	find_tModel	find_relatedBusinesses
deletedTModels				✓	
foreignEntities	✓	✓	✓	✓	
keyNameMatch	✓	✓	✓	✓	✓
myEntities	✓	✓	✓	✓	
omitKeyNameMatch	✓	✓	✓	✓	✓
omitKeyValueMatch	✓	✓	✓	✓	✓
omitTModelKeyMatch	✓	✓	✓	✓	✓
tModelKeyApproximateMatch	✓	✓	✓	✓	✓

deletedTModels

This find qualifier returns only hidden tModels, hence enabling administrators to locate and permanently delete garbage tModels.

Note that the registry settings determine whether `delete_tModel`:

- just hides the tModel from `find_tModel` operations (default behaviour required by the specification);
- really deletes the tModel, provided there are no dependencies on it;

See Administrator's Guide, [Section 2.7, Node](#).

tModel Key	<code>uddi:systinet.com:findQualifier:deletedTModels</code>
Supporting Operations	<code>find_tModel</code> .

foreignEntities

This find qualifier restricts results to entities that do not belong to the caller.



Note

This qualifier does not make any sense for an anonymous caller because all entities will be returned in the query.

tModel Key	<code>uddi:systinet.com:findQualifier:foreignEntities</code>
Supporting Operations	All <code>find_xx</code> operations except <code>find_relatedBusinesses</code> .

keyNameMatch

This find qualifier changes default rules for matching `keyedReferences`. By default `keyNames` are only compared when the General Keywords tModelKey is specified. This find qualifier enforces comparison of `keyNames`.

The `keyNameMatch` and `omitKeyNameMatch` findQualifiers are mutually exclusive.

tModel Key	uddi:systinet.com:findQualifier:keyNameMatch
Supporting Operations	All find_xx operations.

myEntities

This find qualifier restricts results to entities that belong to the caller.



Note

This qualifier does not make any sense for an anonymous caller. All entities would be returned in that case.

tModel Key	uddi:systinet.com:findQualifier:myEntities
Supporting Operations	All find_xx operations except find_relatedBusinesses.

omitKeyNameMatch

This find qualifier changes default rules for matching keyedReferences. By default keyNames are only compared when the General Keywords tModelKey is specified. This find qualifier skips comparison of keyNames.

The keyNameMatch and omitKeyNameMatch findQualifiers are mutually exclusive.

tModel Key	uddi:systinet.com:findQualifier:omitKeyNameMatch
Supporting Operations	All find_xx operations.

omitKeyValueMatch

This find qualifier changes default rules for matching keyedReferences. By default keyValues are compared. This find qualifier skips comparison of keyValues.

The omitKeyValueMatch and omitTModelKeyMatch findQualifiers are mutually exclusive.

tModel Key	uddi:systinet.com:findQualifier:omitKeyValueMatch
Supporting Operations	All find_xx operations.

omitTModelKeyMatch

This find qualifier changes default rules for matching keyedReferences. By default tModelKeys are compared. This find qualifier skips comparison of tModelKeys.

The omitKeyValueMatch and omitTModelKeyMatch findQualifiers are mutually exclusive.

tModel Key	uddi:systinet.com:findQualifier:omitTModelKeyMatch
Supporting Operations	All find_xx operations.

tModelKeyApproximateMatch

This find qualifier changes the default rules for matching keyedReferences. By default tModelKeys are compared without wildcards and case insensitively. This find qualifier enables a tModelKey in a query to include wildcards:

- '%' interpreted as zero or more arbitrary characters;
- '_' interpreted as an arbitrary character.

The behavior is similar to the approximateMatch find qualifier.

tModel Key	uddi:systinet.com:findQualifier:tModelKeyApproximateMatch
Supporting Operations	All find_xx operations.

2.2. Advanced APIs

Advanced APIs cover the following APIs:

- [Validation API](#) - The Valueset Validation API is used to validate values in keyedReferences involved in save operations that reference checked taxonomies. Valueset validation is defined in the [UDDI version 3 specification](#) [http://uddi.org/pubs/uddi_v3.htm]. Every checked taxonomy requires a Web service that implements this API.
- [Taxonomy API](#) - The Taxonomy API provides a high-level view of taxonomies and makes them easy to manage and query. This API was designed according to the UDDI technical note [Providing A Value Set For Use In UDDI Version 3](#) [http://oasis-open.org/committees/uddi-spec/doc/tn/uddi-spec-tc-tn-valuesetprovider-20030212.htm].
- [Category APIs](#) - The Category API complements the Taxonomy API. It is used to query and to manipulate Internal taxonomies in Oracle Service Registry. More information on the subject of internal taxonomies can be found in the [API documentation](#). The categories may be hierarchically organized. Each category may be top-level (without parent), it may have children, or it may be a child of another category. You can drill down through this pattern In the Registry Control.
- [Approval API](#) - The Approval API includes a set of APIs to manage the approval process.
- [Administration Utilities API](#) - The Administration Utilities API provides an interface to perform several low level administrative tasks in Oracle Service Registry.
- [Replication API](#) - The Replication API is used to launch replications in Oracle Service Registry.
- [Statistics API](#) - The Statistics API provides useful information about Oracle Service Registry usage.
- [WSDL Publishing API](#) - Oracle Service Registry WSDL-to-UDDI mapping is compliant with OASIS's Technical Note, [Using WSDL in a UDDI registry Version 2.0](#) [http://www.oasis-open.org/committees/uddi-spec/doc/tn/uddi-spec-tc-tn-wsdl-v2.htm]. It enables the automatic publishing of WSDL documents to UDDI, enables precise and flexible UDDI queries based on specific WSDL artifacts and metadata, and provides a consistent mapping for UDDI v2 and UDDI v3.
- Resources Publishing APIs - [XML2UDDI](#), [XSD2UDDI](#) and [XSLT2UDDI](#). These API sets allow you to manipulate with resources in Oracle Service Registry. XML documents, XML Schemas and XSL Transformations are supported.
- [Inquiry UI API](#) - The Inquiry UI API has been implemented for improving the performance of the Business Service Control. The basic idea is to retrieve data that appear in the Business Service Control using a single API call.
- [Subscription Ext API](#) - The Subscription Extension API has been implemented to allow the user to create subscriptions in the *discovery registry* of the approval process.

2.2.1. Validation

The Valueset validation API is used to validate values in keyedReferences involved in save operations that reference checked taxonomies. Valueset validation is defined in the [UDDI version 3 specification](#) [http://uddi.org/pubs/uddi_v3.htm]. Every checked taxonomy requires a Web service that implements this API. The API is defined by the uddi:uddi.org:v3_valueSetValidation tModel for UDDI version 3, uddi:systinet.com:v2_validateValues for UDDI version 2 and uddi:systinet.com:v1_validateValues for UDDI version 1.

Oracle Service Registry is built according to the UDDI technical note [Providing A Value Set For Use In UDDI Version 3](http://oasis-open.org/committees/uddi-spec/doc/tn/uddi-spec-tc-tn-valuesetprovider-20030212.htm) [http://oasis-open.org/committees/uddi-spec/doc/tn/uddi-spec-tc-tn-valuesetprovider-20030212.htm]. To function correctly, checked taxonomies must be categorized with `uddi-org:validatedBy` taxonomy pointing to the bindingTemplate with the valueset validation Web service accessPoint. This Web service is called whenever the checked taxonomy occurs within a keyedReference during a save operation.

If the Web service is accessible by Oracle Service Registry's classloader, the validation Web service does not need to be invoked over SOAP, but it may run inside the registry's Java Virtual Machine.

The accessPoint value must be in a special form: It must start with the *class:* prefix and continue with fully qualified class name. For example, the internal validation service endpoint is defined as follows: `class:com.systinet.uddi.publishing.v3.validation.service.AclValidator`.

For more information, consult the [UDDI version 3 specification, section 5.6](http://uddi.org/pubs/uddi_v3.htm#_Toc53709335) [http://uddi.org/pubs/uddi_v3.htm#_Toc53709335].

SOAP

- Specification: [uddi_vs_v3.wsdl](http://www.systinet.com/doc/sr-65/wsd/uddi_vs_v3.wsdl) [http://www.systinet.com/doc/sr-65/wsd/uddi_vs_v3.wsdl]

Java

- Java API: `org.systinet.uddi.client.valueset.validation.v3.UDDI_ValueSetValidation_PortType`
- Demos: [Validation demos](#)


2.2.2. Taxonomy

The Taxonomy API provides high-level view of taxonomies and makes them easy to manage and query. This API was built according to the UDDI technical note [Providing A Value Set For Use In UDDI Version 3](http://oasis-open.org/committees/uddi-spec/doc/tn/uddi-spec-tc-tn-valuesetprovider-20030212.htm) [http://oasis-open.org/committees/uddi-spec/doc/tn/uddi-spec-tc-tn-valuesetprovider-20030212.htm].

Data Structures


The following structures are used by the Taxonomy API:

Categories




This structure is a container for zero or more category structures. If the taxonomy is internal, then categories are used to hold possible values of its keyedReferences.

categorizationBag



This structure is a container for one or more categorizations. It defines the containers (categoryBag, keyedReferenceGroup, identifierBag and Publisher Assertion) in which this taxonomy can be used. Possible values are categorization, categorizationGroup, identifier, and relationship. A save operation containing a keyedReference referencing a taxonomy in the wrong container will be denied with E_valueNotAllowed UDDI exception.

Category




This structure corresponds to the keyedReference. It defines the keyedReference of the taxonomy in which it is used. The keyValue must be unique. The disabled attribute is used to mark the category as either helper or deprecated, so it cannot be used as a valid option in keyedReferences. The keyName attribute serves as a label for this category.

Table 13. Attributes

Name	Required
keyName	Yes
keyValue	Yes
disabled	No

compatibilityBag



This structure is a container for one or more compatibilities. It defines the compatibility of the taxonomy with the four basic UDDI data structures - tModel, businessEntity, businessService and bindingTemplate. If the taxonomy is not compatible with one of these UDDI structures, then a save operation containing a keyedReference referencing this taxonomy in this structure will be denied with E_valueNotAllowed UDDI exception.

taxonomy

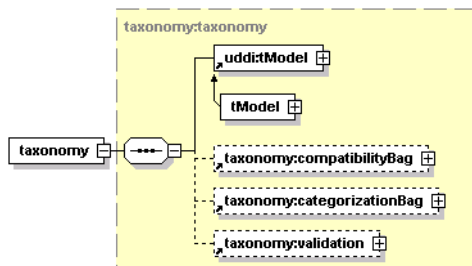


Table 14. Attributes

Name	Required
check	No
unvalidatable	No
brief	No

Each taxonomy is identified by its tModel.

- The optional check attribute is used to define whether the taxonomy is checked or not. If the tModel is checked, then a [validation](#) structure must be present.

- The unvalidatable attribute is used to mark the checked taxonomy as unvalidatable. Unvalidatable taxonomies cannot be used in keyedReferences.
- The brief attribute is related to categories structure and its meaning depends on context, in which it is used.

taxonomyDetail




Table 15. Attributes

Name	Required
truncated	No

This structure is a container for zero or more taxonomies. The truncated attribute indicates whether the list of taxonomies is truncated.

taxonomyInfo

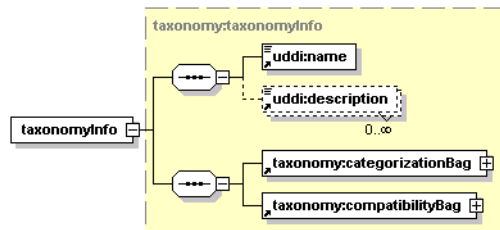



Table 16. Attributes

Name	Required
check	Yes
unvalidatable	No

The taxonomyInfo is an extension of the tModelInfo structure.


- The check attribute indicates whether or not the taxonomy is checked.
- The unvalidatable attribute is used to mark the checked taxonomy as unvalidatable. Unvalidatable taxonomies cannot be used in keyedReferences.

taxonomyInfos



This structure is a container for zero or more taxonomyInfo structures.

taxonomyList




This structure serves as a container for optional listDescription and optional [taxonomyInfos](#) structures. The truncated attribute indicates whether the list of taxonomies is truncated.

Table 17. Attributes

Name	Required
truncated	No

validation

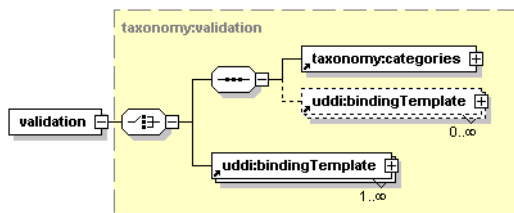


This structure is used to hold information for validating a checked taxonomy. The [categories](#) structure defines the list of available values for keyedReferences checked by the Internal validation service. Binding templates contains the valueset validation Web service endpoint.

Operations

delete_taxonomy

The delete_taxonomy API call is used to delete one or more taxonomies from Oracle Service Registry. The taxonomy consists of a tModel and optional business services and categories.



Arguments

- `uddi:authInfo` - This optional argument is an element that contains an authentication token.
- `uddi:tModelKey` - One or more required uddiKey values that represent existing taxonomy tModels.


Upon successful completion, a disposition report is returned with a single success indicator.

Permissions

This API call requires API manager permission with the name `org.systinet.uddi.client.taxonomy.v3.TaxonomyApi` and the action `delete_taxonomy`.

download_taxonomy

The download_taxonomy API call is used to fetch a selected taxonomy from Oracle Service Registry. This call is stream oriented and is useful for fetching the content of very large taxonomies.



Arguments

- taxonomy:authInfo - This optional argument is an element that contains an authentication token.
- uddi:tModelKey - required uddiKey value that represents an existing taxonomy tModel.

Returns

This API call returns a ResponseMessageAttachment with the selected taxonomy upon success.

Permissions

This API call requires the API manager permission with name `org.systinet.uddi.client.taxonomy.v3.TaxonomyApi` and the action `download_taxonomy`.

find_taxonomy

The find_taxonomy API call is used to find all taxonomies in a registry that match given criteria. This call is an extension of the UDDI v3 find_tModel API call.

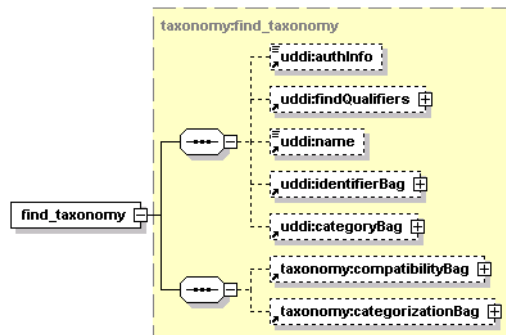


Table 18. Attributes

Name	Required
check	No
unvalidatable	No

Arguments

- uddi:authInfo - This optional argument is an element that contains an authentication token.
- uddi:findQualifiers - The collection of findQualifier used to alter default behavior.
- uddi:name - The string value represents the name of tModel to be found.

- `uddi:identifierBag` - The list of keyedReferences from tModel IdentifierBag.
- `uddi:categoryBag` - The list of keyedReferences from tModel categoryBag.
- [taxonomy:compatibilityBag](#) - An optional list of Compatibilities.
- [taxonomy:categorizationBag](#) - An optional list of Categorizations.
- `check` - Optional boolean value that limits returned data to checked (or unchecked) taxonomies only.
- `unvalidatable` - Optional boolean value that limits returned data to unvalidatable taxonomies only.



Important

The `unvalidatable` attribute of the tModel of a checked taxonomy will be set to true, if one of the following rules is met:

- The tModel of a checked taxonomy does not contain the `validatedBy` keyedReference
- The `bindingTemplate` from keyedReferences does not exist or is not readable because of ACLs.

Returns

This API call returns the [TaxonomyList](#) upon success.

Permissions

This API call requires API user permission `org.systinet.uddi.client.taxonomy.v3.TaxonomyApi` and the action `find_taxonomy`.

get_taxonomy

The `get_taxonomy` API call returns the Taxonomy structure corresponding to each of the `tModelKey` values specified.

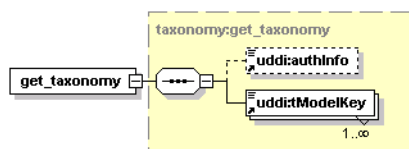


Table 19. Attributes

Name	Required
brief	No

Arguments

- `uddi:authInfo` - This optional argument is an element that contains an authentication token.
- `uddi:tModelKey` - Required `uddiKey` value representing an existing taxonomy tModel.
- `brief` - Requests not to fetch the `categories` element. Note that only the API manager can set this attribute to false.

Returns

This API call returns the [TaxonomyList](#) on success.



Important


If the tModel of a checked taxonomy does not contain the validatedBy keyedReference, the taxonomy's unvalidatable attribute will be set to true and the validation structure will be missing.

Permissions

This API call requires the API user permission `org.systinet.uddi.client.taxonomy.v3.TaxonomyApi` and the action `get_taxonomy`.

save_taxonomy

The `save_taxonomy` API call is used to publish taxonomies to Oracle Service Registry.



The taxonomy properties (checked, unvalidatable, compatibilityBag, and categorizationBag) are first combined with their counterparts in the tModel's categoryBag.



Note

It is an error to specify a validation structure for an unchecked taxonomy. If the taxonomy contains a validation structure, it is automatically set to be checked. If the taxonomy is neither checked nor unchecked, it will be saved as unchecked. If a checked taxonomy does not have a validation structure, the taxonomy is saved with the unvalidatable attribute set to true.

If the categories structure is defined in the validation structure, then the taxonomy will be checked by the Internal validation service. The bindingTemplates are optional; if they are specified, then their AccessPoint must point to the Internal validation service's Web service endpoint.

If the categories structure is not defined in the validation structure, then there must be at least one bindingTemplate. The bindingTemplate must implement valueset validation API (either `uddi:uddi.org:v3_valueSetValidation`, `uddi:systinet.com:v2_validateValues` or `uddi:systinet.com:v1_validateValues`). There must be a valid AccessPoint.

If the serviceKey is given, then this businessService must be part of the Operational business entity (`uddi:systinet.com:uddinodebusinessKey`). During the `save_taxonomy` operation, the businessService will be overwritten.

Arguments

- `taxonomy:authInfo` - This optional argument is an element that contains an authentication token.
- [taxonomy:taxonomy](#) - A list of taxonomies to be saved.

Returns

This API call returns the [TaxonomyDetail](#) on success.

Permissions

This API call requires the API manager permission `org.systinet.uddi.client.taxonomy.v3.TaxonomyApi` and the action `save_taxonomy`.

upload_taxonomy

The `upload_taxonomy` API call is used to publish a Taxonomy into Oracle Service Registry. This call is stream oriented and is useful for publishing very large taxonomies.



Permissions

This API call requires the API manager permission named `org.systinet.uddi.client.taxonomy.v3.TaxonomyApi` and the action `upload_taxonomy`.

Persistence Format


The taxonomy persistence format is used by taxonomy Download/Upload operations. Following is an example of the taxonomy persistence format:

```

<taxonomy xmlns="http://systinet.com/uddi/taxonomy/v3/5.0"
  xmlns:uddi="urn:uddi-org:api_v3"
  check="true">
  <tModel tModelKey="uddi:foo.com:demo:myTaxonomy">
    <uddi:name>My taxonomy</uddi:name>
    <uddi:description>Category system</uddi:description>
  </tModel>
  <compatibilityBag>
    <compatibility>businessEntity</compatibility>
  </compatibilityBag>
  <categorizationBag>
    <categorization>categorization</categorization>
  </categorizationBag>
  <validation>
    <bindingTemplate bindingKey="" serviceKey="" xmlns="urn:uddi-org:api_v3">
      <accessPoint useType="endPoint">
        http://www.foo.com/MyValidationService.wsdl
      </accessPoint>
      <tModelInstanceDetails>
        <tModelInstanceInfo
          tModelKey="uddi:uddi.org:v3_valueSetValidation"/>
        <tModelInstanceInfo
          tModelKey="uddi:systinet.com:demo:myTaxonomy"/>
      </tModelInstanceDetails>
    </bindingTemplate>
  </validation>
</taxonomy>

```

This format reflects the [taxonomy.xsd](http://www.systinet.com/doc/sr-65/wsdl/taxonomy.xsd) [http://www.systinet.com/doc/sr-65/wsdl/taxonomy.xsd] XML Schema Definition file. For more information, see the data structure of [Section taxonomy](#).

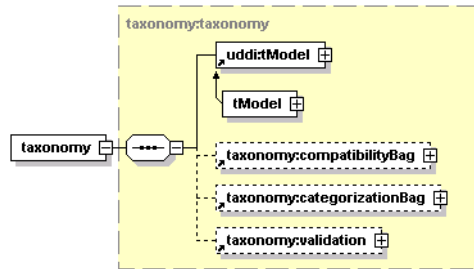

WSDL

You can find the WSDL specification in the file [taxonomy.wsdl](http://www.systinet.com/doc/sr-65/wsdl/taxonomy.wsdl) [http://www.systinet.com/doc/sr-65/wsdl/taxonomy.wsdl].

API Endpoint

You can find the Taxonomy API endpoint at `http://<host name>:<port>/<context>/uddi/taxonomy`.

Java

Java API is generated from Taxonomy WSDL. You are encouraged to browse org.systinet.uddi.client.taxonomy.v3.TaxonomyApi and to read and try [Taxonomy demos](#).

Taxonomy 5.5 Extension

This section describes the taxonomy 5.5. extension intended for [Range queries](#) functionality implementation.

Data Structures

The following structures are used by the Taxonomy 5.5 API:

Taxonomy

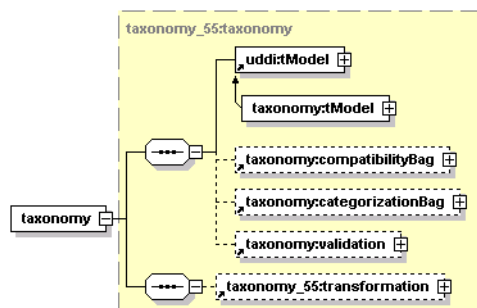
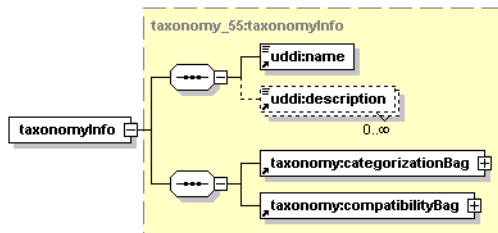


Table 20. Attributes


Name	Required
check	No
unvalidatable	No
brief	No

This structure is almost identical to [taxonomy](#), except that the [transformation](#) argument has been added

taxonomyInfo**Table 21. Attributes**

Name	Required
check	Yes
tModelKey	yes
unvalidatable	No
isOrderedBy	No

This structure is almost identical to [taxonomyInfo](#), except that the optional attribute `isOrderedBy` was added to contain the name of the comparator `tModel`.

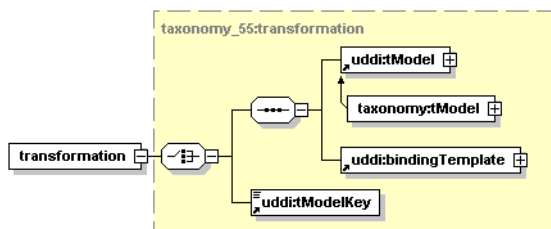transformation

This structure holds a reference to a transformation service implementation. For more information about the transformation service, please see Administrator's Guide, [Section Custom Ordinal Types](#).

- `uddi:tModel` - The `tModel` that represents a comparator taxonomy.
- `uddi:bindingTemplate` - This argument holds the reference of the transformation service implementation. The `accessPoint` element of the `bindingTemplate` includes the name of the java class implementation of the service with the prefix `class:`.
- `uddi:tModelKey` The key of the `tModel` that represents the transformation.

API Endpoint

You can find the Taxonomy 5.5 API endpoint at `http://<host name>:<port>/<context>/uddi/taxonomy55`.


2.2.3. Category

The Category API complements the [Taxonomy API](#). It is used to query and to manipulate Internal taxonomies in Oracle Service Registry. The categories may be hierarchically organized. Each category may be top-level (without parent), it may have children, or it may be a child of another category. You can drill down through this pattern in the Registry Control.

Data Structures

The following structures are used by the Category API:

Categories



This structure is a container for zero or more category elements.

category



Table 22. Attributes

Attribute	Required
disabled	No
leaf	No

This element contains a single keyedReference element that defines value of the category.

The disabled attribute is used to indicate that a category cannot be used as a valid option in keyedReferences. Either it has been deprecated or it is only a parent for other categories. The tModel key value in the uddi-org:types taxonomy is one such disabled category.

The leaf attribute indicates whether this category is a leaf in the category tree.

categoryList




Table 23. Attributes

Attribute	Required
truncated	No


This structure serves as a container for optional listDescription and categories structures. The truncated attribute indicates whether a returned list of categories is truncated.

Operations

add_category

The add_category API call is used to add a new category to the Internal taxonomy identified by the tModelKey in the keyedReference. The parentKeyedReference element is used to define the parent category of new category to be saved. If the parentKeyedReference element is missing, then the new category will have no parent.

Syntax

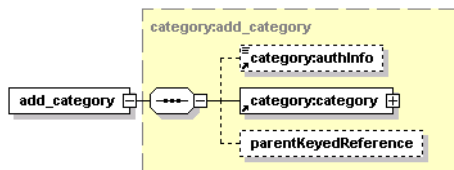

Arguments

- `category:authInfo` - This optional argument is an element that contains an authentication token.
- `category:category` - Category to be added.
- `parentKeyedReference` - Optional keyedReference; serves as parent of the new category.


Permissions

This API call requires API manager permission for `org.systinet.uddi.client.category.v3.CategoryApi` and for the action `add_category`.

delete_category

The `delete_category` API call deletes the selected category from Oracle Service Registry.

Syntax



Arguments

- `category:authInfo` - This optional argument is an element that contains an authentication token.
- `keyedReference` - Category to be deleted.


Permissions

This API call requires API manager permission for `org.systinet.uddi.client.category.v3.CategoryApi` and the action `delete_category`.

find_category

The `find_category` API call is used to query Oracle Service Registry for categories that match given criteria.

Syntax

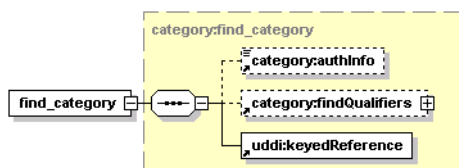

Arguments

- `category:authInfo` - This optional argument is an element that contains an authentication token.
- `category:findQualifiers` - Optional list of `findQualifiers`, that modifies default behavior.
- `uddi:keyedReference` - The category containing search arguments.

Behavior

`FindByName` and `FindByValue` `findQualifiers` are used to distinguish whether the call will search by `keyName` or `keyValue` from the `keyedReference` that is the argument of the call. The default is to search by value.

The `caseSensitiveMatch` and `caseInsensitiveMatch` `findQualifiers` are used to control whether the search will be case sensitive; the default is case sensitive.

The `ApproximateMatch` `findQualifier` is used to search with SQL wildcards. The default `findQualifier`, `exactMatch`, instructs the search to perform an exact comparison.

Finally there are four `findQualifiers` that affect the order in which categories are returned:

- `sortByNameAsc`
- `sortByNameDesc`
- `sortByValueAsc` (default)
- `sortByValueDesc`

These find qualifiers are exclusive. If you combine them, an exception is thrown.


Returns

This API call returns a `CategoryList` upon success.

get_category

The `get_category` API call is used to get categories having a relation, identified by `getQualifier`, to the category identified by given `keyedReference`. If the `getQualifier` is `childCategories`, then the call returns categories that have the selected category as their parent. If the `siblingCategories` `getQualifier` is used, then categories having same parent as selected category are returned.

Syntax

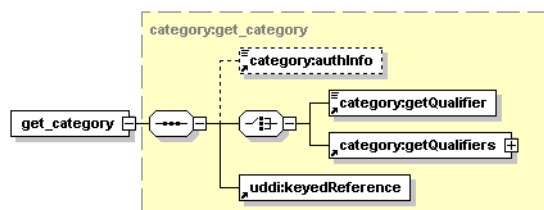

Arguments

- `category:authInfo` - This optional argument is an element that contains an authentication token.
- `category:getQualifier` and `category:getQualifiers` - Control search behavior.

- `uddi:keyedReference` - The category whose relatives shall be received.


Returns

This API call returns a [CategoryList](#) upon success.

get_rootCategory

The `get_rootCategory` API call returns all categories of the Internal taxonomy identified by given `tModelKey` that have no parent.

Syntax

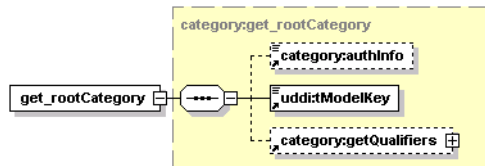

Arguments

- `category:authInfo` - This optional argument is an element that contains an authentication token.
- `uddi:tModelKey` - Required `uddiKey` value that represents an existing taxonomy `tModel`.
- `category:getQualifiers` - Control search behavior.


Returns

This API call returns a [CategoryList](#) upon success.

get_rootPath

The `get_rootPath` API call returns categories from root category, then its child categories until the selected category in this order: root category, parent's parent, parent and the selected category.

Syntax



Arguments

- `category:authInfo` - This optional argument is an element that contains an authentication token.
- `uddi:keyedReference` - Category to be searched


Returns

This API call returns a [CategoryList](#) upon success.

move_category

The `move_category` API call is used to move selected category from current parent (if any) to a new parent category. If the `newParentKeyedReference` is not defined, then the category will have no parent.

Syntax

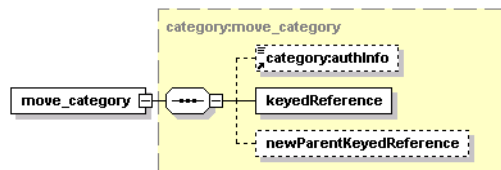

Arguments

- `category:authInfo` - This optional argument is an element that contains an authentication token.
- `keyedReference` - Category to be deleted.
- `newParentKeyedReference` - Optional category, that becomes new parent of the category.


Permissions

This API call requires API manager permission for `org.systinet.uddi.client.category.v3.CategoryApi` and the action `move_category`.

set_category

The `set_category` API call is used to update the selected category in Oracle Service Registry.

Syntax

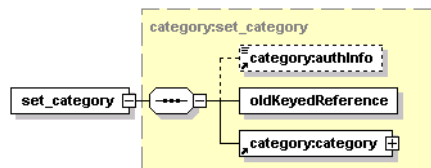

Arguments

- `category:authInfo` - This optional argument is an element that contains an authentication token.
- `oldKeyedReference` - Current category to be updated.
- [category:category](#) - New category, that will replace selected category.

Permissions

This API call requires API manager permission for `org.systinet.uddi.client.category.v3.CategoryApi` and the action `set_category`.

WSDL

You can find this API's WSDL specification in the file [category.wsdl](#) [<http://www.systinet.com/doc/sr-65/wsdl/category.wsdl>].

API Endpoint

You can find the Category API at `http://<host name>:<port>/<context>/uddi/category`.

Java

Java API is generated from Category WSDL. You are encouraged to browse org.systinet.uddi.client.category.v3.CategoryApi and to read and try [Category demos](#).

2.2.4. Approval

The approval process includes the following API sets:

- [Section Requestor](#)
- [Section Approver](#)
- [Section Approval Management](#)
- [Section Approval Content Checker](#)

Requestor


The Approval Requestor API is used to manage approval requests in Oracle Service Registry from the requestor point of view.

Data Structures


The following structures are used by the Approval Requestor API:

- [Section approvalKeys](#)
- [Section approvalRequest](#)
- [Section approvalRequestInfo](#)
- [Section approvalRequestList](#)
- [Section approvalRequestRecord](#)
- [Section keys4Deletion](#)
- [Section keys4Saving](#)
- [Section Request](#)
- [Section requestInfo](#)
- [Section requestList](#)
- [Section requestWrapper](#)

approvalKeys




This element is a container for the optional elements `keys4Saving` and `keys4Deletion`.

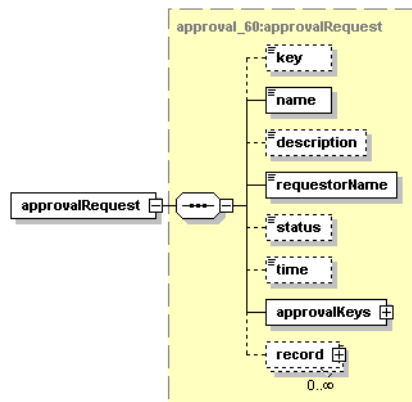approvalRequest

This structure describes one approval request and contains the following elements:

- `key` - identifies the approval request
- `name` - user-defined name of the request
- `description` - description of the request
- `requestorName` - the [loginName](#) of the requestor
- `status` - status of the approver request (open, submitted, closeCancelled, closeRejected, closeApproved, corrupted). The corrupted status means some entities from the approval request have been deleted from the registry. It is not possible to search for approval requests using the corrupted status.
- `time` - time at which the request switched to the current status (xsd:dateTime)
- `approvalKeys` - keys of element to be saved or deleted from the *discovery registry*
- [record](#)

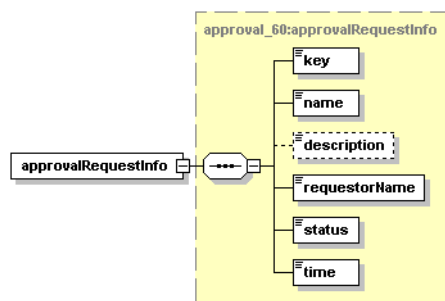
approvalRequestInfo

The `approvalRequestInfo` structure is used by [approvalRequestList](#) and contains the following elements:

- `key` - identifies the `approvalRequestInfo`
- `name` - name of the request
- `description` - description of the `approvalRequestInfo`
- `requestorName` - [loginName](#) of the requestor


- **status** - status of the approvalRequestInfo (open, submitted, closeCancelled, closeRejected, closeApproved, corrupted). The corrupted status means some entities from the approval request have been deleted from the registry. It is not possible to search for approval requests using the corrupted status.
- **time** - time at which the request switched to the current status (xsd:dateTime)

approvalRequestList

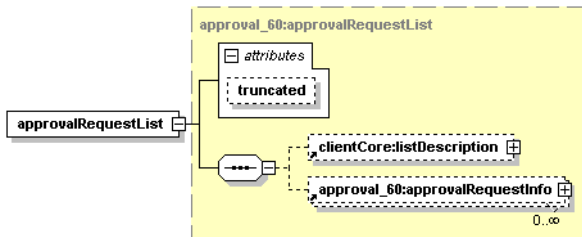

The `approvalRequestList` structure contains a list of [approvalRequestInfos](#).


approvalRequestRecord

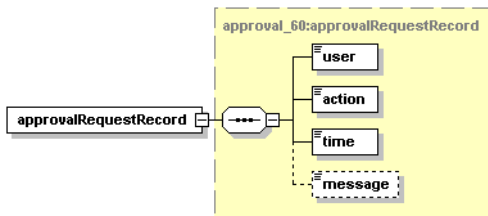

This structure is used in [approvalRequests](#) and contains the following elements:

- **user** - requestor's username
- **action** - action made with the request (saveRequest, askForApproval, cancelRequest, remindApprover, approveRequest, rejectRequest)
- **time** - time at which the `approvalRequestRecord` switched the current action (xsd:dateTime)
- **message** - may contain a requestor's message to the approval contact or approver's message to the requestor.


keys4Deletion

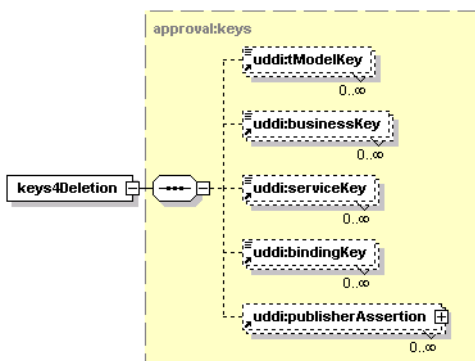

This element is a container for UDDI keys or publisher assertions to be deleted from the *discovery registry*. It can contain the optional elements:

- tModelKey
- businessKey
- serviceKey
- bindingKey
- publisherAssertion

keys4Saving

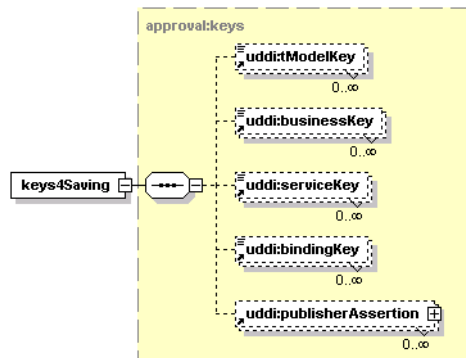


This element is a container for UDDI keys or publisher assertions to be saved to the *discovery registry*. It can contain the optional elements

- tModelKey
- businessKey
- serviceKey
- bindingKey
- publisherAssertion

Request

! Important

This structure is deprecated. User [approvalRequest](#) instead.

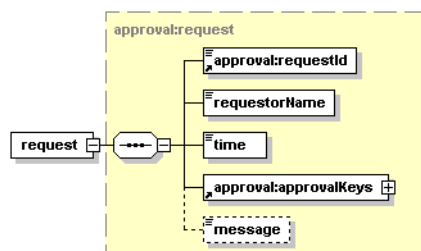

This element describes one approval request. It contains:

- The mandatory element `requestId` that identifies the request


- A requestorName holds the [loginName](#) of the requestor.
- The time element is set to the time the request was made.
- The approvalKeys element is used to store keys of element to be saved or deleted from the *discovery registry*.
- The optional message element may contain a requestor's message to the approval contact.

requestInfo



Important

This structure is deprecated. Used [approvalRequestInfo](#) instead.

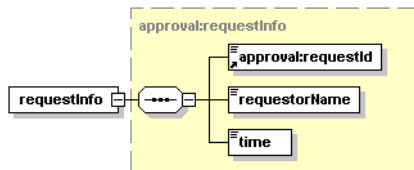

This element contains:


- The mandatory element requestId that identifies the request
- A requestorName holding [loginName](#) of requestor
- A time element set to the time the request was made

requestList




Important

This structure is deprecated. Use [approvalRequestList](#) instead.



This element is used to store an optional listDescription element that describes the result set and an optional set of requestInfo elements.

requestWrapper

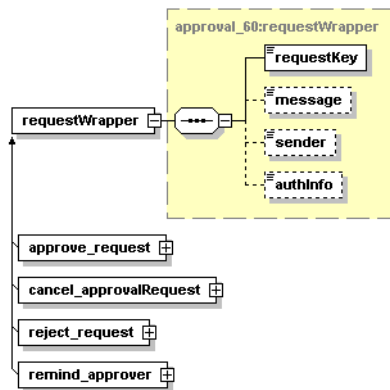

This structure wraps the request structure to be inherited in `approve_request`, `cancel_approvalRequest`, `reject_request`, and `remind_approver` structures.

WSDL

You can find the WSDL specification in the file [approval.wsdl](http://www.systinet.com/doc/sr-65/wsd1/approval.wsdl) [<http://www.systinet.com/doc/sr-65/wsd1/approval.wsdl>].

Java

The Approval Requestor API is generated from [approval.wsdl](http://www.systinet.com/doc/sr-65/wsd1/approval.wsdl) [<http://www.systinet.com/doc/sr-65/wsd1/approval.wsdl>]. You are encouraged to browse its [org.systinet.uddi.approval.v3.RequestorApi](http://www.systinet.com/doc/sr-65/wsd1/approval.wsdl).

API Endpoint

The endpoint for the Approval Requestor API is available at `http://<host name>:<http port>/uddi/requestor`

Approver

The Approver API is used to manage approval requests in Oracle Service Registry from the approver's point of view.

Data Structures

The Approver API shares the same definition of structures with the Requestor API. See [Section Data Structures](#) for information on these structures.

Operations


The Approver API has the following operations:

- [Section approve_request](#)
- [Section Approve](#)
- [Section find_approvalRequest](#)
- [Section findRequest](#)
- [Section getBindingDetail](#)
- [Section getBusinessDetail](#)
- [Section getOperationalInfo](#)

- [Section get_approvalRequest](#)
- [Section getRequest](#)
- [Section getServiceDetail](#)
- [Section getTModelDetail](#)
- [Section reject_request](#)
- [Section Reject](#)

approve_request

The approve_request API call is used to approve the request. The user must be an approval contact for the requestor.

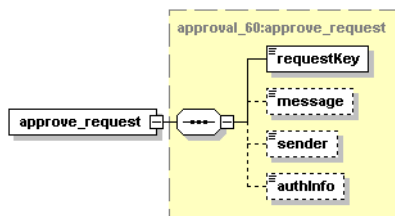

Arguments

The approve_request API call has the following arguments:

- requestKey - a mandatory argument holding the key of the approval request
- message - This optional element may contain text that will be delivered to the requestor by an email.
- sender - Sender is an optional helper element. If set, it must be equal to the [loginName](#) of the user whose authentication token is equal to the token in authInfo. If an administrator (a user with admin manager permission) calls approve_request, the authInfo contains the authentication token of the administrator.

The value of the sender argument may contain the loginName of any existing user.

- authInfo - This optional argument is an element that contains an authentication token.

Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.v3.RequestorApi` and the action `approve_request`.


Approve



Important

This operation is deprecated. Use [approveRequest](#) instead.

The approve API call is used to approve the request identified by requestId. The user must be an approval contact for the requestor.

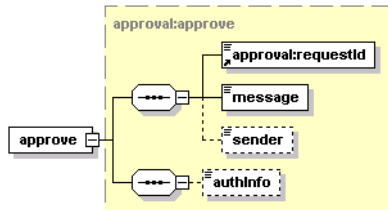

Arguments

- **authInfo** - This optional argument is an element that contains an authentication token.
- **requestId** - mandatory argument holding key of approval request.
- **message** - optional element that may contain text to be delivered to the requestor via email.
- **sender** - an optional helper element. If set, it must be equal to the [loginName](#) of the user.

Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.v3.RequestorApi` and the action `approve`.

find_approvalRequest

The `find_approvalRequest` API call is used to find all approval requests that should be handled (that is, approved or rejected) by the approver.


For more information, see [Section find_approvalRequest](#)

findRequest

! Important

This operation is deprecated. Use [find_approvalRequest](#) instead.

The `findRequest` API call is used to find the requests that the current user is allowed to approve. If the `requestorName` element is specified, this call only returns requests made by this requestor.

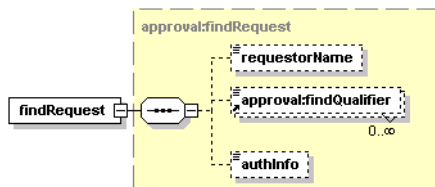

Arguments

The `find_request` API call has the following arguments:

- **authInfo** - This optional argument is an element that contains an authentication token.
- **requestorName** - This optional element identifies the requestor to be searched. The `requestorName` contains the value of [loginName](#).
- **findQualifier** - The collection of `findQualifiers` used to alter default behavior.

Behavior

The following findQualifiers affect the behavior of the call:

- The exactMatch findQualifier requires that an exact match be returned.
- The default approximateMatch findQualifier enables SQL wildcard query.
- The sortByNameAsc (default) and sortByNameDesc findQualifiers control the order in which the data is returned.


Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.v3.RequestorApi` and the action `findRequest`.

getBindingDetail

The getBindingDetail API call is an extended version of the standard UDDI API call. It is used to get details of the selected bindingTemplate mentioned in the approval request without respect to its access control list. The structure may be configured to allow access only to selected users, but the approval contact must be able to review it.

If the given bindingKey is contained in the approvalKeys structure and the user is the approval contact for the requestor, the ACL check will be skipped and the bindingTemplate will be returned.



Arguments

The getBindingDetail API call has the following arguments:

- `authInfo` - This optional argument is an element that contains an authentication token.
- `requestId` - Mandatory argument holding key of the approval request.
- `bindingKey` - This mandatory argument contains the keys of the bindingTemplates to be fetched.


Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.v3.RequestorApi` and the action `getBindingDetail`.

getBusinessDetail

The getBusinessDetail API call is an extended version of the standard UDDI API call. It is used to get details of the selected businessEntity mentioned in the approval request without respect to its access control list. The structure may be configured to allow access only selected users, but the approval contact must be able to review it.

If the given businessKey is contained in the approvalKeys structure and the user is the approval contact for the requestor, the ACL check will be skipped and the businessEntity will be returned.



Arguments

The getBusinessDetail API call has the following arguments:

- **authInfo** - This optional argument is an element that contains an authentication token.
- **requestId** - Mandatory argument holding the key of the approval request.
- **businessKey** - This mandatory argument contains the keys of businessEntities to be fetched.


Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.v3.RequestorApi` and the action `getBusinessDetail`.

getOperationalInfo

The getOperationalInfo API call is an extended version of the standard UDDI API call. It is used to get details of the selected structure mentioned in the approval request without respect to its access control list. The structure may be configured to allow access only to selected users, but the approval contact must be able to review it.

If the given entityKey is contained in the approvalKeys structure and the user is the approval contact for the requestor, the ACL check will be skipped and the operationalInfo will be returned.

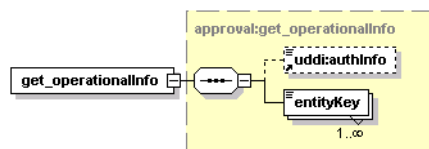

Arguments

The getOperationalInfo API call has the following arguments:

- **authInfo** - This optional argument is an element that contains an authentication token.
- **requestId** - Mandatory argument holding the key of the approval request.
- **entityKey** - This mandatory argument contains the keys of UDDI structures to be fetched.

Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.v3.RequestorApi` and the action `getOperationalInfo`.

get_approvalRequest

The get_approvalRequest API call is used by an approver to get details of the approval request identified by the requestKey.

For more information, see [Section get_approvalRequest](#)


getRequest



Important

This operation is deprecated. Use [get_approvalRequest](#) instead

The getRequest API call is used to get details of the approval request identified by the requestId. The user must be an approval contact for the requestor who makes the request.



Arguments

The getRequest API call has the following arguments:

- authInfo - This optional argument is an element that contains an authentication token.
- requestId - Mandatory argument holding the key of the approval request.


Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.v3.RequestorApi` and the action `getRequest`.

getServiceDetail

The getServiceDetail API call is an extended version of the standard UDDI API call. It is used to get details of the selected businessService mentioned in an approval request without respect to its access control list. The structure may be configured to allow access only to selected users, but the approval contact must be able to review it.

If the given serviceKey is contained in the approvalKeys structure and the user is the approval contact for the requestor, the ACL check will be skipped and the businessService will be returned.

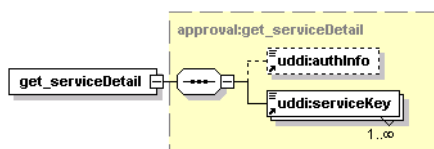

Arguments

The getServiceDetail API call has the following arguments:

- authInfo - This optional argument is an element that contains an authentication token.
- requestId - Mandatory argument holding the key of the approval request.
- serviceKey - This mandatory argument contains the keys of businessServices to be fetched.


Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.v3.RequestorApi` and the action `getServiceDetail`.

getTModelDetail

The getTModelDetail API call is an extended version of the standard UDDI API call. It is used to get details of a selected tModel mentioned in an approval request without respect to its access control list. The structure may be configured to allow access only to selected users, but the approval contact must be able to review it.

If the given tModelKey is contained in the approvalKeys structure and the user is the approval contact for the requestor, the ACL check will be skipped and the tModel will be returned.



Arguments

The getTModelDetail API call has the following arguments:


- **authInfo** - This optional argument is an element that contains an authentication token.
- **requestId** - Mandatory argument holding the key of the approval request.
- **tModelKey** - This mandatory argument contains keys of tModels to be fetched.

Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.v3.RequestorApi` and the action `getTModelDetail`.

reject_request

The reject_request API call is used to reject a request identified by a requestKey. The user must be an approval contact for the requestor.

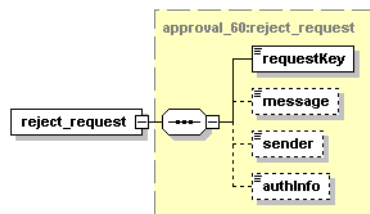

Arguments

The reject_request API call has the following arguments:

- **requestKey** - Mandatory argument holding the key of the approval request.
- **message** - This optional element may contain text that will be delivered to the requestor via email.
- **sender** - Sender is an optional helper element. If set, it must be equal to the [loginName](#) of the user. If the administrator (a user with admin manager permission) calls `reject_request`, the `authInfo` contains the authentication token of administrator. The value of the `sender` argument may contain a `loginName` of any existing user.
- **authInfo** - This optional argument is an element that contains an authentication token.

Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.v3.RequestorApi` and the action `reject_request`.


Reject



Important

This operation is deprecated. Use [reject_request](#) instead

The Reject API call is used to reject a request identified by `requestId`. The user must be an approval contact for the requestor.

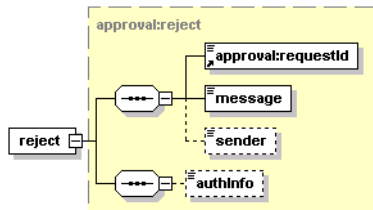

Arguments

The Reject API call has the following arguments:

- `authInfo` - This optional argument is an element that contains an authentication token.
- `requestId` - Mandatory argument holding the key of the approval request.
- `message` - This optional element may contain text that will be delivered to the requestor via email.
- `sender` - Sender is an optional helper element. If set, it must be equal to the [loginName](#) of the user.

Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.v3.RequestorApi` and the action `reject`.

WSDL

You can find the WSDL specification in the file [approval.wsdl](#) [<http://www.systinet.com/doc/sr-65/wsdl/approval.wsdl>].

Java

Approval Approver API is generated from [approval.wsdl](#) [<http://www.systinet.com/doc/sr-65/wsdl/approval.wsdl>]. You are encouraged to browse its [org.systinet.uddi.approval.v3.RequestorApi](#).

API Endpoint

The endpoint for the Approval Approver API is available at `http://<host name>:<http port>/uddi/approver`

Approval Management


The Approval Management API is used to manage approval requestors and approval contacts in Oracle Service Registry.

Data Structures

The following structures are used by the Approval Management API:

- [Section principalList](#)
- [Section Principal](#)
- [Section Approver](#)
- [Section Requestor](#)

principalList



This element serves as a container for zero or more principal elements. The optional listDescription element is used to describe the result set.

Principal

This element contains the optional attribute principalType, which may be assigned to a user or group. The element's text contains the [loginName](#) of the user, or a group name, depending on the principalType value.

Approver

This element contains the optional attribute principalType, which may be assigned to a user or group. The element's text contains the [loginName](#) of the user, or a group name, depending on principalType value.

Requestor

This element contains the optional attribute principalType, which may be assigned to a user or group. The element's text contains the [loginName](#) of the user, or a group name, depending on principalType value.


Operations

The Approval Management API has the following operations:

- [Section addApprover](#)
- [Section addRequestor](#)
- [Section deleteApprover](#)
- [Section deleteRequestor](#)
- [Section findApprover](#)
- [Section findRequestor](#)
- [Section isApprover](#)
- [Section Save](#)

addApprover

The addApprover API call is used to add a new approval contact to Oracle Service Registry.



Arguments


- `authInfo` - This optional argument is an element that contains an authentication token.
- `approver` - This mandatory element identifies the user or group to be added as a new approval contact.

Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.management.ApprovalManagementApi` and the action `addApprover`.

addRequestor

The addRequestor API call is used to assign a new requestor to a given approval contact.

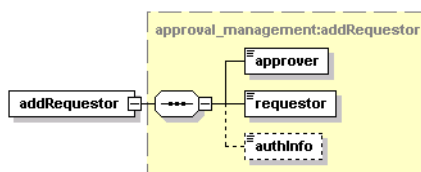

Arguments


- `authInfo` - This optional argument is an element that contains an authentication token.
- `approver` - This mandatory element identifies an approval contact.
- `requestor` - This mandatory element identifies a new requestor.

Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.management.ApprovalManagementApi` and the action `addRequestor`.

deleteApprover

The deleteApprover API call is used to remove the given approval contact from Oracle Service Registry.



Arguments

- `authInfo` - This optional argument is an element that contains an authentication token.


- approver - This mandatory element identifies an approval contact.

Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.management.ApprovalManagementApi` and the action `deleteApprover`.

deleteRequestor

The `deleteRequestor` API call is used to remove relationships between the requestor and a given approval contact in Oracle Service Registry.

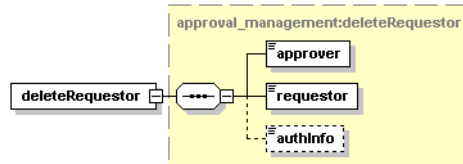

Arguments


- `authInfo` - This optional argument is an element that contains an authentication token.
- `approver` - This mandatory element identifies an approval contact.
- `requestor` - This mandatory element identifies a new requestor.

Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.management.ApprovalManagementApi` and the action `deleteRequestor`.

findApprover

The `findApprover` API call is used to find approval contacts in Oracle Service Registry who match the given criteria. Default `findQualifiers` are `approximateMatch` and `sortByNameAsc`.

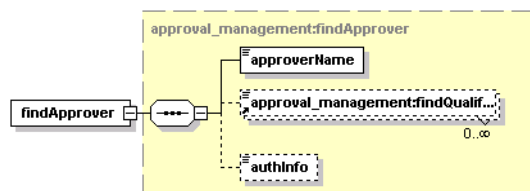

Arguments

- `authInfo` - This optional argument is an element that contains an authentication token.
- `findQualifier` - The collection of `findQualifiers` used to alter default behavior.
- `approverName` - This mandatory element represent an approval contact to be searched.

Returns


This API call returns the `PrincipalList` upon success.

Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.management.ApprovalManagementApi` and the action `addApprover`.

findRequestor

The `findRequestor` API call is used to find all requestors of a given approval contact in the registry that match the search criteria.

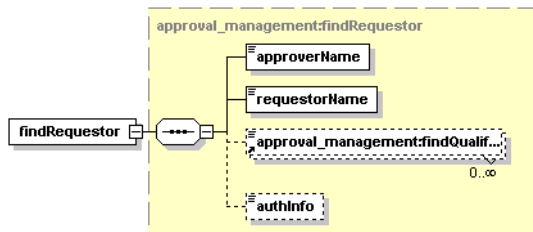

Arguments

- `authInfo` - This optional argument is an element that contains an authentication token.
- `findQualifier` - The collection of `findQualifiers` used to alter default behavior.
- `approverName` - This mandatory element contains the approval contact's name.
- `requestorName` - This mandatory element represents the requestor to be searched. It must be the [loginName](#) of the requestor.

Returns


This API call returns the `PrincipalList` upon success.

Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.management.ApprovalManagementApi` and the action `findRequestor`.

isApprover

The `isApprover` API call finds out whether the user is an approver.




Arguments

- `name` - login name of the user
- `authInfo` - This optional argument is an element that contains an authentication token.

Save

The Save API call combines the addApprover and addRequestor API calls into a single method. If the approval contact does not exist, it is created. Then all requestors are added to this approval contact.



Arguments

The Save API call has the following arguments:

- `authInfo` - This optional argument is an element that contains an authentication token.
- `approver` - This mandatory element identifies an approval contact.
- `requestor` - This mandatory element identifies new requestors.

Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.management.ApprovalManagementApi` and the action `addApprover`.

WSDL

You can find the WSDL specification in the file [approval_management.wsdl](http://www.systinet.com/doc/sr-65/wSDL/approval_management.wsdl) [http://www.systinet.com/doc/sr-65/wSDL/approval_management.wsdl].

Java

Approval Management API is generated from the Approval Management WSDL. You are encouraged to browse its [org.systinet.uddi.approval.management.ApprovalManagementApi](http://www.systinet.com/doc/sr-65/wSDL/approval_management.wsdl).

API Endpoint

The endpoint for Approval Management API is available at `http://<host name>:<http port>/uddi/approvalManagement`

Approval Content Checker

The Approval Content Checker API provides the approval contact a way to programmatically automate checks of data to be approved. For example, there might be a Web service implementing this API, which requires that each structure be signed. Another implementation may ensure that business services have binding templates. The usage is up to the will of the approval contact.

Operations


The Approval Content Checker API has the following operations:

- [Section cancelRequest](#)
- [Section cancelRequest](#)

- [Section delete_approvalRequest](#)
- [Section find_approvalRequest](#)
- [Section findRequest](#)
- [Section get_approvalRequest](#)
- [Section getRequest](#)
- [Section remind_approver](#)
- [Section request_approver](#)
- [Section requestApprover](#)
- [Section save_approvalRequest](#)
- [Section synchronize](#)

cancel_approvalRequest

This API call will cancel a request that has been submitted for approval.

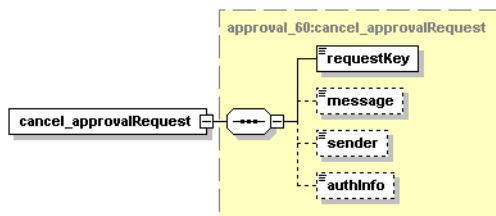

Arguments

The cancel_approvalRequest API call has the following arguments:

- requestKey - Mandatory argument holding the key of the approval request.
- message - This element may contain text that will be delivered to the approval contact via email.
- sender - Sender is an optional helper element. If set, it must be equal to the [loginName](#) of the user. If the administrator (a user with admin manager permission) calls cancel_approvalRequest, the authInfo contains the authentication token of administrator. The value of the sender argument may contain a loginName of any existing user.
- authInfo - This optional argument is an element that contains an authentication token.

Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.v3.RequestorApi` and the action `cancel_approvalRequest`.


cancelRequest



Important

This operation is deprecated. Use [cancel_approvalRequest](#) instead.

The cancelRequest API call is used by the requestor to cancel the request identified by requestId.



Arguments


- **authInfo** - This optional argument is an element that contains an authentication token.
- **requestId** - Mandatory argument holding the key of the approval request.
- **message** - This element may contain text that will be delivered to the approval contact via email.
- **sender** - Sender is an optional helper element. If set, it must be equal to the [loginName](#) of the user.

Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.v3.RequestorApi` and the action `cancelRequest`.

delete_approvalRequest

This operation will delete an approval request. Requests are not deleted automatically after approval or rejection. Requests are held in the registry and a requestor/approver can look at them at any time. This method is used to clean the given requestor's requests.



Arguments

The delete_approvalRequest operation has the following arguments:


- **authInfo** - This optional argument is an element that contains an authentication token.
- **requestKey** - Mandatory argument holding the key of the approval request.

Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.v3.RequestorApi` and the action `cancelRequest`.

find_approvalRequest

The find_approvalRequest API call is used to find all approval requests of the requestor.

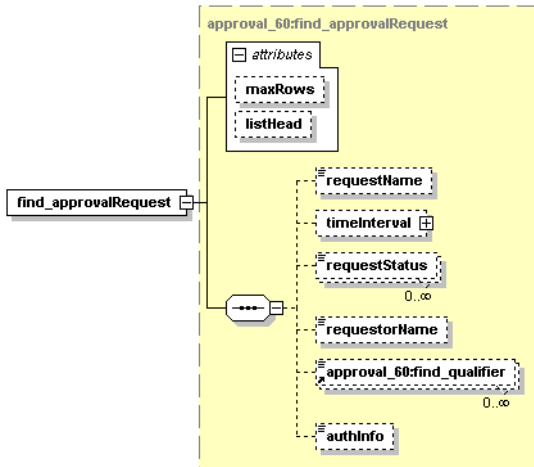

Arguments

The find_approvalRequest API call has the following arguments:

- `requestName` - The name of the request
- `timeInterval` - You can specify a time interval search criteria (from, to) having inclusive attributes.
- `requestStatus` - A list of request statuses (open, submitted, closeCancelled, closeRejected, closeApproved)
- `requestorName` - This optional element is set to the [loginName](#) of the user.
- `approval_60:find_qualifier` - The collection of findQualifiers used to alter default behavior.
- `authInfo` - This optional argument is an element that contains an authentication token.

Behavior

The following findQualifiers affect the behavior of the call:

- The `exactMatch` findQualifier specifies that an exact match is required.
- The default `approximateMatch` findQualifier enables an SQL wildcard query.
- The `sortByNameAsc` (default) and `sortByNameDesc` findQualifiers control the order in which data is returned, as do the time, requestor and status sorts below.
- `sortByTimeAsc`, `sortByTimeDesc`
- `sortByRequestorNameAsc`, `sortByRequestorNameDesc`
- `sortByStatusAsc`, `sortByStatusDesc`


Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.v3.RequestorApi` and the action `find_approvalRequest`.

findRequest**Important**

This operation is deprecated. Use [find_approvalRequest](#) instead.

The findRequest API call is used to find all approval requests of the requestor who calls this method.

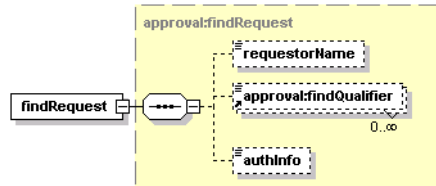**Arguments**

- authInfo - This optional argument is an element that contains an authentication token.
- requestorName - This optional element is set to the [loginName](#) of the user.
- findQualifier - The collection of findQualifiers used to alter default behavior.

Behavior

The following findQualifiers affect the behavior of the call:


- The exactMatch findQualifier specifies that an exact match is required.
- The default approximateMatch findQualifier enables an SQL wildcard query.
- The sortByNameAsc (default) and sortByNameDesc findQualifiers control the order in which data is returned.

Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.v3.RequestorApi` and the action `findRequest`.

get_approvalRequest

The get_approvalRequest API call is used by a requestor to get details of the approval request identified by requestKey.

**Arguments**

- requestKey - Mandatory argument holding the key of an approval request.
- authInfo - This optional argument is an element that contains an authentication token.

Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.v3.RequestorApi` and the action `get_approvalRequest`.


getRequest



Important

This operation is deprecated. Use [get_approvalRequest](#) instead.

The `getRequest` API call is used by a requestor to get details of the approval request identified by `requestId`.



Arguments


- `authInfo` - This optional argument is an element that contains an authentication token.
- `requestId` - Mandatory argument holding the key of an approval request.

Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.v3.RequestorApi` and the action `getRequest`.

remind_approver

The `remind_approver` API call is used by a requestor to remind the approval contact to review a submitted request. If a requestor is not satisfied with the approver's delay, the requestor can notify the approver about the unhandled approval requests.

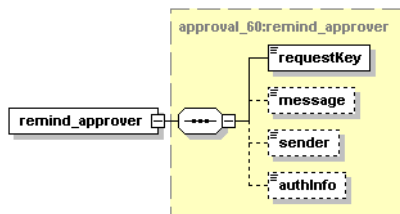

Arguments

The `remind_approver` API call has the following arguments:

- `requestKey` - identifies the request.
- `message` - This optional element may contain text that will be delivered to the approver via email.
- `sender` - Sender is an optional helper element. If set, it must be equal to the [loginName](#) of the user. If the administrator (a user with admin manager permission) calls `remind_approver`, the `authInfo` contains the authentication token of administrator. The value of the `sender` argument may contain the `loginName` of any existing user.


- `authInfo` - This optional argument is an element that contains an authentication token.

Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.v3.RequestorApi` and the action `remind_approver`.

request_approver

The `request_approver` API call is used by a requestor to request data for promotion to a *discovery registry*.

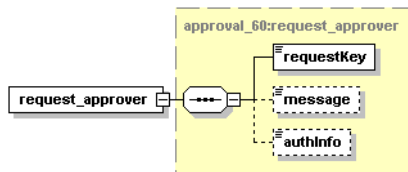

Arguments

The `request_approver` API call has the following arguments:

- `requestKey` - identifies the request
- `message` - This optional element may contain text that will be delivered to the requestor via email.
- `authInfo` - This optional argument is an element that contains an authentication token.

Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.v3.RequestorApi` and the action `request_approver`.


requestApprover



Important

This operation is deprecated. Use [request_approver](#) instead.

The `requestApprover` API call is used by a requestor to request that an approval contact approve changes to the *publication registry*.

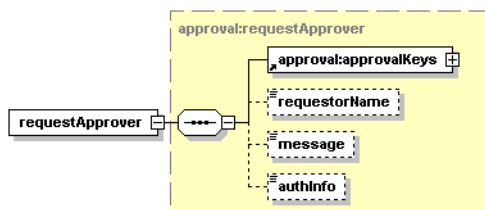

Arguments

- `authInfo` - This optional argument is an element that contains an authentication token.
- `requestorName` - This optional element is set to the [loginName](#) of the user.


- `message` - This optional element may contain text that will be delivered to the requestor via email.
- `approvalKeys` - This mandatory element is a container for the UDDI keys of structures to be saved or deleted on the *discovery registry*.

Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.v3.RequestorApi` and the action `requestApprover`.

save_approvalRequest

This operation is used to save an approval request.

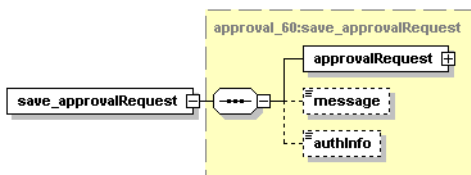

Arguments

The `save_approvalRequest` operation has the following arguments:


- [approvalRequest](#)
- `message` - This element may contain text that will be delivered to the approval contact via email.
- `authInfo` - This optional argument is an element that contains an authentication token.

Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.v3.RequestorApi` and the action `save_approvalRequest`.

synchronize

The Synchronize API call is used to synchronize data on *publication registry* with data on the *discovery registry*. The `synchronizationType` element is used to choose the way the synchronization will be performed. Possible values are `publication_priority`, `partial_discoveryPriority`, and `full_discoveryPriority`. The synchronization behaviors are described in [Section 1.5.3, Synchronization of Data](#).

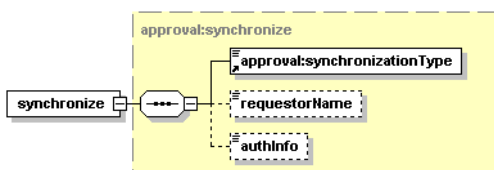

Arguments

The Synchronize API call has the following arguments:

- `authInfo` - This optional argument is an element that contains an authentication token.
- `requestorName` - This mandatory element identifies the [loginName](#) of the requestor.

- `synchronizationType` - This mandatory element is used to choose the synchronization method.


Permissions

This API call requires the API manager permission with the name `org.systinet.uddi.approval.v3.RequestorApi` and the action `synchronize`.

Data Structures


The following structures are used by the Approval Content Checker API:

approvalEntitiesDetail



This element is a container for the optional elements `entitiesDetail4Saving` and `entitiesDetail4Deletion`. The type for both structures is `entitiesDetail`.

entitiesDetail

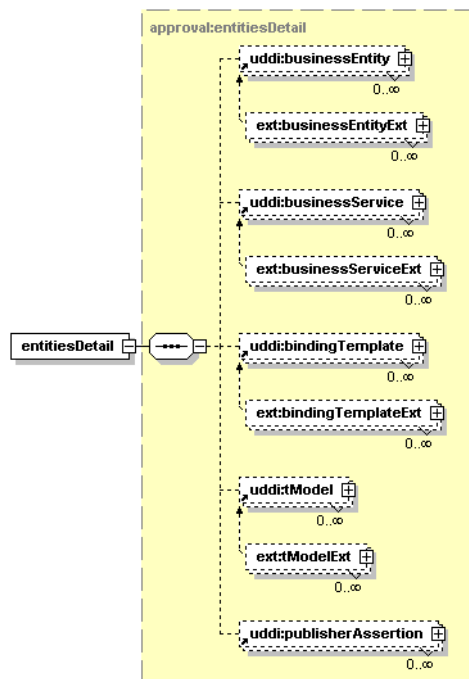


This element holds structure details to be propagated from the *publication registry* to the *discovery registry*. It contains a list of `businessEntities`, `businessServices`, `bindingTemplates`, `tModels` and `publisherAssertions`.

In fact, the extended version of this structure is returned, because it is necessary to transfer the original values of UDDI version 2 keys and standard structures are missing this data.

Operations

checkRequest

The checkRequest API call is made during an approve API call. It is used to perform user-specific checks of data. If the check fails, the implementation returns a DispositionReport with an error code other than E_SUCCESS. See the example in the Developer's Guide, [Example 15. Content Checker Implementation](#)



Arguments

The checkRequest API call has the following arguments:

- approvalEntitiesDetail - This element contains details of all structures to be checked.
- requestorName - This element identifies the requestor by [loginName](#).

Returns

Upon successful completion, a disposition report is returned with a single success indicator.

WSDL

You can find the WSDL specification in the file [approval_checker.wsdl](#) [http://www.systinet.com/doc/sr-65/wsdl/approval_checker.wsdl].

Java

Approval Content Checker API is generated from [approval_checker.wsdl](#) [http://www.systinet.com/doc/sr-65/wsdl/approval_checker.wsdl]. You are encouraged to browse [org.systinet.uddi.approval.checker.v3.CheckerApi](#).

See also the example, [Section 3.6. Writing a Content Checker](#), in the Developer's Guide,

2.2.5. Administration Utilities


The Administration Utilities API provides an interface to perform several low level administration tasks in Oracle Service Registry.

Operations

cleanSubscriptionHistory

This utility removes subscription histories from Oracle Service Registry. If the olderThan value is not specified, the utility deletes all historical data; otherwise it deletes data older than the specified value.

Syntax



Arguments

- `uddi_v3:authInfo` - This optional argument is an element that contains an authentication token.
- `olderThan` - Optional argument specifying the date before which subscription history is deleted.


Permissions

This API call requires API manager permissions for `org.systinet.uddi.admin.AdministrationUtilsApi` and for the `cleanSubscriptionHistory` action.

clean_unusedAccounts

This utility is useful when LDAP is used as a user store. Oracle Service Registry treats LDAP as read-only and all data from LDAP is mirrored to the registry's database. After you remove users from LDAP using LDAP tools, data removed from LDAP stays in the database. To remove the orphan data from the database, execute the `clean_unusedAccounts` operation.

Syntax




Permissions

This API call requires API manager permissions for `org.systinet.uddi.admin.AdministrationUtilsApi` and for the `clean_unusedAccounts` action.

deleteTModel

The `delete_tModel` API removes one or more tModels from Oracle Service Registry. Note that the `delete_tModel` call in the UDDI version 3 specification does not physically remove the tModel from the database; it marks the tModel as deprecated. The `delete_tModel` call from Administration Utilities can be used to delete such deprecated tModels from the database.

Syntax

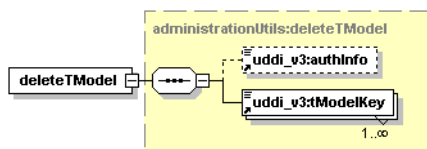

Arguments

- `uddi_v3:authInfo` - This optional argument is an element that contains an authentication token.
- `uddi_v3:tModelKey` - One or more required `uddiKey` values that represent existing tModels.


Permissions

This API call requires API manager permission for `org.systinet.uddi.admin.AdministrationUtilsApi` and the action `deleteTModel`.

rebuild_cache

Database cache stores v3 UDDI structures in database as objects. Using this cache increases performance of v3 inquiry `get_business`, `get_service`, `get_binding`, `get_tModel` and `find_binding` operations. On the other hand the cache synchronization take some time mainly in v1 and v2 publishing API operations. The cache can be enabled or disabled by Registry Control. By default, the cache is enabled. Each time caching is switched on, the cache is rebuilt. After the initial rebuild the cache is incrementally synchronized each time `save_xxx` or `delete_xxx` operation is performed on v1, v2, v3 publishing API. Explicit rebuild is enabled by `rebuild_cache` operation. This operation is suitable when data is changed by an administrator in a SQL console (note that such data changing is not recommended).

Syntax



Arguments

- `uddi_v3:authInfo` - This optional argument is an element that contains an authentication token.

Permissions


This API call requires API manager permissions for `org.systinet.uddi.admin.AdministrationUtilsApi` and for the `rebuild_cache` action.

replaceURL

The `replaceURL` API call is used to replace URL prefixes in the following entities:

- `tModel` - `OverviewDoc` URL
- `tModelInstanceInfo` - `overviewDoc` URL and `DiscoveryURL`
- `binding template` - `accessPoint` URL

Syntax

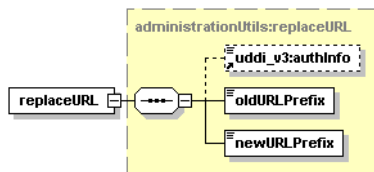

Arguments

- `uddi_v3:authInfo` - This optional argument is an element that contains an authentication token.
- `oldURLPrefix` - old value of URL prefix
- `newURLPrefix` - new value of URL prefix


Permissions

This API call requires API manager permission for `org.systinet.uddi.admin.AdministrationUtilsApi` and the action `replaceURL`.

replaceKey

The replaceKey API call is used to change the uddiKey of a selected UDDI structure in Oracle Service Registry. The key must be specified in either UDDI version 3 format or UDDI version 2 format. The optional elements uddiKeyNewV2 and uddiKeyNewV3 hold new values of uddiKeys for the selected UDDI structure.

Syntax

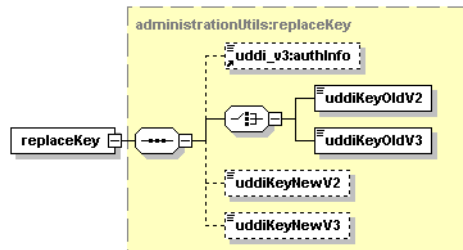

Arguments

- uddi_v3:authInfo - This optional argument is an element that contains an authentication token.
- uddiKeyOldV2 - Value of the uddiKey of an existing UDDI structure in UDDI version 2 format.
- uddiKeyOldV3 - Value of a uddiKey of an existing UDDI structure in UDDI version 3 format.
- uddiKeyNewV2 - New value of the uddiKey in UDDI version 2 format.
- uddiKeyNewV3 - New value of the uddiKey in UDDI version 3 format.

Permissions

This API call requires API manager permission for org.systinet.uddi.admin.AdministrationUtilsApi and the action replaceKey.

resetDiscoveryURLs

Sets the discoveryURL value of each businessEntity in Oracle Service Registry to its default value.

Syntax



Arguments

- uddi_v3:authInfo - This optional argument is an element that contains an authentication token.


Permissions

This API call requires API manager permission for org.systinet.uddi.admin.AdministrationUtilsApi and the action resetDiscoveryURLs.

transform_keyedReferences

This operation is necessary when the type of taxonomy keyValues or the implementation of the taxonomy transformation service have been changed. For more information see, User's Guide, [Section 5.4, Taxonomy: Principles, Creation and Validation](#).

Syntax



Arguments

- `uddi_v3:authInfo` - This optional argument is an element that contains an authentication token.
- `uddi_v3:tModelKey`

Permissions

This API call requires API manager permission for `org.systinet.uddi.admin.AdministrationUtilsApi` and the action `transform_keyedReferences`.

WSDL

You can find the WSDL specification for this API in [administrationUtils.wsdl](http://www.systinet.com/doc/sr-65/wsdll/administrationUtils.wsdl) [http://www.systinet.com/doc/sr-65/wsdll/administrationUtils.wsdl].

API Endpoint

You can find the Administration Utilities API endpoint at `http://<host name>:<port>/<context>/uddi/administrationUtils`.

Java

The Java API is generated from Administration Utils WSDL. You are encouraged to browse [org.systinet.uddi.admin.AdministrationUtilsApi](#) for more information.

2.2.6. Replication

The Replication API is used to launch replications in Oracle Service Registry.

Operations

Replicate

The replicate API call is used to immediately start replications.



Arguments

- `authInfo` - This optional argument is an element that contains an authentication token.

Behavior

When this API call is invoked, it stops the scheduling of replications and, if needed, waits until the completion of current replications. It then starts a new replication process in which replications are rescheduled from this time with the normal replication interval. This results in one of two scenarios:

- If no replications are in process when the `replicate` call is made, the call stops the replication schedule, runs the replication, and restarts the schedule from the time the call was made. For example, if replications had been scheduled on the hour, and the call is made at 9:15, replications will then occur at 10:15, 11:15, and so forth.
- If there is a replication in process when the `replicate` call is made, scheduling is stopped, the call waits for the current process to conclude, runs the replication, and restarts schedule from the time the call was made as in the previous scenario.

WSDL

You can find the WSDL specification in the file [replication_v3.wsdl](http://www.systinet.com/doc/sr-65/wsd/replication_v3.wsdl) [http://www.systinet.com/doc/sr-65/wsd/replication_v3.wsdl].

API Endpoint

You can find the Replication API endpoint at `http://<host name>:<port>//<context>/uddi/replication`.

Java

The Java API is generated from the Replication WSDL. You are encouraged to browse its org.systinet.uddi.replication.v3.ReplicationApi.

2.2.7. Statistics

The Statistics API provides useful information about Oracle Service Registry usage.

Data Structures

The following structures are used by the Statistics API:

accessStatisticsDetail




Table 24. Attributes

Attribute	Required
enable	yes

This structure is a container for zero or more [apiStatisticsDetail](#) elements. The `enable` attribute is used to distinguish whether the returned data is consistent or not. If set to false, the Statistics interceptor has been configured not to run and returned data will be outdated.

apiStatisticsDetail




Table 25. Attributes

Attribute	Required
apiName	Yes
requestCount	Yes
exceptionCount	Yes
lastCall	Yes

This structure contains information about usage of the API specified in the attribute `apiName` and its methods. It also serves as a container for [methodStatisticsDetail](#) elements.

The `requestCount` attribute holds a number indicating how many times this API has been used since its last reset or since Oracle Service Registry installation.

The `exceptionCount` attribute indicates the number of exceptions that have interrupted execution of the API's methods.

The `lastCall` attribute contains the time this API was last invoked.

methodStatisticsDetail

Table 26. Attributes

Attribute	Required
methodName	Yes
requestCount	Yes
exceptionCount	Yes
lastCall	Yes

This element contains information about usage of the method specified in the attribute `methodName`.

The `requestCount` attribute holds a number indicating how many times this method has been called since its last reset or since Oracle Service Registry installation.

The `exceptionCount` attribute indicates the number of exceptions that have interrupted execution of this method.

The `lastCall` attribute contains the time this method was last invoked.

structureStatisticsDetail



This structure serves as a container for the `structure` element.

Structure

Table 27. Attributes


Attribute	Required
name	Yes
count	Yes

The structure element indicates how many UDDI structures of the type given by the name attribute are stored in the registry.

Operations

get_accessStatistics

The get_accessStatistics API call is used to fetch information about usage of selected UDDI APIs in Oracle Service Registry. The filter element is used to specify which APIs' statistics will be returned. If it is empty, the statistics for all APIs are returned.



Arguments

- statistics:authInfo - This optional argument is an element that contains an authentication token.
- statistics:filter - Optional regular expression to match selected APIs by their name. The wildcard characters ? and * are supported.

Returns


Upon successful completion, an accessStatisticsDetail structure is returned.

Permissions

This API call requires API manager permission for org.systinet.uddi.statistics.StatisticsApi and the action get_accessStatistics.

get_structureStatistics

The get_structureStatistics API call is used to get overview information about how many UDDI structures is stored within Oracle Service Registry.



Arguments

- statistics:authInfo - This optional argument is an element that contains an authentication token.

Returns


Upon successful completion, an structureStatisticsDetail structure is returned.

Permissions

This API call requires API manager permission for `org.systinet.uddi.statistics.StatisticsApi` and the action `get_structureStatistics`.

reset_accessStatistics

The `reset_accessStatistics` API call is used to reset API usage statistics in Oracle Service Registry. The optional filter element is used to limit affected APIs, if it is not set, statistics for all APIs is removed.



Arguments

- `statistics:authInfo` - This optional argument is an element that contains an authentication token.
- `statistics:filter` - Optional regular expression to match selected APIs by their name. The wildcard characters `?` and `*` are supported.

Permissions

This API call requires API manager permission for `org.systinet.uddi.statistics.StatisticsApi` and the action `reset_accessStatistics`.

WSDL

You can find the WSDL specification in the file [statistics.wsdl](http://www.systinet.com/doc/sr-65/wsdl/statistics.wsdl) [http://www.systinet.com/doc/sr-65/wsdl/statistics.wsdl].

API Endpoint

You can find the Statistics API endpoint at `http://<host name>:<port>/<context>/uddi/statistics`.

Java


Java API is generated directly from WSDL. You are encouraged to browse [org.systinet.uddi.statistics.StatisticsApi](#).

2.2.8. WSDL Publishing

Oracle Service Registry WSDL-to-UDDI mapping is compliant with OASIS's Technical Note, [Using WSDL in a UDDI registry Version 2.0](http://www.oasis-open.org/committees/uddi-spec/doc/tn/uddi-spec-tc-tn-wsdl-v2.htm) [http://www.oasis-open.org/committees/uddi-spec/doc/tn/uddi-spec-tc-tn-wsdl-v2.htm]. It enables the automatic publishing of WSDL documents to UDDI, enables precise and flexible UDDI queries based on specific WSDL artifacts and metadata, and provides a consistent mapping for UDDI v2 and UDDI v3.

Data Structures

wsdlDetail




`wsdlDetail` completes information about the WSDL to be mapped.

Arguments

- [wsdl2uddi:wsdl](#) - Contains URI or physical location of mapped WSDL.
- [wsdl2uddi:wsdlMapping](#) - Describes wsdl:types to be mapped.

wsdl




WSDL contains information about location of a mapped WSDL.

Arguments

- wsdlLocation - The URI or physical location of a mapped WSDL.
- any - Used to make extensible documents (see [XML schema](http://www.w3.org/TR/xmlschema-1/) [http://www.w3.org/TR/xmlschema-1/]). It is generally used as the DOM pattern of a mapped WSDL.

wsdlMapping

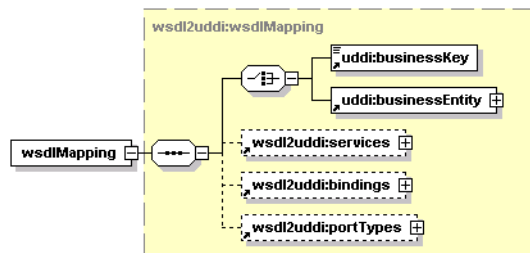

WsdlMapping describes the wsdl:types to be mapped. It is used to alter the default behavior of mapping the specified WSDL. In contained structures, it is possible to describe each mapped wsdl:type correctly. This is to ensure exact mapping and prevent duplication of data in the registry.

Arguments


- uddi:businessKey - Represents the businessKey of an existing uddi:businessEntity to which the assigned wsdl:types will be mapped.
- uddi:businessEntity - Represents an existing businessEntity to which the assigned wsdl:types will be mapped.
- [wsdl2uddi:porttypes](#) - Represents the container of wsdl:portTypes to be mapped. wsdl2uddi:porttypes makes it possible map a uddi:tModel to its corresponding [wsdl:portType](#).
- [wsdl2uddi:bindings](#) - Represents the container of wsdl:bindings to be mapped. wsdl2uddi:bindings makes it possible to map a uddi:tModel to its corresponding wsdl:binding.
- [wsdl2uddi:services](#) - Represents the container of wsdl:services to be mapped. wsdl2uddi:services makes it possible to map a uddi:businessService to its corresponding wsdl:service.



Note


Note that uddi:businessKey and uddi:businessEntity are mutually exclusive.

portTypes



The portTypes structure is a simple container of one or more `wsdl2uddi:portTypes`.

portType



PortType represents a mapping of `wsdl:portType` in UDDI. It contains information necessary to map the `wsdl:portType` to a corresponding `uddi:tModel` accurately.

Arguments

- `uddi:tModelKey` - Represents the `tModelKey` of an existing `uddi:tModel` which will be reused or rewritten (depending on the publishingMethod selected by the user) with data from `wsdl:portType`.
- `uddi:tModel` - Represents an existing `uddi:tModel` which will be reused or rewritten (depending on the publishingMethod selected by the user) with data from `wsdl:portType`.



Note


Note that `uddi:tModelKey` and `uddi:tModel` are mutually exclusive.

Table 28. Attributes

Name	Required
name	optional
namespace	optional
publishingMethod	optional


These attributes describe the [wsdl:portType](#) of the appropriate WSDL. Name and namespace represent the `wsdl:portType` QName. `publishingMethod` represents an enumeration of available mapping use cases. It can be set to rewrite, create, reuse, or ignore. The default `publishingMethod` is reuse.

Bindings



The bindings structure is a simple container of one or more `wsdl2uddi:bindings`.

binding



A binding represents a mapping of `wsdl:binding` in UDDI. It contains information necessary for the precise mapping of a `wsdl:binding` to the appropriate `uddi:tModel`.

Arguments

- `uddi:tModelKey` - Represents the `tModelKey` of an existing `uddi:tModel` which will be reused or rewritten (depending on the `publishingMethod` selected by the user) with data from `wsdl:binding`.
- `uddi:tModel` - Represents an existing `uddi:tModel` which will be reused or rewritten (depending on the `publishingMethod` selected by the user) with data from `wsdl:binding`.



Note

Note that `uddi:tModelKey` and `uddi:tModel` are mutually exclusive.


Table 29. Attributes

Name	Required
name	optional
namespace	optional
publishingMethod	optional

These attributes describe the `wsdl:binding` from the appropriate WSDL. Name and namespace represent the `wsdl:binding` QName.


`publishingMethod` represents an enumeration of the available mapping use cases. It can be set to `rewrite`, `create`, `reuse`, or `ignore`. The default `publishingMethod` is `reuse`.

Services



The services structure is a simple container of one or more `wsdl2uddi:services`.

service

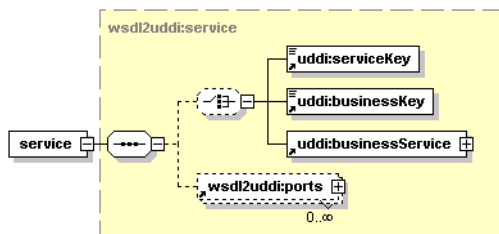

Service represents the mapping of `wsdl:service` in UDDI. It contains information necessary to map a `wsdl:service` to the appropriate `uddi:businessService` precisely.

Arguments

- `uddi:businessKey` - represents `businessKey` of an existing `uddi:businessEntity` to which the translated `wsdl:service` will be stored.

- `uddi:serviceKey` - represents the `serviceKey` of an existing `uddi:businessService` which will be reused or rewritten (depending on the `publishingMethod` selected by user) with data from `wsdl:service`.
- `uddi:businessService` - represents an existing `uddi:businessService` which will be reused or rewritten (depending on the `publishingMethod` selected by user) with data from `wsdl:service`.
- `wsdl:ports` - represents existing `uddi:bindingTemplates` which will be reused or rewritten (depending on the `publishingMethod` selected by user) with data from `wsdl:service` ports.



Note

Note that `uddi:serviceKey` and `uddi:businessService` are mutually exclusive.


Table 30. Attributes

Name	Use
name	optional
namespace	optional
publishingMethod	optional

These attributes describe the `wsdl:service` from an appropriate WSDL. Name and namespace represents the `wsdl:service` QName.


`publishingMethod` represents an enumeration of available mapping use cases. It can be set to `rewrite`, `create`, `reuse`, or `ignore`. The default `publishingMethod` is `reuse`.

ports



The ports structure is a simple container for one or more `wsdl2uddi:ports`.

port



Port represents a mapping of `wsdl:port` in UDDI. It contains information necessary to map the `wsdl:port` to the appropriate `uddi:bindingTemplate` precisely.

Arguments

- `uddi:bindingKey` - Represents the `bindingKey` of an existing `uddi:bindingTemplate` which will be reused or rewritten (depending on the `publishingMethod` selected by user) with data from `wsdl:port`.
- `uddi:bindingTemplate` - Represents an existing `uddi:bindingTemplate` which will be reused or rewritten (depending on the `publishingMethod` selected by user) with data from `wsdl:service`.



Note


Note that `uddi:bindingKey` and `uddi:bindingTemplate` are mutually exclusive.

Table 31. Attributes

Name	Required
name	optional
publishingMethod	optional


These attributes describe the `wsdl:port` from an appropriate WSDL. `name` represents the `wsdl:port` name. `publishingMethod` represents an enumeration of available mapping use cases. It can be set to `rewrite`, `create`, or `reuse`. The default `publishingMethod` is `reuse`.

wsdlServiceInfos



The `wsdlServiceInfo` structure is a simple container of one or more `wsdl2uddi:wsdlServiceInfos`.

wsdlServiceInfo



The `wsdlServiceInfo` completes information about the `wsdlLocation` and `uddi:businessService` being searched.

Arguments

- `wsdlLocation` - The URI or physical location of a WSDL.
- `wsdl2uddi:portInfos` - Container for [wsdl2uddi:ports](#) which contain the `wsdl:port` mapped to the appropriate `uddi:bindingTemplate`.


Table 32. Attributes

Name	Required
name	required
namespace	required
serviceKey	required

These attributes describes how the `wsdl:service` is mapped from the appropriate WSDL. `name` and `namespace` represent the `wsdl:service` QName.

The `serviceKey` represents the `uddi:businessService` on which the `wsdl:service` is mapped.

PortInfos



The portInfos structure is a simple container of one or more `wsdl2uddi:portInfo`.

portInfo



The portInfo completes information about `uddi:bindingTemplates` used in the `uddi:businessService` being searched.

Arguments

- `uddi:accessPoint` contains information about accessing the `uddi:businessService` being searched.


Table 33. Attributes

Name	Required
name	required
bindingKey	required

These attributes describe how the `wsdl:port` is mapped from the appropriate WSDL. Name represents the `wsdl:port` name. BindingKey represents the `uddi:bindingTemplate` on which the `wsdl:port` is mapped.

Operations

publish_wsdl



Publish_wsdl ensures the publishing of a WSDL to a UDDI registry. It uses the Publishing API to store translated `wsdl:types` to the UDDI registry. For more information about the Publishing API, please see [UDDI v3 - publishing API](http://uddi.org/pubs/uddi_v3.htm#_Toc53709290) [http://uddi.org/pubs/uddi_v3.htm#_Toc53709290]).

By default UDDI entities are rewritten by data contained in `wsdl:types` as follows: Each `wsdl:type` is first searched on the specified registry. The found UDDI entity is rewritten, or a new entity is created if one is not found. However, the user can specify how the `wsdl:types` will be published to the registry.

You can alter the default publish behavior and define which `wsdl:types` will be mapped on the appropriate UDDI entity and, naturally, whether the UDDI entity will be created, rewritten, or reused.

For more information about publish behavior and its use cases, see [publishingMethod](#). Below are some rules by which `wsdl:types` are assigned to the appropriate UDDI entities depending on whether the `wsdl:type` is found on the user account or on a foreign account. Note that `wsdl:services` are searched only on the user's account, unlike `wsdl:portType` or `wsdl:binding`. This is because it is preferable to use tModels from a foreign account rather than tModels translated from a WSDL.

publishingMethod

PublishingMethod describes the behavior of the publish operation. In accordance with the set behavior, the corresponding `wsdl:type` will be mapped to the UDDI registry.

Note that [publish_wsdl](#) is set to `reuse` by default. However, if a user wants to rewrite an entity or create a new entity, the default behavior can be changed from "reuse" to "rewrite" or "create" to ensure unique mapping.

Use cases

- `rewrite` - `wsdl:type` is searched on the registry and the found UDDI structure is redrawn by data of that `wsdl:type`. If the `wsdl:type` is not found, a new one will be created.
- `reuse` - The default behavior of the publish operation. Using this behavior, the user is able to reuse an entire existing UDDI structure. The found UDDI entity will not be redrawn by data of that `wsdl:type`. Note that when using this method, inconsistencies may occur between the published `wsdl:type` and the corresponding UDDI entity. This behavior should be helpful when we need to use existing tModels instead of tModels mapped from `wsdl:portTypes` or `wsdl:bindings` (For example, `uddi:hostingRedirectors`).
- `create` - This method is used mainly for testing purposes. By using this behavior a new UDDI entity is created from the `wsdl:type` regardless of whether the UDDI entity already exists on the registry.



Important

When using this behavior, undesirable duplications may occur. It is necessary to use this behavior carefully.

- `ignore` - This method is used when you do not want to publish the UDDI entity. You can restrict which parts of the WSDL document will be published.

Arguments


- `uddi:authInfo` - This required argument is the string representation of the `uddi:authToken`.
- `wsdl2uddi:wsdlDetail` - Completes WSDL location and user-defined WSDL mapping rules. For more information, please see [wsdl2uddi:wsdlDetail](#).

Here the user can specify which `wsdl:type` from the WSDL corresponds to the entity on the target registry and how the specified `wsdl:type` will be mapped. For more information, please see [wsdl2uddi:publishingMethod](#).

Returns

`wsdl2uddi:wsdlDetail` - Contains detailed information about how the individual `wsdl:types` are published. For more information, please see [wsdl2uddi:wsdlDetail](#).

unpublish_wsdl



Unpublish_wsdl ensures unpublishing of WSDL from UDDI registry. It uses the Publishing API to delete UDDI entities corresponding to `wsdl:types` from a UDDI registry. For more information about the Publishing API, please see [UDDI v3 - publishing API](#) [http://uddi.org/pubs/uddi_v3.htm#_Toc53709290].

Each `wsdl:type` is first searched on the specified registry. The found UDDI entity is deleted or if the entity is not found it is simply omitted. Found tModels are either physically deleted or only marked as deprecated in accordance with configuration. (When tModels are deleted by their owners, they are generally marked as deprecated. Usually only the administrator can permanently delete deprecated tModels from the registry.)


Arguments

- `uddi:authInfo` - This required argument is the string representation of the `uddi:authToken`.
- `wsdl2uddi:wsdlDetail` - completes the WSDL location and user-defined WSDL unpublish rules. For more information, please see [wsdl2uddi:wsdlDetail](#). Here the user can specify which `wsdl:type` from a WSDL corresponds to the UDDI entity existing on the target registry. This is because that `wsdl:type` can occur more than once on a registry.

Returns

`wsdl2uddi:wsdlDetail` - Contains detailed information about how individual `wsdl:type`s are unpublished from a target registry. For more information, please see [wsdl2uddi:wsdlDetail](#).

get_wsdlServiceInfo

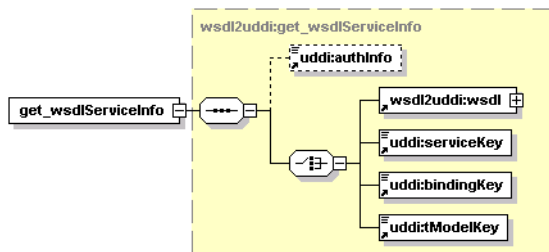

`Get_wsdlServiceInfo` discovers `uddi:businessServices` corresponding to `wsdl:services` from a particular WSDL. It uses the Inquiry API to get UDDI entities matching `wsdl:types`. For more information about the Inquiry API, please see [UDDI-inquiry API](#) [http://uddi.org/pubs/uddi_v3.htm#_Toc53709271].

This operation discovers corresponding UDDI entities either on the user's account or on the foreign account (in accordance with the specified `uddi:authInfo`). In consideration with multiple occurrences of UDDI entities corresponding to `wsdl:types`, the search algorithm optimizes output in accordance with relations between individual `wsdl:types` from the given WSDL. Only the [wsdl2uddi:wsdlServiceInfo](#) corresponding exactly to the `wsdl:service` from the WSDL (that is, that contains all `wsdl:types` from the appropriate WSDL) will be returned.

Arguments

- `uddi:authInfo` - This optional argument is the string representation of the `uddi:authToken`.
- `wsdl2uddi:wsdl` - An argument used to discover [wsdl2uddi:wsdlServiceInfos](#). This argument ensures that only the `uddi:businessService` corresponding exactly to the `wsdl:service` from that WSDL will be returned. For more information, please see [wsdl2uddi:wsdl](#)).
- `uddi:serviceKey` - `uddi:serviceKey` of `uddi:businessService` existing on the target registry. Note that only `uddi:businessServices` containing a "WSDL Type Category System" (that is, the `uddi:categoryBag` of a found `uddi:businessService` must contain a `uddi:keyedReference` with a `uddi:tModelKey` representing "WSDL Type Category System" and the `keyValue` "service") will be returned.
- `uddi:bindingKey` - `uddi:bindingKey` of `uddi:bindingTemplate` existing on the target registry. For UDDI v3 holds that only `uddi:businessServices` which contain `uddi:bindingTemplate` corresponding to a given `uddi:bindingKey` with the "WSDL Type" Category System. (that is, the `uddi:categoryBag` of a found `uddi:bindingTemplate` must contain `uddi:keyedReference` with `uddi:tModelKey` representing "WSDL Type Category System" and the `keyValue`

"binding") will be returned. Naturally this "WSDL Type Category System" must also be contained in the appropriate `uddi:businessService`.

Note that `uddi:bindingTemplates` in v2 do not contain `uddi:categoryBag`. Even though the found `uddi:bindingTemplate` must contain `uddi:tModels` compliant with "WSDL Type Category System" in its `uddi:tModelInstanceDetails`.

- `uddi:tModelKey` - the `uddi:tModelKey` of the `uddi:tModel` existing on the target registry. Note that only `uddi:businessServices` which use `uddi:tModels` compliant with "WSDL Type Category System" will be returned. That is, the `uddi:categoryBag` of the found `uddi:tModel` must contain `uddi:keyedReference` with `uddi:tModelKey` representing "WSDL Type Category System" and the `keyValue` "binding" or "portType"). Naturally, this "WSDL Type Category System" must also be contained in the appropriate `uddi:businessService`.




Note

Note that `wsdl2uddi:wsdl`, `uddi:serviceKey`, `uddi:bindingKey` and `uddi:tModelKey` are mutually exclusive.

Returns

`wsdl2uddi:wsdlServiceInfos` - Contains UDDI entities corresponding to `wsdl:types` from the specified WSDL. For more information, please see [wsdl2uddi:wsdlServiceInfos](#).

find_wsdlServiceInfo

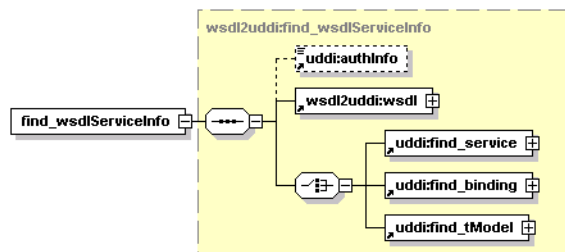

This operation is a bit more complex than [wsdl2uddi:get_wsdlServiceInfo](#). `Find_wsdlServiceInfo` discovers `uddi:businessServices` corresponding to `wsdl:services` from a particular WSDL. It uses the Inquiry API to find UDDI entities matching `wsdl:types`. For more information about the Inquiry API, please see [UDDI-inquiry API](#) [http://uddi.org/pubs/uddi_v3.htm#_Toc53709271]).

This operation discovers corresponding UDDI entities either on the user's account or on a foreign account (in accordance with the specified `uddi:authInfo`). In consideration for multiple occurrence of UDDI entities corresponding to `wsdl:types`, the search algorithm optimizes output in accordance with relations between individual `wsdl:types` from the specified WSDL and the `uddi:find_xx` structure specified by the user. Only the [wsdl2uddi:wsdlServiceInfo](#) corresponding exactly to the `wsdl:service` from the WSDL will be returned, that is, the `wsdl2uddi:wsdlServiceInfo` containing all `wsdl:types` from the appropriate WSDL at once, and satisfying the user's defined `uddi:find_xx`.

Arguments

- `uddi:authInfo` - This optional argument is the string representation of the `uddi:authToken`.
- `wsdl2uddi:wsdl` - required argument used to discover [wsdl2uddi:wsdlServiceInfos](#). This argument ensures that only the `uddi:businessService` corresponding exactly to the `wsdl:service` from that WSDL will be returned. For more information, please see [wsdl2uddi:wsdl](#).
- `uddi:find_service` - Argument used for a more detailed description of search criteria. For more information, see [uddi:find_service](#) [http://uddi.org/pubs/uddi_v3.htm#_Toc53709283]. Found `uddi:businessServices` must follow the same rules as in the case of [wsdl2uddi:get_wsdlServiceInfo](#).

- `uddi:find_binding` - Argument used for a more detailed description of search criteria. For more information, see [uddi:find_binding](http://uddi.org/pubs/uddi_v3.htm#_Toc53709280) [http://uddi.org/pubs/uddi_v3.htm#_Toc53709280]. Found `uddi:businessServices` and `uddi:bindingTemplates` must follow the same rules as in the case of [wsdl2uddi:get_wsdlServiceInfo](#).
- `uddi:find_tModel` - Argument used for a more detailed description of search criteria. For more information, see [uddi:find_tModel](http://uddi.org/pubs/uddi_v3.htm#_Toc53709284) [http://uddi.org/pubs/uddi_v3.htm#_Toc53709284]. Found UDDI entities must follow the same rules as in the case of [wsdl2uddi:get_wsdlServiceInfo](#).




Note

Note that `uddi:find_service`, `uddi:find_binding` and `uddi:find_tModel` are mutually exclusive.

Returns

`wsdl2uddi:wsdlServiceInfos` - Contains UDDI entities corresponding to `wsdl:` types from the specified WSDL. For more information, please see [wsdl2uddi:wsdlServiceInfos](#).

find_wsdlMapping

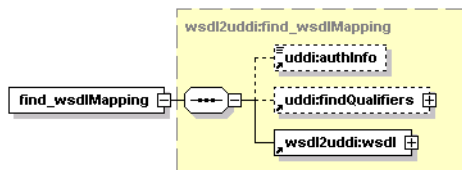

This operation finds mapping of the WSDL document.

Arguments

- `uddi:authInfo` - This argument is the string representation of the `uddi:authToken`.
- `uddi:findQualifiers` - See [Find Qualifiers](http://uddi.org/pubs/uddi-v3.0.1-20031014.htm#_Toc53709275) [http://uddi.org/pubs/uddi-v3.0.1-20031014.htm#_Toc53709275]
- [wsdl2uddi:wsdl](#)

Returns

This operation returns [wsdl2uddi:wsdlMapping](#).

WSDL

[wsdl2uddi_v2.wsdl.wsdl](http://www.systinet.com/doc/sr-65/wsdl/wsdl2uddi_v2.wsdl) [http://www.systinet.com/doc/sr-65/wsdl/wsdl2uddi_v2.wsdl]

[wsdl2uddi_v3.wsdl.wsdl](http://www.systinet.com/doc/sr-65/wsdl/wsdl2uddi_v3.wsdl) [http://www.systinet.com/doc/sr-65/wsdl/wsdl2uddi_v3.wsdl]

API Endpoint

You can find the WSDL2UDDI API endpoint at `http://<host name>:<port>/<context>/uddi/wsdl2uddi`.

Java

`org.systinet.uddi.client.wsdl2uddi.v3.Wsdl2uddiApi`

Demos v2: [WSDL2UDDI demos](#)


Demos v3: [WSDL2UDDI demos](#)

2.2.9. XML Publishing

XML-to-UDDI mapping enables the automatic publishing of XML documents to UDDI and precise, flexible UDDI queries based on specific XML metadata.

Data Structures

namespace

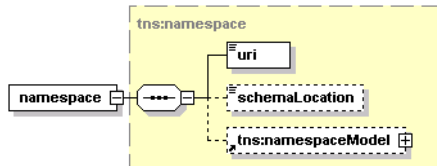

This structure is a container for a namespace.


Table 34. Attributes

publishingMethod	optional

Arguments

- `uri` - URI of the namespace.
- `schemaLocation` - This argument holds the location of the schema specified by the XML document using `xsi:schemaLocation` declaration.
- [tns:namespaceModel](#) - This argument holds mappings that represent this namespace.

namespaceList




This structure represent a list of namespaces.

Arguments

- [tns:namespace](#) - represents a member of the namespaceList.

namespaceModel




This structure describes mapping of a particular namespace (or no namespace) within the XML document.

Arguments


- `uddi:name` - name of the tModel corresponding to the namespace's XML Schema
- `uddi:tModelKey` - tModelKey name of the tModel corresponding to the namespace's XML Schema

resourceInfo




This structure holds the location of the resource.

usesNamespaces




This structure represents a list of namespaces.

usesSchemas



This structure holds a list of schemas.

xmlMapping

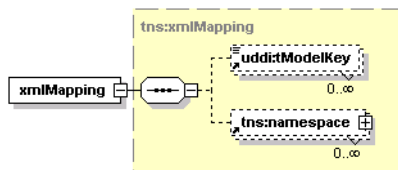


This structure represents an XML mapping.

Arguments

- `uddi:tModelKey` - `tModelKeys` of `tModels` that correspond to the XML document. When used with `publish_xml`, zero `tModelKeys` or a single `tModelKey` can be used.
- `tns:namespace` - List of namespaces used in the XML document with their mappings to UDDI `tModels`


xmlResourceDetail

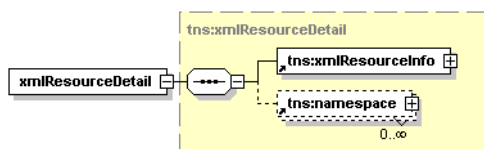

This structure describes the published XML document. It contains the location of the document and a list of the namespaces referenced by the XML document. The document declares a prefix for the XML namespace using the `xmlns:` declaration.


Arguments

- `tns:xmlResourceInfo` - contains the location of the XML document (URI)
- `tns:namespace` - a list of namespace information, one entry for each namespace used in the XML document

xmlResourceDetails**Table 35. Attributes**

truncated	optional


This structure, used in the result list of the `find_xml` query, provides information about a published XML document.

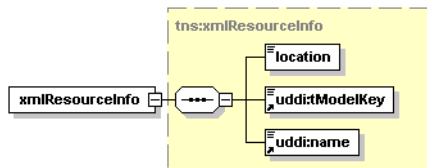xmlResourceInfo

This structure, served as a result from the `find_xml` query, represents a simple information object about an XML document. It contains information needed for a simple presentation and identifies the UDDI tModel holding the rest of the information.

Arguments

- `location` - the location (URI) of the XML document
- `uddi:tModelKey` - tModelKey of the tModel that corresponds to the XML document. The key can be used with `get_xmlDetail`
- `uddi:name` - name of the tModel

xmlResourceList

This structure contains a list of XML resources, possibly a sublist or a large result set. When only a sublist is returned, the structure must contain the `listDescription` element.


Arguments

- `uddi:listDescription` - description of the result list, in case it is a subset of a larger result set.
- `tns:xmlResourceInfo` - information about individual results (published XML documents)

Operations

find_xml

Syntax

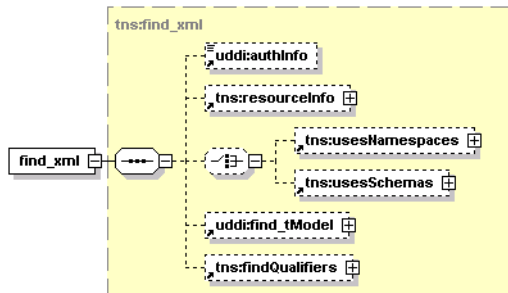

This operation finds the XML document.

Table 36. Attributes

listHead	optional
maxRows	optional

Arguments


- `uddi:authInfo` - This optional argument is the string representation of the `uddi:authToken`.
- [tns:resourceInfo](#) - URI location of the published XML document.
- [tns:usesNamespaces](#) - search by XML namespace URIs of the published XML document.
- [tns:usesSchemas](#) - schemas of the published XML document.
- `uddi:find_tModel` - Argument used for a more detailed description of search criteria. For more information, see [uddi:find_tModel](#) [http://uddi.org/pubs/uddi_v3.htm#_Toc53709284]. The search criteria implied by the other members of `find_xml` structure will be merged with the contents of `uddi:find_tModel` contents.

Returns

This API call returns the [xmlResourceList](#) on success.

find_xmlMapping

Syntax

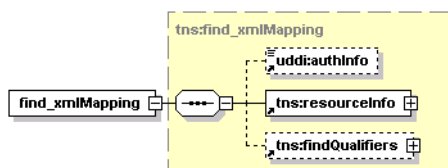

This operation finds a mapping among the UDDI entities for the XML resource.

Table 37. Attributes


policy	optional

Arguments

- **policy** - The policy (attribute) may be one of:
 - **automatic** (default) switches the operation to find UDDI entities for all XSD references, even those assumed from the XML namespace. For each used namespace URI, the function attempts to find all XML Schema tModels registered in UDDI which define the namespace contents and return their tModelKeys.
 - **locations** restricts the search only to namespaces containing `xsi:schemaLocation` or `xsi:noNamespaceSchemaLocation`. For these namespaces, the function returns tModelKeys of the XML Schema tModels stored in the registry matching the namespace. The operation ignores usage of namespaces lacking the `schemaLocation` attribute and does not return matching UDDI tModelKeys in this case.
- **uddi:authInfo** - This required argument is the string representation of the `uddi:authToken`.
- **[tns:resourceInfo](#)** - URI location of the XML document.

Returns

This API call returns [xml2uddi:xmlMapping](#) upon success.

get_xmlDetail**Syntax**


This operation returns the registered mapping information for the XML document identified by a key.

Arguments

- **uddi:authInfo** - This optional argument is the string representation of the `uddi:authToken`.
- **uddi:tModelKey** - Required `uddiKey` value representing an existing XML tModel.

Returns

This API call returns the [xml2uddi:xmlResourceDetails](#) which describes the XML and the schemas used to define the document elements.

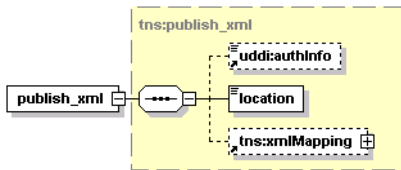publish_xml**Syntax****Table 38. Attributes**

policy	optional
publishingMethod	optional
namespacePublishing	optional

This operation creates a new instance of a tModel representing the XML document.

**Note**

This operation does not publish the contents of an XSD file.

All existing information which overlaps with the XML-to-UDDI mapping are overwritten, or removed from the registry, according to the input data. If the arguments pass information about a namespace, the passed information will be used. Any extraneous schema tModel references will be purged from the XML tModel's category bag.

Arguments


- **policy** - This optional attribute may have one of the following values:
 - **automatic** (default) - all XSD references found in the XML document, even those assumed from XML namespace prefix declarations will be published.
 - **explicit** - Only the XSD references provided in the call will be published.
 - **locations** - references to XSDs that are given with the `xsi:schemaLocation` or `xsi:noNamespaceSchemaLocation` will be published.
- **publishingMethod** - This optional attribute specifies whether the operation creates a new tModel (possibly assigned its name/value from the caller-supplied structure), or renews the passed tModel contents.
- **namespacePublishingMethod** - This optional attribute controls whether new tModels will be created for namespaces, the existing tModels will be reused, or the namespaces will be ignored. When `reuse` is specified, the target tModelKey can be also given. It is an error to specify a tModelKey that does not exist in the Registry. When `create` is specified for a namespace and the tModelKey is given, it is used as the publisher-assigned key for the new tModel. Possible values are `create`, `reuse`, and `ignore`.
- **uddi:authInfo** - This optional argument is the string representation of the `uddi:authToken`.
- **location** - location of the XML document.
- **tns:xmlMapping** - mapping structure to be used in XML publishing.

Returns

This API call returns the [xmlResourceDetail](#) on success.

unpublish_xml

Syntax



This operation removes the metadata (tModel) for the XML document, identified by tModelKey. Since the XML structure is not published, data about the XML document are effectively discarded. If the XML document's metadata is referenced from outside, the unpublish call fails. The dispositionReport will contain keys of the UDDI entities that refer to the XML document.

Arguments

- `uddi:authInfo` - This optional argument is the string representation of the `uddi:authToken`.
- `uddi:tModelKey` - tModelKey of the XML document.

Returns

This API call returns the `xmlResourceDetail` on success.

WSDL

[xml2uddi_v3.wsdl](http://www.systinet.com/doc/sr-65/wsd/xml2uddi_v3.wsdl) [http://www.systinet.com/doc/sr-65/wsd/xml2uddi_v3.wsdl]

API Endpoint

You can find the XML2UDDI API endpoint at `http://<host name>:<port>/<context>/uddi/xml2uddi`.

Java

[org.systinet.uddi.client.xml2uddi.v3.Xml2uddiApi](#)

2.2.10. XSD Publishing

XSD-to-UDDI mapping enables the automatic publishing of XML Schema Documents into UDDI and enables precise, flexible UDDI queries based on specific XML schema metadata.


The mapping of XML Schema Document information to UDDI covers:

- XML types - Types declared at the global level in the XML Schema Document. These types are mapped to tModels in UDDI.
- XML elements - XML elements declared at the global level in the XML Schema Document. These elements are mapped to tModels in UDDI.
- References to other XML namespaces - Information about imported schemas are stored in the registry.

The API allows the user to search for an schema's tModels based on the namespace they define, or the elements and types they declare within that namespace. The API can also extract the published information back from the registry, so it can be accessed as a list of elements, types, and schemas rather than tModels and other UDDI entities.

Data Structures

Elements




This structure represents elements declared by the published XML Schema Document.

Arguments

- `element` - This argument represents an element declared by the published XML Schema Document.

importedSchemaModel




This structure contains the basics of the imported XML Schema tModel.

Arguments


- `uddi:tModelKey` - The key of the tModel of the schema of the imported XML namespace.
- `uddi:name` - The name of that schema's tModel.

resourceInfo



This structure describes the location of the XML Schema Document.

schemaCandidate




This structure holds possible mappings of how the XML Schema Document can be published.

Arguments

- `location` - The location of the candidate XML Schema Document.
- [xsd2uddi:schemaMapping](#) - The mapping of the candidate XML Schema Document contents

schemaImport

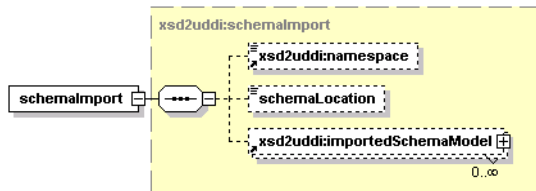


This structure holds the imported namespace, that is, the list of possible mappings for this `xsd:import`, for an `xsd:import` clause in the XML Schema Document. If a specific location is specified in the XML Schema Document text for the imported XML Schema Document, it is also present.

Arguments


- `xsd2uddi:namespace` - The imported namespace. If missing, a no-namespaced XML schema is imported
- `schemaLocation` - The location for the XML Schema Document, if given explicitly. If the imported XML Schema Document does not specify an exact schema location, this value is null.
- `xsd2uddi:importedSchemaModel` - The tModel information of the candidates for this import.

schemaImports



This structure describes a list of `xs:imports` in the schema.

schemaMapping

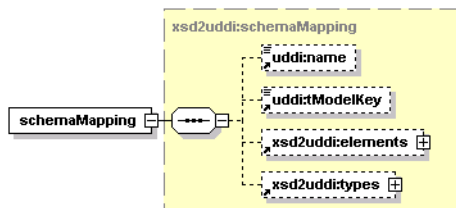


This structure describes a mapping of the XSD contents to an individual XSD tModel and its contents.

Arguments

- `uddi:name` - Name of the XML Schema tModel.
- `uddi:tModelKey` - tModelKey for the XML Schema tModel
- [xsd2uddi:elements](#) - Mapping for contained XML elements
- [xsd2uddi:types](#) - Mapping for contained XML types.

schemaMappings

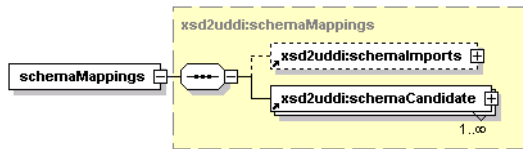


This structure describes a mapping from the contents of a XML Schema Document to UDDI entities. There are two parts. The first part describes possible matches for `xs:imports` specified by the XML Schema Document; the second, individual candidates that may match the XML Schema Document contents. The candidate structure then contains a mapping of the XML Schema Document onto the particular candidate tModel and the related UDDI entities.

Arguments

- [xsd2uddi:schemaImports](#) - mapping for referenced (imported) XML Schema Documents.
- [xsd2uddi:schemaCandidate](#) - an individual mapping candidate.

symbol




This structure holds mapping of an individual symbol (XSD element and type) to the registry.

Arguments


- `localName` - Local name of the mapped symbol.
- [xsd2uddi:symbolModel](#) - The basics of the tModel that represents the symbol.

symbols



A common structure for mapping types and elements.

symbolModel




Basic information about a tModel that represents an element or a type declared by the XML Schema Document

Arguments


- `uddi:name` - Name of the symbol's tModel. This argument is optional when publishing a XML Schema Document; it is always filled in API responses.
- `uddi:tModelKey` - tModelKey of the symbol's model

types



Mapping of types declared by the XML Schema Document being mapped

xsdDetail

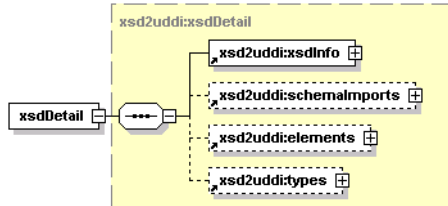


The structure provides detailed information about a specific XML Schema Document, its contents and its references.

Arguments


- [xsd2uddi:xsdInfo](#) - General information about the XML Schema Document itself
- [xsd2uddi:schemaImports](#) - Information about XML namespaces imported into the XML Schema Document
- [xsd2uddi:elements](#) - List of elements in the schema
- [xsd2uddi:types](#) - List of types in the schema

xsdDetails



Details of the XSD

xsdInfo

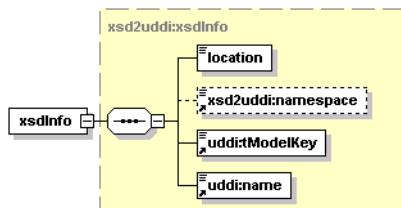

This structure holds general information about the XML Schema Document.

Arguments

- location - The location of the XML Schema Document. This location can be used to retrieve the contents
- xsd2uddi:namespace - The URI of the XML namespace defined by the XML Schema Document
- uddi:tModelKey - tModel key for the schema's tModel

- `uddi:name` - tModel name for the schema's tModel

xsdResourceList

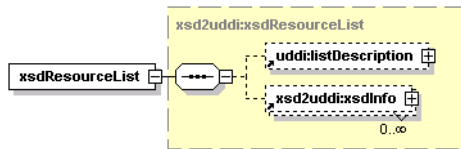


Table 39. Attributes

Name	Required
truncated	optional

This structure holds a list of XSDs, returned from a `find_xsd` call.


Arguments

- `uddi:listDescription` - holds a list of descriptions as specified in UDDI's API documentation.
- [xsd2uddi:xsdInfo](#) - holds information about individual registered XSD models.

Operations

find_xsd

Syntax

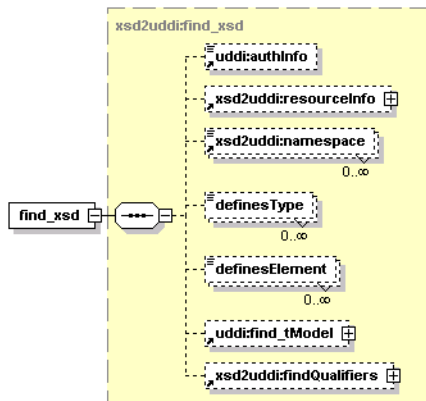

This operation finds the XML Schema Document. The caller can limit the number of search results to be returned and can iterate through the search results using the `listHead` and `maxRows` arguments.

The name and URI lists passed as the input search criteria may use wildcard characters provided that the `approximateMatch` `findQualifier` is present. If the `ownEntities` `findQualifier` is used, the operation returns only entities owned by the authenticated user. Other entities are not returned even though they match the other search criteria.

Table 40. Attributes

Name	Required
listHead	optional
maxRows	optional

Arguments


- `uddi:authInfo` - This optional argument is the string representation of the `uddi:authToken`.
- [xsd2uddi:resourceInfo](#) - URI location of the published XML Schema Document. The registry does not read from the location, it is used as a search criteria for the current UDDI contents only.
- `xsd2uddi:namespace` - Allows to search by the namespace defined by a XML Schema Document. Contains a list of XML namespace URIs. An XML Schema Document satisfies this condition if its `targetNamespace` attribute is among the URIs.
- `definesType` - Allows the user to search by defined type. Contains a list of type names. An XML Schema Document satisfies this condition if it defines a global type with a name passed in the list.
- `definesElement` - The returned schemas must define the named element.
- `uddi:find_tModel` - An argument used for a more detailed description of search criteria. For more information, see [uddi:find_tModel](#) [http://uddi.org/pubs/uddi_v3.htm#_Toc53709284]. These criteria are combined with the other criteria specified by the `find_xsd` structure. In the case of a conflict, the criteria in `find_xsd` take precedence.

Returns

This API call returns the [xsdResourceList](#) on success. If the caller specifies the `maxRows` attribute, the returned `xsdResourceList` will contain, at most, that many results. Note that the search may yield a `tModel`, which does not entirely comply with the XSD-to-UDDI mapping specification, such as when the `tModel` information is altered manually. In these cases, an attempt to use `get_xsdDetail` on such a `tModel` will produce an exception.

find_xsdMapping

Syntax

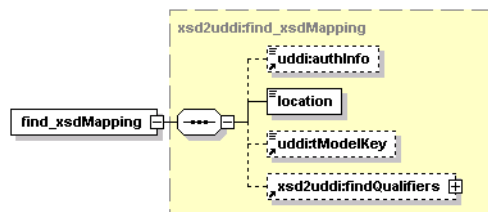

This operation finds a suitable mapping for contents of the given XML Schema Document. The operation downloads and parses the XML Schema Document at the given location, and matches the contents against the information already published in the registry. It will produce zero or more possible mappings for the given XML Schema Document.

The caller may request that the mapping is attempted only against a specific `tModel` that represents an XML Schema Document. In that case, only one mapping will be returned.

If the document at the specified location, or one of its dependencies (for example, schemas for XML namespaces which the document imports) are not accessible to the registry, an exception will be raised. If the document is not an XML schema or contains errors, the operation will throw an exception.

Arguments

- `uddi:authInfo` - (Optional) - authentication
- [xsd2uddi:resourceInfo](#) - The XSD identification (location)

- `uddi:tModelKey` - (Optional), the proposed schema tModel whose contents should be matched. If set, only published contents of that XML Schema Document will be considered for mapping.


Returns

This API call returns [xsd2uddi:schemaMapping](#) upon success. The structure contains possible matches for the XML Schema Document at the specified location, which are already stored in the UDDI. There are also possible matches for the XML Schema Documents for XML namespaces imported into the main XML Schema Document.

The call will fail if it cannot access the XML Schema Document or one of its dependencies.

get_xsdDetail

Syntax



Gets the detail about a published XML Schema Document tModels.

Arguments

- `uddi:authInfo` - This optional argument is the string representation of the `uddi:authToken`.
- `uddi:tModelKey` - Required `uddiKey` value representing an existing XML Schema Document tModel.

Returns

This API call returns the `xsd2uddi:xsdDetails`.

If the passed tModelKey does not exist, or identifies a tModel that does not represent an XML Schema Document, an exception is raised.

publish_xsd

Syntax

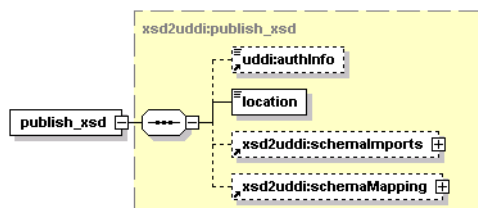


Table 41. Attributes

Name	Required
importPolicy	optional
contentPolicy	optional
publishingMethod	optional
contentPublishingMethod	optional
importPublishingMethod	optional

Request to publish XML schema information to the registry. The user may pass only minimal information and rely on the matching algorithm used internally to find the appropriate mapping for the published XML Schema Document.

Using the importPolicy and contentPolicy, the caller may limit the scope of the published data. By the publishingMethod, contentPublishingMethod and importPublishingMethod attributes, the caller may specify the default behavior for publishing - whether an existing UDDI entity is reused and possibly updated, or a new UDDI entity is created, or the particular kind of information is ignored at all.

The registry will need to read the XML Schema Document during the call as well as any resources referenced (imported) by it. If a XML Schema Document or a referenced resource is not available, the operation will fail.

If the caller does not specify a mapping for some element, type, or XML namespace import and there will be more possible matching UDDI entities, the call will fail because the mapping of that XML schema entity is considered ambiguous. It is the responsibility of the caller to provide specific directions for the publishing in such cases.

If the schemaMapping entry for a type, an element or an import specifies a publishingMethod reuse, the API will try to find a suitable UDDI entity. If such an entity is not found, the API will create one. If the caller provides a specific tModelKey with the reuse publishingMethod, the tModelKey must exist and that tModel will be updated with the element, type or import data.

If the schemaMapping entry for a type, an element or an import specifies a publishing method create, the API will always create a new UDDI entity for that XML Schema Document piece. If the caller specifies the tModelKey in the schemaMapping entry, the new UDDI entity will be assigned that tModelKey. The caller may specify a name for the new tModel, too.

If the caller specifies ignore publishing method for an element, a type or an import, that particular XML Schema Document piece will not be published at all. If the publishing operation updates an existing entity in the registry that contains a reference to the element, type or an import, the reference will be purged. When an element or type is ignored, the matching UDDI entity will be deleted from the registry as well by the publish operation.

Arguments

- uddi:authInfo - (Optional) - authentication
- location - XSD identification (location).
- [xsd2uddi:schemaImports](#) - Mapping for referenced (imported) XML Schema Documents
- [xsd2uddi:schemaMapping](#) - (Optional) customized mapping for the schema contents and references
- importPolicy - attribute specifying which imports will be published
- contentPolicy - attribute specifying which content will be published


- `publishingMethod` - attribute specifying the default publishing method for the contents (elements, types) declared by the schema; default = update
- `contentPublishingMethod` - The default publishing method for elements and types (ignore, create, reuse); default = reuse. This publishing method will be used for all elements or types unless the `SchemaMapping` contains an entry for the element or type that provides a different value.
- `contentPublishingMethod` - The default publishing method for imports (ignore, create, reuse); default = reuse. This publishing method will be used for all imported XML namespaces unless the `SchemaMapping` contains an entry for the XML namespace that provides a different value.

Returns

This API call returns the `xsdDetail` with the published XML Schema Document information on success.

unpublish_xsd

Syntax



Unpublish the XML Schema Document. The operation checks whether the XML Schema Document is referenced from other data published in the UDDI. If so, the operation fails as the semantics of the referencing data might break if the XML Schema Document information is removed from the UDDI registry.

Arguments

- `uddi:authInfo` - This optional argument is the string representation of the `uddi:authToken`.
- `uddi:tModelKey` - `tModelKey` of the `tModel` that represents the XML Schema Document.

Returns

This API call returns the [xsdDetail](#) on success.

WSDL

[xsd2uddi_v3.wsdl](#) [http://www.systinet.com/doc/sr-65/wsdl/xsd2uddi_v3.wsdl]

API Endpoint

You can find the XSD2UDDI API endpoint at `http://<host name>:<port>/<context>/uddi/xsd2uddi`.

Java

[org.systinet.uddi.client.xsd2uddi.v3.Xsd2uddiApi](#)

2.2.11. XSLT Publishing

XSLT-to-UDDI mapping enables the automatic publishing of XSLT into UDDI and enables precise, flexible UDDI queries based on specific XSL Transformation Documents.


The UDDI stores information about the input and output formats accepted and produced by the XSL transformation and about other XSL stylesheets imported into the transformation. The input format is defined by an XML Schema. The output

format may be defined by an XML Schema (its representing tModel), or it may be typed by a general tModel that represents the user's definition of the output. The UDDI also stores the output method used by the stylesheet: html, xml, text.

The XSLT Publishing API allows to search for the stylesheets by types of their input and output in order to locate a XSL suitable for processing a particular document, or a XSL that may produce some desired format.

Data Structures

compatibleSchema




A query for the input format of the style sheet. Selects those style sheets, which accept the specified schema. The schema can be given either using a namespace URI or directly using the tModelKey of the XML Schema tModel representation in the UDDI.

Arguments


- namespace - the URI of the XML namespace defined by the schema
- uddi:tModelKey - tModelKey of the tModel that represents the XML Schema

compatibleSchemaList



This structure holds a list of [compatibleSchemas](#).

contentMapping

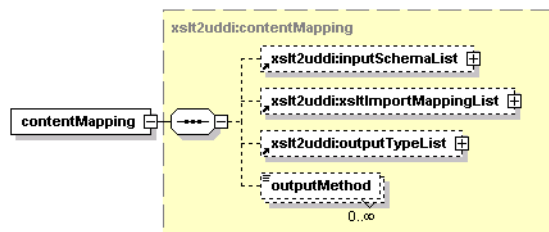


Describes how the contents of the XSLT transformation are mapped to the entities published in the registry.

Arguments


- [xslt2uddi:inputSchemaList](#)
- [xslt2uddi:xsltImportMappingList](#)
- [xslt2uddi:outputTypeList](#)
- outputMethod - One or more output methods, as defined by the XSLT specification. The default value substituted by the API when no output method is given is "xml".

inputSchemaList



List of the XSL transformation's information structures and references to input schemas.

namespaceMatch

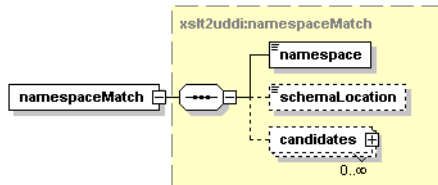


This structure represents matches found in the UDDI registry for a specific XML namespace URI referenced by the XSL Transformation Document.

Arguments


- namespace - XML namespace URI referenced in the XSL transformation
- schemaLocation - explicit location of the XML schema for the namespace. Optional.
- candidates - possible mappings to tModels. For more information, please see [xslt2uddi:tModelRef](#).

namespaceMatchList



This structure holds a list of [namespaceMatches](#).

outputType




The types of resources the XSL transformation may produce. Currently only xml is supported, typed by a XML Schema tModel

Arguments


- uddi:tModelKey - tModel that represents the formal description of the output format
- [xslt2uddi:xmlSchema](#)

outputTypeList



List of descriptions of output formats the style sheet can produce.

producesOutput




Query parameter that selects results based on the output produced by the XSL Transformation Document

Arguments


- `uddi:tModelKey` - key of a tModel that represents the formal description of the output format. Currently only tModels that represent XML schemas are supported
- `namespace` - the namespace URI of the XML namespace that defines output elements produced by the XSL Transformation Document

producesOutputList



List of output format query parameters

resultMapping

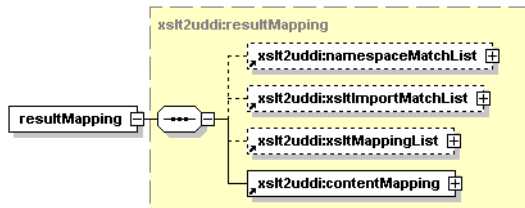

This structure holds the result of [find xsltMapping](#). It describes possible mappings for XML namespaces (their schemas) and mappings for stylesheet imported to the XSLT passed to the request. Finally, the tModels that match the XSL Transformation Document itself are reported in the mapping. For each of tModel that matches the mapped %xslt;, there's a suggested mapping of the XSLT Document contents onto the particular tModel and its related data.

The nested contentMapping structure is a suggestion how to map the XSL Transformation Document on a new tModel, rather than on some existing one. Mappings to already existing tModels are described in xsltMappingList nested structure.


It may happen, that a XML namespace URI or an importer XSL Transformation Document has several mappings into the UDDI. In such cases, the entries in the xsltMappingList or the contentMapping may contain no tModelKeys as an indication that the mapping algorithm could not decide the mapping. It is up to the caller to resolve such ambiguities.

Arguments

- [xslt2uddi:namespaceMatchList](#)
- [xslt2uddi:xsltImportMatchList](#)
- [xslt2uddi:xsltMappingList](#)

- [xslt2uddi:contentMapping](#)

tModelRef




This structure holds a reference to a tModel representing an XML Schema document, or XML style sheet document.

Arguments

- `uddi:name` - name of the tModel. This name is always present in API response messages.
- `uddi:tModelKey` - tModelKey that represents an XML schema or XSLT document.

usesStylesheet




This structure is used in [find_xslt](#) queries.

Arguments


- `location` - location of the XSLT document.
- `uddi:tModelKey` - tModelKey of the tModel that represents the XSLT document.

usesStylesheetList



This structure holds a list of [usesStylesheets](#).


xmlSchema

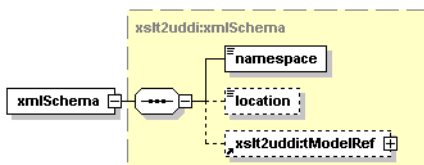

Description of a referenced XML Schema

Arguments


- `namespace` - The namespace referenced from the XSL Transformation Document
- `location` - The explicit location of the XML Schema for the namespace, if given in the XSLT. Optional.
- [xslt2uddi:tModelRef](#)

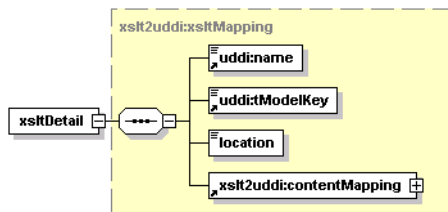xsltDetail


This structure holds the representation of an XSLT document in the UDDI registry.

Arguments

- `uddi:name` - name of the XSL Transformation Document tModel .
- `uddi:tModelKey` - the tModelKey of the tModel that represents the XSL Transformation Document
- `location` - the URI of the XSL Transformation Document document
- [xslt2uddi:contentMapping](#)

xsltDetailList


This structure represents a list of [xsltDetails](#).

xsltImportMapping

This structure holds a mapping XSL Transformation Document imported to UDDI entities.


Arguments

- `location` - location of the imported XSL Transformation Document.
- [xslt2uddi:tModelRef](#) - references to tModels that match the imported XSL Transformation Document.

xsltImportMappingList

This structure represents a list of [xsltImportMappings](#).

xsltImportMatch

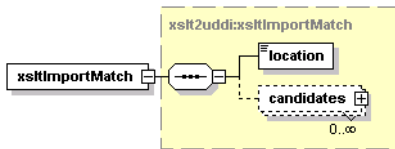


This structure represents a matching between imported XSL Transformation Documents and UDDI entities.

Arguments


- `location` - location of the imported XSL Transformation Document.
- `candidates` - possible mappings to UDDI tModels. See [xslt2uddi:tModelRef](#)

xsltImportMatchList



This structure holds a list of [xsltImportMatches](#).

xsltInfo

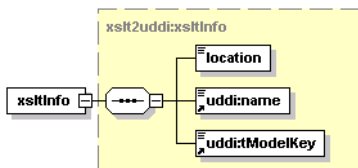


This structure represents an item from the list returned by [find_xslt](#) operations.

Arguments


- `location` - location of the XSL Transformation Document
- `uddi:name` - name of the XSL Transformation Document
- `uddi:tModelKey` - the key of tModel that represents the XSL Transformation Document.

xsltInfos

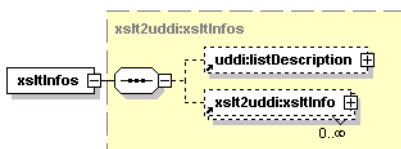

This structure holds a list of [xsltInfos](#).

xsltMapping

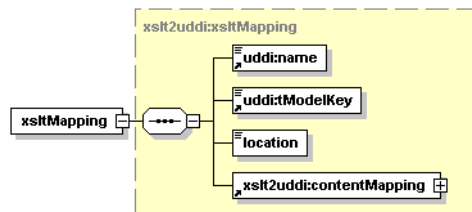


This structure describes the mapping of an XSL Transformation Document.

Arguments

- `uddi:name` - name for the XSLT tModel
- `uddi:tModelKey` - tModelKey of the target tModel
- `location` - location of the XSL Transformation Document.
- [xslt2uddi:contentMapping](#)

xsltMappingList



This structure represents a list of [xslMappings](#)

Operations

find_xslt

Syntax

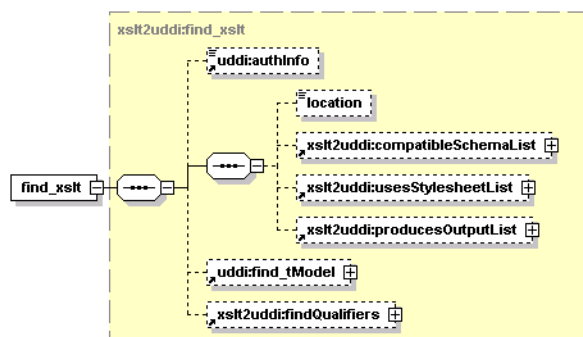


Table 42. Attributes

Name	Required
listHead	optional
maxRows	optional

This operation finds the XSLT tModel that satisfies the search criteria. The caller may limit the number of results or page through the list of results using `listHead` and `maxRows` attributes. They have the same semantics as in `find_tModel` in the UDDI Inquiry API.

The name and URI lists passed as the input search criteria may use wildcard characters provided that the `approximateMatch` findQualifier is present. If the `ownEntities` findQualifier is used, the operation returns only entities owned by the authenticated user. Other entities are not returned even though they match the other search criteria.

Arguments


- `uddi:authInfo` - This optional argument is the string representation of the `uddi:authToken`.
- `location` - location of the XSL Transformation Document.
- [xslt2uddi:compatibleSchemaList](#)
- [xslt2uddi:usesStylesheetList](#)
- [xslt2uddi:producesOutputList](#)
- `uddi:find_tModel` - a generic query parameter to further restrict the search using user-defined criteria
- `xslt2uddi:findQualifiers` - see find qualifiers

Returns

This API call returns the a list of [xsltInfos](#) on success.

find_xsltMapping

Syntax

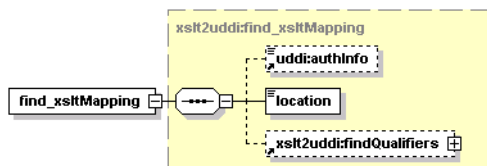

This operation finds a suitable mapping for contents of the given XSL Transformation Document.

The mapping algorithm tries not to report ambiguous mapping unless necessary. If some reference to a XML namespace or an imported XSL Transformation Document is ambiguous, the mapping algorithm will consider the already published data and suggest the tModelKey used by the existing tModel that represents the XSL Transformation Document. So in other words, if there is an XSL Transformation Document tModel already published, that references a specific tModelKey for a XML namespace, that tModelKey will be reported in the XsltMappingList even though there are more possible matching entities for the XML namespace.

Arguments


- `uddi:authInfo` - authentication
- `location` - location of the XSL Transformation Document
- `xslt2uddi:findQualifiers` - see find qualifiers

Returns

This API call returns [xslt2uddi:resultMapping](#) upon success.

get_xsltDetail

Syntax

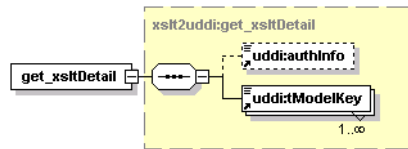

This operation gets the detail about published XSLT tModels.

Arguments

- `uddi:authInfo` - This optional argument is the string representation of the `uddi:authToken`.
- `uddi:tModelKey` - required key value representing an existing XSLT tModel.

Returns

This API call returns the [xslt2uddi:xsltDetailList](#).

publish_xslt

Syntax

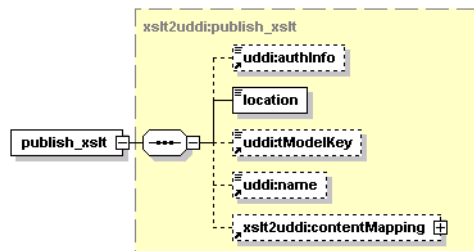


Table 43. Attributes

Name	Required
publishingMethod	optional
schemaMethod	optional
importMethod	optional

A request to publish XSLT information to the UDDI registry.

The `publishingMethod` defines how the XSL Transformation Document will be published in the UDDI registry. The `schemaMethod` and `importMethod` attributes define the defaults for publishing XML schema references, or references to imported XSL Transformation Documents, respectively. It is possible to override those defaults in entries of the passed `contentMapping`.

The registry will need to read the XSL Transformation Document document being published. If the XSLT is not available to the UDDI registry, the operation will fail.

If the caller does not specify a mapping for some referenced XML namespace URI, or an imported XSL Transformation Document, and there will be more possible matching UDDI entities, the call will fail because the mapping is considered ambiguous. It is the responsibility of the caller to provide specific directions for the publishing in such cases.

If a mapping entry specifies "create" as its publishing method, a new entity will be created to represent the particular part of the XSL Transformation Document. In this case the tModelKey of the mapping, if present, is used to provide a publisher-assigned key to the new entity.

If a mapping entry specifies "ignore" publishing method, the information is not propagated into the UDDI registry at all. When updating an existing XSL Transformation Document tModel, such information are purged. So when a XML namespace is "ignored", the publishing operation will remove the association between the XSL Transformation Document and the ignored XML Schema. Ignoring an element or type will delete the representing tModel entity from the UDDI.

Arguments


- `uddi:authInfo` - (Optional) - authentication
- `location` - XSLT identification (location) of the XSL Transformation Document.
- `uddi:tModelKey` - the tModelKey to be updated
- `uddi:name` - the name of the tModel, optional
- [xslt2uddi:contentMapping](#)
- `publishingMethod` - The publishing method for the XSLT itself (create, update). (default = update).
- `schemaMethod` - The publishing method for the referenced schemas (create, reuse, ignore). (Default = reuse).

Returns

This API call returns the [xsltDetail](#) on success.

unpublish_xslt

Syntax



Unpublish the XSL Transformation Document.

The contents of the UDDI Registry are checked whether there are referencies to this XSLT representant. If so, the operation fails with a disposition report that clearly shows tModelKeys of the referencing entities. Only references between XSLTs are checked (the `uddi:uddi.org:resource:reference` taxonomy).

Arguments

- `uddi:authInfo` - This optional argument is the string representation of the `uddi:authToken`.
- `uddi:tModelKey` - tModelKey of the XSLT.

Returns

This API call returns the [xsltDetail](#) on success.

WSDL

[Xslt2uddi_v3.wsdl](http://www.systinet.com/doc/sr-65/wsd/xslt2uddi_v3.wsdl) [http://www.systinet.com/doc/sr-65/wsd/xslt2uddi_v3.wsdl]

API Endpoint

You can find the XSLT2UDDI API endpoint at `http://<host name>:<port>/<context>/uddi/xslt2uddi`.

Java

`org.systinet.uddi.client.xslt2uddi.v3.Xslt2uddiApi`

2.2.12. Inquiry UI

The Inquiry UI API has been implemented for improving the performance of the Business Service Control. The basic idea is to retrieve data that appear in the Business Service Control using a single API call.

This API contains only one operation [get_entityDetail](#). Its input includes a query specification and an output format:

- The **query specification** comprises one of the standard UDDI v3 API data structures: `find_business`, `find_services`, `find_binding`, `find_tModel`, `get_businessDetail`, `get_serviceDetail`, `get_bindingDetail` and `get_tModelDetail`.
- The **output format** defines which data structures will be returned and how they will be pruned.

The operation [get_entityDetail](#) returns a list of UDDI data structures. ACLs are also applied to retrieved data.

For example, if you specify the following inquiry:

```
<get_entityDetail xmlns="http://systinet.com/uddi/inquiryUI/6.0">
  <outputFormat>
    <businessEntityMask descriptionIncluded="true" identifierBagIncluded="true"/>
    <businessServiceMask descriptionIncluded="true"/>
  </outputFormat>
  <find_binding serviceKey="uddi:systinet.com:demo:hr:employeesList"
    xmlns="urn:uddi-org:api_v3"/>
</get_entityDetail>
```

You will receive the following output:

```
<entityDetail xmlns="http://systinet.com/uddi/inquiryUI/6.0">
  <businessEntity businessKey="uddi:systinet.com:demo:hr"
    xmlns="urn:uddi-org:api_v3">
    <name>HR</name>
    <description>HR department</description>
    <businessServices>
      <businessService serviceKey="uddi:systinet.com:demo:hr:employeesList"
        businessKey="uddi:systinet.com:demo:hr">
        <name>EmployeeList</name>
        <description>wsdl:type representing service</description>
      </businessService>
    </businessServices>
    <identifierBag>
      <keyedReference tModelKey="uddi:systinet.com:demo:departmentID"
        keyName="department id" keyValue="002"/>
    </identifierBag>
```

```
</businessEntity>
</entityDetail>
```

If there are matching bindingTemplates accessible while associated businessServices are not (because of ACLs), such bindingTemplates will be included in the result in a separate list of bindingTemplates. The same behavior applies to accessible businessServices of inaccessible businessEntities.

Data Structures

The following structures are used by the Inquiry UI API:

- [Section bindingTemplateMask](#)
- [Section businessEntityMask](#)
- [Section businessServiceMask](#)
- [Section contactMask](#)
- [Section entityDetail](#)
- [Section outputFormat](#)
- [Section tModelInstanceInfoMask](#)
- [Section tModelMask](#)

bindingTemplateMask

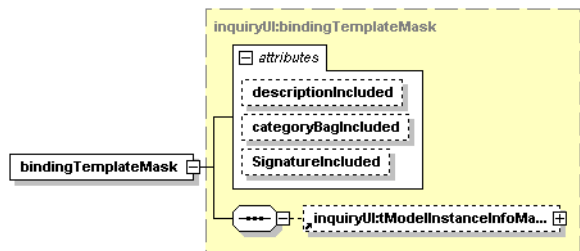
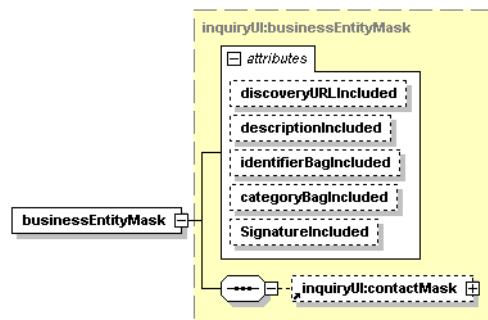


Table 44. Attributes


Attribute	Required
descriptionIncluded	No
categoryBagIncluded	No
SignatureIncluded	No

The bindingTemplateMask structure specifies the mask of the binding template of the [outputFormat](#). Optional attributes define which elements will be returned in the [entityDetail](#)

businessEntityMask**Table 45. Attributes**


Attribute	Required
discoveryURLIncluded	No
descriptionIncluded	No
identifierBagIncluded	No
categoryBagIncluded	No
SignatureIncluded	No

The businessEntityMask structure specifies the mask of the business entity of the [outputFormat](#). It also include a [contactMask](#). Optional attributes define which elements will be returned in the [entityDetail](#).

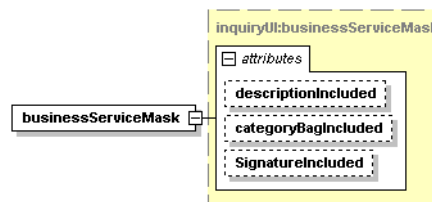businessServiceMask**Table 46. Attributes**

Attribute	Required
descriptionIncluded	No
categoryBagIncluded	No
SignatureIncluded	No


The businessServiceMask structure specifies the mask of the business service of the [outputFormat](#). Optional attributes define which elements will be returned in the [entityDetail](#).

contactMask

The contactMask structure specifies the submask of the business entity mask of the [outputFormat](#). Optional attributes define which elements will be returned in the [entityDetail](#)

Table 47. Attributes

Attribute	Required
descriptionIncluded	No
phoneIncluded	No
emailIncluded	No
addressIncluded	No

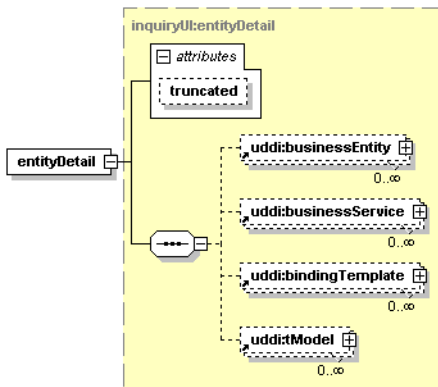
entityDetail

The entityDetail structure is returned by the [get_entityDetail](#) operation. The attribute truncated indicates a truncated result list.

Table 48. Attributes

Attribute	Required
uddi:truncated	No

outputFormat

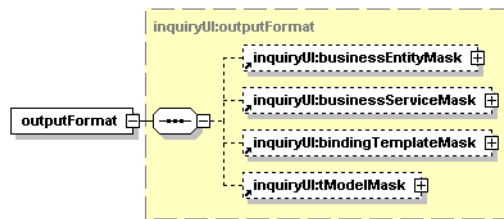


The `outputFormat` is a mask for data to be returned and can prune returned structures. The output format is defined by the following arguments.

Arguments

- [inquiryUI:businessEntityMask](#)
- [inquiryUI:businessServiceMask](#)
- [inquiryUI:bindingTemplateMask](#)
- [inquiryUI:tModelMask](#)

tModelInstanceInfoMask

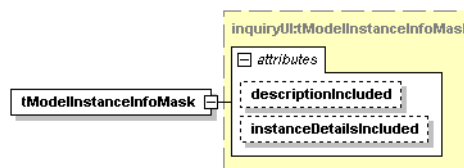


The `tModelInstanceInfoMask` structure specifies the mask of the tModel instance info of the [outputFormat](#). Optional attributes define which elements will be returned in the [entityDetail](#)

Table 49. Attributes

Attribute	Required
<code>descriptionIncluded</code>	No
<code>instanceDetailsIncluded</code>	No

tModelMask



The `tModelMask` structure specifies the mask of the tModel of the [outputFormat](#). Optional attributes define which elements will be returned in the [entityDetail](#)


Table 50. Attributes

Attribute	Required
descriptionIncluded	No
overviewDocIncluded	No
identifierBagIncluded	No
categoryBagIncluded	No
SignatureIncluded	No

Operations

get_entityDetail

This is the core operation of the Inquiry UI API.

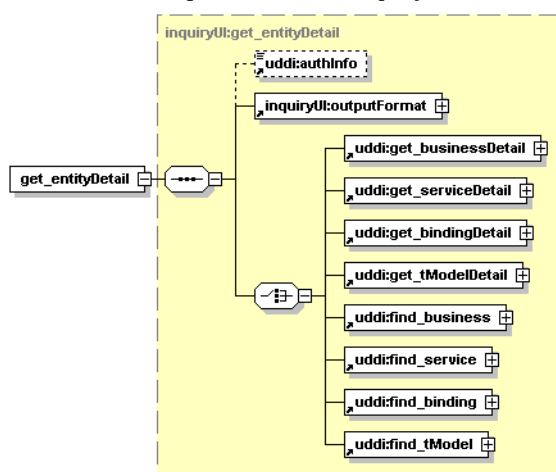

Arguments

- `uddi:authInfo` - This optional argument is an element that contains an authentication token.
- [inquiryUI:outputFormat](#)
- `uddi:get_businessDetail`, `uddi:get_bindingDetail`, `uddi:get_tModelDetail`, `uddi:find_business`, `uddi:find_service`, `uddi:find_binding`, `uddi:find_tModel` - standard UDDI v3 structures.

Returns

Upon successful completion, an [entityDetail](#) structure is returned.

WSDL

You can find the WSDL specification in the file [inquiryUI.wsdl](#) [<http://www.systinet.com/doc/sr-65/wsdl/inquiryUI.wsdl>].

API Endpoint

You can find the Inquiry UI API endpoint at `http://<host name>:<port>/<context>/uddi/inquiryUI`.

Java

Java API is generated directly from WSDL. You are encouraged to browse org.systinet.uddi.client.v3.ui.InquiryUIApi.

2.2.13. Subscription Ext

The Subscription Extension API has been implemented to allow the user to create subscriptions in the *discovery registry* of the approval process. This means that subscription creation is not subject to the approval process; users can save subscriptions directly to the discovery registry. However, under this API, users are not allowed to save a bindingTemplate for the email address where notifications are sent. The Subscription Extension API allows the user to specify a bindingTemplate in the subscriptionExt structure in the save_subscription operation. This bindingTemplate is saved under the Notification Service Container of the operator's business entity. The Notification Service Container is a businessService with the key uddi:systinet.com:subscription:notification_service_container. This API can also be used for "read-only" registry. In that case, users are not allowed to publish their data to the registry. Their subscriptions can be saved with this API.

Data Structures

The following structures are used by the Subscription Extension API:

- [Section Notification Service Container](#)
- [Section subscriptionExt](#)

Notification Service Container

The Notification Service Container is a business service stored under the operator's business entity. It has the key: uddi:systinet.com:subscription:notification_service_container. This business service is imported together with other registry pre-deployed data.

subscriptionExt

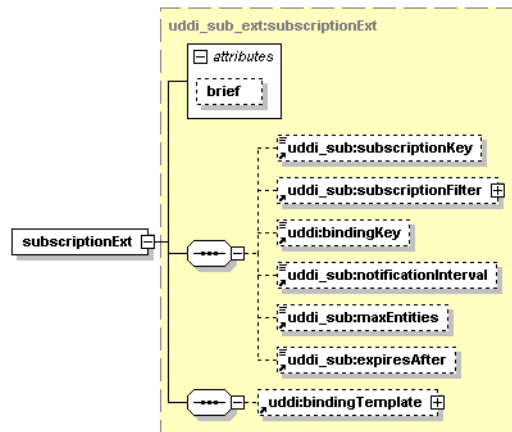


Table 51. Attributes

Attribute	Required
brief	No

The subscriptionExt structure substitutes the uddi_sub:subscription structure in the save_subscription structure of the standard UDDI v3 API.

Operations

The following operations extend the standard UDDI v3 API:

- [Section save_subscription](#)
- [Section delete_subscription](#)

save_subscription

- This operation is used when creating a new subscription. If the bindingTemplate is specified, then the subscription is saved under the caller's user account under the [Notification Service Container](#). The bindingKey is generated by the registry, the other structures of the bindingTemplate remain untouched. The bindingKeys in both the subscription and the bindingTemplate are ignored. The subscription structure returns a bindingKey referencing the saved bindingTemplate, but not the bindingTemplate itself.
- Updating the existing subscription. The algorithm of the standard saving of subscriptions is extended with these steps:
 1. If the subscription refers to a bindingTemplate under the [Notification Service Container](#), then the binding template will be deleted. See [delete_subscription](#)
 2. If the bindingTemplate is specified in the subscription, then the bindingTemplate is stored under the [Notification Service Container](#)

delete_subscription

If the subscription references a bindingTemplate which is under the [Notification Service Container](#), then the bindingTemplate will be deleted.

WSDL

You can find the WSDL specification in the file [uddi_sub_v3_ext.wsdl](#) [http://www.systinet.com/doc/sr-65/wsdl/uddi_sub_v3_ext.wsdl].

API Endpoint

You can find the Statistics API endpoint at `http://<host name>:<port>/<context>/uddi/subscriptionExt`.

Java

The Java API is generated directly from WSDL. You are encouraged to browse [org.systinet.uddi.client.subscription.v3.ext.UDDISubscriptionExtStub](#).

2.3. Security APIs

Security APIs cover the following APIs:

- [Account API](#) - Account API is used to query and manage user accounts in Oracle Service Registry.
- [Group API](#) - Group API is used to query and manage user groups in Oracle Service Registry.
- [Permission API](#) - Permission API is used to query and manage permissions in Oracle Service Registry.


2.3.1. Account

Account API is used to query and manage user accounts in Oracle Service Registry.

Data Structures

The following structures are used by the Account API:

userAccount

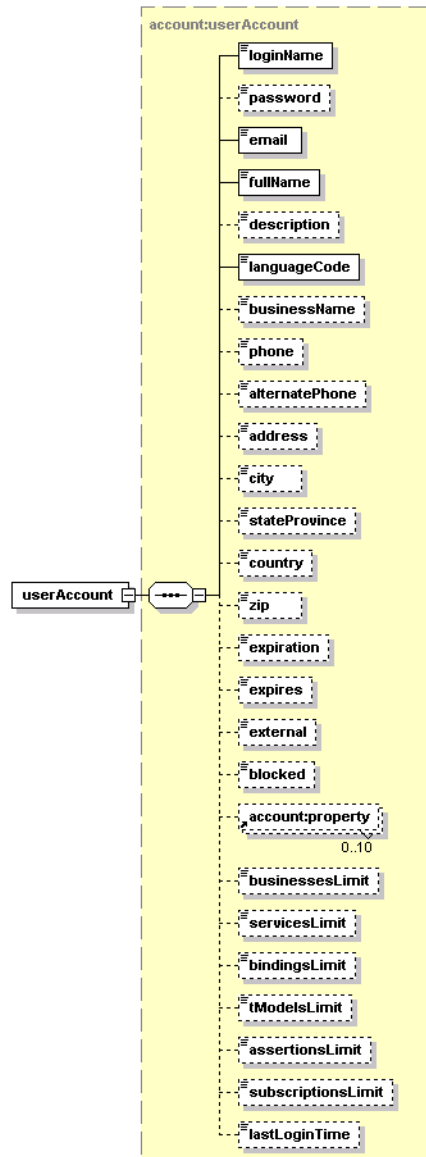


The `userAccount` element is container that holds the attributes of a user account in the Oracle Service Registry. The required elements are:


- `loginName`
- `email`
- `fullName`
- `languageCode`

All other elements are optional.


Element	Description
loginName	contains the login name of the user account
password	contains the password used to authorize the user
email	holds the user's email address
fullName	holds the user's full name
description	use for describing the user or the user's role
languageCode	the language the user speaks
businessName	name of organization where the user is employed
phone	telephone number used to contact the user
alternatePhone	second telephone number used to contact the user
address	
city	
stateProvince	
country	
zip	
expiration	may hold the time when the user account expires
expires	indicates whether the account may expire over time
external	a flag indicating whether the user account is external or stored in the UDDI registry
blocked	a flag indicating whether the user is blocked
account:property	an unspecified string; its meaning depends on UserStore type
businessesLimit	specifies how many business entities the user account may save
servicesLimit	specifies maximum number of business services within a single business entity that the user account may own
bindingsLimit	specifies how many bindingTemplates the user account may save within a single businessService
tModelsLimit	specifies the number of tModels the user account may save
assertionsLimit	specifies the number of publisherAssertions the user account may save
subscriptionsLimit	specifies the number of subscriptions the user account may save
lastLoginTime	contains information regarding when the user last logged into the registry

userInfo

This element serves as a container for short information about single userAccount. It contains the required element `loginName`, and the optional elements `fullName`, `description`, and `email`.

userInfos


This element holds one or more `userInfo` elements.

userList

This element contains optional `listDescription` and `userInfos` elements.

Operations**find_userAccount**

The `find_userAccount` API call is used to find user accounts in Oracle Service Registry that match given criteria.

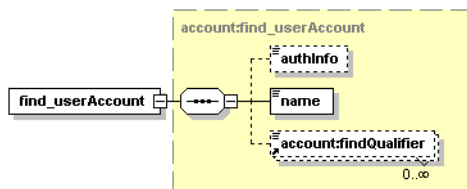Syntax**Arguments**

- `authInfo` - This optional argument is an element that contains an authentication token.
- `name` - Name to be searched.
- `account:findQualifier` - The collection of `findQualifier` used to alter default behavior.

Behavior

The following `findQualifiers` affect behavior of the call:

- The `findByLoginName` `findQualifier` (default) is used to specify that user accounts shall be searched by `loginName`.

- With the `findByFullName` `findQualifier`, user accounts are searched by the `fullName` property.
- If the `exactMatch` `findQualifier` is present, an exact match is required.
- The default `approximateMatch` `findQualifier` enables SQL wildcard queries.
- If the `findBlockedAccount` `findQualifier` is present, only blocked accounts are returned.
- The `sortByNameAsc` (default) and `sortByNameDesc` `findQualifiers` controls the order in which the data is returned.

Returns

This API call returns the [userList](#) upon success.


Permissions

This API call requires the API user permission for `org.systinet.uddi.account.AccountApi` and the action `find_userAccount`.

get_userAccount

The `get_userAccount` API call returns `userAccount` structure of selected user.

Syntax



Arguments

- `authInfo` - This optional argument is an element that contains an authentication token.
- `loginName` - This required argument uniquely identifies the user account.

Returns

This API call returns [userAccount](#) upon success.


Permissions

This API call requires the API user permission for `org.systinet.uddi.account.AccountApi` and the action `get_userAccount` to get user's own account detail and API manager permission for `org.systinet.uddi.account.AccountApi` and the action `get_userAccount` to get other users' accounts.

save_userAccount

The `save_userAccount` API call is used to save or update `userAccount` in Oracle Service Registry. Whether public registration is allowed or not depends on the Oracle Service Registry configuration. It may be also configured to block registered account until it is enabled by code sent by email.

Syntax



Arguments

- `authInfo` - This optional argument is an element that contains an authentication token.
- `account:userAccount` - The user account to be saved.

Returns

This API call returns `userAccount` upon success.


Permissions

This API call requires the API user permission for `org.systinet.uddi.account.AccountApi` and the action `save_userAccount` to save user's own account or register new account and API manager permission for `org.systinet.uddi.account.AccountApi` and the action `save_userAccount` to save other users' accounts.

delete_userAccount

The `delete_userAccount` API call causes selected user account to be removed from Oracle Service Registry.

Syntax



Arguments

- `authInfo` - This optional argument is an element that contains an authentication token.
- `loginName` - This required argument uniquely identifies the user account.

Returns

This API call returns `UserAccount` upon success.


Permissions

This API call requires the API user permission for `org.systinet.uddi.account.AccountApi` and the action `delete_userAccount` to delete user's own account and API manager permission for `org.systinet.uddi.account.AccountApi` and the action `delete_userAccount` to delete other users' accounts.

enable_userAccount

The `enable_userAccount` API call is used to activate user account identified by `loginName` argument in Oracle Service Registry.

Syntax



Arguments

- `loginName` - This required argument uniquely identifies the user account.

- `account:enableCode` - Confirmation string.

WSDL

You can find the WSDL specification in the file [account.wsdl](http://www.systinet.com/doc/sr-65/wsd/account.wsdl) [http://www.systinet.com/doc/sr-65/wsd/account.wsdl].

API Endpoint

You can find the Account API endpoint at `http://<host name>:<port>/<context>/uddi/account`.

Java

The Java API is generated from Account WSDL. You are encouraged to browse [org.systinet.uddi.account.AccountApi](#) and to read and try [Account demos](#).


2.3.2. Group

Group API is used to query and manage user groups in Oracle Service Registry.

Data Structures


The following structures are used by the Group API:

group

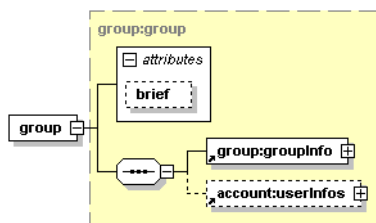


This element serves as a container for groupInfo and userInfo structures.

groups



This element serves as a container for one or more group structures.

groupInfo




This element contains information about one user group:

- The required `name` element holds the name of the group.

- The optional description element is used to describe group and its usage.
- The owner element contains the loginName of the user who created this group.
- The privateGroup element indicates whether the group is public or private.
- The external element indicates whether the group is external (For example, in LDAP) or not.

groupInfos



This element serves as a container for one or more groupInfo elements.

groupList

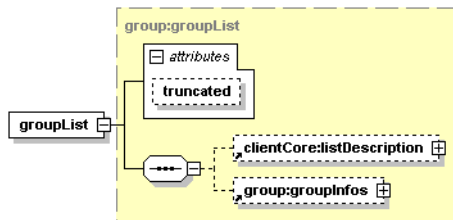


Table 52. Attributes

Attribute	Required
truncated	No


This structure server as a container for optional listDescription and optional groupInfos structures. The truncated attribute indicates whether the list of groupInfos is truncated.

Operations

add_user

The add_user API call is used to add a user to a user group.

Syntax

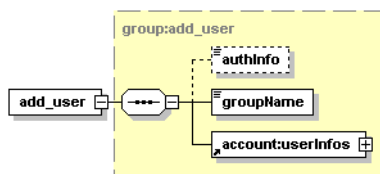

Arguments

- authInfo - This optional argument is an element that contains an authentication token.
- groupName - the group to which the user will be added.
- account:userInfos - user that will be added to the group.


Permissions

This API call requires API user or manager permission for `org.systinet.uddi.client.group.GroupApi` and the action `add_user`.

find_user

The `find_user` API call is used to find user within the user group.

Syntax

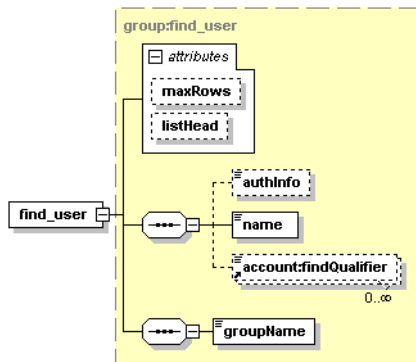

Arguments

- `authInfo` - This optional argument is an element that contains an authentication token.
- `name` - login name of the user
- `account:findQualifier` - find qualifier
- `groupName` - the group in which the user will be searched.

Permissions

This API call requires API user or manager permission for `org.systinet.uddi.client.group.GroupApi` and the action `find_user`.


Returns

Upon successful completion, the `UserList` structure is returned.

find_group

The `find_group` API call is used to search groups in Oracle Service Registry.

Syntax

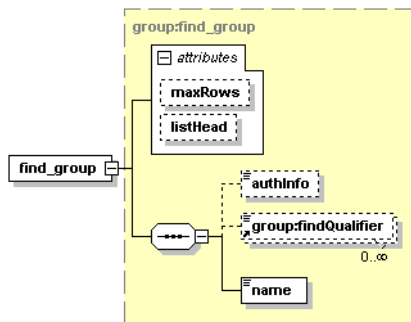

Arguments

- `authInfo` - This optional argument is an element that contains an authentication token.
- `group:findQualifier` - The collection of `findQualifier` used to alter default behavior.
- `name` - The required value contains name of the group to be searched.

Behavior

The following `findQualifiers` affect behavior of the call. The `exactMatch` `findQualifier` causes that exact match on group name is required, while default `approximateMatch` `findQualifier` enables SQL wildcard query. The `findPrivateGroups` `findQualifier` enables search between private groups, `findPublicGroups` enables search between public groups and `findMyGroups` will cause the search to be performed only between groups owned by the user who executed this call. The `sortByNameAsc` and `sortByNameDesc` `findQualifiers` controls order, in which the data is returned.

If no `findQualifier` is defined, default `findQualifier` set contains `approximateMatch`, `findPrivateGroups`, `findPublicGroups` and `sortByNameAsc` `findQualifiers`.

Returns

Upon successful completion, the `groupList` structure is returned.


Permissions

This API call requires API user or manager permission for `org.sysinet.uddi.client.group.GroupApi` and the action `find_group`.

get_group

The `get_group` API call is used to get details for one or more groups in Oracle Service Registry.

Syntax



Arguments

- `authInfo` - This optional argument is an element that contains an authentication token.
- `name` - The required value contains name of the group to be returned.
- `brief` - if you set this attribute, the result will not contain members of the group. Setting the attribute is useful when working with large groups with thousands of members.

Returns

Upon successful completion, the [groups](#) structure is returned.


Permissions

This API call requires API user or manager permission for `org.systinet.uddi.client.group.GroupApi` and the action `get_group`. The user permission is needed to get user's own groups, the manager permission is required to get other users' groups.

save_group

The `save_group` API call is used to save collection of groups to Oracle Service Registry.

Syntax



Arguments

- `authInfo` - This optional argument is an element that contains an authentication token.
- [group:groups](#) - The groups to be saved.

Returns

Upon successful completion, the `groups` structure is returned.


Permissions

This API call requires API user or manager permission for `org.systinet.uddi.client.group.GroupApi` and the action `save_group`. The user permission is needed to save user's own groups, the manager permission is required to update other users' groups.

remove_user

The `remove_user` API call removes user from the group.

Syntax

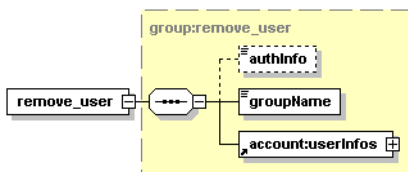

Arguments

- `authInfo` - This optional argument is an element that contains an authentication token.
- `name` - login name of the user
- `groupName` - the group from which the user will be removed


Permissions

This API call requires API user or manager permission for `org.systinet.uddi.client.group.GroupApi` and the action `remove_user`.

delete_group

The `delete_group` API call causes that groups identified by their names will be removed from Oracle Service Registry.

Syntax



Arguments

- `authInfo` - This optional argument is an element that contains an authentication token.
- `name` - The required value contains names of the groups to be deleted.

Returns

Upon successful completion, the [groups](#) structure is returned.


Permissions

This API call requires API user or manager permission for `org.systinet.uddi.client.group.GroupApi` and the action `delete_group`. The user permission is needed to delete user's own groups, the manager permission is required to delete other users' groups.

where_amI

The `where_amI` API call is there to return list of groups where the user executing this call is member. The call returns both private and public groups.

Syntax



Arguments

- `authInfo` - This optional argument is an element that contains an authentication token.
- `loginName` - This required argument uniquely identifies the user account.

Returns

Upon successful completion, the `groupList` structure is returned.

Permissions

This API call requires API user or manager permission for `org.systinet.uddi.client.group.GroupApi` and the action `where_amI`. The user permission is needed to get groups for the user himself, the manager permission is required to get groups for other user.

WSDL

You can find the WSDL specification in the file [group.wsdl](http://www.systinet.com/doc/sr-65/wsdll/group.wsdl) [http://www.systinet.com/doc/sr-65/wsdll/group.wsdl].

API Endpoint

You can find the Group API endpoint at `http://<host name>:<port>/<context>/uddi/group`.

Java

The Java API is generated from Group WSDL. You are encouraged to browse [org.systinet.uddi.group.GroupApi](#) and to read and try [Group demos](#).


2.3.3. Permission

The Permission API is used to query and manage permissions in Oracle Service Registry.

Data Structures


The following structures are used by the Permission API:

permissionDescriptor

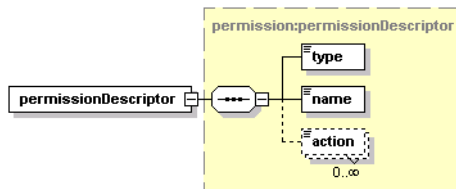

This structure serves as a container for one permission and its actions. The `type` element contains the type of the permission. The `name` element contains the permission's name. Optional `action` elements are used to provide finer granularity to the permission and contain individual actions of this permission.

permissionDescriptors




This structure holds an optional `principal` element and zero or more `permissionDescriptor` structures.

permissionDetail


This structure is a container for zero or more `permissionDescriptors` structures.

principal

This element contains the optional attribute `principalType`, which may be assigned to a user or group. The element's text contains the `loginName` of the user, or the group name, depending on the `principalType` value.

principals


This structure serves as a container for zero or more `principal` elements.

principalList

This structure serves as a list principals returned from the operation [find_principal](#).

Operations**find_principal**

This operation is used to find principals, it replaces the deprecated operation [who_hasPermission](#).

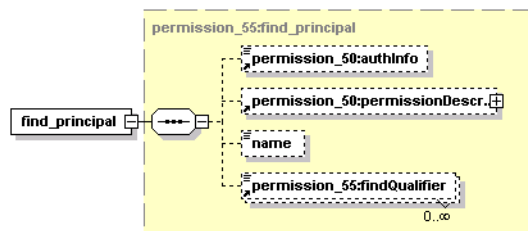Syntax**Arguments**

- `permission:authInfo` - This optional argument is an element that contains an authentication token.
- [permissionDescriptor](#)
- `name` - name of the principal
- `findQualifier`

Returns

Upon successful completion, the [principalList](#) structure is returned.


Permissions

This API call requires API user or manager permission for `org.systinet.uddi.permission.PermissionApi` and the action `get_permission`. The user permission is needed to get permissions for the user himself, the manager permission is required to get permissions for other users.

get_permission

The `get_permission` API call is used to get permissions in Oracle Service Registry, that have been assigned to users or groups identified by the principal's structure.

Syntax



Arguments

- `permission:authInfo` - This optional argument is an element that contains an authentication token.
- [permission:principals](#) - This mandatory structure contains list of users or groups to be searched.

Returns

Upon successful completion, the [permissionDetail](#) structure is returned.


Permissions

This API call requires API user or manager permission for `org.systinet.uddi.permission.PermissionApi` and the action `set_permission`. The user permission is needed to get permissions for the user himself, the manager permission is required to get permissions for other users.

set_permission

The `set_permission` API call serves to set permissions in Oracle Service Registry. Existing permissions for users or groups referenced in `permissionDescriptors` are overwritten by this call.

Syntax



Arguments

- `permission:authInfo` - This optional argument is an element that contains an authentication token.
- [permission:permissionDescriptors](#) - This mandatory structure holds permissions to be set.

Permissions

This API call requires API manager permission for `org.systinet.uddi.permission.PermissionApi` and the action `set_permission`.

who_hasPermission




Important

The `who_hasPermission` operation is deprecated. We recommend to use the operation `find_principal` instead.

The `who_hasPermission` API call is used to find out which users or groups have the specified permissions.

Syntax



Arguments

- `permission:authInfo` - This optional argument is an element that contains an authentication token.
- [permission:permissionDescriptor](#) - This argument contains a description of permissions to be searched.

Returns

Upon successful completion, the principals structure is returned.

Permissions

This API call requires API manager permission for `org.systinet.uddi.permission.PermissionApi` and the action `who_hasPermission`.

WSDL

You can find the WSDL specification in the file [permission.wsdl](#) [<http://www.systinet.com/doc/sr-65/wsdl/permission.wsdl>].

API Endpoint

You can find the Permission API endpoint at `http://<host name>:<port>/<context>/uddi/permission`.

Java

The Java API is generated from Permission WSDL. You are encouraged to browse its [org.systinet.uddi.permission.PermissionApi](#) and to read and try the [Permission demos](#).

2.4. Registry Client

This section describes how to prepare your own client distribution. A client created this way allows you to access the Oracle Service Registry API through a SOAP interface.

2.4.1. Client Package



Note

CLIENT_HOME refers to the directory in which the Oracle Service Registry Client distribution will be created.

REGISTRY_HOME refers to the directory in which Oracle Service Registry is installed

To create a client application distribution follow these steps:

1. Make sure Oracle Service Registry is successfully installed.
2. In the CLIENT_HOME directory, create a subdirectory named lib.

Copy the following files from REGISTRY_HOME/lib to CLIENT_HOME/lib

```
activation.jar
builtin-serialization.jar
core_services_client.jar
jaas.jar
jaxm.jar
jaxrpc.jar
jetty.jar
runner.jar
saaj.jar
security-ng.jar
security2-ng.jar
security_providers_client.jar
wasp.jar
wsdl_api.jar
xercesImpl.jar
xml-apis.jar
xmlParserApis.jar
```

3. In the CLIENT_HOME directory, create a subdirectory named dist.

Copy the following files from REGISTRY/dist to CLIENT_HOME/dist:

```
account_client.jar
admin_utils_client.jar
approval_client_v3.jar
approval_content_checker_client_v3.jar
approval_management_client.jar
approval_production_client_v3.jar
category_client_v3.jar
configurator_client.jar
configurator_cluster_client.jar
group_client.jar
permission_client.jar
replication_client_v3.jar
statistics_client.jar
taxonomy_client_v3.jar
```

```
taxonomy_client_v31.jar
transformer_kr_client.jar
uddiclient_api_ext.jar
uddiclient_api_v1.jar
uddiclient_api_v2.jar
uddiclient_api_v3.jar
uddiclient_api_v3_ext.jar
uddiclient_core.jar
uddiclient_custody_v3.jar
uddiclient_subscription_listener_v3.jar
uddiclient_subscription_v3.jar
uddiclient_validate_values_v1.jar
uddiclient_validate_values_v2.jar
uddiclient_value_set_caching_v3.jar
uddiclient_value_set_validation_v3.jar
wsdl2uddi_client_v2.jar
wsdl2uddi_client_v3.jar
xml2uddi_client_v3.jar
xsd2uddi_client_v3.jar
xslt2uddi_client_v3.jar
```

4. In the CLIENT_HOME directory, create a subdirectory named conf. Copy the following files from REGISTRY_HOME/conf to CLIENT_HOME/conf:

```
clientconf.xml
log4j.config
```



Note

If you want to use the https connection in Oracle Service Registry, you must import the certificate file into clientconf.xml using the PStoreTool. This file contains the certificate of the Oracle Service Registry installation by default.



Tip

You do not have to copy client files to directories that have specific names (lib, dist, and conf). All client files can be copied to the flat directory CLIENT_HOME, for example. If you do this, however, replace CONF_DIRECTORY, DIST_DIRECTORY, and LIB_DIRECTORY with CLIENT_HOME in this section's instructions.

2.4.2. JARs on the Client Classpath

For each client package, the associated .jar files must be added to the classpath. These .jar files are listed in the appropriate sections below.

Oracle Service Registry Runtime

To enable the Oracle Service Registry Runtime client package, add these .jar files to the classpath.

```
activation.jar
builtin-serialization.jar;
```

```
core_services_client.jar;  
jaas.jar;  
jaxm.jar;  
jaxrpc.jar  
runner.jar  
saaj.jar;  
security-ng.jar;  
security2-ng.jar;  
security_providers_client.jar;  
wasp.jar;  
wsdl_api.jar  
xercesImpl.jar;  
xml-apis.jar;  
xmlParserApis.jar;
```

UDDI API Client v1

To enable the UDDI API (v1) client package, add these .jar files to the classpath. For more information on this client package, please see [Section 2.1.2, UDDI Version 1](#)

```
uddiclient_api_v1.jar  
uddiclient_core.jar
```

UDDI API Client v2

To enable the UDDI API (v2) client package, add these .jar files to the classpath. For more information on this client package, please see [Section 2.1.3, UDDI Version 2](#).

```
uddiclient_api_v2.jar  
uddiclient_core.jar
```

UDDI API Client v3

To enable the UDDI API (v3) client package, add these .jar files to the classpath. For more information on this client packages, please see [Section 2.1.4, UDDI Version 3](#).

```
uddiclient_api_v3.jar  
uddiclient_core.jar
```

UDDI API Client v3 ext X

To enable the UDDI API (v3, ext X) client package, add these .jar files to the classpath.

```
uddiclient_api_v3_ext.jar  
uddiclient_api_v3.jar  
uddiclient_core.jar
```

Account Client

To enable the Account client package, add these .jar files to the classpath. For more information on this client package, please see [Section 2.3.1, Account](#).

```
account_client.jar
uddiclient_core.jar
```

Admin Utilities Client

To enable the Admin Utilities client package, add these .jar files to the classpath. For more information on this client package, please see [Section 2.2.5, Administration Utilities](#).

```
admin_utils_client.jar
uddiclient_api_v3.jar
uddiclient_core.jar
```

Approval Client v3

To enable the Approval (v3) client package, add these .jar files to the classpath. For more information on this client package, please see [Section 2.2.4, Approval](#).

```
approval_client_v3.jar
uddiclient_api_v3.jar
uddiclient_api_v2.jar
uddiclient_core.jar
```

Approval Content Checker Client v3

To enable the v3 Approval Content Checker client package, add these .jar files to the classpath.

```
approval_content_checker_client_v3.jar
uddiclient_core.jar
```

Approval Management Client

To enable the Approval Management client package, add these .jar files to the classpath.

```
approval_management_client.jar
uddiclient_core.jar
```

Category Client v3

To enable the Category (v3) client package, add these .jar files to the classpath. For more information on this client package, please see [Section 2.2.3, Category](#).

```
category_client_v3.jar
```

```
uddiclient_api_v3.jar  
uddiclient_core.jar
```

Group Client

To enable the Group client package, add these .jar files to the classpath. For more information on this client package, please see [Section 2.3.2, Group](#).

```
group_client.jar  
account_client.jar  
uddiclient_core.jar
```

Permission Client

To enable the Permission client package, add these .jar files to the classpath. For more information on this client package, please see [Section 2.3.3, Permission](#).

```
permission_client.jar  
account_client.jar  
uddiclient_core.jar
```

Replication Client v3

To enable the Replication (v3) client package, add these .jar files to the classpath. For more information on this client package, please see [Section 2.2.6, Replication](#).

```
replication_client_v3.jar  
uddiclient_core.jar
```

Statistics Client

To enable the Statistics client package, add these .jar files to the classpath. For more information on this client package, please see [Section 2.2.7, Statistics](#).

```
statistics_client.jar  
uddiclient_core.jar
```

Taxonomy Client v3

To enable the v3 Taxonomy client package, add these .jar files to the classpath. For more information on this client package, please see [Section 2.2.2, Taxonomy](#).

```
taxonomy_client_v3.jar  
taxonomy_client_v31.jar  
uddiclient_api_v3.jar  
uddiclient_core.jar
```

UDDI Custody Client v3

To enable the v3 UDDI Custody client package, add these .jar files to the classpath. For more information on this client package, please see [Section Custody](#).

```
uddiclient_custody_v3.jar  
uddiclient_api_v3.jar  
uddiclient_core.jar
```

UDDI Subscription Client v3

To enable the v3 UDDI Subscription client package, add these .jar files to the classpath. For more information on this client package, please see [Section Subscription](#).

```
uddiclient_subscription_v3.jar  
uddiclient_api_v3.jar  
uddiclient_core.jar
```

UDDI Subscription Listener Client v3

To enable the v3 UDDI Subscription Listener client package, add these .jar files to the classpath. For more information on this client package, please see [Section Subscription](#).

```
uddiclient_subscription_listener_v3.jar  
uddiclient_subscription_v3.jar  
uddiclient_api_v3.jar  
uddiclient_core.jar
```

UDDI Validate Values Client v1

To enable the UDDI Validate Values (v1) client package, add these .jar files to the classpath. For more information on this client package, please see [Section 2.2.1, Validation](#).

```
uddiclient_validate_values_v1.jar  
uddiclient_api_v1.jar  
uddiclient_core.jar
```

UDDI Validate Values v2

To enable the UDDI Validate Values (v2) client package, add these .jar files to the classpath. For more information on this client package, please see [Section 2.2.1, Validation](#).

```
uddiclient_validate_values_v2.jar  
uddiclient_api_v2.jar  
uddiclient_core.jar
```

UDDI Value Set Caching Client v3

To enable the UDDI Value Set Caching (v3) client package, add these .jar files to the classpath.

```
uddiclient_value_set_caching_v3.jar  
uddiclient_api_v3.jar  
uddiclient_core.jar
```

UDDI Value Set Validation Client v3

To enable the UDDI Value Set Validation (v3) client package, add these .jar files to the classpath. For more information on this client package, please see [Section 2.2.1, Validation](#).

```
uddiclient_value_set_validation_v3.jar  
uddiclient_api_v3.jar  
uddiclient_core.jar
```

WSDL2UDDI Client v2

To enable the WSDL2UDDI (v2) client package, add these .jar files to the classpath. For more information on this client package, please see [Section 2.2.8, WSDL Publishing](#)

```
wsdl2uddi_client_v2.jar  
uddiclient_api_v2.jar  
uddiclient_core.jar
```

WSDL2UDDI Client v3

To enable the WSDL2UDDI (v3) client package, add these .jar files to the classpath. For more information on this client package, please see [Section 2.2.8, WSDL Publishing](#)

```
wsdl2uddi_client_v3.jar  
uddiclient_api_v3.jar  
uddiclient_core.jar
```

Resources publishing (XML, XSD, XSLT) Client

To enable the client package, add these .jar files to the classpath.

```
uddiclient_api_v3.jar  
uddiclient_core.jar  
xml2uddi_client_v3.jar  
xsd2uddi_client_v3.jar  
xslt2uddi_client_v3.jar
```


Classpath Examples

To run your Oracle Service Registry client code you must add a config directory, wasp.jar, and client's jars to the classpath.



Note

```
CLIENT_HOME=.      CONF_DIRECTORY=CLIENT_HOME\conf      DIST_DIRECTORY=CLIENT_HOME\dist
LIB_DIRECTORY=CLIENT_HOME\lib
```

- If you want to use only UDDI Version 3:

```
CONF_DIRECTORY;LIB_DIRECTORY\wasp.jar;DIST_DIRECTORY\uddiclient_api_v3.jar
```

- If you want to use only UDDI Version 3 and UDDI Subscription Version 3:

```
CONF_DIRECTORY;LIB_DIRECTORY\wasp.jar;DIST_DIRECTORY\uddiclient_api_v3.jar%;
DIST_DIRECTORY\uddiclient_subscription_v3.jar
```

- If you want to use only UDDI Version 3, UDDI Subscription Version 3, and Taxonomy:

```
CONF_DIRECTORY;LIB_DIRECTORY\wasp.jar;DIST_DIRECTORY\uddiclient_api_v3.jar%;
DIST_DIRECTORY\uddiclient_subscription_v3.jar;DIST_DIRECTORY\taxonomy_client_v3.jar
```

2.5. Client Authentication

By default, all exposed registry APIs use the UDDI authentication scheme, where an authentication token is passed with every call to identify a remote user. This is shown in registry demos such as [Section 1.3.2, Publishing v3](#). The UDDI authentication scheme can be replaced.

This section demonstrates an example client that publishes a new business entity using HTTP-Basic or SSL client authentication.

2.5.1. Example Client

For simplicity, the example client uses a SOAP stack provided with Oracle Service Registry. You can use a SOAP stack of your choice to communicate with the registry.

Example 3. ExampleClient.java

```
// (c) Copyright 2001-2008 Hewlett-Packard Development Company, L.P.
// Use is subject to license terms.

import org.systinet.uddi.client.v3.UDDIPublishStub;
import org.systinet.uddi.client.v3.UDDI_Publication_PortType;
import org.systinet.uddi.client.v3.struct.*;

public class ExampleClient {
    public static void main(String[] args) {
        String registryBaseUrl = System.getProperty("registry.base.url", "http://localhost:8080");

        String urlPublishing = registryBaseUrl+ "/uddi/publishing";
        System.out.print("Using publishing URL "+urlPublishing + " .");

        try {
            UDDI_Publication_PortType publish = UDDIPublishStub.getInstance(urlPublishing);
            System.out.println(publish.save_business(new Save_business
                (new BusinessEntityArrayList(new BusinessEntity(new NameArrayList
                    (new Name("Created by Client Authentication Example"))))));

            System.out.println(" done");
        } catch (Exception e) {
            e.printStackTrace();
        }
    }
}
```

The client is created as follows:

1. Create the directory CLIENT_HOME.
2. Create a client class in the CLIENT_HOME directory. The example client is shown in [Example 3, ExampleClient.java](#). The client contains no security calls or structures. Client-side security is configured later using properties supplied to the java command that runs the client.
3. In CLIENT_HOME, create the lib subdirectory. Copy the jar files required for compilation and client execution to this directory. All the jars are in the Oracle Service Registry installation directory. They are:
 - lib/activation.jar
 - lib/builtin_serialization.jar
 - lib/core_services_client.jar
 - lib/jaxm.jar
 - lib/jaxrpc.jar
 - lib/jetty.jar
 - lib/log4j.jar
 - lib/saaj.jar

-
- lib/security-ng.jar
 - lib/security2-ng.jar
 - lib/security_providers_client.jar
 - lib/wasp.jar
 - lib/wsdl_api.jar
 - lib/xalan.jar
 - lib/xercesImpl.jar
 - lib/xml-apis.jar
 - dist/uddiclient_core.jar
 - dist/uddiclient_api_v3.jar
4. In CLIENT_HOME, create the conf subdirectory. Copy configuration files required to run the client to this directory. These files are also in the Oracle Service Registry installation directory:
 - conf/clientconf.xml
 - conf/package12.xml
 - conf/package13.xml
 - conf/jaas.config
 5. Compile the example client class using a CLASSPATH that includes all jar files in the lib subdirectory of CLIENT_HOME

Before running the client, configure registry to one of the authentication schemes described in [Section 8.1, HTTP Basic](#) or [Section 8.3, SSL Client authentication with Embedded HTTP/HTTPS Server](#). If you want to configure a deployed registry for SSL client authentication, follow the instructions given in [Section 8.5, J2EE Server Authentication](#)

To run the client:

1. Use a classpath that includes all jar files from CLIENT_HOME/lib, and the directory containing the compiled example class.
2. Add the following property definitions to the java command line:
 - -Dwasp.location=CLIENT_HOME
 - -Djava.security.auth.login.config=CLIENT_HOME/conf/jaas.config
3. To run the client with HTTP Basic authentication add the following command-line options:
 - -Dwasp.username=USERNAME
 - -Dwasp.password=PASSWORD

- `-Dwasp.securityMechanism=HttpBasic`
- `-Dregistry.base.url=http://HOST:PORT/CONTEXT`

Use the credentials of a registered user instead of USERNAME and PASSWORD. To register a new user, start with the main page of registry console. See [Section 2, Registry Consoles](#) for details. If you imported demo data during installation, you can also use the demo user `demo_john` with password `demo_john`.

The base URL for registry is specified using the `registry.base.url` property as shown in [Example 3, ExampleClient.java](#). Replace HOST,PORT and CONTEXT to match your registry deployment; for example `http://pc1.example.com:8080`.

4. To run the client with SSL client authentication add the following command-line options:

- `-Dwasp.username=USERNAME`
- `-Dwasp.password=PASSWORD`
- `-Dwasp.securityMechanism=SSL`
- `-Dregistry.base.url=https://HOST:PORT/CONTEXT`

Unlike HTTP Basic authentication, USERNAME and PASSWORD are used to obtain the client identity from a local protected store. You must import the client identity using the instructions provided in [Section 9, SSL Tool](#). The protected store of the example client is in the file `CLIENT_HOME/conf/clientconf.xml`. You must also import a server certificate (or the certificate of a certification authority that issued the server certificate) to the same protected store using the instructions provided in [Section 8, PStore Tool](#).

Use an alias in the protected store instead of USERNAME. PASSWORD stands for the password that is used to protect the private key stored under that alias.

The base URL for registry is specified using the `registry.base.url` System property as shown in [Example 3, ExampleClient.java](#). Replace HOST,PORT and CONTEXT to match your registry deployment; for example `https://pc1.example.com:8443`.

3. Server-Side Development

This chapter focuses on the server-side development of Oracle Service Registry extensions. Possible ways of accessing Oracle Service Registry are discussed including examples.


- [Accessing backend APIs](#) via servlet deployed on an application server.
- [Custom Oracle Service Registry Modules](#) - how to create and deploy custom Oracle Service Registry modules.
- [Interceptors](#) can monitor or modify the requests and responses of Oracle Service Registry. Interceptors are at the lowest level of Oracle Service Registry API call processing.
- [Writing custom Validation services](#) - Oracle Service Registry provides several ways to define and use validation services for taxonomies or identifier systems including remotely and locally deployed validation services and an internal validation service. For details, please see User's Guide, [Section 5.4, Taxonomy: Principles, Creation and Validation](#). This chapter focuses how to create a validation service.
- [Writing subscription notification services](#) - How to implement subscription notification service deployed on Systinet Server for Java.
- [JSP Framework](#) - This section covers the Web Framework.

- [Business Service Control Framework](#) - This section covers the Business Service Control Framework.

3.1. Accessing Backend APIs

This section will show you how to integrate Oracle Service Registry with your application. Your application can be deployed as a servlet to the same context of the application server as the registry. In this case, the servlet of your application can access instances of Oracle Service Registry APIs as shown in [Figure 5](#).


Figure 5. Accessing Backend Registry APIs - Architecture View

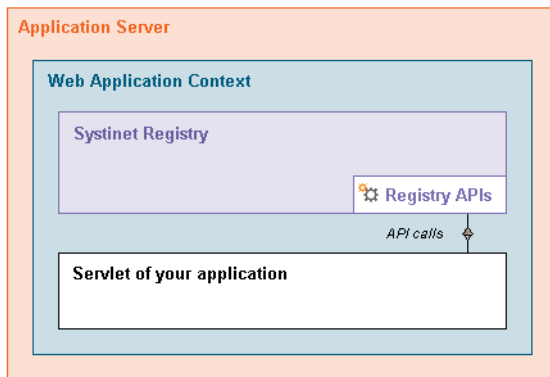

The sequence of steps that precedes access to the Oracle Service Registry API is shown in [Figure 6](#).

1. Oracle Service Registry's API implementations are registered in the WASP context during the boot of the registry.
2. The example servlet deployed in the WASP context calls the `getInstance()` method with the required UDDI Registry interface as a parameter to obtain a reference of the interface implementation.
3. The example servlet can call the API methods of Oracle Service Registry.

Figure 6. Accessing Backend Registry APIs - Sequence Diagram

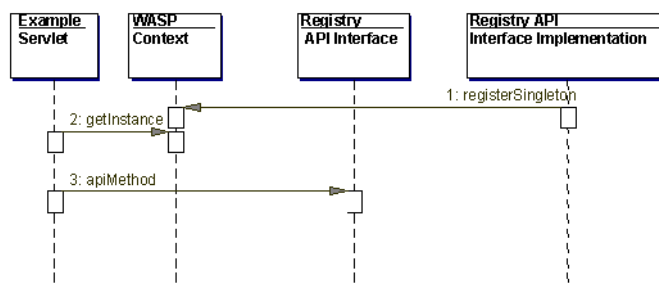

Follow these steps to create and deploy the example servlet:

1. Create the example servlet class shown in [Example 4, ExampleServlet.java](#).

Compile the `ExampleServlet.java` using:


```
javac -classpath %REGISTRY_HOME%\dist\uddiclient_api_v3.jar;
%REGISTRY_HOME%\dist\uddiclient_core.jar;
```

```
%REGISTRY_HOME%\lib\wasp.jar;  
%J2EE_HOME%\common\lib\servlet-api.jar ExampleServlet.java
```

2. Create deployment package/directory that will include compiled class and web.xml as shown in [Example 5, Example Servlet's web.xml](#).
3. Deploy the package.

You can test it as shown at [Figure 7](#).

Figure 7. Example Servlet Output

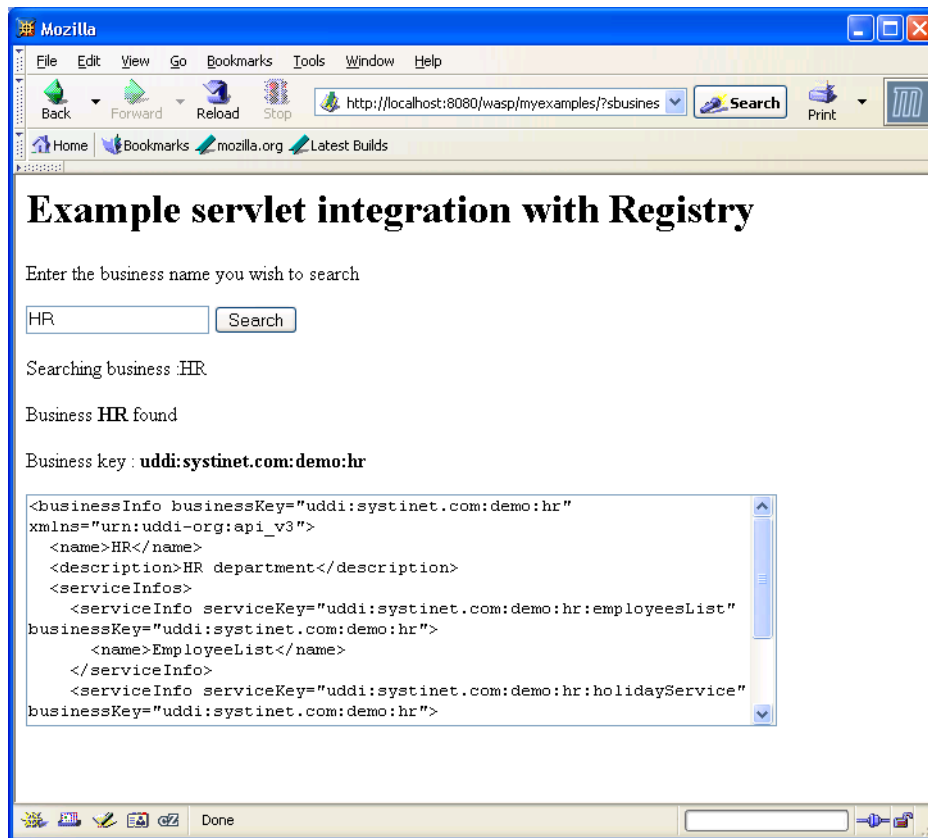

Example 4. ExampleServlet.java

```

package com.systinet.example.servlet;

import org.idoox.wasp.Context;
import org.idoox.wasp.InstanceNotFoundException;
import org.systinet.uddi.InvalidParameterException;
import org.systinet.uddi.client.v3.UDDIException;
import org.systinet.uddi.client.v3.UDDI_Inquiry_PortType;
import org.systinet.uddi.client.v3.struct.*;

import javax.servlet.ServletException;
import javax.servlet.http.HttpServlet;
import javax.servlet.http.HttpServletRequest;
import javax.servlet.http.HttpServletResponse;
import java.io.IOException;
import java.io.PrintWriter;
import java.util.Iterator;

public class ExampleServlet extends HttpServlet {

    public void doGet(HttpServletRequest request, HttpServletResponse response)
        throws IOException, ServletException {
        try {
            String searchedBusiness = request.getParameter("sbusiness");
            if (searchedBusiness == null) searchedBusiness = "";
            response.setContentType("text/html");
            PrintWriter out = response.getWriter();
            out.println("<HTML>");
            out.println("<HEAD>");
            out.println("<H1>Example servlet integration with Registry</H1>");
            out.println("<P>Enter the business name you wish to search");
            out.println("<FORM METHOD=GET ACTION=/wasp/myexamples/>");
            out.println("<INPUT NAME=sbusiness SIZE=20 VALUE=" + searchedBusiness + ">");
            out.println("<INPUT TYPE=SUBMIT VALUE=Search>");
            out.println("</FORM>");

            // get UDDI API V3 Inquiry implementation
            UDDI_Inquiry_PortType inquiry =
                (UDDI_Inquiry_PortType) Context.getInstance(UDDI_Inquiry_PortType.class);

            // prepare find_business call
            Find_business find_business = new Find_business();
            if (searchedBusiness.length() > 0) {
                find_business.addName(new Name(searchedBusiness));
                out.println("<P>Searching business : " + searchedBusiness);
                // call find_business
                BusinessList businessList = inquiry.find_business(find_business);
                // process the result
                BusinessInfoArrayList businessInfoArrayList
                    = businessList.getBusinessInfoArrayList();
                if (businessInfoArrayList == null) {
                    out.println("<P><B>Nothing found</B>");
                }
            }
        } catch (Exception e) {
            e.printStackTrace();
        }
    }
}

```

```

    } else {

        out.println("<P>Business <B>" + searchedBusiness + "</B> found");
        for (Iterator iterator =
            businessInfoArrayList.iterator(); iterator.hasNext();) {
            BusinessInfo businessInfo = (BusinessInfo) iterator.next();
            out.println("<P>Business key : <B>" +
                businessInfo.getBusinessKey() + "</B>");
            out.println("<P><TEXTAREA ROWS=10 COLS=70>");
            out.println(businessInfo.toXML());
            out.println("</TEXTAREA>");

        }

    }

    out.println("</HTML>");
} catch (InvalidParameterException e) {
} catch (InstanceNotFoundException e) {
} catch (UDDIException e) {
}

}
}

```

Example 5. Example Servlet's web.xml

```


<servlet>
  <servlet-name>ExampleServlet</servlet-name>
  <servlet-class>com.systinet.example.servlet.ExampleServlet</servlet-class>
</servlet>

<servlet-mapping>
  <servlet-name>ExampleServlet</servlet-name>
  <url-pattern>/myexamples/*</url-pattern>
</servlet-mapping>

```

3.2. Custom Registry Modules

In this section, we will show you how to extend Oracle Service Registry functionality with your custom modules. Custom modules can be added to Oracle Service Registry as shown in [Figure 8](#).

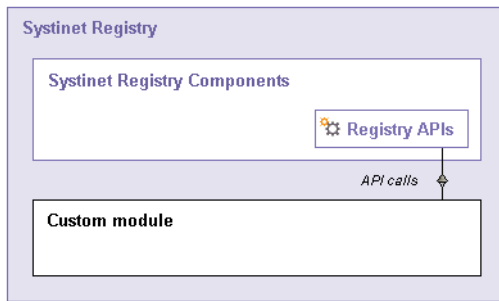Figure 8. Custom Registry Module - Architecture View

To create and deploy a registry module, follow these steps:

1. Write a class that implements `org.systinet.uddi.module.Module`.
2. Copy your module implementation class to the directory `REGISTRY_HOME/app/uddi/services/WASP-INF/classes`.
3. Create a configuration file for the module in `REGISTRY_HOME/app/uddi/conf`.
4. Shutdown Oracle Service Registry, delete the `REGISTRY_HOME/work` directory, and restart the registry.

The main class of the custom module must implement `org.systinet.uddi.module.Module` interface that has these methods:

- `load()` is invoked as the first method of the module. You can put reading of the configuration file in here.
- `init()` is invoked after the `load()` method. Put the core implementation of your module in here. Write non-blocking code or start a new thread.
- `destroy()` is invoked just before the Oracle Service Registry shutdown.

3.2.1. Accessing Registry APIs

To access the Oracle Service Registry API you must obtain the API stub using the `getApiInstance()` method of the API implementation class. For example to obtain the stub of the Statistics API use:

```
StatisticsApi statapi = StatisticsApiImpl.getApiInstance();
```

Mapping between API interface classes and implementation classes is stored in the `REGISTRY_HOME/app/uddi/services/WASP-INF/package.xml` file. See [Table 53, “Mapping API Interface and Implementation Classes”](#).

Table 53. Mapping API Interface and Implementation Classes

Interface class	Implementation class
org.systinet.uddi.client.v1.InquireSoap	com.systinet.uddi.inquiry.v1.InquiryApiImpl
org.systinet.uddi.client.v1.PublishSoap	com.systinet.uddi.publishing.v1.PublishingApiImpl
org.systinet.uddi.client.v2.Publish	com.systinet.uddi.publishing.v2.PublishingApiImpl
org.systinet.uddi.client.v2.Inquire	com.systinet.uddi.inquiry.v2.InquiryApiImpl
org.systinet.uddi.client.v3.UDDI_Security_PortType	com.systinet.uddi.v3.SecurityApiImpl
org.systinet.uddi.client.v3.UDDI_Publication_PortType	com.systinet.uddi.publishing.v3.PublishingApiImpl
org.systinet.uddi.client.v3.UDDI_Inquiry_PortType	com.systinet.uddi.inquiry.v3.InquiryApiImpl
org.systinet.uddi.client.subscription.v3.UDDI_Subscription_PortType	com.systinet.uddi.subscription.v3.SubscriptionApiImpl
org.systinet.uddi.client.custody.v3.UDDI_CustodyTransfer_PortType	com.systinet.uddi.custody.v3.CustodyApiImpl
org.systinet.uddi.replication.v3.ReplicationApi	com.systinet.uddi.replication.v3.ReplicationApiImpl
org.systinet.uddi.client.wsdl2uddi.v3.Wsdl2uddiApi	com.systinet.uddi.wsdl2uddi.v3.Wsdl2uddiApiImpl
org.systinet.uddi.client.wsdl2uddi.v2.Wsdl2uddiApi	com.systinet.uddi.wsdl2uddi.v2.Wsdl2uddiApiImpl
org.systinet.uddi.client.category.v3.CategoryApi	com.systinet.uddi.category.v3.CategoryApiImpl
org.systinet.uddi.client.taxonomy.v3.TaxonomyApi	com.systinet.uddi.taxonomy.v3.TaxonomyApiImpl
org.systinet.uddi.statistics.StatisticsApi	com.systinet.uddi.statistics.StatisticsApiImpl
org.systinet.uddi.admin.AdministrationUtilsApi	com.systinet.uddi.admin.AdministrationUtilsApiImpl
org.systinet.uddi.permission.PermissionApi	com.systinet.uddi.permission.PermissionApiImpl
org.systinet.uddi.group.GroupApi	com.systinet.uddi.group.GroupApiImpl
org.systinet.uddi.account.AccountApi	com.systinet.uddi.account.AccountApiImpl
org.systinet.uddi.configurator.ConfiguratorApi	com.systinet.uddi.configurator.cluster.ConfiguratorApiImpl

3.2.2. Custom Module Sample

This section includes step-by-step instructions how to create a registry module that counts the number of restarts of Oracle Service Registry and saves the result to a configuration file.

Follow these steps:

1. Create Java file `ExampleModule.java` as shown in [Example 6, ExampleModule.java](#)
2. Compile the module using `java -classpath "%REGISTRY_HOME%\app\uddi\services\WASP-INF\lib\application_core.jar; %REGISTRY_HOME%\lib\wasp.jar" ExampleModule.java`
3. Copy all module classes (`ExampleModule.class`, `ExampleModule$RestartConfig$Counter.class`, `ExampleModule$RestartConfig.class`) to the `REGISTRY_HOME/app/uddi/services/WASP-INF/classes/com/systinet/example/module` directory.
4. Create the configuration file `mymodule.xml` in `REGISTRY_HOME/app/uddi/conf` folder. For details, please see [Example 7, Example configuration file for custom module](#).
5. Shutdown Oracle Service Registry, delete the `REGISTRY_HOME/work` directory, and restart the registry.

The number of restarts will be printed in the window console in which you started Oracle Service Registry. See also the configuration file of the module where a new element counter is created.

Example 6. ExampleModule.java

```
package com.systinet.example.module;

import org.idoox.config.Configurable;
import org.systinet.uddi.module.Module;

public class ExampleModule implements Module {
    private long restart = 0;
    private RestartConfig.Counter counter;

    interface RestartConfig {
        public Counter getCounter();
        public void setCounter(Counter counter);
        public Counter newCounter();
        interface Counter {
            public long getRestart();
            public void setRestart(long restart);
        }
    }

    public void load(Configurable config) {
        System.out.println("MY MODULE CONFIG READING");
        RestartConfig restartConfig = (RestartConfig) config.narrow(RestartConfig.class);
        if (restartConfig != null) {
            counter = restartConfig.getCounter();
            if (counter == null) {
                counter = restartConfig.newCounter();
                restartConfig.setCounter(counter);
            }
            try {
                restart = counter.getRestart();
            } catch (Exception e) {
                counter.setRestart(0);
            }
        }
    }

    public void init() {
        System.out.println("MY MODULE STARTED");
        counter.setRestart(++restart);
        System.out.println("UDDI REGISTRY: number of restarts = " + restart);
    }

    public void destroy() {
    }
}
```


Example 7. Example configuration file for custom module

```
<?xml version="1.0" encoding="UTF-8"?>
<config name="myconf">
  <module loader="com.systinet.example.module.ExampleModule" name="MyModule">
  </module>
</config>
```

3.3. Interceptors

Interceptors can monitor or modify the requests and responses of Oracle Service Registry as shown in [Figure 9](#). They are at the lowest level of Oracle Service Registry API call processing, and can be used for:

- Logging requests. See [Section 3.3.2, Logging Interceptor Sample](#).
- Computing message statistics. See [Section 3.3.3, Request Counter Interceptor Sample](#).
- Changing request arguments (adding default values)
- Prohibiting some API calls

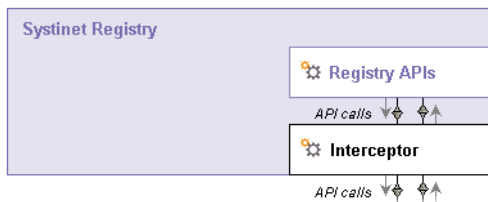Figure 9. Registry Interceptors

There are three types of Oracle Service Registry interceptor:

- **Request Interceptor** Monitors or modifies request arguments, stops processing requests, or throws an exception. This type of interceptor accepts a called method object and its arguments.
- **Response Interceptor** Monitors or modifies response values or throws an exception. This interceptor accepts a called method object and its response value.
- **Exception Interceptor** Monitors, modifies, or changes an exception. This interceptor accepts a called method object and its thrown exception.

If you want to directly access the Oracle Service Registry API see [Section 3.2.1, Accessing Registry APIs](#) for more information.

3.3.1. Creating and Deploying Interceptors

To create an Interceptor, follow these steps:

1. Write a class that implements the `org.systinet.uddi.interceptor` interface.
2. Copy your interceptor implementation class to the directory `REGISTRY_HOME/app/uddi/services/Wasp-inf/classes`.
3. Create a configuration file for your interceptor in the `REGISTRY_HOME/app/uddi/conf` directory. See [Section \[Interceptor Configuration\]\(#\)](#).

-
4. Shutdown Oracle Service Registry, delete the REGISTRY_HOME/work directory, and restart the registry.

3.3.2. Logging Interceptor Sample

This section includes step-by-step instructions how to create the interceptor that logs requests.

To create a logging interceptor:

1. Create Java file `LoggingInterceptor.java` as shown in [Example 8, Logging Interceptor Class](#).
2. Compile the interceptor using **Java -classpath "%REGISTRY_HOME%\app\uddi\services\Wasp-inf\lib\application_core.jar; %REGISTRY_HOME%\lib\wasp.jar" LoggingInterceptor.java**
3. Copy `LoggingInterceptor.class` to the `REGISTRY_HOME/app/uddi/services/wasp-inf/classes/interceptor` directory.
4. Create the configuration file `Myinterceptor.xml` in `REGISTRY_HOME/app/uddi/conf` folder. For details, please see [Example 9, Logging Interceptor Configuration File](#).
5. Shutdown Oracle Service Registry, delete the `REGISTRY_HOME/work` directory, and restart the registry.

Example 8. Logging Interceptor Class

```
package interceptor;

import org.idoox.config.Configurable;
import org.idoox.wasp.WaspInternalException;
import org.idoox.wasp.interceptor.InterceptorChain;
import org.systinet.uddi.interceptor.ExceptionInterceptor;
import org.systinet.uddi.interceptor.RequestInterceptor;
import org.systinet.uddi.interceptor.ResponseInterceptor;
import org.systinet.uddi.interceptor.StopProcessingException;
import java.lang.reflect.Method;

public class LoggingInterceptor implements RequestInterceptor,
        ResponseInterceptor, ExceptionInterceptor {

    public void load(Configurable config)
        throws WaspInternalException {
        // no initialization required
    }

    public void destroy() {
        // no destroy required
    }

    public void intercept(Method method,
        Object[] args,
        InterceptorChain chain,
        int position)
        throws StopProcessingException, Exception {
        System.out.println("request: " + method.getName());
    }

    public Object intercept(Method method,
        Object returnValue,
        InterceptorChain chain,
        int position)
        throws Exception {
        System.out.println("response: " + method.getName());
        return returnValue;
    }

    public Exception intercept(Method method,
        Exception e,
        InterceptorChain chain,
        int position) {
        System.out.println("exception: " + method.getName());
        return e;
    }
}
```

Example 9. Logging Interceptor Configuration File

```
<?xml version="1.0" encoding="UTF-8"?>
<config name="MyInterceptorConfig">
  <UDDIInterceptorInstance name="LoggingInterceptorInstance"
    instancePerCall="false"
    className="interceptor.LoggingInterceptor"/>
  <UDDIInterceptor name="LoggingInterceptor"
    instanceName="LoggingInterceptorInstance"
    interceptorChain="inquiry_v3"
    request="true"
    response="true"
    fault="true" />
</config>
```

Interceptor Configuration

The configuration file must be present in the `REGISTRY_HOME/app/uddi/conf` directory. For details please see [Example 9. Logging Interceptor Configuration File](#). Interceptors are called in the same order as they appear in the configuration file.

- `config name` - the unique (unambiguous) name of the configuration.
- `UDDIInterceptorInstance` - contains information about the implementation class and its instantiation.
 - `name` - The name of interceptor instance. This name is used as a link to the `UDDIInterceptor/instanceName` section of the configuration.
 - `instancePerCall` - If the `instancePerCall` attribute is set to `true`, then the class will be instantiated once per API call. Otherwise, this interceptor instantiates only once for all calls.
 - `className` - name of the class that implements the interceptor.
- `UDDIInterceptor` - The `UDDIInterceptor` contains references to UDDI Interceptors and their types.
 - `name` - name of the interceptor.
 - `instanceName` - this attribute contains the name of the `UDDIInterceptorInstance` section of the configuration file.
 - `interceptorChain` - `UDDIInterceptorChains` are defined for each API in their configuration files. This attribute contains a reference to the required API.
 - `request` - when set `true`, the interceptor catches requests.
 - `response` - when set `true`, the interceptor catches responses.
 - `fault` - when set `true`, the interceptor catches faults.

3.3.3. Request Counter Interceptor Sample

In this section, we will create an interceptor that counts requests and stores the number of request to a configuration file. The steps required to create a Request Counter Interceptor are the same as those in the [Section 3.3.2, Logging Interceptor Sample](#).

Interceptor implementation is shown in [Example 10, Request Counter Interceptor Class](#); the configuration file is shown in [Example 11, Request Counter Interceptor Configuration File](#).

Example 10. Request Counter Interceptor Class

```

package interceptor;

import org.idoox.config.Configurable;
import org.idoox.wasp.WaspInternalException;
import org.idoox.wasp.interceptor.InterceptorChain;
import org.systinet.uddi.interceptor.RequestInterceptor;
import org.systinet.uddi.interceptor.StopProcessingException;
import java.lang.reflect.Method;

public class RequestCounterInterceptor implements RequestInterceptor {

    private long request = 0;
    private RequestCounterInterceptorConfig.Counter counter;

    /**
     * RequestCounterInterceptor config interface
     */
    interface RequestCounterInterceptorConfig {
        public Counter getCounter();
        public void setCounter(Counter counter);
        public Counter newCounter();
        interface Counter {
            public long getRequest();
            public void setRequest(long request);
        }
    }

    public void intercept(Method method,
                          Object[] args,
                          InterceptorChain chain,
                          int position)
        throws StopProcessingException, Exception {
        counter.setRequest(++request);
        System.out.println("request: " + request);
    }

    public void load(Configurable config)
        throws WaspInternalException {
        RequestCounterInterceptorConfig intinterceptorConfig =
            (RequestCounterInterceptorConfig)
                config.narrow(RequestCounterInterceptorConfig.class);
        if (intinterceptorConfig != null) {
            counter = intinterceptorConfig.getCounter();
            if (counter == null) {
                counter = intinterceptorConfig.newCounter();
                intinterceptorConfig.setCounter(counter);
            }
            try {
                request = counter.getRequest();
            } catch (Exception e) {
                counter.setRequest(0);
            }
        }
    }
}

```

```

    }

    /**
     * Destroys the interceptor.
     */
    public void destroy() {
        // no destroy required
    }
}

```

Example 11. Request Counter Interceptor Configuration File

```

<?xml version="1.0" encoding="UTF-8"?>
<config name="myInterceptors">
  <UDDIInterceptorInstance className="interceptor.RequestCounterInterceptor"
    instancePerCall="false" name="RequestCounterInterceptorSampleInstance">
  </UDDIInterceptorInstance>
  <UDDIInterceptor fault="false"
    instanceName="RequestCounterInterceptorSampleInstance"
    interceptorChain="inquiry_v3" name="RequestCounter" request="true"
    response="false"/>
</config>

```

3.4. Writing a Custom Validation Service

Oracle Service Registry provides several ways to define and use validation services for taxonomies or identifier systems. For details about Oracle Service Registry taxonomies, please see User's Guide, [Section 5.4, Taxonomy: Principles, Creation and Validation](#). This chapter focuses on custom validation services that you can deploy:

- Locally on Oracle Service Registry - Local validation service.
- Remotely to a SOAP server, for example the Systinet Server for Java - External validation service.

There are three different Java interfaces for validation services, one for each of the main UDDI data structures. These interfaces correspond to the WSDL Port Types of the Validation Service defined in the UDDI specification.

- UDDI v3 validation services must implement [org.systinet.uddi.client.valueset.validation.v3.UDDI_ValueSetValidation_PortType](#).
- UDDI v2 validation services must implement [org.systinet.uddi.client.vv.v2.ValidateValues](#).
- UDDI v1 validation services must implement [org.systinet.uddi.client.vv.v1.ValidateValues](#).

These interfaces are similar enough that we will only describe v3 validation. Your validation service must implement the interface [UDDI_ValueSetValidation_PortType](#). This interface only has the `validate_values` method which has only one parameter, `Validate_values`. This parameter is a wrapper for real parameters: optional `authInfo` and basic UDDI data structures (businessEntities, businessServices, bindingTemplates, tModels and publisherAssertions) to validate. The `validate_values` method returns [org.systinet.uddi.client.v3.struct.DispositionReport](#). If validation passes successfully, the `DispositionReport` should contain only one [org.systinet.uddi.client.v3.struct.Result](#) with `errNo` equals [org.systinet.uddi.client.UDDIErrorCodes](#).

3.4.1. Deploying Validation Service

Once the validation service is implemented, you can deploy the validation service locally on Oracle Service Registry. To deploy the validation service on Oracle Service Registry

1. Create a `classes` subdirectory under `REGISTRY_HOME/app/uddi/services/WASP-INF` and copy the class file into this directory (with respect to subdirectories corresponding to packages).
2. Shutdown Oracle Service Registry, delete the `REGISTRY/work` directory, and restart Oracle Service Registry.

For more information, please see the Demos, [Section 2.4, Validation](#). For details about the configuration of Validation Services, please see Administrator's Guide, [Section 1.5, Taxonomy Management](#)

To deploy an external validation service, you must create a deployment package.

3.4.2. External Validation Service

This section shows you how to implement and package an external validation service that will be deployed to Systinet Server for Java. We show you how to package and deploy the ISBN validation service from the validation demo described in [Section 2.4, Validation](#). We assume you have already built the Validation demo.



Note


We also assume Oracle Service Registry is installed in the `REGISTRY_HOME` folder and running at `http://localhost:8888/registry/` and that

Systinet Server for Java is installed in `WASP_HOME` folder and running at `http://localhost:6060/`

To package and deploy a validation service to Systinet Server for Java:

1. Create a deployment package.

Create the jar file `ExampleValidation.jar` with the following structure:

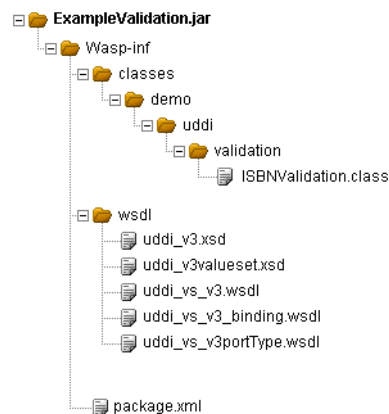

Copy `ISBNValidation.class` from `REGISTRY_HOME/demos/advanced/validation/build/classes` to the package.

Copy the `wsdl` and `xsd` files from `REGISTRY_HOME/doc/wsdl` to the package.

Copy the `package.xml` file shown at [Example 12, package.xml](#) to the package.

2. Deploy the validation package with required Oracle Service Registry client packages into Systinet Server for Java.
 - a. **copy** `%REGISTRY_HOME%\dist\uddiclient_api_v3.jar` `%WASP_HOME%\app\system\uddi`
 - b. **copy** `%REGISTRY_HOME%\dist\uddiclient_value_set_validation_v3.jar` `%WASP_HOME%\app\system\uddi`

c. **copy** ExampleValidation.jar %WASP_HOME%\app\system\uddi

3. Shutdown the Systinet Server for Java, delete the WASP_HOME/work directory, and restart the Systinet Server for Java

Now you can upload the checked taxonomy from REGISTRY/demos/advanced/validation/data. For more information, please see User's Guide [Section 1.5.5, Uploading Taxonomies](#).

Modify the validation service endpoint as shown in [Figure 10](#)

Figure 10. Validation for Checked Taxonomy

Home > Registry management > Find taxonomy > Edit taxonomy Welcome admin

Browse Search Publish Profile **Manage**

Registry management :: Registry configuration :: Registry control configuration

Edit taxonomy

Name:	demo:ISBN		
Description:	A category system used to connect tModel with ISBN of book, that describes its API.		
Categorization:	☒ categorization	☐ categorizationGroup	☐ identifier
	☐ relationship		
Compatibility:	☐ bindingTemplate	☐ businessEntity	☐ businessService
	☒ tModel		
	☐ checked internal		
	☒ checked external		
Validation:	Validation service endpoints:		
	Version 3:	http://localhost:6060/ISBNValidation	
	Version 2:		
	Version 1:		
	☐ unchecked		
Unvalidatable:	☐		

You can run and test the validation service using Validation demo described in [Section 2.4, Validation](#).

3.4.3. Sample Files

Example 12. package.xml

```
<?xml version="1.0" encoding="UTF-8"?>
<package xmlns="http://systinet.com/wasp/package/1.2"
  xsi:schemaLocation=
    "http://systinet.com/wasp/package/1.2 http://systinet.com/wasp/package/1.2"
  targetNamespace="http://my.org" version="1.0"
  name="ISBNValidation" client-package="false" library="false"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:tns="http://my.org"

  xmlns:UDDIClient-value-set-validation-v3=
    "http://systinet.com/uddi/client/value-set-validation/v3/5.0">

  <dependency ref="UDDIClient-value-set-validation-v3:UDDIClient-value-set-validation-v3"
    version="5.0"/>
    <service-endpoint name="ISBNValidation"
      path="/ISBNValidation"
      service-instance="tns:ISBNValidationInstance"
      processing="UDDIClient-value-set-validation-v3:UDDIClientProcessing">
      <wsdl uri="uddi_vs_v3.wsdl" xmlns:wsdl="urn:uddi-org:vs_v3_binding"
        service="wsdl:UDDI_ValueSetValidation_SoapService"/>
    </service-endpoint>
    <service-instance name="ISBNValidationInstance"
      implementation-class="demo.uddi.validation.ISBNValidation"
      preload="false" ttl="600" instantiation-method="shared"/>
</package>
```

3.5. Writing a Subscription Notification Service

This section will show you how to implement a subscription notification service. When you create an Oracle Service Registry subscription you can specify a notification listener service endpoint as described in [Section 1.4, Subscriptions in Oracle Service Registry](#). In this chapter, we describe the following use case: The user wants to create a service that will be executed when a subscription notification is sent. The listener notification service will be deployed on the Systinet Server for Java.

The procedure of creating and deploying the subscription notification consist of the following steps:

1. Create subscription notification service class. Package the notification service class with necessary wsdl, schema, and deployment descriptor files.
2. Deploy the service notification package with the required Oracle Service Registry client packages into Systinet Server for Java.
3. Create a subscription using the Registry Control.



Note

We assume Oracle Service Registry is installed in REGISTRY_HOME folder and running at <http://localhost:8888/registry/>, and that


Systinet Server for Java is installed in WASP_HOME folder and running at <http://localhost:6060/>.

Now we will describe the process in detail:

1. Create the subscription notification service class shown in [Example 13, ExampleNotificationListener.java](#)
2. Compile the ExampleNotificationListener.java using:

```
javac -classpath%REGISTRY_HOME%\dist\uddiclient_api_v3.jar;
%REGISTRY_HOME%\dist\uddiclient_core.jar;
%REGISTRY_HOME%\dist\uddiclient_subscription_listener_v3.jar;
%REGISTRY_HOME%\dist\uddiclient_subscription_v3.jar ExampleNotificationListener.java
```

3. Package the ExampleNotificationListener.class with necessary wsdl, schema and deployment descriptor file as follows:
 - a. Create a jar file ExampleNotificationListener.jar with the following structure:

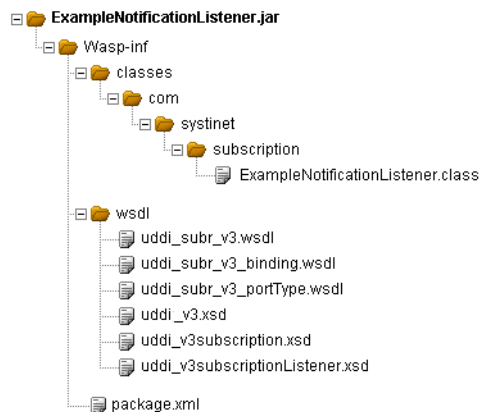

- b. Copy the wsdl and schema files from REGISTRY_HOME/doc/wsdl to the package.
 - c. Copy the package.xml file shown in [Example 14, package.xml](#) to the package.
4. Deploy the service notification package with required Oracle Service Registry client packages into Systinet Server for Java.
 - a. **copy %REGISTRY_HOME%\dist\uddiclient_api_v3.jar %WASP_HOME%\app\system\uddi**
 - b. **copy %REGISTRY_HOME%\dist\uddiclient_subscription_v3.jar %WASP_HOME%\app\system\uddi**
 - c. **copy %REGISTRY_HOME%\dist\uddiclient_subscription_listener_v3.jar %WASP_HOME%\app\system\uddi**
 - d. **copy ExampleNotificationListener.jar %WASP_HOME%\app\system\uddi**
5. Shutdown the Systinet Server for Java, delete the WASP_HOME/work directory, and restart the Systinet Server for Java
6. Create a subscription using the Registry Control.

See [Section Publishing Subscriptions](#) for instructions on how to create a subscription.

7. Publish the subscription with the Notification listener type Service endpoint. Enter the Notification listener endpoint as `http://your.computer.name.com:6060/ExampleNotificationListener` as shown in [Figure 11](#)

Figure 11. Create Subscription

Edit subscription	
Subscription filter:	Find business
Notification listener type:	Service endpoint
Notification listener endpoint:	http://localhost:6060/ExampleNotificationListener
Business service:	- Select parent business service -
Business entity:	- Select parent business entity -
Notification interval:	0 years 0 months 0 days 0 hours 1 minutes 0 seconds
Expires after (MM/DD/YYYY hh:mm):	☐ Never ☒ 8 / 8 / 2005 15 : 11
Max entities:	-1
Brief:	☐

3.5.1. Sample Files

Example 13. ExampleNotificationListener.java

```
package com.systinet.subscription;

import org.systinet.uddi.client.subscription.listener.v3.UDDI_SubscriptionListener_PortType;
import org.systinet.uddi.client.subscription.listener.v3.struct.Notify_subscriptionListener;
import org.systinet.uddi.client.v3.UDDIException;
import org.systinet.uddi.client.v3.struct.DispositionReport;

public class ExampleNotificationListener implements UDDI_SubscriptionListener_PortType{

    public DispositionReport notify_subscriptionListener(Notify_subscriptionListener body)
        throws UDDIException {
        System.out.println(body.toXML());
        DispositionReport result = DispositionReport.DISPOSITION_REPORT_SUCCESS;
        return result;
    }
}
```

Example 14. package.xml

```
<?xml version="1.0" encoding="UTF-8"?>
<package xmlns="http://systinet.com/wasp/package/1.2"
  xsi:schemaLocation="http://systinet.com/wasp/package/1.2
http://systinet.com/wasp/package/1.2"
  targetNamespace="http://my.org" version="1.0"
  name="ExampleNotificationListener" client-package="false" library="false"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns:tns="http://my.org"

  xmlns:uddi_subr_v3="urn:uddi-org:subr_v3"
  xmlns:uddiclient_subscription_listener_v3=
    "http://systinet.com/uddi/client/subscription/listener/v3/5.0">

  <dependency ref=
    "uddiclient_subscription_listener_v3:UDDIClient-subscription-listener-v3" version="5.0"/>

  <service-endpoint name="ExampleNotificationListener"
    path="/ExampleNotificationListener"
    service-instance="tns:ExampleNotificationListenerInstance"
    processing="uddiclient_subscription_listener_v3:UDDIClientProcessing">
    <wsdl uri="uddi_subr_v3.wsdl"
      service="uddi_subr_v3:UDDI_SubscriptionListener_SoapService"/>
    </service-endpoint>
  <service-instance name="ExampleNotificationListenerInstance"
    implementation-class="com.systinet.subscription.ExampleNotificationListener"
    preload="false" ttl="600" instantiation-method="shared"/>
</package>
```

3.6. Writing a Content Checker

In this section, we will show you how to create a content checker. The content checker provides an approver the ability to programmatically check data for approval. We assume you are familiar with the Approval Process, which is described in the following sections:

- User's Guide, [Section 1.5, Approval Process in Oracle Service Registry](#)
- Administrator's Guide, [Section 7, Approval Process Principles](#)

We will show you how to create and deploy a content checker on the following example: an Approver set a rule that each business entity name must start with prefix "org.". Data that does not satisfy this rule cannot be approved (that is, copied to a *discovery registry*). The content checker is executed when a approver clicks on the **Approve** button in the Approve request page of the Oracle Service Registry console.

To set up this optional content checking:

1. Write a class that implements the class `org.systinet.uddi.approval.checker.v3.CheckerApi`.
2. Deploy the implementation class to the Oracle Service Registry.
3. Register the implementation of the content checker class in the Oracle Service Registry's data.

Now, we will look at the steps in detail:

1. Write a class that implements the `org.systinet.uddi.approval.checker.v3.CheckerApi`
 - a. Create the content checker class as shown in [Example 15, Content Checker Implementation](#).
 - b. Compile the `CheckerApiImpl.java`, and add jars from the directory `PUBLICATION_REGISTRY_HOME/dist` to the class path.
2. Deploy the implementation class to the Oracle Service Registry.



Note

In the case of deployment to an application server, you must make the modifications in the location where they will be used. This may mean in the registry directory where registry is unpacked inside the application server, not in the installation directory. If the registry is not yet deployed, but the WAR/EAR file is available, modify the WAR/EAR file first and then deploy it. The relative paths for files are the same but `PUBLICATION_REGISTRY_HOME` is different.

- a. Copy the `CheckerApiImpl.class` to the file `PUBLICATION_REGISTRY_HOME/app/uddi/services/WASP-INF/lib/approval_staging_v3.jar` to the folder `com/systinet/uddi/approval/v3/approver` inside the jar file.
 - b. Shutdown the *Publication Registry*, delete the `PUBLICATION_REGISTRY_HOME/work` directory, and restart the *Publication Registry*.
3. Register the implementation of the content checker class in the Oracle Service Registry data.
 - a. Log on to the *Publication Registry* as an approver. The content checker will be applicable to an approver who follows these steps:
 - b. [Publish the WSDL](#) of the checker service:

[Publish the WSDL](#) located at `http://<host_name>:<http_port>/uddi/doc/wsd/approval_checker.wsdl` to a new or already existing business entity. Use the **Advanced publishing** mode and be sure to reuse the existing WSDL portType (tModel name: `CheckerApi`, tModel's key: `uddi:systinet.com:uddi:service:porttype:approvalchecker`). The WSDL service `approval_checker_SoapService` will be published under the business entity.
 - c. Specify the checker in the access point of a new binding template under the `approval_checker_SoapService` service.

Enter the value of access point which starts with the `class:` prefix and continue with the fully qualified class name. For example, `class:com.systinet.uddi.approval.v3.approver.CheckerApiImpl`.

Example 15. Content Checker Implementation

```

package com.systinet.uddi.approval.v3.approver;

import org.systinet.uddi.InvalidParameterException;
import org.systinet.uddi.approval.checker.v3.CheckerApi;
import org.systinet.uddi.approval.checker.v3.struct.CheckRequest;
import org.systinet.uddi.approval.v3.ApprovalErrorCodes;
import org.systinet.uddi.approval.v3.ApprovalException;
import org.systinet.uddi.approval.v3.struct.ApprovalEntitiesDetail;
import org.systinet.uddi.approval.v3.struct.EntitiesDetail;
import org.systinet.uddi.client.v3.struct.*;

/**
 * Checks if a BE starts with org_
 */
public class CheckerApiImpl implements CheckerApi {

    public DispositionReport checkRequest(CheckRequest checkRequest)
        throws ApprovalException {

        try {
            ResultArrayList resultArrayList = new ResultArrayList();

            ApprovalEntitiesDetail approvalEntitiesDetail =
                checkRequest.getApprovalEntitiesDetail();
            if (approvalEntitiesDetail != null) {
                EntitiesDetail entitiesDetail4Saving =
                    approvalEntitiesDetail.getEntitiesDetail4Saving();
                BusinessEntityArrayList businessEntityArrayList =
                    entitiesDetail4Saving.getBusinessEntityArrayList();
                if (businessEntityArrayList != null) {
                    for (int i = 0; i < businessEntityArrayList.size(); i++) {
                        BusinessEntity businessEntity = businessEntityArrayList.get(i);
                        if (businessEntity != null) {
                            NameArrayList nameArrayList =
                                businessEntity.getNameArrayList();
                            for (int j = 0; j < nameArrayList.size(); j++) {
                                Name name = nameArrayList.get(j);
                                if (name != null && !name.getValue().startsWith("org_")) {
                                    resultArrayList.add(
                                        new Result(ApprovalErrorCodes.INVALID_DATA,
                                            new ErrInfo(ApprovalErrorCodes.getCode(
                                                ApprovalErrorCodes.INVALID_DATA),
                                                "Only business entities whose name start with the " +
                                                "prefix \"org_\" are allowed" +
                                                " (BE [key: " + businessEntity.getBusinessKey() +
                                                ", name: " + name.getValue() + "])"),
                                            KeyType.businessKey));
                                }
                            }
                        }
                    }
                }
            }
        }
    }
}

```

```
        }
    }

    if (resultArrayList.size() > 0) {
        return new DispositionReport(resultArrayList);
    } else {
        return DispositionReport.DISPOSITION_REPORT_SUCCESS;
    }
} catch (InvalidParameterException e) {
    // should not occur
    throw new ApprovalException(ApprovalErrorCodes.FATAL_ERROR, e.getMessage());
}
}
```

3.7. Registry Web Framework

This section describes Oracle Service Registry from the developer's point of view. It describes the Oracle Service Registry Framework architecture and configuration.

- [Section 3.7.1, Architecture Description](#)
- [Section 3.7.2, Directory Structure](#)
- [Section 3.7.3, Framework Configuration](#)
- [Section 3.7.4, syswf JSP tag library](#)
- [Section 3.7.5, Typical Customization Tasks](#)

3.7.1. Architecture Description

The framework uses the Jasper engine, a part of the Tomcat server. It is able to run on Jasper1 from Tomcat version 4.1 (Servlet API 2.3/JSP spec 1.2) or Jasper2 from Tomcat version 5 (Servlet API 2.4/JSP spec 2.0). It also uses a customized JSTL 1.0 tag library implementation which is based on Apache tag libraries from the [Jakarta project](http://jakarta.apache.org/) [http://jakarta.apache.org/].

Applications using the Web Framework are composed of pages. Every page of the web has a URI where it can be accessed. In the Web Framework, we call each page of the web as a task.

The Web Framework uses a component model to build up the web application. Every task is assigned to a component which is the real entity behind the process that generates the resulting HTML page displayed to the user. Thus, every task references a component, but components need not be associated with tasks, as we will see later.

Each component is built from two parts:

- a [JSP part](#)
- a [Java part](#)

The JSP part serves as a template and takes care of parsing and visualization of the data that comes in a session, or in a request to which they are stored in the Java part of a component.

The framework functionality is accessible from the JSP parts of components through a JSP tag library. This library contains tags for creating references to tasks, nesting components, and tags for creating HTML form elements that support dynamic behavior.

Sometimes, a component is purely JSP-based as the one associated with this documentation page. But when the page must process user-entered information, or when data must be modified before presentation, you must use the Java part of the component.

To switch from one page to another, use the `syswf:control` custom tag in the JSP part of the source task component. The `syswf:control` tag's `targetTask` attribute defines the task (that is, the page) the user should be transferred to. The custom tag is translated into a piece of JavaScript code responsible for correct page submitting.

Tasks can be accessed directly using a web browser. For example, if the registry's web interface runs on the address `http://localhost:8888/registry/uddi/web`, a task with the URI `/findBusiness` can be accessed directly from the client browser at `http://localhost:8888/registry/uddi/web/findBusiness`.

Component Java Interface Part

The Java part of the component must implement the `com.systinet.webfw.Component` interface from the Web Framework library. However, it usually extends its default implementation: `com.systinet.webfw.ComponentImpl`. For those components that do not declare their Java part, this default implementation is automatically used.

The interface consists of two methods:

- `void process(String action, Map params)`
- `void populate(String action, Map params)`


The `process()` method is called just before the translation of the component's JSP part is started, so it should take care of data preparation and it should also handle the actions requested by the user (react to pressed buttons, etc.).

The `populate()` method is called only when the POST request to the URI comes from the same URI, so it's a perfect place to modify the way data from a web page is populated back into objects. Actually, the target objects are always Java Beans which simplify their handling quite a bit.

Request Diagram

The diagram shown in [Figure 12](#) demonstrates how requests for the page are handled by the Web Framework:

Figure 12. Request Diagram

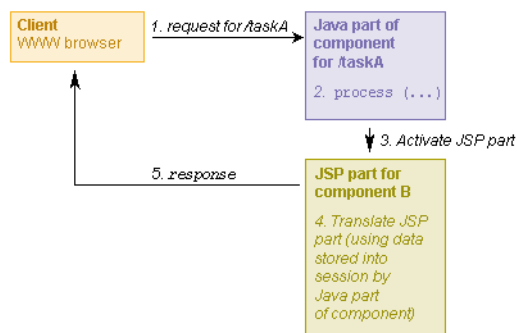

1. The request is sent by the client browser from a different page than the page requested.

2. The `process()` method is called on taskA component's Java part. This method should perform actions triggered by controls in the web page and/or prepare data for taskA component's JSP part.
3. Processing of taskA component's JSP part is initialized.
4. While taskA component's JSP part is being processed, the resulting HTML is generated.
5. Processing of taskA component's JSP part finishes; the response is returned to the client's browser.




Note

If the request is sent by the client browser from the same page as the page requested (meaning the source and target tasks are the same), then the `populate()` method is called on the task component's Java part before the `process()` method.

Nesting Components

As we noted above, the component JSP part can include other components using the `syswf:component` custom tag right in the JSP code. The diagram shown in [Figure 13](#) presents how a request is handled when there are such nested components. Note that now the request comes from the same task it is targeted to:

Figure 13. Nesting Components Diagram

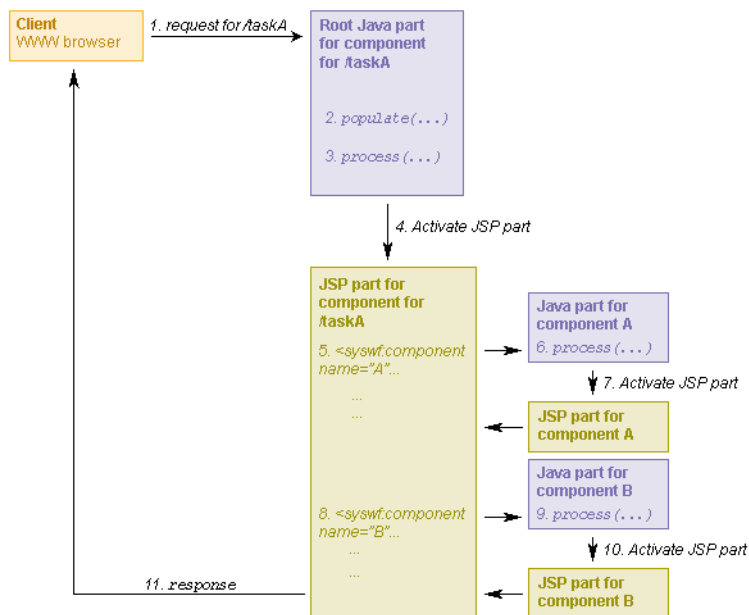

1. The request is sent by the client browser from the same page as the page requested.
2. The `populate()` method is called on taskA component's Java part. This method is responsible for the transfer of data from web page form elements (input fields, radio buttons, etc.) to JavaBeans objects on the server.
3. The `process()` method is called on taskA component's Java part. This method should perform actions triggered by controls in the web page and/or prepare data for taskA component's JSP part.
4. Processing of taskA component's JSP part is initialized.
5. Request for insertion of component A is found.

6. The `process()` method is called on the Java part of component A. This method should prepare data for component presentation.
7. Processing of the JSP part of component A is performed. Once finished, the result is included in the parent JSP page.
8. Request for insertion of component B is found.
9. The `process()` method is called on the Java part of component B. This method should prepare data for component presentation.
10. Processing of the JSP part of component B is performed. Once finished, the result is included in the parent JSP page.
11. Processing of taskA component's JSP part finishes. The response is returned in the client's browser.

Component JSP Part

Example 16. Skeleton of the JSP Page

The following example displays the WSDL URL for a WSDL service.

```
<%@ taglib prefix="c" uri="http://java.sun.com/jstl/core" %>
<%@ taglib prefix="syswf" uri="http://systinet.com/jsp/syswf" %>

<syswf:page headerTemplate="pageHeader.jsp" footerTemplate="pageFooter.jsp">

    <syswf:wrap headerTemplate="design/pageHeader.jsp"
        footerTemplate="design/pageFooter.jsp">
        ...
    </syswf:wrap>

</syswf:page>
```

The core of the JSTL (standard tag library) together with the Registry Web Framework custom tag library are imported. The beginning of the page is declared (`syswf:page` tag); page header and footer represented as JSP pages are passed as attributes. These pages contain the basic HTML tags and declaration of Java Scripts that will be used in the page.

To enable automatic wrapping and resizing, all of the page's content is packed into the `syswf:wrap` tag to which page header and footer JSP pages are passed as attributes. The header and footer pages contain:

- The design part - the logo and menu, such as the labels at the top of this page under the product name
- The navigation path - shown in the top right corner of this page
- Text that should be displayed in the bottom of the page, such as copyright information.

Implicit Objects

Implicit objects allow you to interact with various framework parts, from Java code or JSP pages. A reference to an implicit object should be obtained from the `com.systinet.uddi.util.CallContext` class, or by using simple getter methods from `com.systinet.webfw.ComponentImpl`.

- **request** HTTP request interface; here you can read, for example, http headers included in user's request. Using request attributes is the preferred way to transfer data from Java to JSP pages.

- **response** HTTP response interface; can be used, for example, to set content type and other response header data or to send binary data back to client.
- **localSession** Contains the `java.util.Map` object, which is accessible from the current task only. For example, when you have tasks A and B in navigation history, each has a separate local session. When you return from task B to task A, the whole local session content of task B is discarded.
- **globalSession** Contains the `java.util.Map` object, which is shared among all tasks; this session can be used, for example, to store the current user's `authToken`, or other application-wide data.

Data Types

Data type classes are responsible for converting values between web page HTML form fields and underlying Java Beans objects. The Data type class must implement the simple interface `com.systinet.webfw.datatype.DataType` with two methods:

- `String objectToWeb(Object value)` provides conversion from arbitrary Java type to String usable in web pages.
- `Object webToObject(String value)` provides conversion in the opposite direction.

There are predefined implementations of this object for converting the simple Java data types `string`, `int`, `long`, and `boolean`.

Client-side Validators

Validators can be used to validate user input before a web page is submitted to a server. The validation is invoked by a specific page control (a button or a link). There is a predefined set of validators for common input field checks.

Table 54. Predefined Validators

Name	Description
required	Checks if the field is not empty.
uddiKey	Checks if the field content starts with the <code>uddi:</code> prefix.
length50, length255, length8192	length80, length4096, Checks if the field contains no more than the specified number of characters.
email	Checks if the field contains an email address.
long	Checks if the field contains a number of type <code>long</code> .
int	Checks if the field contains a number of type <code>int</code> .

To add a validator to an input field or a text area, use the `sysfw:checker` tag. To trigger the validation control, use the `sysfw:validate` tag.

Example 17. Validators Usage

```
<sysfw:input name="businessKey" value="">
  <sysfw:checker name="required" action="viewBusinessV3"/>
  <sysfw:checker name="uddiKey" action="viewBusinessV3"/>
</sysfw:input>
...
<sysfw:control action="viewBusiness" caption="View business" mode="button">
  <sysfw:validate action="viewBusinessV3"/>
</sysfw:control>
```

The [Example 17, Validators Usage](#) shows an input field with two checkers, the first one checks if the field is not empty and the second one checks if the field contains a string starting with the prefix `uddi:` (uddi key). Both checkers are invoked when a user clicks the **View business** button.

Validation is performed using a JavaScript function. The validator name is required to be defined in the JavaScript function with the name `check_required`. The return value from the validator is of the boolean type: `true` when the field content is valid, and `false` when content is invalid. In case of error, the validator displays an error message with the description of the allowed field content. This validator is also responsible for transferring the focus to the field with an error.

Example 18. Required Validator Implementation

```
// is required checker
function check_required (formID, fieldID)
{
    var value = getFieldValue(formID, fieldID);
    if (isEmpty(value))
    {
        alertRequired();
        setFocus(formID, fieldID);
        return false;
    }
    return true;
}
```

Custom validators should be added to the file `REGISTRY_HOME/app/uddi/web.jar/webroot/script/uddi.js`. Many functions for validation are defined in the file `REGISTRY_HOME/app/uddi/web.jar/webroot/script/wf.js`.

3.7.2. Directory Structure

JSP pages for the Oracle Service Registry user interface are placed in the `REGISTRY_HOME/app/uddi/web.jar/jsp` directory. Static content, such as scripts and images, is stored in the `REGISTRY_HOME/app/uddi/web.jar/webroot` directory.

JSP Page Reference

Table 55. Root Files

File	Description
<code>error.jsp</code>	skeleton for error page
<code>home.jsp</code>	main page with welcome text
<code>login.jsp</code>	login page
<code>management.jsp</code>	page with buttons for all registry management tasks
<code>pageFooter.jsp</code>	page header containing required JavaScripts and HTML form. Do not write any design here; use <code>design/pageFooter.jsp</code> instead
<code>pageHeader.jsp</code>	contains mainly page hidden fields. Do not write any design here; use <code>design/pageHeader.jsp</code> instead
<code>uddiErrorComponent.jsp</code>	component responsible for displaying error messages

Table 56. Content of Page Directories

Directory	Description
account	All pages related to account management
admin	Administration tools for tModel deletion and key replacement
approval	Pages for approval process
configuration	Registry and web configuration pages
custody	User interface for custody transfer
design	Contains various design elements such as frames and tabs
group	Group management
inquiry	UDDI inquiry pages
permission	Permission management
publishing	UDDI publishing pages
replication	Replication management
statistics	Shows registry statistics
subscription	UDDI subscription pages
taxonomy	Taxonomy browsing and management
util	Various page components
wsdl2uddi	WSDL-to-UDDI mapping pages
xml2uddi	Inquiry and publishing pages for mapping of XML files to UDDI
xsd2uddi	Inquiry and publishing pages for mapping of XML schemas to UDDI
xslt2uddi	Inquiry and publishing pages for mapping of XSLT style sheets to UDDI

3.7.3. Framework Configuration

All needed configuration settings are stored in the file `REGISTRY_HOME/app/uddi/conf/web.xml`

Component

Specifies configuration of page components.

Table 57. Component Attributes

Attribute	Description	Required
name	Unique component identification	yes
className	Fully qualified class name of the component implementation class	no
page	Path to JSP page with component design; path is relative to root JSP directory.	no

Task

Contains definition of tasks.

Table 58. Task Attributes

Attribute	Description	Required
URI	Unique string used to call a task from controls or directly using http URL; the URI must start with a forward slash (/) character.	yes
caption	task description to be displayed, for example as page title	no
component	Name of task root component	yes

Table 59. Subelement

Element	Description	Required
param	Additional parameters to be passed to the root component; each parameter is specified as name-value pair.	no

Data Type

Contains the definition of the data types.

Table 60. Data Type Attributes

Attribute	Description	Required
typeName	Unique name of the data type; this name is used to reference a data type, for example from the syswf:input tag.	yes
className	Name of data type implementation class	yes

Other Configuration**Table 61. Configuration Elements**

Element	Description
url	First part of the URL used to access Oracle Service Registry without encryption (plain HTTP); this part should contain the http protocol prefix, hostname, and port.
secureUrl	First part of the URL used to access Oracle Service Registry using encryption. This part should contain https protocol prefix, hostname and port.
context	Context part of the URL, used to access Oracle Service Registry tasks; the default value is uddi/web for standalone registries and registry/uddi/web for registries ported to an application server.
dataContext	Context part of the URL, used to access Oracle Service Registry's static content, for example, images and cascading style sheets. The default value is uddi/webdata for standalone registries and registry/uddi/webdata for registries ported to an application server.
serverSessionTimeout	Default timeout of server-side sessions (measured in seconds).
uploadTempDir	Directory used to store temporary files during the upload process; this path should be relative to service context directory.
maxUploadSize	Maximum size of uploaded files; larger files are rejected.
jspDir	Directory with JSP pages; the path should be relative to service context directory.
jspEngine	Contains JSP engine initialization parameters and the compilation classpath. A complete list of available Jasper initialization parameters can be found below.

Jasper Configuration

Table 62. Jasper init Configuration Parameters

Parameter name	Default value	Description
checkInterval	300	If the development parameter is false and reloading parameter is true, background compiles are enabled. checkInterval is the time in seconds between checks to see if a JSP page needs to be recompiled.
compiler	javac	Which compiler Ant should be used to compile JSP pages. See the Ant documentation for more information.
classdebuginfo	true	Indicates whether the class file should be compiled with debugging information
development	true	Indicates whether Jasper is used in development mode; checks for JSP modification on every access.
enablePooling	true	Determines whether tag handler pooling is enabled
ieClassId	clsid:8AD9C840-044E-11D1-B3E9-00805F499D93	The class-id value sent to Internet Explorer when using <jsp:plugin> tags.
fork	true	Tells Ant to fork compiles of JSP pages so that a separate JVM is used for JSP page compiles from the JVM in which Tomcat is running.
javaEncoding	UTF8	Java file encoding to use for generating java source files.
keepgenerated	true	Indicates whether generated Java source code for each page is kept or deleted.
logVerbosityLevel	WARNING	The level of detailed messages to be produced by this servlet. Increasing levels cause the generation of more messages. Valid values are FATAL, ERROR, WARNING, INFORMATION, and DEBUG.
mappedfile	false	Indicates whether the static content is generated with one print statement per input line, to ease debugging.
reloading	true	Indicates whether Jasper checks for modified JSPs.

3.7.4. syswf JSP tag library

A JSP page using the syswf tag library must include this header <%@ taglib prefix="syswf" uri="http://systinet.com/jsp/syswf" %>

syswf:component

Includes the component with specified parameters.

Table 63. syswf:component Attributes

Attribute	Description	Required
prefix	All parameter names in component will be prefixed with this prefix; the prefix must be unique within each JSP page.	yes
name	Name of component, as written in the config file.	yes

Table 64. syswf:component Subelements

Element	Description	Required
param	When this parameter value is passed into a component, it will be accessible in the request scope in the component Java class and in the JSP page.	optional

The value of the parameter should be specified in two ways: As a value attribute or as a content of the value tag.

Example 19. Component Parameters

```
<syswf:component prefix="names" name="nameList">
  <syswf:param name="color1" value="white"/>
  <syswf:param name="color2">black</syswf:param>
</syswf:component>
```

syswf:page

Creates an HTML page form with all required internal fields. This must be the root element of all components used as tasks.

Table 65. syswf:page Attributes

Attribute	Description	Required
headerTemplate	The filename of the JSP page containing the page header, this file is designed to create elements required for framework functionality. Note that there should be no graphic design.	yes
footerTemplate	The filename of the JSP page containing the page footer, this file is designed to create elements required for framework functionality. Note that there should be no graphic design.	yes

syswf:wrap

This tag helps you to separate page functionality from its design. It includes specified header and footer templates before and after the body element. Header and footer templates should be parametrized using syswf:param tags.

Table 66. syswf:wrap Attributes

Attribute	Description	Required
headerTemplate	File name of JSP page containing the header.	no
footerTemplate	File name of JSP page containing the footer.	no

Table 67. syswf:wrap Subelements

Element	Description	Required
param	When you pass the parameter value into a component, this parameter will be accessible in the request scope in the component Java class and JSP page.	no

syswf:control

Creates a button or link, which should be used to trigger actions and transfers to other tasks.

Table 68. syswf:control Attributes

Attribute	Description	Required
action	Action to be passed to a control's parent component.	no
mode	Allowed values are button , anchor , script , or image . The script generates the submit JavaScript command, which can be used, for example, as a value for the HTML onClick attribute. Image is a graphic button.	yes
targetTask	URI of task to be called.	no
targetDepth	Specifies level in navigation path to be used.	no
targetUrl	Specifies the URL to be used to submit data; usable, for example, when you need to switch from http to https.	no
caption	control caption	required in anchor and button mode
hint	Help text, displayed as tooltip.	no
disabled	If set to true , button is disabled and link cannot be clicked.	no
redirect	If set to true , the task is only redirected to another task. This means that task data stored in a local session will also be accessible from the target task. Normal behavior is that a local session is not transferred between tasks.	no
src	Path to the image file used as graphic button.	required in image mode

Table 69. syswf:control Subelements

Element	Description	Required
param	Adds action parameters.	no
attribute	Adds attributes to created input or an HTML tag.	no

syswf:input

Inserts input field into JSP page.

Table 70. syswf:input Attributes

Attribute	Description	Required
name	Specifies the name of the accessible value of this input field.	yes
value	Specifies a value which appears in the input field, or a base object for the property attribute.	yes
property	Contains the property name of the object specified by the expression in the value attribute.	no
hint	Help text, displayed as a tooltip.	no
dataType	Data type which will be used to transform values between the underlying Java Bean object and the input field.	no
disabled	If set to <code>true</code> , the input field will be disabled.	no
mode	A possible value is password, used for password fields.	no

Table 71. syswf:input Subelements

Element	Description	Required
attribute	Appends a name and value pair as attribute to the resulting HTML tag; usable, for example, for the CSS class specification for an input field.	no

syswf:selectOne

Displays controls which enable the user to select one value from a list of available values.

Table 72. syswf:selectOne Attributes

Attribute	Description	Required
name	Specifies the name under which this value will be accessible; select one element.	yes
mode	Specifies visual style; possible values are radio , check box , and menu .	no
value	Specifies a value which will be selected, or a base object for the property attribute.	yes
property	Contains the property name of the object specified by expression in the value attribute.	no
optionValues	Specifies a comma-delimited list of available values, the expression of which evaluates either to String[], or to an array of object for the optionValuesProperty attribute.	yes
optionValuesProperty	Contains property name of objects specified by expression in the optionValues attribute.	no
optionCaptions	Specifies a comma-delimited list of available captions, the expression of which evaluates either to String[], or to an array of object for the optionCaptionsProperty attribute.	no
optionCaptionsProperty	Contains property name of objects specified by expression in the optionCaptions attribute.	no
hint	Help text, displayed as tooltip.	no
dataType	Data type which will be used to transform values between the underlying Java Bean object and the selected element.	no

Table 73. syswf:selectOne Subelements

Element	Description	Required
attribute	Appends a name/value pair as an attribute to resulting HTML tags.	no

syswf:selectMany

Displays controls which enable the user to select multiple values from list of available values.

Table 74. syswf:selectMany Attributes

Attribute	Description	Required
name	Specifies the name under which the value of this selectMany element will be accessible.	yes
mode	Specifies visual style possible values check , box and menu .	no
value	Specifies an array of values which will be selected, or base objects, for the property attribute.	yes
property	Contains property name of objects specified by expression in the value attribute.	no
optionValues	Specifies a comma-delimited list of available values the expression of which evaluates to String[], or to an array of object for the optionValuesProperty attribute.	yes
optionValuesProperty	Contains the property name of objects specified by expression in the optionValues attribute.	no
optionCaptions	Specifies a comma-delimited list of available captions, the expression of which evaluates to either String[], or to an array of object for the optionCaptionsProperty attribute.	no
optionCaptionsProperty	Contains a property name for objects specified by expression in the optionCaptions attribute.	no
hint	Help text, displayed as tooltip.	no

Table 75. syswf:selectMany Subelements

Element	Description	Required
attribute	Appends a name/value pair as an attribute to result HTML tags.	no

syswf:textArea

Creates a text area HTML component.

Table 76. syswf:textArea Attributes

Attribute	Description	Required
name	Specifies the name under which the value of this text area will be accessible.	yes
value	Specifies a value which appears in the text area, or a base object for the property attribute.	yes
property	Contains a property name of an object specified by expression in the value attribute.	no
hint	Help text, displayed as tooltip.	no
dataType	Data type which will be used to transform values between underlying the Java Bean object and the text area.	no
disabled	If set to true , the text area will be disabled.	optional

Table 77. syswf:textArea Subelements

Element	Description	Required
attribute	Appends a name/value pair as an attribute to the result HTML tag; usable, for example, for CSS class specification for the text area.	no

syswf:value

Evaluates the given expression and transform result using data type.

Table 78. syswf:value Attributes

Attribute	Description	Required
value	Specifies the expression which will be evaluated.	yes
hint	Help text, displayed as tooltip.	no
dataType	Data type which will be used to transform value.	no

syswf:size

This tag will fill the page attribute with size of given List, UDDIList, StringArrayList or Array.

Table 79. syswf:size Attributes

Attribute	Description	Required
var	Name of variable to store the size of a given list or array.	yes
value	Specifies an expression to be evaluated; the result must be List, UDDIList, StringArrayList or Array.	yes
scope	Scope of the variable to store the size of a given list or array. Allowed values are request , session , application , or default .	no

navigationPath

This component renders the history path (bread crumbs links)

navigationPath component in action

Example 20. Component Parameters

```
<syswf:component name="navigationPath" prefix="path"/>
```

3.7.5. Typical Customization Tasks

- **Q: Where can I find the code which generates the page header?** A: It is defined in the file `design/pageHeader.jsp`.
- **Q: How do I change the text displayed on a page's title bar?** A: Modify content of `<title>` tag in the file `pageHeader.jsp`.
- **Q: Where is the right place to include my own JavaScript files?** A: Reference to your files should be placed in `pageHeader.jsp`. Place your script files in the `REGISTRY_HOME/app/uddi/web.jar/webroot/script` directory.

- **Q: Where is it possible to change the text displayed in the page footer?** A: The page footer is defined in the file `design/pageFooter.jsp`.

3.8. Business Service Control Framework

This section describes the Business Service Control (BSC) from the developer's point of view. It describes the Business Service Control Framework architecture and configuration, and demonstrates how to customize the console.

The Business Service Control implementation and configuration are contained in the JAR file `bsc.jar` located in directory `REGISTRY_HOME/app/uddi`.

This section has the following subsections:

[Section 3.8.1, Business Service Control Localization](#) How to localize the Business Service Control, or the Registry Control.

[Section 3.8.2, Directory Structure](#) The directory structure of `bsc.jar`.

[Section 3.8.3, Business Service Control Configuration](#) Business Service Control configuration files in `bsc.jar`.

[Section 3.8.5, Permission support](#) Features to establish whether users have permission to perform operations.

[Section 3.8.6, Components and Tags](#) Components and tags in `bsc.jar` used to develop Business Service Control components.

3.8.1. Business Service Control Localization

Oracle Service Registry is ready for localization. This chapter is focused on localization of web applications such as the Business Service Control and Registry Control. It provides information on Oracle Service Registry localization support and how to write localizable web applications.

Basic concepts

The localization support is built upon standard Java resource bundles and the JSP formatting tag library.

Locale detection

The user language-detection routine is invoked for each HTTP request. When the user is logged in, the `userAccount`'s `languageCode` is used, if it is set. Otherwise the browser's preferred language is used. The system then finds the resource bundle for the chosen locale or uses a default resource bundle, if there is no such localized resource bundle. See the `ResourceBundle` javadocs for details of the algorithm.

The system uses UTF-8 encoding by default, but it can be configured to use a custom locale-encoding mapping in the file `web.xml`:

```
<webFramework>
  <encoding>
    <map locale="en" encoding="UTF-8"/>
    <map locale="zh" encoding="Big5"/>
  </encoding>
</webFramework>
```

Resource bundles

There is one resource bundle common to all JSP files serving as a dictionary - `com.systinet.uddi.bui.standard.BUIMessages`. It contains keys for common words like "OK", "Cancel" or names of entities (Provider, Service). Then each top-level directory in the `jsp` directory has a unique resource bundle for its files

and subdirectories. The resource bundles for Business Service Control are located within the SRC directory and are copied to the WASP-INF/classes directory during build phase.

Resource keys naming convention

The resource key is composed of JSP file name (without suffix) and an English identifier in camel notation. (Capital letters are used to indicate the start of words, instead of a space or underscore.) If the JSP file is located in some subdirectory of the top-level directory, the subdirectory name is also encoded in the resource key. For example resources for JSP file `search/interfaces/simple.jsp` are stored in the file `com.systinet.uddi.bui.standard.component.search.SearchMessages.properties` and all keys have the prefix `interfaces.simple_`.

In some configuration files it is necessary to use a custom resource bundle instead of the default bundle. There is a way to encode the custom resource bundle name into the resource key. If the resource key contains the character \$, then the part before it will be treated as the resource bundle identifier and the rest of the resource key as actual resource key. For example `customBundle$resourceKey`.

Localization of Configuration

The configuration files are localizable too. For example the file `conf/bsc.xml` has texts in the resource bundle `com.systinet.uddi.bui.framework.BSCMessages.properties`. The attributes like `caption` and `hint` have their localizable alternatives `captionKey` and `hintKey`, which have precedence over the original attributes providing text. The exception to this rule is the task element in the file `conf/web_component.xml`, where `caption` attribute has precedence over new `captionKey` attribute.

JSP localization

The localization of JSP files uses the standard formatting tag library. Every JSP must start with import of this library and setting of the locale for the current user, if he is logged in. The user's language is stored in the session variable `userDefaultLanguage`.

Example 21. Example of localization

```
<%@ taglib prefix="fmt" uri="http://java.sun.com/jstl/fmt" %>
<c:if test="{not empty globalSession['userName']}">
  <fmt:setLocale value="{globalSession['userDefaultLanguage']}" scope="page"/>
</c:if>
<fmt:setBundle basename="com.systinet.uddi.bui.standard.component.search.SearchMessages"
var="search_Message"/>
<fmt:message key="interfaces.simple_operationProperty" bundle="{search_Message}"/>
```

In addition to the full power of the standard formatting library there are several extensions that complement localization needs.

ParseResourceKey tag

The `parseResourceKey` tag is used, when the resource key can contain an embedded resource bundle. It detects such a situation and introduces two new variables that will hold the values of resource bundle and resource key to be used.

Table 80. ParseResourceKey tag Parameters

Param	Description	Required
key	The resource key that may contain an embedded custom resource bundle.	yes
defaultBaseName	Default resource bundle to use if no custom bundle is detected.	yes
varBundle	Name of variable that will hold the name of the bundle for this resource.	yes
varResource	Name of variable that will hold resource key.	yes

Example 22. ParseResourceKey tag - Usage Example

```
<syswf:parseResourceKey key="${captionKey}"
    defaultBaseName="com.systinet.uddi.bui.framework.WebComponentMessages"
    varBundle="bundleName" varResource="finalCaptionKey"/>
<fmt:setBundle basename="${bundleName}" var="dynamic_Message"/>
<fmt:message key="${finalCaptionKey}" var="dialogCaption" bundle="${dynamic_Message}"/>
```

LocalizedFileName tag

LocalizedFileName tag finds the name of the localized file for the current locale. It uses the same heuristic search as resource bundle loading. For example if there is a file `scripts.js` and the french locale is set, then `scripts_fr.js` may be returned.

Table 81. localizedFileName tag Parameters

Param	Description	Required
basedir	Prefix to be concatenated to fileName to access a resource from the servlet context.	yes
fileName	Name of file whose localized version is needed.	no
var	Name of variable that will hold the file name for the current locale.	yes

Example 23. localizedFileName - Usage Example

```
<syswf:localizedFileName basedir="/../webroot/" fileName="js/bui.js" var="jsBui"/>
<script language="JavaScript" src="<c:out value="${jsBui}"/>"></script>
```

LocalizedInclude tag

Sometimes it is necessary to localize very long text and it would not be practical to store it in a resource bundle as a key, especially when the text contains formatting information. For this purpose there is a tag `localizedInclude`, which writes to output the content of file selected in the current locale. The rules for file selection are same as for Resource bundles.

Table 82. localizedInclude tag Parameters

Param	Description	Required
baseName	Path to resource with the text to be written to output.	yes

Example 24. localizedInclude - Usage Example

```
<syswf:localizedInclude baseName="publish/service/generic/selectInterfaces.html"/>
```

Java localization

The localization of web applications uses standard resource bundles. It is necessary to use `com.systinet.webfw.util.BundleHelper` instead of `java.util.ResourceBundle` to retrieve a resource bundle otherwise different rules for locale selection will be used in the java code and JSP files, which results in page with portions in different languages.

3.8.2. Directory Structure

The following table summarize the directories inside `bsc.jar`.

Table 83. bsc.jar Directories

Directory	Description
conf	Configuration files of the Business Service Control. See Section 3.8.3, Business Service Control Configuration
jsp	JSP files
src	Source Java files
WASP-INF	Compiled Java and JSP classes, libraries, and SOAP stack configuration files
webroot	Static content of Business Service Control pages such as HTML, Javascript, graphics and CSS.

The `bsc.jar` package depends on the UDDI-service package. So services in the UDDI-service package are available to Business Service Control developers.

If you want to edit and modify any of the Business Service Control's source JSP or Java files, perform the following steps:

1. Unzip `bsc.jar` to a temporary location.
2. Edit the source files.
3. Compile the Java sources against the libraries in the `REGISTRY_HOME/lib` directory and the client libraries from the `REGISTRY_HOME/dist` directory.
4. Copy the resulting `.class` files into the `WASP-INF/classes` directory of the unzipped JAR.
5. Stop Oracle Service Registry
6. To preserve any changes made to the Business Service Control configuration at runtime, copy the contents of directory `REGISTRY_HOME/work/uddi/bsc.jar/conf` to the `conf` directory of the unzipped JAR.
7. Zip the JAR again and deploy it over the original file in the `REGISTRY_HOME/app/uddi` directory.

If you intend to change the JSP files only for testing purposes, you do not have to redeploy the `bsc.jar`. It is sufficient to modify the JSP files in `REGISTRY_HOME/work/uddi/bsc.jar/jsp`. You must reload pages in the browser before any change is visible. Note that files under `REGISTRY_HOME/work` are liable to be overwritten or deleted when packages are re-deployed.

conf Directory

This directory contains the following configuration files:

Table 84. conf Directory Contents

File	Description
bsc.xml	The Business Service Control configuration file. This contains the configuration of tabs, user profiles, URLs, paging limits, enterprise classifications, and settings for the approval process and subscription components. Also API endpoints and a flag determining whether SOAP communication is used for these. See Section 3.8.3, Business Service Control Configuration .
web.xml	The deployment configuration file. This contains Business Service Control deployment information such as web interface URLs and contexts. It also defines the location of JSP files, their pre-compiled versions and declared libraries for the JSP engine.
web_component.xml	The web framework configuration file. This contains the web framework's static settings including definitions of components, tasks and data types, and configuration for menus, context menus, trees and customizable taxonomies.
component_description.xml	This describes components in terms of their roles, relationships and interfaces.

jsp directory

This directory contains the JSP files that constitute the base of the Business Service Control and the following subdirectories:

Table 85. jsp Directory Contents

Directory	Contents (JSP files)
account	Account management
approval	Approval process interface (part of tools section).
browse	Report section of console, includes also entity details pages
catalog	Catalog section of console
common	Common pages for table component actions
configuration	Content of configuration section
design	Design including miscellaneous page and frame headers and footers
editor	Component editor components
publish	Catalog section of the console
query	Query framework components
search	Search section of console
table	Table framework components
taxonomy	Taxonomy framework components
tools	Tools section components
util	Utility components such as navigationPath
view	Entity list view pages of console
WEB-INF	Configuration files for JSP pages including declaration of use, tag libraries, etc.
wizard	The wizardIterator framework component

src directory

This directory contains the source files of the Business Service Control

Table 86. src Directory Contents

Enclosing Package	Description
com.systinet.uddi.bui.framework	Source Java files for the Business Service Control framework.
com.systinet.uddi.bui.standard	Source Java files for Business Service Control default implementation

WASP-INF directory

This directory contains the package.xml file for the Business Service Control, and the subdirectories listed in the following table:

Table 87. WASP-INF Subdirectories

Directory	Contents
classes	Compiled Java classes of the Business Service Control (including the Java parts of components and several utility classes)
jsp-classes	Pre-compiled JSP pages (JSP parts of components) from the jsp directory
lib	Libraries for the web application, including JSP, JSTL supporting libraries, etc.

webroot Directory

Contains subdirectories listed in the following table:

Table 88. webroot Subdirectories

Directory	Contents
gui	Resource files such as CSS, graphics, HTML
gfx	A deprecated directory that contained miscellaneous graphic files such as icons, logos, etc.
script	A deprecated directory that contained Java Scripts and the bui.css file for the Business Service Console

3.8.3. Business Service Control Configuration

The bsc.jar file in directory REGISTRY_HOME/app/uddi contains the configuration files for the entire Business Service Control. They are located in the conf subdirectory, the contents of which were summarized in [Directory Structure](#). In this section, we focus on the file bsc.xml.

- [Section Oracle Service Registry API Endpoint URL](#)
- [Section Result Filtering](#)
- [Section Main Menu Tabs](#)
- [Section User Profiles](#)
- [Section Entity List Views](#)
- [Section Browsable Taxonomies](#)

- [Section Paging Limits](#)

Oracle Service Registry API Endpoint URL

This configuration part contains the endpoint URLs used by the Business Service Control to communicate with Oracle Service Registry:

```
<url>http://localhost:8888/registry</url>
<secureUrl>https://localhost:8443/registry</secureUrl>
<useSoap>false</useSoap>
<uddiEndpoints accountApiPath="/uddi/account" approverApiPath="/uddi/approver"
  categoryApiPath="/uddi/category" configuratorApiPath="/uddi/configurator"
  inquiryPath="/uddi/inquiryExt" inquiryUIApiPath="/uddi/inquiryUI"
  publishingPath="/uddi/publishingExt" requestorApiPath="/uddi/requestor"
  securityPath="/uddi/security" subscriptionPath="/uddi/subscriptionExt"
  taxonomyApiPath="/uddi/taxonomy" wsdlApiPath="/uddi/wsdl2uddi"
  xml2UddiApiPath="/uddi/xml2uddi" xsd2UddiApiPath="/uddi/xsd2uddi"
  xslt2UddiApiPath="/uddi/xslt2uddi"/>
```

The endpoint URL is composed of two parts:

- The prefix, taken from the url element (or secureURL element for a secure endpoint)
- The relative part, taken from the specified uddiEndpoints attribute (depending on the type of the endpoint).

If you want to use a different target registry, it is usually sufficient to change the prefix (the absolute part of the URL).



Important

The useSoap element indicates whether to use SOAP to access Oracle Service Registry, or to ignore the declared API endpoints and make the calls directly through the Java virtual machine.

Result Filtering

Use this section to filter data that should not be displayed in the Business Service Control. For example, to hide the Operational business entity, you can set up a filter in the businessUI element. Note that child elements of an element you filter will not be displayed in the Business Service Control.

The following sample will hide the Operational business entity in the Business Service Control:

```
<filteredKeys>
  <businessKey>uddi:systinet.com:uddinodebusinessKey</businessKey>
</filteredKeys>
```

Main Menu Tabs

```
<tab tabId="home" taskId="/home">
  <captionKey>bsc.tab_home</captionKey>
  <hintKey>bsc.tab_homeHint</hintKey>
</tab>
<tab tabId="search" taskId="/search">
  <captionKey>bsc.tab_search</captionKey>
  <hintKey>bsc.tab_searchHint</hintKey>
</tab>
<tab tabId="catalog" taskId="/publish">
```

```

    <captionKey>bsc.tab_catalog</captionKey>
    <hintKey>bsc.tab_catalogHint</hintKey>
  </tab>
  <tab tabId="tools" taskId="/tools">
    <captionKey>bsc.tab_tools</captionKey>
    <hintKey>bsc.tab_toolsHint</hintKey>
  </tab>
  <tab tabId="report" taskId="/browse">cat
    <captionKey>bsc.tab_reports</captionKey>
    <hintKey>bsc.tab_reportsHint</hintKey>
  </tab>
  <tab tabId="configure" taskId="/configure">
    <captionKey>bsc.tab_configure</captionKey>
    <hintKey>bsc.tab_configureHint</hintKey>
  </tab>

```

Each tab element contains the definition of one main menu tab. These tabs are rendered in the top left area of the Business Service Control, under the product logo.



Important

Some navigation tabs should not be visible in all cases. Tab visibility depends on the profile selected for the current user. The Oracle Service Registry administrator should define tab visibility using the [Configuration](#) main menu tab.

Table 89. Tab element attributes

Attribute	Description	Required
captionKey	Resource bundle key to caption visible for users.	yes
tabId	Unique tab identification.	yes
taskId	URI of the task called when a user clicks on this tab.	yes
hintKey	Resource bundle key to descriptive text displayed as tab tooltip.	no

User Profiles

```

<profile defaultTab="home" profileId="default" captionKey="bsc.profile_anonymousUserProfile">
  <visibleTab>search</visibleTab>
  <visibleTab>report</visibleTab>
  <visibleTab>home</visibleTab>
  <defaultView viewId="Common" viewType="providers"/>
  <defaultView viewId="Common" viewType="interfaces"/>
  <defaultView viewId="Common" viewType="endpoints"/>
  <defaultView viewId="Common" viewType="bindings"/>
  <defaultView viewId="Common" viewType="services"/>
</profile>

```

Each profile element contains the definition of one user profile. The user profile defines the visibility of tabs, default navigation tab, and default views for various Business Service Control entity lists.

Users are able to [change their profiles](#) using the **My Profile** link from the Home page, unless an administrator has prohibited this via the **Configure** tab.

Table 90. Profile Element Attributes

Attribute	Description	Required
caption	Tab caption visible for users.	yes
profileId	Unique profile identification.	yes
defaultTab	TabId of the tab which will be displayed after user login. This attribute must contain the identification of one of the visible tabs defined for this profile.	yes
visibleTab	Id of navigation which will be visible for this user profile.	at least one
defaultView	Specifies the viewId of the view used as default when the user enters a page with a result list. The attribute viewType defines the type of list and viewId defines view identification.	one for each viewType

Entity List Views

```

<!-- list of available views -->
<view captionKey="bsc.view_business" viewId="Business"/>
<view captionKey="bsc.view_common" viewId="Common"/>
<view captionKey="bsc.view_technical" viewId="Technical"/>
<view captionKey="bsc.view_operation" viewId="Operation"/>

<!-- list of available view types -->
<viewType captionKey="bsc.viewType_providers" viewTypeId="providers"/>
<viewType captionKey="bsc.viewType_services" viewTypeId="services"/>
<viewType captionKey="bsc.viewType_endpoints" viewTypeId="endpoints"/>
<viewType captionKey="bsc.viewType_interfaces" viewTypeId="interfaces"/>
<viewType captionKey="bsc.viewType_bindings" viewTypeId="bindings"/>

```

The view element defines a list of available views. The viewType element defines a list of available entity list types.

**Important**

The viewId and viewType values are used to determine which component will be used for view presentation. The Business Service Control automatically checks the existence of all available view components, and only existing views will be presented to user. The View component name has the following format: [viewType][viewId]Results. For example, the component rendering the business view on a list of providers is named providersBusinessResults

Browsable Taxonomies

```

<browsableTaxonomy captionKey="bsc.browsableTaxonomy_usage"
tModelKey="uddi:systinet.com:taxonomy:usage"/>
<browsableTaxonomy captionKey="bsc.browsableTaxonomy_endpoint"
tModelKey="uddi:systinet.com:taxonomy:endpoint:status"/>
<browsableTaxonomy captionKey="bsc.browsableTaxonomy_status"
tModelKey="uddi:systinet.com:taxonomy:interface:status"/>
<browsableTaxonomy captionKey="bsc.browsableTaxonomy_namespace"
tModelKey="uddi:uddi.org:xml:namespace"/>
<browsableTaxonomy captionKey="bsc.browsableTaxonomy_localName"
tModelKey="uddi:uddi.org:xml:localName"/>
<browsableTaxonomy captionKey="bsc.browsableTaxonomy_certification"
tModelKey="uddi:systinet.com:taxonomy:service:certification"/>

```

```
<browsableTaxonomy captionKey="bsc.browsableTaxonomy_availability"
tModelKey="uddi:systinet.com:taxonomy:endpoint:availability"/>
<browsableTaxonomy captionKey="bsc.browsableTaxonomy_wsiCompliance" tModelKey="uddi:65719168-
72c6-3f29-8c20-62defb0961c0"/>
<browsableTaxonomy captionKey="bsc.browsableTaxonomy_milestone"
tModelKey="uddi:systinet.com:versioning:milestone"/>
<browsableTaxonomy captionKey="bsc.browsableTaxonomy_releaseDate"
tModelKey="uddi:systinet.com:versioning:releasedate"/>
<browsableTaxonomy captionKey="bsc.browsableTaxonomy_version"
tModelKey="uddi:systinet.com:versioning:version"/>
```

This section holds information about the list of browsable taxonomies. Each taxonomy is displayed as one node in the Business Service Control **Reports** tab. This list is also used when displaying the **Classifications** tab on entity detail pages.

Table 91. BrowsableTaxonomy Attributes

Attribute	Description	Required
caption	Taxonomy display name used when rendering the navigation tree on the Report tab.	yes
tModelKey	The key of the taxonomical tModel in Oracle Service Registry.	yes

Paging Limits

```
<pagingLimits component="resourcesXsltResults" pageSize="10" pageCount="20"/>
<pagingLimits component="resourcesWsdResults" pageSize="10" pageCount="20"/>
<pagingLimits component="default" pageSize="10" pageCount="20"/>
```

In this section, the limits of rows displayed on one page and the number of pages displayed are defined. Each component should define its specific settings, or that default values are used when settings are not found.

3.8.4. Entity Configuration

In this section, we will explain how the Business Service Control can be configured to recognize UDDI data as Business Service Control Entities and how to hook into standard actions for those entities.

Overview

The UDDI specification recognizes 4 entity types. However Business Service Control needs to present the UDDI data in terms of the user's business. Because of various mappings of resources, business artifacts etc. to UDDI, a single UDDI entity may correspond to several business-level entities.

The Entity Configuration defines how to recognize individual business artifacts. UDDI *categorization* is used to annotate the UDDI data with information about their role or type. So for example, a tModel is just a *resource* for the Business Service Control GUI. But when the tModel contains, for example, the `uddi:uddi.org:resource:type` category with value `xslt`, it represents an *XSL Transformation document*. Depending on business needs for the artifacts, different presentations, actions, or relationships may be available.

The Entity Configuration further specifies *Views* to be used for the particular entity. A View is a web page, or a portion of it, customized for the particular Entity. Views correspond to abstract operations that make sense on several entities. For example, pages for **Delete** action are different for Services and Providers but both pages perform the same abstract operation.

Configuration

The configuration is stored in the file `conf/bsc.xml`, inside the `entityViews` element. New Entities can be created by adding new Entity definitions to that configuration, or behaviour of existing Entities can be changed. In this release, we support creation of new Entities and customization of Entities based on tModels (TM).

The following example shows a commented configuration of a "Categorization" entity, derived from a tModel. It corresponds to a taxonomy tModel used by the Registry. The individual parts of the configuration will be described below

Example 25. Definition of an XML document

```

<!--
  Definition of a new entity, based on a TModel (TM). We specify an icon,
  a (localizable) name (caption) and (localizable) description.
-->
<entity entityId="xsd" type="TM" icon="xsd.gif"
  captionKey="bsc.entityViews_xsd_caption" descriptionKey="bsc.entityViews_xsd_description">

  <!--
    Categorization together with "type" attribute (above) tells the
    framework how to identify this type of entities
  -->
  <categorization>
    <keyedReference tModelKey="uddi:uddi.org:resource:type" keyValue="xsd"/>
  </categorization>

  <!--
    Views tells the BSC which components and tasks should be used
    to display information about the entity or to manipulate with
    the entity
  -->
  <views>
    <view type="list" task="/browse/resources/xsds">
      <parameter paramName="entityId" paramValue="{entityId}"/>
      <parameter paramName="editableMode" paramValue="{editableMode}"/>
    </view>
    <view type="listMy" task="/browse/resources/xsds">
      <parameter paramName="entityId" paramValue="{entityId}"/>
      <parameter paramName="editableMode" paramValue="{editableMode}"/>
      <parameter paramName="filterMyEntities" paramValue="true"/>
    </view>
    <view type="create" task="/publish/resources/xsds/createXSDResource">
      <parameter paramName="requiredCategories"
paramValue="{categoryBag.KeyedReferenceArrayList}"/>
    </view>
    <view type="edit" task="/publish/resources/xsds/editXSDResource">
      <parameter paramName="tModelKey" paramValue="{entityKey}"/>
    </view>
    <view type="find" task="/search/resources/schemas">
      <parameter paramName="editableMode" paramValue="{editableMode}"/>
    </view>
    <view type="searchResults" component="resourcesXsdResults">
      <parameter paramName="query" paramValue="{query}"/>
      <parameter paramName="var" paramValue="{var}"/>
    </view>
    <view type="detail" task="/browse/xsdDetail">
      <parameter paramName="tModelKey" paramValue="{entityKey}"/>
    </view>
    <view type="treeContextMenu" component="contextMenu_xsdList"/>
    <view type="pageMenu" task="/catalog/xsdMenu"/>
    <view component="xsdsSubscriptionView" type="subscriptionChangeView"/>
    <view type="delete" task="/publish/resources/xsds/unpublishXSDResource">
      <parameter paramName="tModelKey" paramValue="{entityKey}"/>

```

```

    </view>
</views>

<!--
  References defines how to make associations with this type of entity,
  what keyedReferences to use and who can make the association
-->
<references>
  <!-- One or more references, leading to this entity type. -->
  <reference refName="schema"
    captionKey="bsc.entityViews_xsd_refSchema_caption"
    descriptionKey="bsc.entityViews_xsd_refSchema_description">
    <!-- originTypes may be either entityIds, or UDDI entity types.
      No origin means all entities match
    <originType>xml</originType>
    -->
    <originType>xml</originType>
    <keyedReference tModelKey="uddi:uddi.org:resource:reference" keyName="definition"/>

  </reference>
  <reference refName="schemaOfSource"
    captionKey="bsc.entityViews_xsd_refSchemaOfSource_caption"
    descriptionKey="bsc.entityViews_xsd_refSchemaOfSource_description">
    <originType>xslt</originType>
    <keyedReference tModelKey="uddi:uddi.org:resource:reference"
      keyName="transformation-source"/>
  </reference>
  <reference refName="schemaOfDestination"
    captionKey="bsc.entityViews_xsd_refSchemaOfDestination_caption"
    descriptionKey="bsc.entityViews_xsd_refSchemaOfDestination_description">
    <originType>xslt</originType>
    <keyedReference tModelKey="uddi:uddi.org:resource:reference"
      keyName="transformation-destination"/>
  </reference>
  <reference refName="dependencyOnXSD"
    captionKey="bsc.entityViews_dependencyOnXSD_caption"
    descriptionKey="bsc.entityViews_dependencyOnXSD_description">
    <keyedReference tModelKey="uddi:systinet.com:dependency" keyName="tModel"/>
  </reference>
</references>
</entity>

```

Entity Definition

The Business Service Control Entity definition element introduces a new Entity recognized by the Business Service Control. The entity has an *id*, a title, an optional description and an icon.

Table 92. Entity definition attributes

Attribute	Description	Required
entityId	An unique identifier that identifies this entity type. It should start with lowercase letter, and use only alphanumeric characters.	Yes
captionKey	This string serves as a key to the resource bundle, which stores to actual string used for the entity caption. See below regarding handling of singular and plural forms.	Yes
descriptionKey	The key into the resource bundle, for the string that provides a short decription of the entity type. The description may contain HTML markup.	No

When the Business Service Control needs to print a noun, that describes a collection of entities, it uses the string denoted by the `captionKey` resource bundle key. In the case the Business Service Control needs to print a *singular* noun, which stands for the entity type, it uses the key with `_single` suffix. All strings are taken from the resource bundle `src/BSCMessages.properties`, unless specified otherwise by the `captionKey` attribute (see [Section 3.8.1, Business Service Control Localization](#) for details).

The `icon` attribute is relative to directory `webroot/gfx/tree`. The icon is displayed in navigation trees to provide an unique visual appearance for the entity type.

Example 26. Definition of a XML document

```
<!--
  The "XML Document" entity is derived from UDDI TModel.

  The definition also defines what name and icon should display for this
  type of data.
-->
<entity entityId="xml" type="TM" icon="xml.gif"
  captionKey="bsc.entityViews_xml_caption" descriptionKey="bsc.entityViews_xml_description">

  <categorization>
    <!--
      "XML Documents" are characterized by a keyedReference for the
      uddi:uddi.org:resource:type taxonomy, with "xml" value.
    -->
    <keyedReference tModelKey="uddi:uddi.org:resource:type" keyValue="xml"/>
  </categorization>
</entity>
```

Entity Categorization

As noted in the overview, an UDDI data structure may be used to represent several abstractions - Entities. An *Entity* is characterized by two things:

- *basic UDDI type*
- *categorization*

The basic UDDI type is one of:

BE

Business Entity

BS

Business Service

BT

Binding Template

TM

tModel

The UDDI entity needs to be of the specified type in order to be recognized as the particular BSC Entity. In addition, you may specify mandatory `keyedReferences`, which the UDDI entity needs to have. The BSC Entity that has most `keyedReferences` matching the UDDI data will be selected. If there remains a choice, one is chosen at random.

Zero or more `keyedReferences` can be specified. When no categorization is present, all appropriate UDDI structures match, regardless of their contents. When specified, each `keyedReference` entry can have the following attributes:

Table 93. `keyedReferenceAttributes`

Attribute	Description	Required
<code>tModelKey</code>	A <code>tModel</code> key of the <i>taxonomy</i> used for categorization	yes
<code>keyName</code>	The <code>keyName</code> of the required <code>keyedReference</code> . If the attribute is omitted, <code>keyNames</code> are ignored.	no
<code>keyValue</code>	The <code>keyValue</code> of the required <code>keyedReference</code> . If the attribute is omitted, <code>keyValues</code> are ignored (any matches).	no

Example 27. Definition of a XML document

```

<!--
  This is a definition of a WSDL service. It is derived from the Business
  Service UDDI structure (BS)
-->
<entity entityId="service" type="BS" icon="service.gif"
  captionKey="bsc.entityViews_service_caption"
  descriptionKey="bsc.entityViews_service_description">
  <categorization>
    <!--
      A WSDL service is characterized by having the
      "uddi:uddi.org:wsdl:types" category with "service" value,
      according to the WSDL to UDDI mapping Technical Notes
    -->
    <keyedReference tModelKey="uddi:uddi.org:wsdl:types"
      keyValue="service"/>
  </categorization>
</entity>

<!--
  This is a specification of a XSL Transformation entity. It is derived from
  a TModel UDDI structure (TM)
-->
<entity entityId="xslt" type="TM" icon="xslt.gif"
  captionKey="bsc.entityViews_xslt_caption"
  descriptionKey="bsc.entityViews_xslt_description">
  <categorization>
    <!--
      The XSLT resource is characterized by the resource:type
      category which must have the "xslt" value, according to
      the proposed mapping Technical Note.
    -->
    <keyedReference tModelKey="uddi:uddi.org:resource:type"
      keyValue="xslt"/>
  </categorization>
</entity>

```

**Note**

There must be an uncategorized Entity defined for each of the UDDI structures, to serve as a "catch-all" for data that does not match any specific entity. The default Business Service Control configuration provides such Entities.

Entity Views

A *View* stands for a visualization of some aspect, or an abstract task, that is available for the entity. Some tasks may or may not be available, depending on whether an appropriate View is available for the rendered data. The Business Service Control implementation uses View definitions to lookup tasks and components, which are appropriate for handling the data presentation, or to perform operations on the data.

A View is identified by a *viewType*. There can be at most one View for the particular *viewType* defined for the given entity. If such View is not defined, the Entity does not support the relevant visualization, or operation. The following table summarizes the supported *viewTypes*.

Table 94. Predefined View types

viewType	Description	Required
searchResults	Embeddable component, that provides a search results for a given type of Entity. The Component should accept a query, and render the matching results on the screen. These Components are used in Reports, Quicksearch etc.	No
edit	Task for editing a specific entity. The task accepts an entity key, and produces a screen (form, wizard) suitable for editing the entity.	No
detail	Provides a task that displays detailed information for an entity. The task accepts the key of the entity to display. This View is mandatory to ensure that information about any entity can be reached.	Yes
find	Provides a searching task for the entity. The task is supposed to display a form and results of the search.	No
subscriptionChangeView	Provides a Component to render subscription results for the particular entity type. The Component accepts the list of subscriptions to filter and display as a parameter	No
create	Provides a Task with a Wizard or a form to create a new entity. The Task may process a parameter that identifies a parent structure where the new entity should be stored.	No
delete	Provides a Task for deleting the entity. The Task should accept a single key, or a collection of keys as a parameter, and it should handle deletion of a single or several entities.	No
list	Provides a task, which displays all entities of the particular type. The Task accepts a parameter, which turns edit functions on/off. These tasks should not require login.	No
listMy	Provides a task, which displays all entities of the type owned by the logged-in user; otherwise, the function is just as with the list view.	No
treeContextMenu	Provides a context menu for the Catalog tree. If missing, there will not be a context menu for the entity.	No
pageMenu	Provides a Task that displays the entity's menu when the Entity is selected in the Catalog tree. If missing, the entity will not be shown in Catalog at all.	No

Each view can take some parameters. The parameters are passed by the code that invokes the View, and the framework passes them to the View's implementation component or task. The caller must be able to use the same parameters for invoking a View on different Entity types to remain independent of implementation details of individual Entities. To achieve this, the View definition not only contains parameter names, but also uses a simple mechanism to translate View's parameters to the implementation Component or Task parameters.

This is achieved by allowing JSTL EL expressions as parameter values. The parameter definition in the View configuration specifies the name of the parameter passed to the implementation Component or Task (`paramName`) and EL expression to construct the value from the parameter(s) passed by the caller (`paramValue`). Those EL expressions are evaluated in the context of a special component used to invoke Views, so all *parameters*, *request* and *session variables* can be used to create the resulting value.

The following example shows a definition for the "Detail" View for the "Service" entity. Note how the general "entityKey" parameter, which is applicable to all Detail Views, translates to a specific parameter of the particular implementation Task.

Example 28. Classification of data in Java

```
<!--
  We declare a view of type "detail", which is implemented by the
  Task /browse/serviceDetail
-->
<view type="detail" task="/browse/serviceDetail">
  <!--
    The implementation task accepts "serviceKey" parameter,
    we have to adapt the View's parameter to the custom name.
  -->
  <parameter paramName="serviceKey" paramValue="{entityKey}"/>
</view>
```

References

Entities may have some relationships or associations between them. An association between A and B is established by creating a `keyedReference`, with the `tModelKey` that identifies the type of the relationship and a `keyValue` which holds the `entityKey` of the other side of the association. Only directed associations between two UDDI entities are supported, however because of Registry query capabilities, it is also possible to navigate in the reverse direction of an association - and Business Service Control supports that with the "Referenced By" action.

A reference is defined by:

refName

An identifier that identifies this reference.

keyedReference

A `keyedReference` which is used to represent the association in the Registry. The `tModelKey` is mandatory, the `keyName` tag is optional: if present, the `keyedReference` must have such `keyName` value in order to form this reference.

originType

Zero or more `originTypes` can be specified to restrict which Entities can establish associations. If no `originType` is present, the association can originate at any type of entity. When `originType` is present, only the listed entity types can serve as origins for the association. Multiple `originType` values are supported.

The permitted values are the values of the `id` Entity definition attribute. In addition, values that represent the UDDI structure types are permitted (BE, BS, BT, TM). When an UDDI structure type is specified, the Reference can originate from any entity derived from that UDDI structure.



Note

The permitted origins should be a *subset* of the relationship Taxonomy compatibility list. If you permit an `originType`, whose UDDI structure is incompatible with the relationship Taxonomy, you will not be able to add such references (associations) to entities.

The Business Service Control presents References to other entities on Detail pages of entities, and provides "Referenced By" action for an entity to discover where the entity is referenced from. References defined in this configuration can also be added by the Business Service Control user using the Add Reference Wizard.

The following example shows how Policies can be associated with an arbitrary Entity. We define a reference to the "policy" entities, with a certain tModelKey (according to the WS-Policy specification), and we do not restrict who can use such a reference.

Example 29. Policy Entity

```
<!--
  Definition of the "Policy" entity
-->
<entity entityId="policy" type="TM" icon="policy.gif"
  captionKey="bsc.entityViews_policies" descriptionKey="bsc.entityViews_policies">
  <!-- Some categorization that identifies the entity -->
  <categorization>
    <keyedReference tModelKey="uddi:schemas.xmlsoap.org:policytypes:2003_03"
      keyValue="policy" keyName="policy"/>
  </categorization>
  <views>
    <!-- List of views, not important for this example -->
    ...
  </views>

  <references>
    <!--
      We define a Reference named "refLocalPolicy", with a (localizable) caption and
      description.
      originTypes specifier is missing, so this Reference can originate from any type of
      Entity.
    -->
    <reference refName="refLocalPolicy"
      captionKey="bsc.entityViews_policy_refLocalPolicy_caption"
      descriptionKey="bsc.entityViews_policy_refLocalPolicy_description">
      <!--
        This Reference will be stored using a keyedReference, that have tModelKey set
        to "uddi:schemas.xmlsoap.org:localpolicyreference:2003_03" and keyName set to
        "Associated Policy"
      -->
      <keyedReference tModelKey="uddi:schemas.xmlsoap.org:localpolicyreference:2003_03"
        keyName="Associated Policy"/>
    </reference>
  </references>

</entity>
```

How to classify UDDI data

If a Component wants to smoothly integrate, it should ask the Entity Configuration to classify the data it works with. Then it can write proper nouns to the web page, and use tasks and components configured for the entity instead of using hardcoded links. The first step is obviously to find out what Entity the data correspond to.

In Java, you will use the EntityHelper to determine the classification:

Example 30. Classification of data in Java

```

UDDIObject fromInstance;

/**
    Assume, that the "fromInstance" variable is initialized to an UDDIObject
    instance
 */

// Extract CategoryBag from whatever UDDI structure we have
CategoryBag fromCatBag = BscObjectUtilities.getCategoryBag(fromInstance, true);
// Get the list of KeyedReferences
KeyedReferenceArrayList fromKr = fromCatBag.getKeyedReferenceArrayList();
// Lookup the appropriate Entity definition from Entity Configuration
EntityHelper.Entity myEntity = helper.findEntityByCategorization(fromKr, fromType);

```

The code snippet provides you with an `EntityHelper.Entity` instance, which describes the data type. Please refer to API documentation for details how to use the retrieved data.

Using Entities in JSP pages

The `EntityHelper` API class is designed for simple usage from JSPs. For classification, you may use the following snippet:

Example 31. Classification of data in JSP

```

<!--
    The "instance" variable should be initialized to some UDDIObject
    instance. The "entityType" variable will be created and set to the
    appropriate EntityHelper.Entity instance by the tag.
-->
<bsc:setEntityClassification var="entityType" instance="${instance}"/>

```

The `bsc:setEntityClassification` is a JSP alternative to call the `findEntityByClassification` method of the `EntityHelper` class. Note the usage of the `bscEntityClassifier`. This is session variable, provided by the Business Service Control Framework so the `EntityHelper` API is accessible from JSP pages.

If you are given an `entityId` instead of a data structure, you may easily refer to the `EntityHelper.Entity` instance using an EL expression in the JSP:

Example 32. Classification of data in JSP

```

<!--
    The "entityId" variable should be initialized
    to one of the entity types as defined in bsc.xml

    The "bscEntityClassifier" contains a framework-provided instance
    of the EntityHelper API, which provides a Map of available entities
    for easy lookup from JSP.
-->
<c:set var="bscEntityType" value="${bscEntityClassifier.entities[entityId]}"/>

```

In order to use the Entity's caption or description, the procedure described in Localization guide must be used, to make use of the appropriate localized string. We recommend using the following pattern:

Example 33. Classification of data in JSP

```
<!--
    First, get the entity type for the given entityId, we are expected to
    work with
-->
<c:set var="bscEntityType" value="${bscEntityClassifier.entities[entityId]}"/>

<!--
    Handle embedded bundle path specification, see localization guide for
    the details. The evaluated bundle name and key name will be placed
    into named request variables
-->
<syswf:parseResourceKey key="${bscEntityType.captionKey}"
    defaultBaseName="com.systinet.uddi.bui.framework.BSCMessages"
    varBundle="bundleName" varResource="finalCaptionKey"/>

<!--
    Load the bundle, which actually contains the key.
    Note that the bundle name may not be known at design time,
    as it may be embedded in the generalized resource bundle key
-->
<fmt:setBundle basename="${bundleName}" var="dynamic_Message"/>

<!--
    Setup two variables, one holding plural noun for entity caption,
    the other will hold the singular
-->
<fmt:message key="${finalCaptionKey}" var="entityCaption"
    bundle="${dynamic_Message}"/>
<fmt:message key="${finalCaptionKey}_single" var="entityCaption_single"
    bundle="${dynamic_Message}"/>

<!--
    Finally, format some message (properly localizing it through a bundle),
    and substitute the entity nouns in it. Note that the message itself
    can control whether plural or singular is used - it can use {0} to denote
    plural and {1} for singular noun.
-->
<fmt:message key="some_message_key" bundle="${myBundle}">
    <fmt:param value="${entityCaption}"/>
    <fmt:param value="${entityCaption_single}"/>
</fmt:message>
```

The snippet first parses the resource bundle key provided as `entity.captionKey` property, then loads the appropriate `ResourceBundle` using the `fmt:setBundle` standard tag. Note the bundle key naming convention used to load the singular and plural nouns for the Entity type.

Using Views

When working with some data structure, you may directly invoke a Component, using `syswf:component`, or make a link to a specific task using `syswf:control`. If you work on a mixture of data structures, each structure may require a different Component to display itself, or a different Task to perform the action. When the Entity Configuration changes, so that, for example, the task URI of the **Edit** operation changes, pages which use hardcoded component names or task URIs may become inconsistent with the rest of the UI.

You may perform the operation in an abstract way, using the `invokeEntityView` Component. You need to pass in enough information to identify the entity type and you need to specify the type of invoked View (see above for the overview of supported view types). Parameters defined by the View specification will be forwarded to the View component or task. You may pass *additional* parameters, but you have to prefix them with the prefix `view_` so that they are recognized and forwarded.

Example 34. Invoking a Component configured in Entity Configuration

```
<!--
  The following code invokes a "searchResults", which produces a table
  of results for the entity and the passed query.
  The code is taken out from Reports tab implementation
-->
<syswf:component prefix="${tabId}" name="invokeEntityView">
  <!--
    The desired viewType
  -->
  <syswf:param name="viewType" value="searchResults"/>
  <!--
    The query to process, taken from a prepared Map
    of queries for individual entity types
  -->
  <syswf:param name="query" value="${entityQueries[type.id]}/>
  <!--
    Output parameter, component stores the result list in a temporary
    to allow the caller to find out whether the result list is
    empty
  -->
  <syswf:param name="var" value="references_tmp"/>
  <!--
    Propagates the type of the entity, to cover the case
    the view is reusable and is used for multiple entity
    types
  -->
  <syswf:param name="entityId" value="${type.id}"/>
</syswf:component>
```

Example 35. Linking to a Task configured in Entity Configuration

```
<!--  
    This snippet invokes a Create Wizard for the given entity.  
-->  
<syswf:component name="invokeEntityView" prefix="create">  
    <syswf:param name="entityId" value="{entityId}"/>  
    <syswf:param name="viewType" value="create"/>  
  
    <!-- A HTML link will be generated -->  
    <syswf:param name="mode" value="anchor"/>  
    <!-- Text for the hyperlink -->  
    <syswf:param name="caption" value="Link text"/>  
</syswf:component>
```

You may also need to determine whether a certain View is available. The `EntityHelper.Entity` provides you with all supported views as a `java.util.Map`, so you use the contents from a JSP easily:

Example 36. Linking to a Task configured in Entity Configuration

```
<!-- Set the entity type into a variable, for convenience -->  
<c:set var="bscEntityType" value="{bscEntityClassifier.entities[entityId]}"/>  
  
<!-- Check whether the desired view is available -->  
<c:if test="{not empty bscEntityType.views['create']}">  
    <!-- Do some fancy stuff -->  
    ...  
</c:if>
```

The presence of a View indicates, that a certain function is available for an entity. You may conditionally change the page appearance based on such an indication.

Linking to a Detail page

In places where an entity is mentioned, it is often appropriate to link to the entity Detail page. There is a special component `showEntityName` for this purpose. It renders the entity's name as a hyperlink to the entity's Details.

Example 37. Linking to entity details

```

<!--
  This example shows how to create a link to the detail
  page of an Entity. The entity is given by its key,
  UDDI type and the keyedReferences.
-->
<syswf:component name="showEntityName" prefix="name1">
  <syswf:param name="entityKey" value="{key}"/>
  <syswf:param name="uddiType" value="TM"/>
  <syswf:param name="keyedReferences" value="{keyedReferenceArrayList}"/>
</syswf:component>

<!--
  The following example shows how to use UDDI structure itself,
  if it is available to link to the relevant entity detail
-->
<syswf:component name="showEntityName" prefix="n_{row.key}">
  <syswf:param name="entityInstance" value="{theStructure}"/>
  <!--
    We override the rendered string with a custom value.
    If this was omitted, the entity name would be printed
    as the hyperlink text
  -->
  <syswf:param name="instanceName" value="Some string"/>
</syswf:component>

```

A description of the component and its parameters can be found in file `jsp/browse/showEntityName.jsp`, which you can find in `bsc.jar` or in the BSC work directory.

3.8.5. Permission support

Business Service Control contains powerful support for user permission evaluation on selected objects. The developer can easily find out, if the current user is allowed to manipulate some object. This feature takes into consideration object ownership, Access Control Lists, groups and API permissions.

Data classes

The API contains two important Java types. The first is the class `com.systinet.uddi.bui.framework.component.util.permission.UserContext`. An instance is created automatically, when a user logs into the Business Service Control and it is available in the global session under key `userContext`. The instance holds the groups that the user is member of and a list of his permissions.

Then there is an interface `com.systinet.uddi.bui.framework.component.util.permission.DataFeeder`. It is the developer's responsibility to create and feed an instance of its implementation. There are two implementations available. `com.systinet.uddi.bui.framework.component.util.permission.UDDIDataFeeder` is initialized with list of UDDI keys and it fetches specified UDDI structures from Oracle Service Registry. If these structures are already available, then it is better to use `com.systinet.uddi.bui.standard.component.util.permission.BuiDataFeeder` for performance reasons.

PermissionEvaluator

To check user permissions in Java code you must use class `com.systinet.uddi.bui.framework.component.util.permission.PermissionEvaluator`. It contains public methods

to check whether the user can create a business service in the given business entity, or binding template in the given business service, and to check whether the user can update or delete a specified business entity, business service, binding template or tModel. These methods take a UDDI key, the `ServletContext` and a `DataFeeder` implementation as arguments.

Example 38. ParseResourceKey tag - Usage Example

```
boolean allowed = PermissionEvaluator.checkPermissionDeleteTM(tModelKey, userContext,
dataFeeder);
```

checkPermission tag

To check user permissions in JSP, there is a tag `checkPermission`. In addition to a UDDI key, the `ServletContext` and a `DataFeeder` implementation, it accepts `operation` and `var` attributes as arguments. It specified variable receives the result of the check.

Table 95. checkPermission tag Parameters

Param	Description	Required
var	Name of the variable that will hold the result of the check.	yes
scope	Scope for the new variable.	no
operation	Operation identifier. One of <i>create</i> , <i>edit</i> and <i>delete</i> .	yes
key	The key of the UDDI structure for which we want to check permissions.	yes
userContext	Container for user account specific data. Typically available in global session, if the user is logged in.	yes
dataFeeder	Data object holding information about UDDI structures on this page.	yes

Example 39. ParseResourceKey tag - Usage Example

```
<bsc:checkPermission var="permission"
  operation="edit" key="${row.key}"
  userContext="${globalSession['userContext']}"
  dataFeeder="${dataFeeder}"/>
<c:if test="${permission}">
  <syswf:control targetTask="/publish/endpoints/editEndpoint"
    caption="Delete" mode="image" src="gfx/icon/i_edit.gif">
    <syswf:param name="bindingKey" value="${row.key}"/>
  </syswf:control>
</c:if>
```

3.8.6. Components and Tags

This section describes selected components and tags of the Business Service Control (BSC) framework and components of the Business Service Control. The BSC Framework is a set of components and tags used by developers to develop Business Service Control components. For complete documentation of these components, see the Java Doc located in the `REGISTRY_HOME/doc/bsc-api` directory.

- [Framework Components](#)
- [Framework Tags](#)
- [Business Service Control Components](#)

Framework Components

This section describes the following component types:

[Query](#)
[Wizard](#)
[Result](#)
[Taxonomy](#)
[Util](#)

Query

In this section, we will show you how Query components are used in Business Service Control. We explain query components on the page shown in [Figure 14](#) with a page from a wizard for creating a new business service

Figure 14. Query Components

Publish new WSDL service

[Home](#) > [WSDL Services](#) > [Publish new WSDL service](#)

[Cancel](#) [Back](#) Step 2 of 4 [Next](#)

Service properties

Service creation method:

☒ new service **serviceChooser**
☐ rewrite service ---- no service ----

Service properties

Name	GoogleSearchService		
Description			
Usage	inputCategorySetter		
Keyword		=	Add another
Certification	☐ Certified ☐ Not Applicable ☐ Pending ☒ selectCategorySetter		
Release date			
Version	inputCategorySetter		
Milestone			

[Customize...](#)

[Cancel](#) [Back](#) Step 2 of 4 [Next](#)

The service name in the drop down list under the **rewrite service** option is produced via the [Entity chooser component](#)

The following fields in [Figure 14](#) are produced via Taxonomy filters components:

- The **Usage**, **Release date**, **Version** and **Milestone** fields are produced by inputCategorySetter component.
- The **Certification** field is produced by the selectCategorySetter component

Entity Choosers

The Entity Chooser component is used to select one entity from a list of entities obtained by a query.

There are four types of Entity Choosers, each representing a UDDI data structure:

- `businessChooser` for selecting business entities
- `bindingChooser` for selecting binding templates.
- `serviceChooser` for selecting business services
- `tmodelChooser` for selecting technical models.

All these choosers have the similar functionality.

Table 96. entityChooser Parameters

Param	Type	Description	Required	I/O
filter	<code>Find_entity</code> (Find_business, Find_service, Find_binding or Find_tModel)	Filter used for getting a list of entities. If it is not specified, all entities will be fetched.	optional	in
resultObject	Object	The bean where key of the selected entity will be saved.	required	in
resultProperty	String	The property of the resultObject bean, into which the key will stored.	required	in
sort	String	The sorting mode can be <code>asc</code> (for ascending) or <code>desc</code> (for descending). Entities are sorted in the list according to their name.	optional	in
hint	String	String used as a hint which appears if the pointer is on the component view area.	optional	in
changeAction	String	Action sent to the parent component when a selection has changed.	optional	in
detailTask	String	Task used for rendering the detail of a selected entity.	optional	in
entityKeyName	String	Name of the entity key used in detailTask for getting details on an entity.	optional	in
emptyMessage	String	Value displayed if there are no entities to be displayed.	optional	in
pageSize	Integer	Maximum number of entities to be displayed in the list; default value is 50.	optional	in
entitiesTruncatedMessage	String	Value displayed in the list if a query generates more entities than pageSize allows. Default value is "..."	optional	in
mandatoryPermission	String	Permission the user must have on an entity in order for it to be selected. In other words an additional filter criterion. Possible values are create, edit or delete.	optional	in

Example 40. entityChooser Example

```

<!-- Import the syswf framework custom tag library. -->
<%@ taglib prefix="syswf" uri="http://systinet.com/jsp/syswf" %>
...
<syswf:component prefix="business" name="businessChooser">
  <syswf:param name="resultObject" value="{resultBusiness}"/>
  <syswf:param name="resultProperty" value="key"/>
  <syswf:param name="sort" value="ascending"/>
  <syswf:param name="changeAction" value="business"/>
  <syswf:param name="detailTask" value="/browse/providerDetail"/>
  <syswf:param name="entityKeyName" value="businessKey"/>
</syswf:component>

```

Taxonomy Filters**Note**

Taxonomy filters have been obsoleted by categorySetters and are deprecated. See the [introduction above](#).

Taxonomy filter components are used for selecting one category or a subset of all categories of the given taxonomy. The result of the selection is stored in the given CategoryBag.

Taxonomy Filter

The taxonomy filter is used for selecting one or many categories of the given taxonomy specified by its tModel key.

Table 97. taxonomyFilter Parameters

Param	Type	Description	Required	I/O
taxonomyTModelKey	String	Categories from this taxonomy are rendered as selection options.	required	in
categoryBag	CategoryBag	Serves as storage for the result set of the selected categories. The categoryBag component stores and returns the current status of the selection. This parameter can be common for more taxonomies or selectors. For one taxonomy there is an exclusivity of selection, meaning that a new selection replaces of the previous selection for a particular taxonomy.	required	in out
selectMode	String	Defines selection mode as one or many . If mode one is supported, it will be possible to select just one category of the given taxonomy. If mode many is supported, it will be possible to select a subset of of the given taxonomy's categories.	optional	in
viewMode	String	Defines view modes radio , menu , or checkbox . If radio or checkbox modes are used, the selection will be rendered as a set of checks or radio buttons (depending on whether selectMode is one or many) where one button represents one category of the given taxonomy. If menu mode is used, a list box is rendered with a select one or multi-select property, depending on the supported selectMode. Each line item of the list box represents one selectable category.	optional	in
categoryList	String or Category[] (array) or CategoryList	A list of selectable categories. If the parameter has type String, it must be a list of comma-separated category values. This feature is useful if either the subset of all categories of the given taxonomy is intended to be selectable, or the taxonomy does not have all selectable categories specified. For example, an unchecked taxonomy.	optional	in
fakeNil	String	Adds the functionality of the empty selection choice useful for selectionMode = one . If the parameter is used and is not empty, its String value is treated as no selection and is added to the list of selectable categories. If no category is selected, this nil value is visually selected. If this nil value is selected, no category of the given taxonomy is really selected. This feature is useful when selectMode = one is supported and a select one or nothing feature is actually desired.	optional	in

Example 41. Taxonomy Filter - Usage Example

```

<!-- Import the syswf framework custom tag library. -->
<%@ taglib prefix="syswf" uri="http://systinet.com/jsp/syswf" %>
...
<syswf:component prefix="filter" name="taxonomyFilter">
  <syswf:param name="taxonomyTModelKey"
    value="uddi:uddi.org:categorization:types"/>
  <syswf:param name="categoryList" value="yes,no"/>
  <syswf:param name="categoryBag" value="{categoryBag}"/>
  <syswf:param name="viewMode" value="menu"/>
  <syswf:param name="selectMode" value="one"/>
  <syswf:param name="fakeNil" value="nil"/>
</syswf:component>

```

Taxonomy Pure Filter

The Taxonomy Pure Filter component is intended for incrementally adding to a list of selected categories of the given taxonomy. It is useful for taxonomies without defined categories.

It renders input fields representing the specification of the category which will be added to the list.

Table 98. taxonomyFilterPure Parameters

Param	Type	Description	Required	I/O
taxonomyTModelKey	String	Specifies the taxonomy the categories of which can be set to the resulting categoryBag.	required	in
categoryBag	CategoryBag	A storage of the result set of the selected categories. The categoryBag component stores and returns the current state of the selection. This parameter can be common for more taxonomies or selectors. For one taxonomy there is an exclusivity of selection. This means that a new selection of categories replaces the previous selection for a particular taxonomy.	required	in/out
restricted	String	If entered and not empty, it renders one input field for the specification of the value specifying category. Neither captions nor a key name input field are presented.	optional	in
reuse	String	If the reuse parameter is not present, the category specified by input fields is simply added to the given categoryBag (if it is not there already). If the reuse parameter is present and not empty, categoryBag is used for redefinition of the category it stores for the taxonomy given as the component parameter. This means that if the categoryBag already stores a category of the given taxonomy, this category is used and input fields are prefilled using this category. If a new specification of input fields gives the specification of a new category, this category will replace the old one stored in categoryBag.	optional	in

Example 42. Taxonomy Filter Pure - Usage Example

```
<%-- Import the syswf framework custom tag library. --%>
<%@ taglib prefix="syswf" uri="http://systinet.com/jsp/syswf" %>
...
<syswf:component prefix="filterPure" name="taxonomyFilterPure">
  <syswf:param name="taxonomyTModelKey" value="uddi:uddi.org:wsdl:types"/>
  <syswf:param name="categoryBag" value="{categoryBag}"/>
  <syswf:param name="reuse" value=""/>
</syswf:component>
```

Wizard

wizardIterator

This component enables a wizard scenario and handles the navigation between the wizard steps. It renders the wizard navigation buttons as **Next**, **Previous**, **Cancel**, and **Finish**. It is also able to render the complete list of step names with an active step name highlighted.

There are two actions this component sends to the root component: Cancel and Finish. The Cancel action is sent as a reaction when the user presses the **Cancel** button. The Finish action is sent as a reaction when the user presses the **Finish** button. Both actions are declared in the Java part of the wizardIterator component of `com.systinet.uddi.bui.framework.component.wizard.WizardIterator` as final static fields: CANCEL and FINISH.

Table 99. wizardIterator Parameters

Param	Description	Required
componentNames	This value must hold a comma-separated list of Strings. Each String must refer to the name of a component. Each component then represents a step of the wizard. The order of the items in the list is the order of the wizard steps.	required
stepNames	The value of this parameter must hold a comma-separated list of Strings. Its length must be equal to the length of the list passed to the componentNames parameter. Each item of the list represents the title of the step that will be rendered at the top of the resulting wizard step page. The order of the items should correspond to the order of the items in the componentNames parameter.	required
form	The value of this parameter must hold an instance of Object. This instance will be passed as a parameter to every component that represents a wizard step. This is the main entity the wizard iterates over.	required
showStepList	The value of this parameter must hold a boolean. When set to true, a list of the step names with an active step highlighted will be displayed in the left part of the wizard's window.	optional
showDisabledButtons	The value of this parameter must hold a boolean. When set to true, disabled navigation buttons will also be displayed during the iteration (that is,, the Back button in the first step, the Next button in the last step, and the Finish button before the final step). By default only enabled navigation buttons are displayed.	optional

Example 43. wizardIterator - Usage Example

```
<syswf:component name="wizardIterator" prefix="wizard">
  <syswf:param name="componentNames" value="{wizardComponents}"/>
  <syswf:param name="stepNames" value="{wizardNames}"/>
  <syswf:param name="form" value="{form}"/>
  <syswf:param name="showStepList" value="true"/>
  <syswf:param name="showDisabledButtons" value="true"/>
</syswf:component>
```

Result

In this section, we will show how Result components are used in the Business Service Control. We explain result components in [Figure 15](#), which displays list of services

Figure 15. Result Components

[Home](#) > [WSDL Services](#) > [List of WSDL Services](#)

List of WSDL Services

selectResultView

Display Default View as a Table Sort by Name in A-Z order

Filter by Name which starts with

Displaying items **1 - 5** of 15 : ([Single page](#))

	Name ▲	Provider name	Description	Edit
☐	AccountService	Account Services	The account service provides the account related operations	Edit
☐	AddCustomerService	Customer Management System	This service allows a customer to be added to the enterprise customer system.	Edit
☐	BillPaymentService	Account Services	The bill payment service provides the ability to establish bill payment service, cancel bill payment service and get information about bill payment for a customer.	Edit
☐	CheckOrderService	Account Services	This service supports new check orders, check reorders, check order inquiry	Edit
☐	CustomerNotificationService	Customer Management System	This service provides notification messages for various customer changes	Edit

table PageNavigator

1 2 3 [Next](#) ➔

entityListAction

Select an Action: (No items selected)

[Select Page](#) [Select All](#) Delete

[Clear Page](#) [Clear All](#)

The [selectResultView](#) is responsible for rendering the **Result View** with a drop down list containing a list of available result views.

The [tableFilter](#) component renders fields for filter specification including the **Filter** button.

The [columnHeader](#) component renders a single column header in the result table.

selectResultView

This component takes a list of components and displays the first component (or a component specified by the defaultView parameter). SelectResultView also renders a drop down list, so the user can switch to another view from the list.

Table 100. selectResultView Parameters

Param	Description	Required
views	A comma-separated list of component names.	yes
titles	A comma-separated list of titles for the components from the views parameter. They will be displayed in the drop down list.	yes
defaultView	The name of a component to be rendered by default.	no

This component accepts other parameters to be passed to the rendered component. In this way, for example, you can pass the sorting column name, set a prefix, or set data to be displayed.

Example 44. selectResultView - Usage Example

```
<syswf:component prefix="providers" name="selectResultView">
  <syswf:param name="views" value="providersCommonResults,providersBizResults" />
  <syswf:param name="titles" value="Common,Business" />
  <syswf:param name="defaultView" value="${defaultView}"/>
  <syswf:param name="prefix" value="providers" />
  <syswf:param name="sortedBy" value="${sortedBy}"/>
  <syswf:param name="resultList"
    value="${availableProviders.businessEntityArrayList}"/>
</syswf:component>
```

tableFilter

This component renders a filter for the table identified by the parameter table.

Table 101. tableFilter Parameters

Param	Description	Required
table	Value must hold an instance of the com.systinet.uddi.bui.framework.view.Table object.	yes
sortTablePrefix	The prefix of the component that actually performs the filtering. See the processTable component.	yes

Example 45. TableFilter - Usage Example

```
<syswf:component prefix="filter" name="tableFilter">
  <syswf:param name="table" value="${table}"/>
  <syswf:param name="sortTablePrefix" value="sortTable" />
</syswf:component>
```

processTable

This component filters and sorts the rows of the table passed as a parameter. The component is not visual, it only handles actions and manipulates with data structures.

Table 102. processTable Parameters

Param	Description	Required
table	Value must hold an instance of the <code>com.systinet.uddi.bui.framework.view.Table</code> object.	yes
defaultSortColumn	The name of the column to be used for sorting the table provided the user has not chosen a sorting column.	no

Example 46. processTable - Usage Example

```
<syswf:component prefix="sortTable" name="processTable">
  <syswf:param name="table" value="{table}"/>
  <syswf:param name="defaultSortColumn" value="{defaultSortColumn}"/>
</syswf:component>
```

columnHeader

This component renders the column title for a single column. If a column is sortable, then its title is made clickable, so it can be used to sort the table by this column.

Table 103. columnHeader Parameters

Param	Description	Required
table	Value must hold an instance of the <code>com.systinet.uddi.bui.framework.view.Table</code> object.	yes
column	Value must hold an instance of the <code>com.systinet.uddi.bui.framework.view.Column</code> object.	yes
sortTablePrefix	The value of this parameter must be equal to the prefix used in the <code>processTable</code> component, otherwise sorting will not work.	yes

Example 47. columnHeader - Usage Example

```
<syswf:component prefix="providerName" name="columnHeader">
  <syswf:param name="table" value="{table}"/>
  <syswf:param name="column" value="{table.columns[0]}"/>
  <syswf:param name="sortTablePrefix" value="sortTable" />
</syswf:component>
```

Taxonomy

taxonomyTree

This component fetches all referenced categories from a selected internal taxonomy, and constructs a JavaScript tree, and adds it to the selected parent as a child node. Categories are considered to be referenced when they are used in some published keyedReference.

Table 104. taxonomyTree Parameters

Param	Description	Required
tModelKey	Key of internal taxonomy's tModel. If the taxonomy is not internal, it has no categories and thus no nodes in the tree under the parent will be added.	yes
keyValue	Optional parameter that in conjunction with tModelKey constructs one concrete category. Only referenced child categories of this category will be fetched from the registry.	no
parent	Name of a JavaScript variable that will serve as parent for the created tree.	yes

Example 48. taxonomyTree - Usage Example

```
<syswf:component prefix="iso3166" name="taxonomyTree">
  <syswf:param name="tModelKey" value="uddi:uddi.org:ubr:categorization:iso3166"/>
  <syswf:param name="targetTask" value="/browse/views/other/enterprise/taxonomy"/>
  <syswf:param name="parent" value="iso3166"/>
</syswf:component>
```

collectCategories

This component allows you to add and remove categories from the list. It consists of the two column areas. The left column contains the taxonomy tree structure; the right contains the list of currently selected values.

Table 105. collectCategories Parameters

Param	Description	Required
taxonomyTModelKey	Must contain the valid tModel key of the checked internal taxonomy. The values of this taxonomy will be displayed in the tree on the left side.	required
categoryBag	The value of this parameter must contain an instance of the org.systinet.uddi.client.v3.struct.CategoryBag class. This class is used as a holder for the selected categories, which are displayed in the right-hand column.	required

Example 49. collectCategories - Usage Example

```
<syswf:component name="collectCategories" prefix="unspsc">
  <syswf:param name="categoryBag" value="${form.business.entity.categoryBag}"/>
  <syswf:param name="taxonomyTModelKey"
    value="uddi:uddi.org:ubr:categorization:unspsc"/>
</syswf:component>
```

selectableTaxonomyTree

This component displays the taxonomy values in the tree-like structure. Each tree node also contains a check box, which can be used to select a specified value. The tree is constructed on a per-node basis, so it can handle potentially large taxonomy structures.

Table 106. selectableTaxonomyTree Parameters

Param	Description	Required
taxonomyTModelKey	Must contain the valid tModel key of the checked internal taxonomy. The values of this taxonomy will be displayed in the tree.	required

**Tip**

Usage of the selectableTaxonomyTree component: Note that taxonomy data are usually very large, so it is a good idea to restrict the area occupied by this component using the HTML DIV tag with a specified size. The example bellow displays the tree in a scrollable square area of 300 by 300 pixels.

Example 50. Component Parameters

```
<div style="width:300px; height:300px; overflow:scroll; clip:rect(0px 0px 0px 0px);">
  <syswf:component prefix="taxonomy" name="selectableTaxonomyTree">
    <syswf:param name="taxonomyTModelKey" value="{taxonomyTModelKey}"/>
  </syswf:component>
</div>
```

Util**tabbedFrame (deprecated)**

This component renders content divided into several tabs. These tabs are displayed down the right side of screen. The tabbedFrame component is substituted for TabsComponent class.

Table 107. tabbedFrame Parameters

Param	Description	Required
tabNN_component	The value of this parameter must refer to the name of the component. The component then represents the content of a tab. The string NN in the parameter name stands for some number used for ordering the tabs. For example, tab1_component will be rendered before tab2_component.	at least one
tabNN_id	The value of this parameter must hold the tab's unique identifier. Its value is also used to determine which icons should be rendered as tab handles. For example, a tab with the id webpaging will require the images webroot\gfx\tabs\webpaging_0.gif and webroot\gfx\tabs\webpaging_1.gif to be present in bsc.jar. The first image represents unselected tab and the second image contains selected version. The prefix of the parameter name must match the corresponding tabNN_component parameter.	at least one
defaultTab	The value of this parameter must hold the id of the tab which will be active by default. This value is used only when user displays a page with a tabbed component for the first time. The next time identification of the active tab is obtained from a browser cookie rather than from this parameter.	no

Example 51. tabbedFrame configuration - Component Parameters

```

<config name="web" savingPeriod="5000">
  <webFramework>
    ...
    <component name="configuration_tabs"
className="com.systinet.uddi.bui.framework.component.util.TabbedFrame"
page="util/tabbedFrame.jsp">
      <parameter paramName="tab1_id" paramValue="webtabs"/>
      <parameter paramName="tab1_component" paramValue="configuration_webtabs"/>
      <parameter paramName="tab2_id" paramValue="webviews"/>
      <parameter paramName="tab2_component" paramValue="configuration_webviews"/>
      <parameter paramName="tab3_id" paramValue="webtaxonomy"/>
      <parameter paramName="tab3_component" paramValue="configuration_webtaxonomy"/>
      <parameter paramName="tab4_id" paramValue="webpaging"/>
      <parameter paramName="tab4_component" paramValue="configuration_webpaging"/>
      <parameter paramName="tab5_id" paramValue="webui"/>
      <parameter paramName="tab5_component" paramValue="configuration_webui"/>
    </component>
    <component name="configuration_webtabs" page="configuration/webtabs.jsp"/>
    <component name="configuration_webviews" page="configuration/webviews.jsp"/>
    <component name="configuration_webtaxonomy" page="configuration/webtaxonomy.jsp"/>
    <component name="configuration_webpaging" page="configuration/webpaging.jsp"/>
    <component name="configuration_webui" page="configuration/webui.jsp"/>
    ...
  </webFramework>
  ...
</config>

```

TabsComponent

TabsComponent is a semi-complete component that is used to display a list of tabs defined in the configuration file `web_component.xml`. It consists of:

- class `com.systinet.uddi.bui.framework.component.util.TabsComponent` that reads the configuration;
- JSP file `util/tabsComponent.jsp` that renders the tabs.

The developer creates a new component with these and the parameter tabs.

The tabs parameter contains its configuration in the form of XML stored within a `paramValue` element. It must contain root element tabs, which contains tab elements.

Table 108. tab attributes

Attribute	Description	Required
tabId	The value of this attribute defines a unique identifier for this tab within this set of tabs. It can be used in tabs_disable_list component parameter.	yes
tabComponent	This value must be a reference to an existing component that represents the content of the tab.	yes
captionKey	The value of this attribute is a reference to a resource bundle with text that will be rendered as the caption of the tab.	yes
hintKey	The value of this attribute is a reference to a resource bundle with text that will be rendered as a hint for this tab. It will be displayed when the user points to the tab caption.	no

The component accepts a parameter tabs_disable_list with a comma separated list of tab identifiers that will be skipped during tab rendering. Leading and trailing commas are ignored. This way developers may dynamically disable some tabs that are not available in the current context.

Example 52. TabsComponent configuration

```
<component
  name="recentChanges_tabs"
  className="com.systinet.uddi.bui.framework.component.util.TabsComponent"
  page="util/tabsComponent.jsp">
  <parameter paramName="tabs">
    <paramValue>
      <tabs>
        <tab tabId="providers" tabComponent="changes_providers"
          captionKey="webcomponent.recentChanges_tabs_caption_providers"
          hintKey="webcomponent.recentChanges_tabs_hint_providers"/>
        <tab tabId="services" tabComponent="changes_services"
          captionKey="webcomponent.recentChanges_tabs_caption_services"
          hintKey="webcomponent.recentChanges_tabs_hint_services"/>
        <tab tabId="endpoints" tabComponent="changes_endpoints"
          captionKey="webcomponent.recentChanges_tabs_caption_endpoints"
          hintKey="webcomponent.recentChanges_tabs_hint_endpoints"/>
        <tab tabId="interfaces" tabComponent="changes_interfaces"
          captionKey="webcomponent.recentChanges_tabs_caption_interfaces"
          hintKey="webcomponent.recentChanges_tabs_hint_interfaces"/>
      </tabs>
    </paramValue>
  </parameter>
</component>
```

Example 53. TabsComponent usage

```
<syswf:component name="recentChanges_tabs" prefix="tabs">
  <syswf:param name="tabs_disable_list" value="endpoints,interfaces"/>
</syswf:component>
```

TreeComponent

TreeComponent is used to display a static tree. Elements of the tree are links to actions and tasks. Sub-trees can be expanded and collapsed. An icon can be shown next to each link.

TreeComponent is a semi-complete component. It consists of

- class `com.systinet.uddi.bui.framework.component.util.TreeComponent` that reads the configuration from `web_component.xml`;
- JSP `util/treeComponent.jsp` that renders the tree;

All elements of the tree are described in the component configuration, so different trees require different components. The component configuration includes:

- configuration common to different trees:
 - Java class file;
 - JSP file;
- configuration specific to the particular tree:
 - a parameter containing the tree layout;

Example 54. A tree configuration

```

<component name="publishTree"
  className="com.systinet.uddi.bui.framework.component.util.TreeComponent"
  page="util/treeComponent.jsp">
  <parameter paramName="treeContent">
    <paramValue>
      <node nodeId="publish" captionKey="publish" icon="publish.gif">
        <control action="" targetTask="/publish" targetUrl=""/>
        <node nodeId="providers" captionKey="publish_providers" icon="provider.gif">
          <control targetTask="/catalog/providerMenu"/>
          <contextMenuReference component="contextMenu_providersList"/>
        </node>
        <node nodeId="services" captionKey="publish_services" icon="service.gif">
          <control targetTask="/catalog/serviceMenu"/>
          <contextMenuReference component="contextMenu_servicesList"/>
        </node>
        <node nodeId="resources" captionKey="publish_resources" icon="resources_0.gif"
openIcon="resources_1.gif">
          <control targetTask="/publish/resources"/>
          <node nodeId="wsdl" captionKey="publish_resources_wsdl" icon="wsdl_0.gif">

            <control targetTask="/catalog/wsdlMenu"/>
            <contextMenuReference component="contextMenu_wsdlList"/>
            <node nodeId="portTypes" captionKey="publish_resources_wsdl_portTypes"
icon="porttype.gif">
              <control targetTask="/catalog/wsdl/portTypeMenu"/>
              <contextMenuReference component="contextMenu_portTypeList"/>
            </node>
            <node nodeId="ports" captionKey="publish_resources_wsdl_ports"
icon="port.gif">
              <control targetTask="/catalog/wsdl/portMenu"/>
              <contextMenuReference component="contextMenu_portList"/>
            </node>
          </node>
          <node nodeId="xsd" captionKey="publish_resources_xsd" icon="xsd.gif">
            <control targetTask="/catalog/xsdMenu"/>
            <contextMenuReference component="contextMenu_xsdList"/>
          </node>
        </node>
      </paramValue>
    </parameter>
  </component>

```

Table 109. node attributes

Attribute	Description	Required
nodeId	An identifier for the node, must be unique in the tree.	yes
captionKey	Resource-bundle key for caption of the link.	yes
icon	A relative path to the icon for the node. Default is file.png.	no
openIcon	Like icon attribute but for open nodes. Default is same as icon.	no

Table 110. node sub-elements

Element	Description	More than once	Required
node	Node element of subtree.	yes	no
control	Specifies syswf:control like links.	no	yes
elementMenuReference	Link to Section ContextMenuComponent .	no	no

Table 111. control attributes

Attribute	Description	Required
action	An action to syswf:control	no
targetTask	A targetTask to syswf:control	no
targetDepth	A targetDepth to syswf:control, with default 0.	no
targetUrl	A targetUrl to syswf:control	no

A control element can contain parameters described in a parameter element. These parameters will be available in the called task/component.

Table 112. parameter attributes

Attribute	Description	Required
paramName	An identifier	yes
paramValue	Any string.	yes

A contextMenuReference element links the tree node to a [Section ContextMenuComponent](#), which is activated by right-clicking the node. It contains a component attribute, which is used to:

- create an identifier for linking the node and the actual menu;
- call a component of that name to render a contextMenu component. The rendered component is hidden until the menu is activated;

Up to 9 parameters can be specified in the contextMenuReference via parameter elements. They will be merged with the parameters specified in the configuration of the called contextMenu component and used within the syswf:control element.

A TreeComponent may be called without parameters.

ContextMenuComponent

ContextMenuComponent is used to display a context menu. Elements of the menu are links to actions and tasks. An icon can be shown next to each link.

ContextMenuComponent is a semi-complete component. It consists of

- class `com.systinet.uddi.bui.framework.component.util.ContextMenuComponent` that reads the configuration from component parameters in `web_component.xml`;
- `util/contextMenuComponent.jsp` that renders the menu.

All elements of the menu are described in the component the configuration, so different context menus require different components. The component configuration includes:

- configuration common to different context menus:
 - Java class file;
 - JSP file;
- configuration specific to the particular context menu:
 - a parameter containing menu items;

Example 55. A context menu configuration

```
<component name="contextMenu_providersList"
className="com.systinet.uddi.bui.framework.component.util.ContextMenuComponent"
page="util/contextMenuComponent.jsp">
  <parameter paramName="menu">
    <paramValue>
      <contextMenu captionKey="providersList_caption">
        <menuItem captionKey="providersList_item_publish_providers"
icon="ctx_bsn_add.gif">
          <control targetTask="/publish/providers">
            <parameter paramName="editableMode" paramValue="true"/>
          </control>
        </menuItem>
        <menuItem captionKey="providersList_item_search_providers"
icon="ctx_bsn_add.gif">
          <control targetTask="/search/providers">
            <parameter paramName="editableMode" paramValue="true"/>
          </control>
        </menuItem>
        <menuItem captionKey="providersList_item_publish_myProviders"
icon="ctx_bsn_add.gif">
          <control targetTask="/publish/myProviders">
            <parameter paramName="editableMode" paramValue="true"/>
          </control>
        </menuItem>
        <menuItem captionKey="providersList_item_publish_providers_createProvider"
icon="ctx_bsn_add.gif">
          <control targetTask="/publish/providers/createProvider"/>
        </menuItem>
      </contextMenu>
    </paramValue>
  </parameter>
</component>
```

A contextMenu element contains attribute captionKey specifying the resource bundle key for the caption of the menu. Its content is a list of menuItem elements that describe each menu item. Menu items have inks to actions and tasks.a captionKey attribute and an icon attribute specifying the relative path to icon file. Menu items also contain a control element, which is exactly same as the one described in [Section TreeComponent](#).

The component can be called without any parameters, but is not usually called directly in code, but from components such as TreeComponent that reference a context menu from their configuration.

Framework Tags

This section describes the Business Service Control web framework tag library.

- [bsc:setLocalizedNames](#) - selects names from a list in specified language
- [bsc:setLocalizedDescriptions](#) - selects descriptions from a list in a specified language
- [bsc:setSelectedContacts](#) - selects contacts of a certain useType from the given list
- [bsc:setCategories](#) - selects KeyedReferences from a specified list
- [bsc:parseUddiQuery](#) - sets UDDI query to a specified variable
- Table related tags: [bsc:table](#), [bsc:column](#), [bsc:tableActions](#), [bsc:row](#), [bsc:cell](#), [bsc:attribute](#)

bsc:setLocalizedNames

This tag is used to set localized Names from a given list of names. The output JSP variable will contain names that match given criteria. The algorithm selects all Names with a langCode equal to the attribute langCode, if it is defined. Otherwise, Names with default (empty) langCodes are chosen. If there is no such Name at all, then the first Name is selected from the list.

Table 113. setLocalizedNames Parameters

Param	Description	Required
var	Output variable holding a list of names in the required language.	yes
value	This parameter must hold an instance of the <code>org.systinet.uddi.client.v3.struct.NameArrayList</code> object. This object will be searched for localized Names.	yes
scope	Identifies the scope in which the variable will be set. It accepts the following values: request, session, and application. If it is not defined or has a different value, then the page scope is used.	no
langCode	Code of the preferred language. Names with this langCode will be selected from the value parameter.	no

Example 56. setLocalizedNames - Usage Example

```
<bsc:setLocalizedNames var="DEFAULT_NAMES" value="${row.nameArrayList}" />
<c:out value="${DEFAULT_NAMES[0].value}"/>
```

bsc:setLocalizedDescriptions

This tag is used to set localized Descriptions from a given list. It creates a new JSP variable holding a `DescriptionArrayList` of Descriptions that match the given criteria. The algorithm selects all Descriptions with langCode equal to the attribute langCode, if it is defined. Otherwise, Descriptions with default (empty) langCodes are chosen. If there is no such Description at all, then the first Description is selected from the list.

Table 114. setLocalizedDescriptions Parameters

Param	Description	Required
var	The name of the output variable holding the list of descriptions in the required language	yes
value	M u s t h o l d a n i n s t a n c e o f t h e org.systinet.uddi.client.v3.struct.DescriptionArrayList object. This object is searched for localized Descriptions.	yes
scope	This parameter identifies the scope in which the variable are to be set. It accepts the following values: request, session, and application. If it is not defined or has a different value, then the page scope is used.	no
langCode	Code of the required language. Names with this langCode will be selected from the value parameter.	no

Example 57. setLocalizedDescriptions - Usage Example

```
<bsc:setLocalizedDescriptions var="descriptions" value="{row.descriptionArrayList}"
    langCode="{userDefaultLanguage}"/>
<c:out value="{descriptions[0].value}"/>
```

bsc:setSelectedContacts

This tag is used to set Contacts of a certain useType from the given list. It creates a new JSP variable holding ContactArrayList of Contacts that matches given criteria.

The optional findQualifier parameter determines whether an exact match of the useType is required or if a useType containing a regular expression is to be used. Regular expressions used must conform to UDDI syntax, that is, it accepts ? and % as wildcards.

Table 115. setSelectedContacts Parameters

Param	Description	Required
var	The name of the output variable.	yes
value	M u s t h o l d a n i n s t a n c e o f t h e org.systinet.uddi.client.v3.struct.ContactArrayList object; this object will be searched for the selected Contacts.	yes
scope	This parameter identifies the scope, where the variable shall be set. It accepts the following values: request, session and application. If it is not defined or has a different value, then the page scope is used.	no
useType	This parameter holds the value of useType that will be searched in the list of Contacts. If the approximateMatch findQualifier is used, then ? and % characters have the special meaning of wild card characters, as described in the UDDI specification.	yes
findQualifier	The findQualifier parameter determines, whether the useType shall be used for exact match (exactMatch) or whether it contains wild card characters (approximateMatch). If it is not specified, exactMatch is used.	no

Example 58. setSelectedContacts - Usage Example

```
<bsc:setSelectedContacts var="contact" value="${row.contactArrayList}"
    useType="" findQualifier="approximateMatch" />
<c:out value="${contact[0].personNameArrayList[0].value}"/>
```

bsc:setCategories

This tag is used to set KeyedReferences from a given list. It creates a new JSP variable holding a KeyedReferenceArrayList of KeyedReferences that match given criteria. The tModelKey parameter specifies a tModelKey in which each KeyedReference must be selected. The optional keyValue parameter acts as a secondary filter for KeyedReferences.

Table 116. setCategories Parameters

Param	Description	Required
var	The name of the output variable	yes
value	Must hold an instance of the org.systinet.uddi.client.v3.struct.KeyedReferenceArrayList object. This object will be searched for matching KeyedReferences. If the value is not defined, the variable will be unset.	yes
scope	This parameter identifies the scope in which the variable shall be set. It accepts the following values: request, session, and application. If it is not defined or has a different value, then the page scope is used.	no
tModelKey	Holds the value of the tModelKey in which each selected KeyedReference must be contained.	yes
keyValue	This optional parameter serves as an additional filter. If it is specified then each KeyedReference must contain it.	no
keyName	If specified, only keyedReferences whose keyName equals to the attribute value are copied to the result variable.	no

Example 59. setCategories - Usage Example

```
<bsc:setCategories var="unspc" value="${row.categoryBag.keyedReferenceArrayList}"
    tModelKey="uddi:uddi.org:ubr:categorization:unspc" />
<c:out value="${unspc[0].keyName}"/>
```

bsc:parseUddiQuery

This tag is used to set a UDDI query to a specified variable. It can parse XML containing one of the following operations:

```
find_binding
find_business
find_service
find_tModel
get_binding
get_business
get_service
get_tModel
```

If the value parameter is not set, then the tag body is evaluated and used as the value.

Table 117. parseUddiQuery Parameters

Param	Description	Required
var	The name of the introduced variable.	yes
value	Must hold a valid XML representation of the following UDDI operations: find_binding, find_business, find_service, find_tModel, get_binding, get_business, get_service and get_tModel. Note that namespaces must not be omitted!	no

Example 60. parseUddiQuery - Usage Example

```
<bsc:parseUddiQuery var="findQuery" scope="request">
  <find_tModel xmlns="urn:uddi-org:api_v3">
    <categoryBag>
      <keyedReference tModelKey="uddi:uddi.org:wSDL:types"
        keyValue="portType" />
    </categoryBag>
  </find_tModel>
</bsc:parseUddiQuery>
```

bsc:table

The table tag is a key component in the Business Service Control. It is used to define the Table object, which holds data for query results, columns, and unfolded rows. Many components depends on this object, such as [tableFilter](#) and [columnHeader](#).

The behavior of this tag depends on whether the Table object can be found in the selected scope. If the Table is missing, a new object is created and the tag body is evaluated. If the object is present in this scope, then the body is skipped. The table also refreshes, if the request contains the tableRefresh attribute. This prevents unnecessary data conversions when just redisplaying the same page

For example: when a different view is selected in the selectResultView component, then the tableRefresh attribute is pushed to the request and Table is recreated.

Table 118. table Parameters

Param	Description	Required
var	The name of the variable holding the Table object.	yes
scope	Identifies the scope in which the variable shall be set. It accepts the following values: request, session, and application. If it is not defined or has a different value, then the page scope is used.	no

Example 61. Table tag - Usage Example

```

<bsc:table var="${tableName}" scope="session">
  <bsc:column caption="Provider name" filterCaption="Provider name"
    name="providerName" sortable="true" filterable="true"/>
  <bsc:column caption="Keyword Name" filterCaption="Keyword Name"
    name="keywordName" sortable="true" filterable="true"/>
  <bsc:column caption="Keyword Value" filterCaption="Keyword Value"
    name="keywordValue" sortable="true" filterable="true"/>
  <bsc:column caption="Services" name="serviceCount" sortable="true"
    filterable="false"/>
  <c:forEach items="${resultList}" var="row" varStatus="status">
    <bsc:row>
      <bsc:attribute key="businessKey" value="${row.businessKey}" />
      <bsc:attribute key="services" value="${row.businessServiceArrayList}" />
      <bsc:setCategories var="keywords"
        value="${row.categoryBag.keyedReferenceArrayList}"
        tModelKey="uddi:uddi.org:categorization:general_keywords" />
      <bsc:cell trimWhitespace="yes">
        <bsc:setLocalizedNames var="DEFAULT_NAMES"
          value="${row.nameArrayList}" />
        <c:out value="${DEFAULT_NAMES[0].value}"/>
      </bsc:cell>
      <bsc:cell trimWhitespace="yes">
        <c:out value="${keywords[0].keyName}"/>
      </bsc:cell>
      <bsc:cell trimWhitespace="yes">
        <c:out value="${keywords[0].keyValue}"/>
      </bsc:cell>
      <bsc:cell trimWhitespace="yes">
        <syswf:size var="SERVICE_COUNT"
          value="${row.businessServiceArrayList}"/>
        <c:out value="${SERVICE_COUNT}"/>
      </bsc:cell>
    </bsc:row>
  </c:forEach>
</bsc:table>

```

bsc:tableActions

The `bsc:tableActions` tag initializes its output variable with a structure that describes actions that are rendered on the page by the browser. The tag does not produce any HTML output, just the data. It is provided for convenient and simple initialization of other UI components.

The list of actions is populated by `bsc:action` tags, nested in the `bsc:tableActions` tag. The standard UI uses attributes of `bsc:action` to populate and initialize HTML page controls. The standard UI behavior will be explained in attribute descriptions.

To support extensibility, `bsc:action` can specify an `insertInto` attribute, that directs the action into a specified action list. This feature can be utilized by extensions that build on a basic UI.

Table 119. bsc:tableActions attributes

Attribute	Description	Required
var	The name of the output variable that will receive the list of actions constructed by the tag.	yes
scope	The scope of the variable. See the JSP specification [http://jcp.org/aboutJava/communityprocess/final/jsr152/] for a list of scope names.	no

Table 120. bsc:action attributes

Attribute	Description	Required
task	URI of the task associated with the action.	yes
action	The action string associated with the UI action. This string can be sent to the associated task.	no
default	A boolean value of true or false.	yes
insertInto	The value must be of the type <code>com.systinet.uddi.bui.framework.view.TableActions</code> . The action produced by the tag will be appended to that list of actions.	

bsc:column

The column tag appends a new Column to the list of Columns in Table. This tag must be nested within the Table tag.

Table 121. column Parameters

Param	Description	Required
caption	The caption for this column. Used by the columnHeader component.	yes
filterCaption	The caption for this column in the tableFilter component. If empty, no caption is used.	no
name	The identifier of this column for sorting and filtering. If the column is used for filtering or sorting rows, then this parameter is mandatory.	only if used for filtering or sorting
sortable	The boolean property which determines, whether this column can be used for sorting rows of the Table. A case-insensitive match to yes and no is performed.	no
filterable	The boolean property which determines, whether this column can be used for filtering rows of the Table. The values are yes or no.	no

bsc:row

This tag appends a new Row to the list of Rows in Table. It must be nested within the Table tag. This tag supports storing of attributes via a directly nested attribute tag. The key parameter is the unique identifier of the row. The identifier must implement `java.io.Serializable`. If no key value is given, a key value is generated when the row is inserted into a table. The row can contain `<bsc:attribute>` tags which populate the row attributes property.

bsc:cell

The cell tag appends a new Cell to the current Row in the Table. This tag must be nested within the Row tag. If the caption parameter is not specified, then the tag body is evaluated and body content is used. The `trimWhiteSpace` attribute determines whether white spaces at both ends of the body content string shall be removed. This tag supports the storing of attributes via directly nested attribute tags.

Table 122. cell Parameters

Param	Description	Required
caption	The caption for this cell.	no
trimWhiteSpace	The boolean property which determines, whether white space characters from body content shall be removed. Used only if caption is not defined. A case-insensitive match to yes and no is performed.	no

bsc:attribute

The attribute tag is used to decorate the parent tag with additional data. The parent tag hierarchy is searched for the first tag that implements the `Attributive` interface. This parent will receive this tag value via the method `void addAttribute(string key, String value)`.

If the value parameter is not set, then the tag body is evaluated and used as the value.

Table 123. attribute Parameters

Param	Description	Required
key	Name of the attribute	yes
value	The string value for the specified key.	no

Business Service Control Components

This section describes selected components of the Business Service Control.

- [providerSearchResults](#) - executes a `find_business` UDDI query and displays providers that match the query.
- [executeFindProviders](#) - Executes a `find_business` UDDI query and produces a list of providers that match the query.
- [serviceSearchResults](#) - Executes a `find_service` UDDI query and displays services that match the query.
- [executeFindServices](#) - Executes a `find_service` UDDI query and displays services that match the query.
- [endpointSearchResults](#) - Executes a `find_binding` UDDI query and displays Endpoints that match the query.
- [executeFindEndpoints](#) - Executes a `find_binding` UDDI query that processes the results that match the query.
- [interfaceSearchResults](#) - Executes a `find_tModel` UDDI query and displays Interfaces that match the query.
- [executeFindInterfaces](#) - Executes a `find_tModel` UDDI query and displays Interfaces that match the query.
- [bindingSearchResults](#) - Executes a `find_tModel` UDDI query and displays Bindings that match the query.
- [executeFindBinding](#) - Executes a `find_tModel` UDDI query in order to find Bindings.
- [getOperations](#) - Fetches a list of operations for a Binding or a PortType from a WSDL.
- [getDocumentation](#) - Extracts the `useType` documentation from an `org.systinet.uddi.client.v3.struct.OverviewDocArrayList`.
- [getServiceEndpoints](#) - Analyzes the Binding Templates of a Business Service, and creates a list of valid WSDL Endpoints mapped to those Binding Templates.
- [selectCategory](#) - Takes an existing query and adds a `KeyedReference` into the query's `CategoryBag`.

providerSearchResults

This component executes a find_business UDDI query and displays providers that match the query. Alternatively, the component may be given a list of Businesses to display. This alternative approach is recommended when the result cannot be produced by an UDDI query directly, such as when there is some post-processing involved.

The results are displayed in a standard layout that allows selection of a view from a list of supported views.

Table 124. providerSearchResults Parameters

Param	Description	Required
providerList	Must hold an instance of one of the following: import org.systinet.uddi.client.v3.struct.BusinessList org.systinet.uddi.client.v3.struct.BusinessDetail org.systinet.uddi.client.v3.struct.BusinessEntityArrayList The query will not be executed, rather Providers (Businesses) which are given in the list will be displayed.	yes, exclusive with query
defaultView	The component name of the view component that should be displayed by default. Valid names are: - providerCommonResults - common results view - providerBusinessResults - business results view If the parameter is not present, the providersCommonResults view will be displayed.	no
sortedBy	The name of the column for the initial sort order. The list of applicable values depends on the selected default view Component.	no
query	Must hold an instance of the org.systinet.uddi.client.v3.struct.Find_business object. The query will be executed in UDDI using the logged user's credentials.	yes, exclusive with providerList
var	A variable that will also receive the results. An anticipated use of this parameter is to enable the caller to detect if there are no results.	no

Example 62. providerSearchResults - Usage Example

This example shows how to display all Providers (UDDI business entities) whose name starts with "A".

```
<bsc:parseUddiQuery var="providersQuery" scope="session">
  <find_business xmlns="urn:uddi-org:api_v3">
    <findQualifiers>
      <findQualifier>
        uddi:uddi.org:findqualifier:approximateMatch
      </findQualifier>
    </findQualifiers>
    <name>A%</name>
  </find_business>
</bsc:parseUddiQuery>

<syswf:component prefix="providers" name="findProviders">
  <syswf:param name="query" value="{providersQuery}"/>
</syswf:component>
```

executeFindProviders

This Component executes a find_business UDDI query and produces a list of providers that match the query. The results will be placed into a specified result variable in the local session.

The specified result variable is a cache for the result value. If the variable is not empty, the query is not executed. You must clear the variable in order to get a fresh result set. The cache is automatically cleared when a task is selected.

Table 125. executeFindProviders Parameters

Param	Description	Required
query	Must hold an instance of the org.systinet.uddi.client.v3.struct.Find_business object. The query will be executed in UDDI using the logged user's credentials.	yes
var	This value will be used as the name of the result variable in the local session where the component will store the result of the query. The stored result will be of type org.systinet.uddi.client.v3.struct.BusinessDetail.	yes

Example 63. executeFindProviders - Usage Example

This example shows how to display the names of all Providers (UDDI business entities) whose name starts with "A".

```
<bsc:parseUddiQuery var="providersQuery" scope="session">
  <find_business xmlns="urn:uddi-org:api_v3">
    <findQualifiers>
      <findQualifier>
        uddi:uddi.org:findqualifier:approximateMatch
      </findQualifier>
    </findQualifiers>
    <name>A%</name>
  </find_business>
</bsc:parseUddiQuery>

<syswf:component prefix="providers" name="executeFindProviders">
  <syswf:param name="query" value="{providersQuery}"/>
  <syswf:param name="var" value="searchResults"/>
</syswf:component>

Providers whose names start with "A":
<c:forEach items="{searchResults}" var="provider">
  <c:out value="{provider.names[0].value}"/><br/>
</c:forEach>
```

serviceSearchResults

This component executes a find_service UDDI query and displays services that match the query. Alternatively, the component may be given a list of Services to display. This alternative approach is recommended when the result can not be produced by a UDDI query directly, for example, if there is some post-processing required.

The results are displayed in a standard layout that allows the user to select a view from among the supported ones (common, business, etc.).

Table 126. serviceSearchResults Parameters

Param	Description	Required
serviceList	Must hold an instance of one of the following: import org.systinet.uddi.client.v3.struct.ServiceList org.systinet.uddi.client.v3.struct.ServiceDetail org.systinet.uddi.client.v3.struct.BusinessServiceArrayList The query will not be executed, rather Services which are given in the list will be displayed.	yes, exclusive with query
defaultView	The component name of the view component that should be displayed by default. Valid names are: • serviceCommonResults - common results view • serviceBusinessResults - business results view • serviceTechnicalResults - technical results view If the parameter is not present, the serviceCommonResults view will be displayed.	no
sortedBy	The name of the column for the initial sort order. The list of applicable values depends on the selected default view Component.	no
query	Must hold an instance of the org.systinet.uddi.client.v3.struct.Find_service object. The query will be executed in UDDI using the logged user's credentials.	yes, exclusive with serviceList

Example 64. serviceSearchResults - Usage Example

This example displays all services that are categorized within the Certification taxonomy.

```

<bsc:parseUddiQuery var="serviceQuery" scope="session">
  <find_service xmlns="urn:uddi-org:api_v3">
    <findQualifiers>
      <findQualifier>
        uddi:uddi.org:findqualifier:approximateMatch
      </findQualifier>
    </findQualifiers>
    <categoryBag>
      <keyedReference
        tModelKey="uddi:systinet.com:taxonomy:service:certification"
        keyValue="%"
      />
    </categoryBag>
  </find_service>
</bsc:parseUddiQuery>

<syswf:component prefix="services" name="findServices">
  <syswf:param name="query" value="{serviceQuery}"/>
</syswf:component>

```

executeFindServices

This component executes a `find_service` UDDI query and displays services that match the query. The results of the query will be post-processed using `org.systinet.uddi.client.v3.struct.ServiceDetail` so that information about the owning Business Entity is easily available. The component will create wrapper structures (of type `com.systinet.uddi.bui.standard.util.Service`) to link the Service to its parent Business Entity instance. The wrappers will be placed into a specified result variable in the local session.

The specified result variable is a cache for the result value. If the variable is not empty, the query is not executed. You must clear the variable in order to get a fresh result set. The cache is automatically cleared when a task is selected.

Table 127. executeFindServices Parameters

Param	Description	Required
query	Value must hold an instance of the <code>org.systinet.uddi.client.v3.struct.Find_service</code> object. The query will be executed in UDDI using the logged user's credentials.	yes
var	Used to name the result variable in the local session, where the component will store the result of the query. The stored result will be of type <code>com.systinet.uddi.bui.standard.util.Service[]</code> .	yes

endpointSearchResults

This component executes a `find_binding` UDDI query and displays Endpoints that match the query. Alternatively, the component may be given a list of Endpoints to display. This alternative approach is recommended when the result can not be produced by an UDDI query directly, for example, if there is some post-processing required.

The component will load more information from the UDDI Registry, for the interfaces and bindings available on the matching Endpoints. These queries will be executed in UDDI using the logged user's credentials.

The results are displayed in a standard layout that allows the user to select a view from among the supported ones (common, business, etc.).

Table 128. endpointSearchResults Parameters

Param	Description	Required
endpointList	Must hold an instance of either of the following: org.systinet.uddi.client.v3.struct.BindingDetail org.systinet.uddi.client.v3.struct.BindingTemplateArrayList The query will not be executed, rather Endpoints which are given in the list will be displayed.	yes, exclusive with query
defaultView	The component name of the view component that should be displayed by default. The valid names are: • endpointsCommonResults - common results view • endpointsOperationResults - operations results view • endpointsTechnicalResults - technical results view If the parameter is not present, the serviceCommonResults view will be displayed.	no
sortedBy	The name of the column used for the initial sort order. The list of applicable values depends on the selected default view component.	no
query	Must hold an instance of the org.systinet.uddi.client.v3.struct.Find_binding object. The query will be executed in UDDI using the logged user's credentials.	yes, exclusive with endpointList

Example 65. endpointSearchResults - Usage Example

This example displays all endpoints that are categorized within the Certification taxonomy.

```

<bsc:parseUddiQuery var="endpointQuery" scope="request">
  <find_binding xmlns="urn:uddi-org:api_v3">
    <findQualifiers>
      <findQualifier>
        uddi:uddi.org:findqualifier:approximateMatch
      </findQualifier>
    </findQualifiers>
    <categoryBag>
      <keyedReference tModelKey="uddi:65719168-72c6-3f29-8c20-62defb0961c0"
        keyValue="%" />
      <keyedReference tModelKey="uddi:uddi.org:wSDL:types"
        keyValue="portType" />
    </categoryBag>
  </find_binding>
</bsc:parseUddiQuery>

<syswf:component prefix="endpoints" name="endpointSearchResults">
  <syswf:param name="query" value="{endpointQuery}" />
</syswf:component>

```


executeFindEndpoints

This Component executes a find_binding UDDI query that processes the results that match the query. The Component will load more information from the UDDI Registry, for the interfaces and bindings available on the matching Endpoints. These queries will be executed using the logged user's credentials. The processed information will be available as an array of wrapper structures of type `com.systinet.uddi.bui.standard.util.Endpoint`.

The specified result variable is a cache for the result value. If the variable is not empty, the query is not executed. You must clear the variable in order to get a fresh result set. The cache is automatically cleared when a task is selected.

Table 129. executeFindEndpoints Parameters

Param	Description	Required
query	Must hold an instance of the <code>org.systinet.uddi.client.v3.struct.Find_binding</code> object. The query will be executed in UDDI using the logged user's credentials.	yes
var	Used to name the result variable in the local session in which the component will store the result of the query. The stored result will be of type <code>com.systinet.uddi.bui.standard.util.Endpoint[]</code> .	yes

Example 66. executeFindEndpoints - Usage Example

This example displays all endpoints that are categorized within the Certification taxonomy.

```
<bsc:parseUddiQuery var="endpointQuery" scope="request">
  <find_binding xmlns="urn:uddi-org:api_v3">
    <findQualifiers>
      <findQualifier>
        uddi:uddi.org:findqualifier:approximatematch
      </findQualifier>
    </findQualifiers>
    <categoryBag>
      <keyedReference tModelKey="uddi:65719168-72c6-3f29-8c20-62defb0961c0"
        keyValue=""/>
      <keyedReference tModelKey="uddi:uddi.org:wSDL:types"
        keyValue="portType"/>
    </categoryBag>
  </find_binding>
</bsc:parseUddiQuery>

<syswf:component prefix="endpoints" name="executeFindEndpoints">
  <syswf:param name="query" value="{endpointQuery}"/>
</syswf:component>
```

interfaceSearchResults

This component executes a find_tModel UDDI query and displays Interfaces that match the query. Alternatively, the component may be given a list of Endpoints to display. This alternative approach is recommended when the result cannot be produced by an UDDI query directly, such as when some post-processing required.

The results are displayed in a standard layout that allows the user to select a view from among the supported ones (common, business, etc.).

Table 130. interfaceSearchResults Parameters

Param	Description	Required
interfaceList	Must hold an instance of either of the following: org.systinet.uddi.client.v3.struct.TModelList org.systinet.uddi.client.v3.struct.TModelDetail org.systinet.uddi.client.v3.struct.TModelArrayList The query will not be executed, rather Interfaces which are given in the list will be displayed.	yes, exclusive with query
defaultView	The component name of the view component that should be displayed by default. The valid names are: - resourcesPortTypeResults - common results view - portTypeTechnicalResults - technical results view If the parameter is not present, the resourcesPortTypeResults view will be displayed.	no
sortedBy	The name of the column for the initial sort order. The list of applicable values depends on the selected default view component.	no
query	Must hold an instance of the org.systinet.uddi.client.v3.struct.Find_tModel object. The query will be executed in UDDI using the logged user's credentials.	yes, exclusive with endpointList

interfaceSearchResults component in action

Example 67. Component Parameters

This example displays all interfaces that are categorized as "Stable" in the interface:status taxonomy.

```
<bsc:parseUddiQuery var="interfaceQuery" scope="request">
  <find_tModel xmlns="urn:uddi-org:api_v3">
    <categoryBag>
      <keyedReference
        tModelKey="uddi:systinet.com:taxonomy:interface:status"
        keyValue="Stable"
      />
    </categoryBag>
  </find_tModel>
</bsc:parseUddiQuery>

<syswf:component prefix="interfaces" name="interfaceSearchResults">
  <syswf:param name="query" value="{interfaceQuery}"/>
</syswf:component>
```

executeFindInterfaces

This component executes a find_tModel UDDI query and provides a list of TModels (Interfaces) that match the query. The result of the query is placed into a result variable into the local session.

The specified result variable is a cache for the result value. If the variable is not empty, the query is not executed. You must clear the variable in order to get a fresh result set. The cache is automatically cleared when a task is selected.

Table 131. executeFindInterfaces Parameters

Param	Description	Required
query	Must hold an instance of the <code>org.systinet.uddi.client.v3.struct.Find_tModel</code> object. The query will be executed in UDDI using the logged user's credentials.	yes
var	Used to name the result variable in the local session in which the component will store the result of the query. The stored result will be of type <code>org.systinet.uddi.client.v3.struct.TModelDetail</code> .	yes

executeFindInterfaces component in action

Example 68. Component Parameters

This example displays tModel names of all interfaces that are categorized as "Stable" in the interface:status taxonomy.

```
<bsc:parseUddiQuery var="interfaceQuery" scope="request">
  <find_tModel xmlns="urn:uddi-org:api_v3">
    <categoryBag>
      <keyedReference
        tModelKey="uddi:systinet.com:taxonomy:interface:status"
        keyValue="Stable"
      />
    </categoryBag>
  </find_tModel>
</bsc:parseUddiQuery>

<syswf:component prefix="interfaces" name="excuteFindInterfaces">
  <syswf:param name="query" value="{interfaceQuery}"/>
  <syswf:param name="var" value="searchResults"/>
</syswf:component>

Stable interface names:
<ul>
<c:forEach items="{searchResults.TModelArrayList}" var="iface">
  <li><c:out value="{iface.name.value}"/></li>
</c:forEach>
</ul>
```

bindingSearchResults

This component executes a `find_tModel` UDDI query and displays Bindings that match the query. Alternatively, the component may be given a list of tModels (Bindings) to display. This alternative approach is recommended when the result can not be produced by an UDDI query directly, such as when some post-processing required.

The results are displayed in a standard layout that allows the user to select a view from among the supported ones (common, business, etc.).

Table 132. bindingSearchResults Parameters

Param	Description	Required
bindingList	Must hold an instance of one of the following: org.systinet.uddi.client.v3.struct.TModelList org.systinet.uddi.client.v3.struct.TModelDetail org.systinet.uddi.client.v3.struct.TModelArrayList The query will not be executed, rather Interfaces which are given in the list will be displayed.	yes, exclusive with query
defaultView	The component name of the view component that should be displayed by default. Valid names are: - bindingsCommonResults - common results view - bindingsTechResults - technical results view If the parameter is not present, the serviceCommonResults view will be displayed.	no
sortedBy	The name of the column for the initial sort order. The list of applicable values depends on the selected default view Component.	no
query	Value must hold an instance of the org.systinet.uddi.client.v3.struct.Find_tModel object. The query will be executed in UDDI using the logged user's credentials.	yes, exclusive with bindingList

Example 69. bindingSearchResults - Usage Example

This example displays all Bindings

```
<bsc:parseUddiQuery var="bindingQuery" scope="request">
  <find_tModel xmlns="urn:uddi-org:api_v3">
    </find_tModel>
  </bsc:parseUddiQuery>

<syswf:component prefix="bindings" name="bindingSearchResults">
  <syswf:param name="query" value="${bindingQuery}"/>
</syswf:component>
```

executeFindBinding

This component executes a find_tModel UDDI query in order to find Bindings. The result of the query is stored in a local session variable for use with other components and JSP pages.

The specified result variable is considered to be a cache for the result value. If the variable is not empty, the query is not executed. You must clear the variable in order to get a fresh result set. The cache is automatically cleared when a task is selected.

Table 133. executeFindBinding Parameters

Param	Description	Required
query	Must hold an instance of the <code>org.systinet.uddi.client.v3.struct.Find_tModel</code> object. The query will be executed in UDDI using the logged user's credentials.	yes
var	Used to name the result variable in the local session in which the component will store the result of the query. The stored result will be of type <code>org.systinet.uddi.client.v3.struct.TModelDetail</code> .	yes

executeFindBinding component in action

Example 70. Component Parameters

This example displays names of all Bindings

```
<bsc:parseUddiQuery var="bindingQuery" scope="request">
  <find_tModel xmlns="urn:uddi-org:api_v3">
    </find_tModel>
  </bsc:parseUddiQuery>

<syswf:component prefix="bindings" name="executeFindBindings">
  <syswf:param name="query" value="${bindingQuery}"/>
  <syswf:param name="var" value="searchResults"/>
</syswf:component>

Binding names:
<ul>
<c:forEach items="${searchResults.TModelArrayList}" var="binding">
  <li><c:out value="${binding.names.value}"/></li>
</c:forEach>
</ul>
```

getOperations

This component fetches a list of operations for a Binding or a PortType from the WSDL. As the operation list is not published into UDDI, the component will fetch and parse the WSDL from its original location. It operates on a tModel that represents either a WSDL Binding or a WSDL PortType. It extracts the WSDL location from the tModel (according to the WSDL mapping TN).

The result will be available as an array of `com.systinet.uddi.bui.standard.view.OperationView`. The result is also cached in the local session, keyed by the WSDL location (URI) for faster access in subsequent calls. If a Binding is given in the binding parameter, the result will include binding Operations. If a PortType is given in the interface parameter, the result will include PortType operations and the messages used by those operations.

The component will optionally extract all messages from the operations and collect them in the specified result variable. Note that this applies to PortType operations only.

If WSDL parsing or download fails, the component will store the failure (`java.lang.Throwable`) in the specified local session variable. The caller may then display an appropriate message.

Table 134. getOperations Parameters

Param	Description	Required
interface	Must hold an instance of the <code>org.systinet.uddi.client.v3.struct.TModel</code> class. The <code>tModel</code> should represent a WSDL PortType according to the WSDL mapping technical notes.	yes, exclusive with "binding"
binding	Must hold an instance of the <code>org.systinet.uddi.client.v3.struct.TModel</code> class. The <code>tModel</code> should represent a WSDL Binding according to the WSDL mapping technical notes.	yes, exclusive with "interface"
error	Name of the output variable that will receive the <code>java.lang.Throwable</code> instance if an error occurs during WSDL processing. The result will be stored in the request scope.	no
allMessages	Name of the output variable that will receive the collection of all messages (<code>java.util.Collection</code> that contains an instances of <code>om.systinet.uddi.bui.standard.view.MessageView</code>).	no
variable	Name of the output variable that will receive the list of operations extracted from the PortType or Binding definition. The value will be an instance of <code>java.util.Collection</code> that contains an instances of <code>com.systinet.uddi.bui.standard.view.OperationView</code> .	

Example 71. getOperations example

The following example displays the list of operations of a WSDL PortType. It prints their names and descriptions into an HTML table.

```
<!-- Get the list of operations for the WSDL PortType represented by the "tModel" -->
<syswf:component prefix="content" name="getOperations">
  <syswf:param name="variable" value="opers"/>
  <syswf:param name="interface" value="{tModel}"/>
</syswf:component>

<!-- Print out tabularized operation info -->
<table width="100%">
<tr>
  <th width="30%">Operation name</th>
  <th width="70%">Description</th>
</tr>
<c:forEach items="opers" var="operation">
  <tr>
    <!-- Print the operation name -->
    <td class="unfoldedRow" class="unfoldedHeader">
      <c:out value="{operation.name}"/>
    </td>

    <!-- Print the operation documentation -->
    <td class="unfoldedRow" class="unfoldedHeader">
      <c:out value="{operation.documentation}"/>
    </td>
  </tr>
</c:forEach>
</table>
```

getDocumentation

This component extracts the documentation of a certain type from an `org.systinet.uddi.client.v3.struct.OverviewDocArrayList` instance. The `useType` can be given as an exact value, or a regular expression match using the "approximateMatch" findQualifier. All OverviewURLs that match the requested `useType` are returned in a collection through the result variable declared in the request scope.

Table 135. getOperations Parameters

Param	Description	Required
overviewDocArrayList	An instance of <code>org.systinet.uddi.client.v3.struct.OverviewDocArrayList</code> to search in.	yes
useType	The required useType of the OverviewURL. It can contain a literal string or a regular expression.	yes
variable	Name of the variable in which the result should be stored. The variable will be declared at the request scope. The stored value will be a <code>java.util.Collection</code> that contains instances of <code>org.systinet.uddi.client.v3.struct.OverviewURL</code> .	yes
findQualifier	Determines whether the value in the "useType" parameter is interpreted as a literal or as a regular expression. The allowed values are: - approximateMatch - useType contains a regular expression that the OverviewURL's useType must satisfy - exactMatch - useType is a literal and the OverviewURL's useType must be equal to this literal (case-insensitive).	no

Example 72. getDocumentation example

The following example displays the WSDL URL for a WSDL service:

```
<syswf:component prefix="doc" name="getDocumentation" >
  <syswf:param name="variable" value="documentation"/>
  <syswf:param name="docArrayList" value="{tModel.overviewDocArrayList}"/>
  <syswf:param name="useType" value="documentation"/>
</syswf:component>

<!-- Print out the URL -->
<a href="<c:out value="{documentation[0].overviewURL.value}"/>">
  <c:out value="{documentation[0].overviewURL.value}"/>
</a>
```

getServiceEndpoints

This component analyzes the Binding Templates of a Business Service, and creates a list of valid WSDL Endpoints mapped to those Binding Templates. The component produces an array of `com.systinet.uddi.bui.standard.util.Endpoints` for endpoints found on the Service.

The Endpoint is identified by a URL (location); some Interfaces or some Bindings (`com.systinet.uddi.bui.standard.util.Binding`) are deployed at that Location, that in turn communicate using Interfaces (`com.systinet.uddi.bui.standard.util.Interface`). These structures will be returned for each of the Endpoints. Each of the structures contains a reference to the underlying UDDI entity (Binding Template or tModel) so the caller can access the registered information in full.

Table 136. getServiceEndpoints Parameters

Param	Description	Required
service	The instance of org.systinet.uddi.client.v3.struct.BusinessService, whose Endpoints should be returned.	yes
variable	Name of the request-scoped variable where the component will store the result. The result will be an array of com.systinet.uddi.bui.standard.util.Endpoint, one instance for each Endpoint.	yes

Example 73. getServiceEndpoints Example

The following example lists names and descriptions of all interfaces implemented for a service. It iterates through all available Endpoints and the exposed Interfaces and produces the list into a HTML table.

```
<syswf:component prefix="content" name="getServiceEndpoints" >
  <syswf:param name="variable" value="endpoints"/>
  <syswf:param name="service" value="${service}"/>
</syswf:component>

<table width="100%">
  <tr>
    <th width="30%">Interface name</th>
    <th width="70%">Description</th>
  </tr>
  <c:forEach items="${endpoints}" var="endpoint">
    <c:forEach items="${endpoint.interfaces}" var="iface">
      <bsc:setLocalizedDescriptions var="descriptions"
        value="${iface.portTypeTModel.descriptionArrayList}"
        langCode="${userDefaultLanguage}"/>
      <tr>
        <td >
          <c:out value="${iface.name}"/>
        </td>
        <td><c:out value="${descriptions[0].value}"/></td>
      </tr>
    </c:forEach>
  </c:forEach>
</table>
```

selectCategory

This component helps with UDDI query construction. It takes an existing query and adds a KeyedReference into the query's CategoryBag. This will either restrict, or broaden the search, depending on the findQualifiers present in the query.

The component may act in several ways. It can:

- Select entities that are categorized within the given taxonomy. This is done by using keyValue of % and the approximateMatch findQualifier.
- Select entities that are categorized with exactly the passed value.

- Perform an `approximateMatch` on the `keyValue`.

The component takes the session variable identified by the passed variable name and modifies the structure to contain the addition search criteria. The following query structures are supported:

- `org.systinet.uddi.client.v3.struct.Find_binding`
- `org.systinet.uddi.client.v3.struct.Find_business`
- `org.systinet.uddi.client.v3.struct.Find_service`
- `org.systinet.uddi.client.v3.struct.Find_tModel`

Table 137. selectCategory Parameters

Param	Description	Required
category	The <code>tModelKey</code> of the category. A <code>KeyedReference</code> with this <code>tModelKey</code> will be added to the <code>CategoryBag</code> of the query.	yes
variable	The name of the request-scoped variable where the component will store the result. The result will be an array of <code>com.systinet.uddi.bui.standard.util.Endpoint</code> , one instance for each Endpoint.	yes


4. UDDI from Developer Tools

This section describes how to access UDDI from the following development tools:

- [Section 4.1, UDDI from Oracle JDeveloper](#)
- [Section 4.2, UDDI from MS Visual Studio](#)

Developer tools include wizards for searching a UDDI registry and publishing to a UDDI registry. We can say that UDDI searching and publishing rely on getting and publishing WSDL files.

[Figure 16](#) shows how a WSDL is mapped to UDDI. For more information, see [OASIS Technical Note "Using WSDL in a UDDI Registry"](#) [<http://www.oasis-open.org/committees/uddi-spec/doc/tns.htm#WSDLTNV2>]

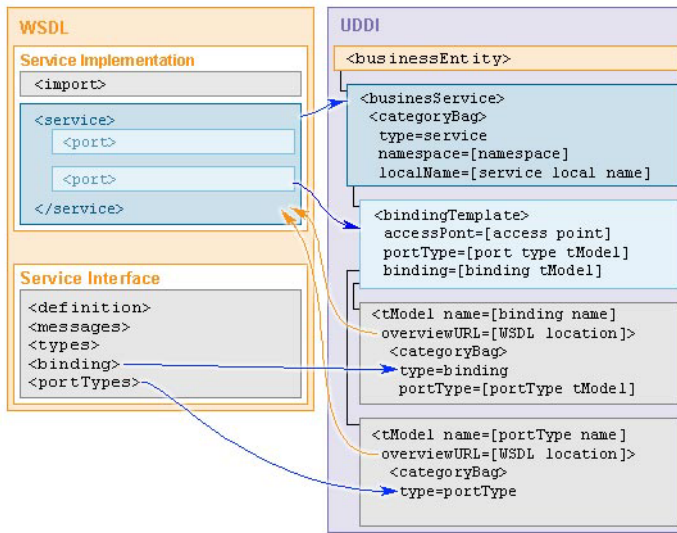Figure 16. WSDL Mapping to UDDI

4.1. UDDI from Oracle JDeveloper

Using Oracle JDeveloper, you can create a connection to the Oracle Service Registry and create a client that will use this connection.

4.1.1. Connecting to Oracle Service Registry from JDeveloper

To create a connection between the Oracle Service Registry and JDeveloper:

1. Right-click **Connections>New...** in the **Connection Navigator**.
2. Specify a connection name.

In the Connection Wizard, provide a connection name and specify the UDDI inquiry endpoint URL. The syntax of this URL is:

```
http://ohs_host:ohs_Port/registry_context/uddi/inquiry
```

ohs_host and *ohs_Port* have the following definitions:

- *ohs_host* is the address of the Oracle WebLogic Server host machine.; for example, `server07.company.com`
- *ohs_Port* is the HTTP listener port assigned to OHS
- *registry_context* is context root used to access the target registry instance, such as "registry" or "registrypub"

For example:

```
http://stserver:8888/registry/uddi/inquiry
```

3. Click **Next**, then click **Test Connection** to verify that you have successfully connected to the Registry.
4. If the test is successful, click **Finish** to create the connection.

4.1.2. Using the JDeveloper Integration

Once you have established a connection to Oracle Service Registry from JDeveloper, you can take advantage of JDeveloper's integration features.

1. Right-click on an Oracle Service Registry connection in the **Connection Navigator** and select **Find Web Services**.
2. Enter a search string to find your service. Use the % symbol to perform a wildcard search.
3. Select the interface, or portType, for the published service.
4. Select the service implementing the interface.
5. Review the information returned for the service to verify it is the one you are searching for.
6. Select the **Generate stub code into the project** option to generate a client-side stub or proxy for the selected service.
JDeveloper generates the stub based on the WSDL published to the Registry.
7. Click **Open the endpoint of this service** in a Web browser to test the service.
8. Click **Display a report describing this service** to view a report summarizing the UDDI metadata stored in the Registry for the selected service.
9. Click **Just add the business providing this service to the UDDI browser** to add the service provider as a persisted entry under the UDDI Registry connection node in the **Connection Navigator**.

4.2. UDDI from MS Visual Studio

Microsoft Visual Studio .NET 2003 includes a wizard for accessing a UDDI registry that allows you to find a WSDL/ASMX file in the UDDI registry. Once you have found a WSDL, you can add a web reference to the Web service definition file to your project.

To start the Web Reference Wizard:

1. On the **Project** menu in Visual Studio .NET, click **Add Web Reference**.
2. The **Add Web Reference** dialog box shown in [Figure 17](#) appears. Enter the URI of a UDDI registry or the URI of a WSDL document representing the Web service.

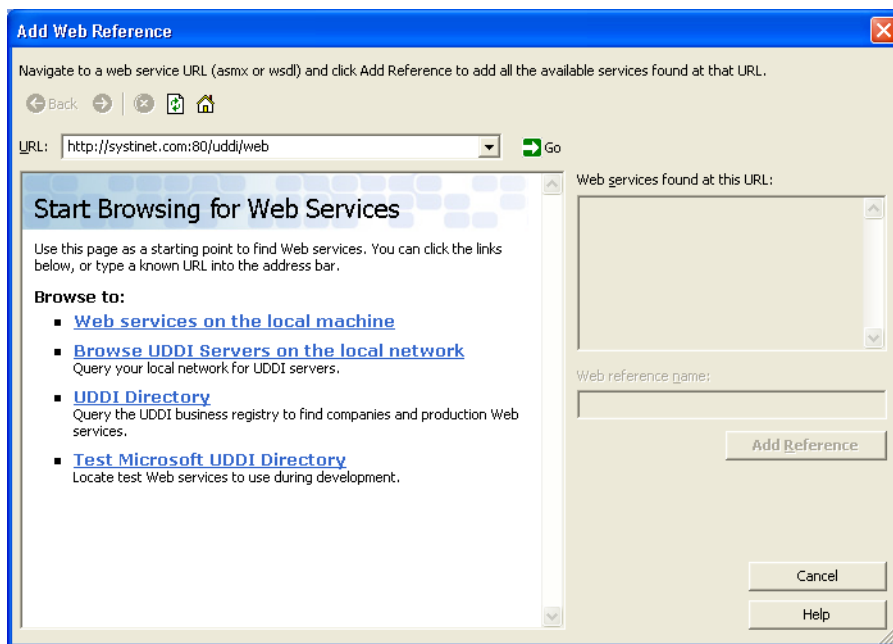
Figure 17. Add Web Reference Default

Figure 18 shows how to browse/search Oracle Service Registry via the **Add Web Reference Wizard**.

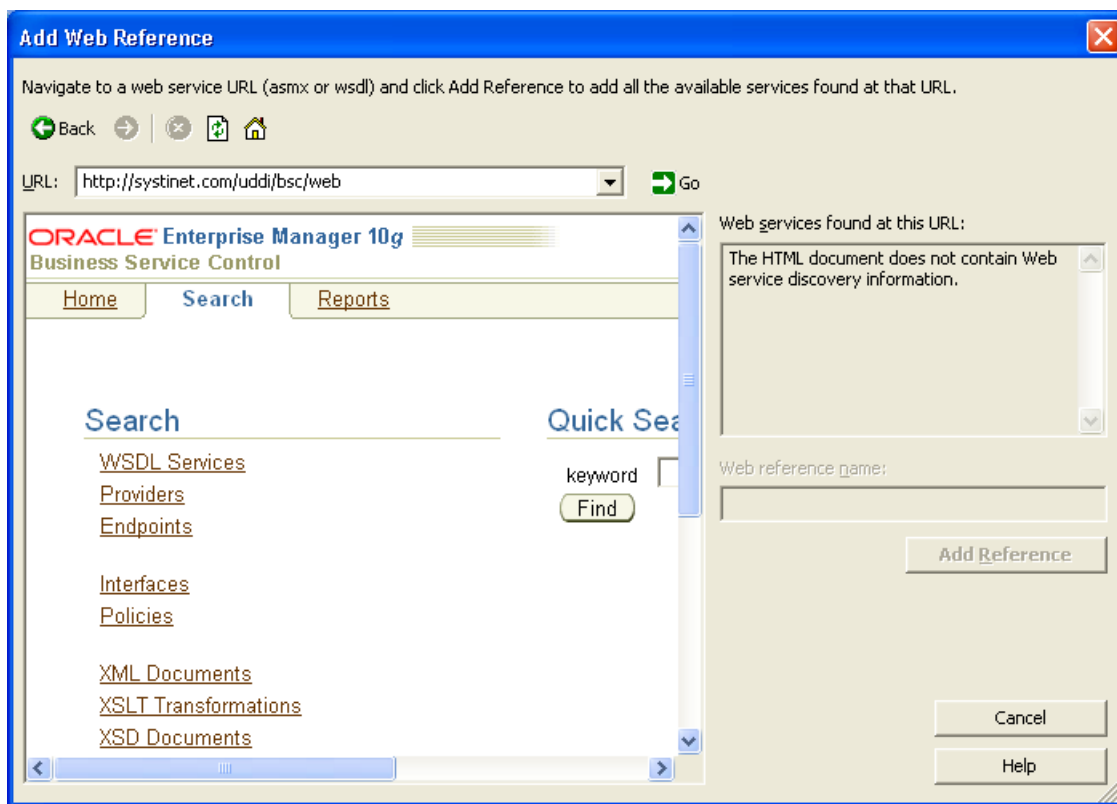
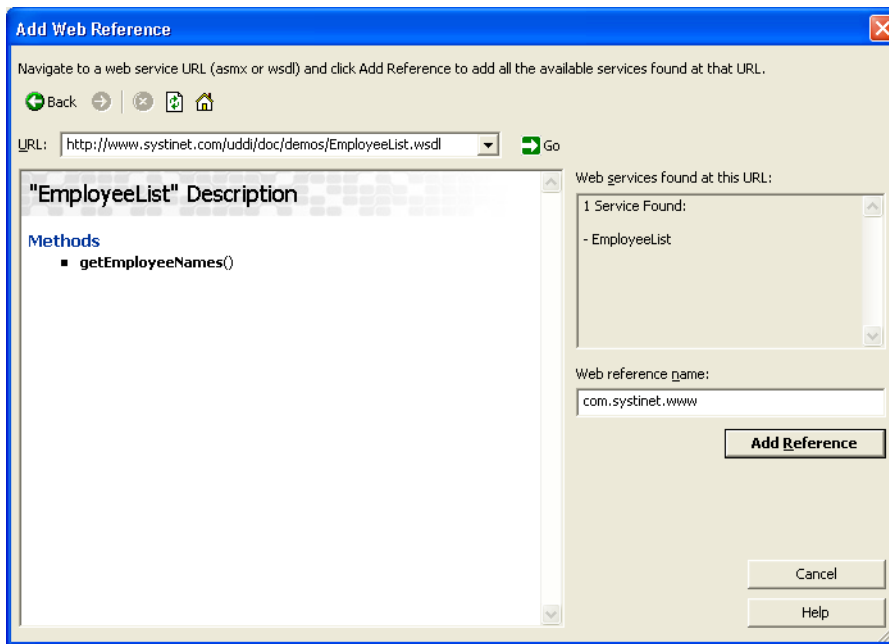
Figure 18. Searching Oracle Service Registry via Web Reference Wizard


Figure 19. Add Web Reference - Found Web service

If you find a WSDL file, the wizard shown in [Figure 19](#) parses the WSDL file displaying Web service method. Then, you can click **Add Reference** button to add the reference to your project.

5. How to Debug

5.1. SOAPSpy Tool

When debugging, it can be useful to track communication between the client and server. SOAPSpy allows the inspection of messages that the client and server exchange. Messages, or more precisely, requests and responses, are coupled to calls. [Figure 20](#) shows the SOAPSpy dialog box.

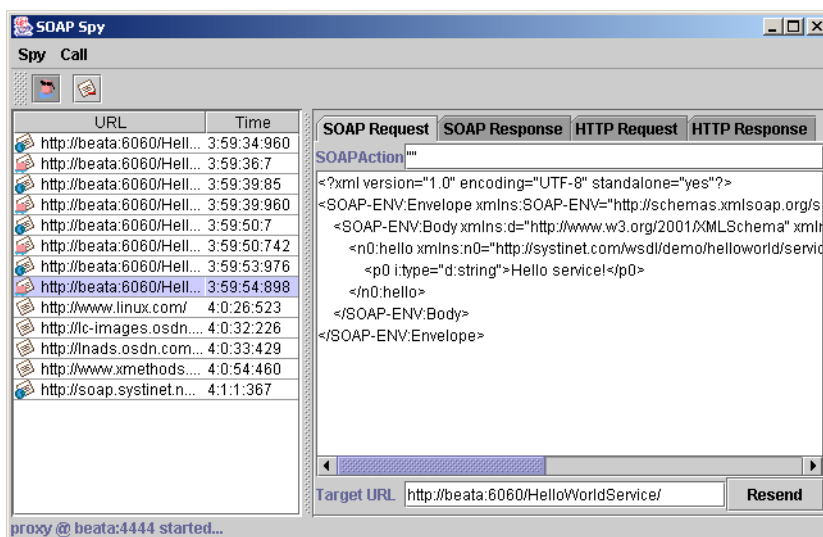Figure 20. SOAPSpy Tool

SOAPSpy works as an HTTP proxy server. It accepts HTTP requests from clients and resends them to their final destinations, or to another HTTP proxy server. SOAPSpy can track not only SOAP and WSDL messages, but also any other documents (HTML pages, binary data, etc.). However, the binary data is shown only schematically; all invalid text characters are translated into question mark (?) characters. SOAPSpy can also work as an HTTP server client: you can make it contact another proxy server instead of connecting to the final destination.

5.1.1. Running SOAPSpy

This tool is placed in the `bin` subdirectory of your Oracle Service Registry server distribution. To start SOAPSpy, enter the command **SoapSpy.bat** on Windows platforms, or **./SoapSpy.sh** on UNIX machines.

Figure 21. Start Spying



Spying must be started first by selecting **Start Spying** from the **Spy** menu or by clicking the spy icon in the main panel, shown in [Figure 21](#).

Figure 22. Status Line



The lower part of the window contains a status bar, shown in [Figure 22](#), with information about the state of the tool. Once started, the status line displays the proxy host and port number.

The following options can be used on the command line when activating SOAPSpy:

- **--port [PORT]**
Starts SOAPSpy at the given port
- **--help**
Shows the help screen on the console
- **--version**
shows the version of SOAPSpy on the console

To make SOAPSpy contact another proxy server instead of making a direct connection to the destination, use the standard Java system properties for HTTP proxies:

- **-Dhttp.proxyHost=PROXY_HOST** - The host name of the proxy server
- **-Dhttp.proxyPort=PROXY_PORT** - The port of the proxy server

There are two possible ways to load the tool:

1. **./SoapSpy**
2. **./SoapSpy --port PROXY_PORT**


5.1.2. Using SOAPSpy

The program consists of a call list and a message viewer.

Received calls are stored in a list on the left side of the window. Calls can be selected and examined. Unwanted calls can be removed from the list using the **Call** menu or context pop-up.

The message viewer displays the selected call, as shown in [Figure 23](#). Every call contains HTTP Request and HTTP Response tabs, which contain raw data caught by SOAPSpy. SOAP calls contain two specific panels, SOAP Request and SOAP Response, for advanced manipulation of SOAP messages. The same applies for WSDL calls.


Figure 23. Call Types



5.1.3. SOAP Request Tab

The SOAP Request tab, shown in [Figure 24](#), consists of the SOAP Action, SOAP message and Target URL where the original request was sent. Every file can be edited. Click the **Resend** to produce a new HTTP request. The resent request appears in the call list.

Figure 24. Request Tab

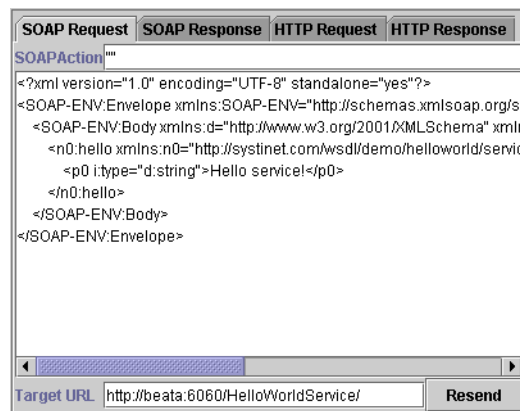

5.1.4. How to Run Clients Using SOAPSpy

Java system properties `http.proxyHost` and `http.proxyPort` need to be set. Use the command **java -Dhttp.proxyHost=CLIENT_COMPUTER_NAME -Dhttp.proxyPort=4444...** before running SoapSpy. E.g.:

```
java -Dhttp.proxyHost=%CLIENT_COMPUTER_NAME% -Dhttp.proxyPort=4444 org.my.FooClient
```



Important

Because SoapSpy works with the `java.net` proxy classes, it will not work with a `localhost` address. This applies to the endpoint URL that your client calls. If you do not see any activity when using SoapSpy, this is a likely cause. If you want to try running a service locally, simply obtain the machine's hostname via the `java.net.InetAddress` class.

5.2. Logging

Oracle Service Registry wraps the [Log4j](http://logging.apache.org/log4j/docs/index.html) [http://logging.apache.org/log4j/docs/index.html] logging service to log errors, warnings, and other information. By default:

- All such events are logged to `REGISTRY_HOME\log\logEvents.log`.
- All errors including stack traces are logged to `REGISTRY_HOME\log\errorEvents.log`.
- Behavior descriptions are configured in `REGISTRY_HOME\conf\log4j.config`.

To use the same logging mechanism in custom server code (such as the Custom Validation Service):

1. Import `com.idoox.debug.Category` to your java class:

```
import com.idoox.debug.Category;
```

2. Create static instance with name of the category:

```
private static Category log = Category.getCategory("com.company.MyValidationService");
```

3. It is a good habit to name the category according to its class name. You can use the category

```
...
try{
    ...
} catch(Exception e){
    log.error("Fatal error", e);
}
...
```


Demos

The Oracle Service Registry demos suite is used to teach the capabilities of the Oracle Service Registry APIs and how to make use of these to interact with the registry over a SOAP interface.



Note

If you want to run demos on Oracle Service Registry, make sure you have properly imported the SSL certificate of the application server to the Oracle Service Registry configuration. For more information see Installation Guide. You may also need to modify the Oracle Service Registry URLs used in demos as shown in the demos property file, `REGISTRY_HOME/demos/env.properties`.

If you get the `java.lang.reflect.UndeclaredThrowableException`, check whether Oracle Service Registry is running

The demos are divided into the following categories:

Basic Demos

The Basic demos cover inquiry and publishing for versions 1, 2, and 3 of the UDDI specification and WSDL2UDDI for versions 2 and 3.

Advanced Demos

The Advanced demos discuss custody, subscriptions, validation, and taxonomies.

Security Demos

In the Security demos, we cover accounts, groups, permissions, and access control lists (ACLs).

Resources Demos

In the resources demos, we cover publishing of WSDL, XML, XSD and XSLT.

1. Basic Demos

Basic Demos section includes the following demos:

- [UDDI v1 demos](#)
- [UDDI v2 demos](#)
- [UDDI v3 demos](#)

1.1. UDDI v1

- [UDDI v1 Inquiry demos](#)
- [UDDI v1 Publishing demos](#)

1.1.1. Inquiry v1

The Oracle Service Registry basic inquiry demo set is used to demonstrate the Oracle Service Registry application programming interface's capabilities and to teach the reader how to use this API to perform basic inquiry calls to a UDDI registry. This documentation covers the [UDDI Version 1 Specification](http://www.oasis-open.org/committees/uddi-spec/doc/contribs.htm#uddiv1) [http://www.oasis-open.org/committees/uddi-spec/doc/contribs.htm#uddiv1].

You will learn how to use the Oracle Service Registry client API to contact and get information from a UDDI registry over a SOAP interface. There is one demo for each UDDI call, from `find_business` to `get_tModelDetail`.

The Oracle Service Registry basic inquiry demo set contains following demos to assist you in learning the Oracle Service Registry client API.

FindBinding Demonstrates how to construct and fill the `Find_binding` object, get an Inquiry stub for the UDDI registry, perform a `find_binding` call, and display the results.

FindBusiness Demonstrates how to construct and fill a `Find_business` object, get an Inquiry stub for the UDDI registry, perform a `find_business` call and display the results.

FindService Demonstrates how to construct and fill a `Find_service` object, get an Inquiry stub for the UDDI registry, perform a `find_service` call and display the results.

FindTModel Demonstrates how to construct and fill a `Find_tModel` object, get an Inquiry stub for the UDDI registry, perform a `find_tModel` call and display the results.

GetBindingDetail Demonstrates how to create a `Get_bindingDetail` object, set the `bindingKey` of the `bindingTemplate` to be fetched, get an Inquiry stub for the UDDI registry, perform a `get_bindingDetail` call, and display the result.

GetBusinessDetail Demonstrates how to create a `Get_businessDetail` object, set the `businessKey` of the `businessEntity` to be fetched, get an Inquiry stub for the UDDI registry, perform a `get_businessDetail` call, and display the result.

GetServiceDetail Demonstrates how to create a `Get_serviceDetail` object, set the `serviceKey` of the `business service` to be fetched, get an Inquiry stub for the UDDI registry, perform a `get_serviceDetail` call, and display the result.

GetTModelDetail Demonstrates how to create a `Get_tModelDetail` object, set the `tModelKey` of the `tModel` to be fetched, get an Inquiry stub for the UDDI registry, perform a `get_tModelDetail` call, and display the result.

Prerequisites and Preparatory Steps: Code

We expect, that you have already installed the Oracle Service Registry and set the `REGISTRY_HOME` environment variable to its installation location.

To run the Oracle Service Registry's demos, your registry must be running.

It is necessary to configure the demos. The configuration system has two levels: global and local. The properties defined at the global level may be overwritten at the local level. The global properties are located in the file:

Windows:	%REGISTRY_HOME%\demos\env.properties
UNIX:	\$REGISTRY_HOME/demos/env.properties

The values set during the installation of the Oracle Service Registry work out of box, and their modification affects all demos. If you need to redefine a property's value for a single demo (that is, at the local level), edit the file `env.properties` in the directory where `run.bat` (`run.sh`) is located. Local properties for Basic/Inquiry demos are loaded in the file:

Windows:	%REGISTRY_HOME%\demos\basic\inquiry\v1\env.properties
UNIX:	\$REGISTRY_HOME/demos/basic/inquiry/v1/env.properties

Table 1. Properties Used in Demos

Name	Default Value	Description
uddi.demos.result.max_rows	5	limit on data returned from registry
uddi.demos.url.inquiry	http://localhost:8888/registry/uddi/inquiry	the inquiry Web service port URL

Presentation and Functional Presentation

This section describes programming pattern used in all demos using the FindTModel demo as an example. You can find its source code in the file:

Windows:	%REGISTRY_HOME%\demos\basic\inquiry\v1\src\demo\uddi\v1\inquiry\FindTModel.java
UNIX:	\$REGISTRY_HOME/demos/basic/inquiry/v1/src/demo/uddi/v1/inquiry/FindTModel.java

The main method is straightforward. It gathers user's input (tModel name), calls a method to initialize the Find_tModel object, executes the find_tModel UDDI call, and displays the list of found tModels:

```
String name = UserInput.readString("Enter name", "demo%");
Find_tModel find_tModel = createFindByTModel(name, findQualifier);
TModelList result = findTModel(find_tModel);
printTModelList(result);
```

The createFindTModel() method is used to create a new instance of the Find_tModel class and initialize it with values from parameters:

```
public static Find_tModel createFindByTModel(String name)
    throws InvalidParameterException {
    System.out.println("name = " + name);
    Find_tModel find = new Find_tModel();
    find.setName(name);
    find.setMaxRows(new Integer(MAX_ROWS));
    find.setGeneric(Constants.GENERIC_1_0);
    return find_tModel;
}
```

The helper method getInquiryStub() returns the UDDI Inquiry stub of the web service listening at the URL specified in the URL_INQUIRY property.

```
public static InquireSoap getInquiryStub()
    throws SOAPException {
    // you can specify your own URL in property - uddi.demos.url.inquiry
    String url = DemoProperties.getProperty(URL_INQUIRY,
    "http://localhost:8888/registry/uddi/inquiry");
    System.out.print("Using Inquiry at url " + url + " ..");
    InquireSoap inquiry = UDDIInquiryStub.getInstance(url);
    System.out.println(" done");
    return inquiry;
}
```

The UDDI API call find_tModel is performed in the method findTModel:

```

public static TModelList findTModel(Find_tModel find_tModel)
    throws UDDIException, SOAPException {
    InquireSoap inquiry = getInquiryStub();
    System.out.print("Search in progress ..");
    TModelList tModelList = inquiry.find_tModel(find_tModel);
    System.out.println(" done");
    return tModelList;
}

```

The list of found tModels is printed with the method `printTModelList`. One interesting aspect of the Oracle Service Registry client API is that each `UDDIObject` contains the method `toXML()`, which returns a human-readable, formatted listing of its XML representation.

```

public static void printTModelList(TModelList tModelList) {
    System.out.println();

    TModelInfoArrayList tModelInfoArrayList = tModelList.getTModelInfoArrayList();
    if (tModelInfoArrayList==null) {
        System.out.println("Nothing found");
        return;
    }

    int position = 1;
    for (Iterator iterator = tModelInfoArrayList.iterator(); iterator.hasNext();) {
        TModelInfo tModelTemplate = (TModelInfo) iterator.next();
        System.out.println("TModel "+position+" : "+tModelTemplate.getTModelKey());
        System.out.println(tModelTemplate.toXML());
        System.out.println();
        System.out.println("*****");
        position++;
    }
}

```

Building and Running Demos

This section shows how to build and run the Oracle Service Registry Basic Inquiry demo set. Our example continues with the `FindTModel` demo.

1. Be sure that the demos are properly configured and the Oracle Service Registry is up and running.
2. Change your working directory to:

Windows:	%REGISTRY_HOME%\demos\basic\inquiry\v1
UNIX:	\$REGISTRY_HOME/demos/basic/inquiry/v1

3. Build all demos using:

Windows:	run.bat make
UNIX:	./run.sh make



Note

When compiling demos on Windows platforms, you may see the following text:

A subdirectory or file ..\..\common\.\build\classes already exists.

This is expected and does not indicate a problem.

4. To get list of all available demos, run

Windows:	run.bat help
UNIX:	./run.sh help

5. Run a selected demo by executing the **run** command with the name of the demo as a parameter. For example, to run the FindTModel demo, invoke

Windows:	run.bat FindBinding
UNIX:	./run.sh FindBinding

The output of this demo will resemble the following:

```
Running FindTModel demo...
Searching for tModel where
Enter name [demo%]:
name = demo%
Using Inquiry at url http://mycomp.com:8888/registry/uddi/inquiry .. done
Search in progress .. done

TModel 1 : uuid:13aee5be-8531-343c-98f8-d2d3a9308329
<tModelInfo tModelKey="uuid:13aee5be-8531-343c-98f8-d2d3a9308329" xmlns="urn:uddi-
org:api_v1">
<name>demo:departmentID</name>
</tModelInfo>

*****
TModel 2 : uuid:8af5f49e-e793-3719-92f3-6ab8998eb5a9
<tModelInfo tModelKey="uuid:8af5f49e-e793-3719-92f3-6ab8998eb5a9" xmlns="urn:uddi-
org:api_v1">
<name>demo:hierarchy</name>
</tModelInfo>

*****
TModel 3 : uuid:5c1d5d80-a4d4-11d8-91cd-5c1d367091cd
<tModelInfo tModelKey="uuid:5c1d5d80-a4d4-11d8-91cd-5c1d367091cd" xmlns="urn:uddi-
org:api_v1">
<name>Demo identifier</name>
</tModelInfo>

*****
```

6. To rebuild demos, execute **run.bat clean** (**./run.sh clean**) to delete the classes directory and **run.bat make** (**./run.sh make**) to rebuild the demo classes.

1.1.2. Publishing v1

The Oracle Service Registry basic publishing demo set demonstrates the Oracle Service Registry application programming interface's capabilities and teaches how to use this API to perform basic publishing calls to a UDDI registry.

The Oracle Service Registry basic publishing demos cover the publication aspect of the [UDDI Version 1 Specification](http://www.oasis-open.org/committees/uddi-spec/doc/contribs.htm#uddiv1) [http://www.oasis-open.org/committees/uddi-spec/doc/contribs.htm#uddiv1]. You will learn, how to use the Oracle Service Registry client API to publish information to a UDDI registry over a SOAP interface. There is one demo for each UDDI call, from `delete_binding` to `save_business`.

The Oracle Service Registry basic publishing demo set contains the following demos to assist you in learning the Oracle Service Registry client API.

DeleteBinding Demonstrates how to construct and fill the `Delete_binding` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `delete_binding` call.

DeleteBusiness Demonstrates how to construct and fill the `Delete_business` object, get Publishing stub for the UDDI registry, get an `authToken`, and perform the `delete_business` call.

DeleteService Demonstrates how to construct and fill the `Delete_service` object, get Publishing stub for the UDDI registry, get an `authToken`, and perform the `delete_service` call.

DeleteTModel Demonstrates how to construct and fill the `Delete_tModel` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `delete_tModel` call.

GetRegisteredInfo Demonstrates how to construct and fill the `Get_registeredInfo` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `get_registeredInfo` call.

SaveBinding Demonstrates how to construct and fill the `Save_binding` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `save_binding` call.

SaveBusiness Demonstrates how to construct and fill the `Save_business` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `save_business` call.

SaveService Demonstrates how to construct and fill the `Save_service` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `save_service` call.

SaveTModel Demonstrates how to construct and fill the `Save_tModel` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `save_tModel` call.

Prerequisites and Preparatory Steps: Code

We expect that you have already installed the Oracle Service Registry and set the `REGISTRY_HOME` environment variable to its installation location.

To run the Oracle Service Registry's demos, your registry must be running.

It is necessary to configure the demos. The configuration system has two levels: global and local. The properties defined at the global level may be overwritten at the local level. The global properties are located in the file:

Windows:	%REGISTRY_HOME%\demos\env.properties
UNIX:	%REGISTRY_HOME%/demos/env.properties

The values set during the installation of the Oracle Service Registry work out of the box, and their modification affects all demos. If you need to redefine a property's value for a single demo (that is, at the local level), edit the file

`env.properties` in the directory where `run.sh(run.bat)` is located. Local level properties for the Basic/Inquiry demos are loaded from the file:

Windows:	%REGISTRY_HOME%\demos\basic\publishing\v1\env.properties
UNIX:	\$REGISTRY_HOME/demos/basic/publishing/v1/env.properties

Table 2. Properties Used in the demos

Name	Default Value	Description
uddi.demos.user.john.name	demo_john	First user's name
uddi.demos.user.john.password	demo_john	First user's password
uddi.demos.user.jane.name	demo_jane	Second user's name
uddi.demos.user.jane.password	demo_jane	Second user's password
uddi.demos.url.publishing	http://localhost:8888/registry/uddi/publishing	The publication Web service port URL
uddi.demos.url.security	http://localhost:8888/registry/uddi/security	The security Web service port URL

Presentation and Functional Presentation

This section describes the programming pattern used in all demos using the SaveBusiness demo as an example. You can find this demo's source code in the file:

Windows:	%REGISTRY_HOME%\demos\basic\publishing\v1\src\demo\uddi\v1\publishing\SaveBusiness.java
UNIX:	\$REGISTRY_HOME/demos/basic/publishing/v1/src/demo/uddi/v1/publishing/SaveBusiness.java

The main method is easy to understand:

1. It gathers the user's input: an optional publisher-assigned businessKey, an array of business entity names with their language codes, and the business' description.
2. The next step is to get the security stub and authorize the user. The resulting authInfo string is a secret key passed in all requests.
3. Next, the `Save_business` object is created, filled, and passed to the `saveBusiness` method as a parameter.

When successful, the `BusinessDetail` object is returned from the UDDI registry and printed.

4. The last step is to discard the `authInfo` string, so that no malicious user can use it to compromise a user's account.

```
String name = UserInput.readString("Enter business name", "Marketing");
String description = UserInput.readString("Enter description", "Saved by SaveBusiness demo");
System.out.println();

UDDI_Security_PortType security = getSecurityStub();
String authInfo = getAuthInfo(user, password, security);
Save_business save = createSaveBusiness(businessKey, names, languageCodes, description,
authInfo);
BusinessDetail result = saveBusiness(save);
printBusinessDetail(result);
discardAuthInfo(authInfo, security);
```

The helper method, `getSecurityStub()` returns the UDDI Security stub of the web service listening at the URL specified by the `URL_SECURITY` property.

```
public static UDDI_Security_PortType getSecurityStub()
    throws SOAPException {
    // you can specify your own URL in property - uddi.demos.url.security
    String url = DemoProperties.getProperty(URL_SECURITY,
    "http://localhost:8888/registry/uddi/security");
    System.out.print("Using Security at url " + url + " ..");
    UDDI_Security_PortType security = UDDISecurityStub.getInstance(url);
    System.out.println(" done");
    return security;
}
```

Similarly, the helper method `getPublishingStub()` returns the UDDI Publication stub of the Web service listening at the URL specified by the `URL_PUBLISHING` property.

```
public static UDDI_Publication_PortType getPublishingStub()
    throws SOAPException {
    // you can specify your own URL in property - uddi.demos.url.publishing
    String url = DemoProperties.getProperty(URL_PUBLISHING,
    "http://localhost:8888/registry/uddi/publishing");
    System.out.print("Using Publishing at url " + url + " ..");
    UDDI_Publication_PortType inquiry = UDDIPublishStub.getInstance(url);
    System.out.println(" done");
    return inquiry;
}
```

The `getAuthInfo()` method is used to authorize the user against the UDDI registry and to get the secret key `authInfo`.

```
public static String getAuthInfo(String userName,
    String password, UDDI_Security_PortType security)
    throws InvalidParameterException, UDDIException {
    System.out.print("Logging in ..");
    AuthToken authToken = security.get_authToken(new Get_authToken(userName, password));
    System.out.println(" done");
    return authToken.getAuthInfo();
}
```

The `discardAuthInfo()` method invalidates the secret key `authInfo`, so it cannot be reused.

```
public static DispositionReport discardAuthInfo(String authInfo,
    UDDI_Security_PortType security)
    throws InvalidParameterException, UDDIException {
    System.out.print("Logging out ..");
    DispositionReport dispositionReport = security.discard_authToken(new
    Discard_authToken(authInfo));
    System.out.println(" done");
    return dispositionReport;
}
```

The `createSaveBusiness()` method is used to create a new instance of the `Save_business` class and initialize it with values from parameters:

```
public static Save_business createSaveBusiness(String name,
    String description, String authInfo)
```

```

throws InvalidParameterException {
    System.out.println("name = " + name);
    System.out.println("description = " + description);

    BusinessEntity businessEntity = new BusinessEntity();
    businessEntity.setBusinessKey("");
    businessEntity.setName(name);
    businessEntity.addDescription(new Description(description));

    Save_business save = new Save_business();
    save.addBusinessEntity(businessEntity);
    save.setAuthInfo(authInfo);
    save.setGeneric(Constants.GENERIC_1_0);
    return save;
}

```

The UDDI API call `save_business` is performed in the `saveBusiness()` method:

```

public static BusinessDetail saveBusiness(Save_business save)
    throws UDDIException, SOAPException {
    UDDI_Publication_PortType publishing = getPublishingStub();
    System.out.print("Save in progress ...");
    BusinessDetail businessDetail = publishing.save_business(save);
    System.out.println(" done");
    return businessDetail;
}

```

The saved `businessEntity` is displayed by the `printBusinessDetail()` method. One interesting aspect of the Oracle Service Registry client API is that each `UDDIObject` contains the `toXML()`, which returns a human-readable formatted listing of the XML representation.

```

public static void printBusinessDetail(BusinessDetail businessDetail) {
    System.out.println();
    BusinessEntityArrayList businessEntityArrayList =
    businessDetail.getBusinessEntityArrayList();
    int position = 1;
    for (Iterator iterator = businessEntityArrayList.iterator(); iterator.hasNext();) {
        BusinessEntity entity = (BusinessEntity) iterator.next();
        System.out.println("Business " + position + " : " + entity.getBusinessKey());
        System.out.println(entity.toXML());
        System.out.println();
        System.out.println("*****");
        position++;
    }
}

```

Building and Running Demos

This section shows how to build and run the Oracle Service Registry Basic Publishing demo set. Let us continue with our `SaveBusiness` demo.

1. Be sure that the demos are properly configured and the Oracle Service Registry is up and running.
2. Change your working directory to

Windows:	%REGISTRY_HOME%\demos\basic\publishing\v1
UNIX:	\$REGISTRY_HOME/demos/basic/publishing/v1

3. Build all demos using:

Windows:	run.bat make
UNIX:	./run.sh make



Note

When compiling demos on Windows platforms, you may see the following text:

```
subdirectory or file ../../common\..\build\classes already exists.
```

This is expected and does not indicate a problem.

4. To get list of all available demos, run

Windows:	run.bat help
UNIX:	./run.sh help

5. The selected demo can be executed via the **run** command using the name of demo as a parameter. For example, to run the SaveBusiness demo, invoke

Windows:	run.bat SaveBusiness
UNIX:	./run.sh SaveBusiness

The output of this demo will resemble the following:

```
Running SaveBusiness demo...
Saving business entity where
Enter business name [Marketing]:
Enter description [Saved by SaveBusiness demo]:

Using Publishing at url https://mycomp.com:8443/registry/uddi/publishing .. done
Logging in .. done
name = Marketing
description = Saved by SaveBusiness demo
Save in progress ... done

Business 1 : 79596f30-a5a9-11d8-91cd-5c1d367091cd
<businessEntity businessKey="79596f30-a5a9-11d8-91cd-5c1d367091cd" operator="Demo Operator"

  authorizedName="demo_john" xmlns="urn:uddi-org:api">
    <name>Marketing</name>
    <description>Saved by SaveBusiness demo</description>
  </businessEntity>
```

```
*****
Logging out .. done
```

6. To rebuild demos, execute `run.bat clean` (`./run.sh clean`) to delete the classes directory and `run.bat make` (`./run.sh make`) to rebuild the demo classes.

1.2. UDDI v2

- [UDDI v2 Inquiry demos](#)
- [UDDI v2 Publishing demos](#)

1.2.1. Inquiry v2

The Oracle Service Registry basic inquiry demo set is used to demonstrate the Oracle Service Registry application programming interface's capabilities and to teach the reader how to use this API to perform basic inquiry calls to a UDDI registry.

The Oracle Service Registry basic inquiry demos cover inquiry aspects of the [UDDI Version 2.0.4 Specification](http://www.oasis-open.org/committees/uddi-spec/doc/tcpspecs.htm#uddiv2) [http://www.oasis-open.org/committees/uddi-spec/doc/tcpspecs.htm#uddiv2]. You will learn how to use the Oracle Service Registry client API to contact and get information from a UDDI registry over a SOAP interface. There is one demo for each UDDI call, from `find_business` to `get_tModelDetail`.

The Oracle Service Registry basic inquiry demo set contains following demos to assist you in learning the Oracle Service Registry client API.

FindBinding Demonstrates how to construct and fill the `Find_binding` object, get an Inquiry stub for the UDDI registry, perform a `find_binding` call, and display the results.

FindBusiness Demonstrates how to construct and fill a `Find_business` object, get an Inquiry stub for the UDDI registry, perform a `find_business` call and display the results.

FindRelatedBusiness Demonstrates how to construct and fill a `Find_relatedBusiness` object, get an Inquiry stub for the UDDI registry, perform a `find_relatedBusiness` call and display the results.

FindService Demonstrates how to construct and fill a `Find_service` object, get an Inquiry stub for the UDDI registry, perform a `find_service` call and display the results.

FindTModel Demonstrates how to construct and fill a `Find_tModel` object, get an Inquiry stub for the UDDI registry, perform a `find_tModel` call and display the results.

GetBindingDetail Demonstrates how to create a `Get_bindingDetail` object, set the `bindingKey` of the `bindingTemplate` to be fetched, get an Inquiry stub for the UDDI registry, perform a `get_bindingDetail` call, and display the result.

GetBusinessDetail Demonstrates how to create a `Get_businessDetail` object, set the `businessKey` of the `businessEntity` to be fetched, get an Inquiry stub for the UDDI registry, perform a `get_businessDetail` call, and display the result.

GetServiceDetail Demonstrates how to create a `Get_serviceDetail` object, set the `serviceKey` of the `business service` to be fetched, get an Inquiry stub for the UDDI registry, perform a `get_serviceDetail` call, and display the result.

GetTModelDetail Demonstrates how to create a `Get_tModelDetail` object, set the `tModelKey` of the `tModel` to be fetched, get an Inquiry stub for the UDDI registry, perform a `get_tModelDetail` call, and display the result.

Prerequisites and Preparatory Steps: Code

We expect, that you have already installed the Oracle Service Registry registry and set the `REGISTRY_HOME` environment variable to its installation location.

To run the Oracle Service Registry's demos, your registry must be running.

It is necessary to configure the demos. The configuration system has two levels: global and local. The properties defined at the global level may be overwritten at the local level. The global properties are located in the file:

Windows:	%REGISTRY_HOME%\demos\env.properties
UNIX:	\$REGISTRY_HOME/demos/env.properties

The values set during the installation of the Oracle Service Registry work out of box, and their modification affects all demos. If you need to redefine the value of some property for a single demo (that is, at the local level), edit the file `env.properties` in the directory where `run.bat` (`run.sh`) is located. Local level properties for Basic/Inquiry demos are loaded in the file:

Windows:	%REGISTRY_HOME%\demos\basic\inquiry\v2\env.properties
UNIX:	\$REGISTRY_HOME/demos/basic/inquiry/v2/env.properties

Table 3. Properties Used in Demos

Name	Default Value	Description
uddi.demos.result.max_rows	5	limit of data returned from registry
uddi.demos.url.inquiry	http://localhost:8888/registry/uddi/inquiry	the inquiry Web service port URL

Presentation and Functional Presentation

This section describes the programming pattern used in all demos using the `FindTModel` demo as an example. You can find its source code in the file:

Windows:	%REGISTRY_HOME%\demos\basic\inquiry\v2\src\demo\uddi\v2\inquiry\FindTModel.java
UNIX:	\$REGISTRY_HOME/demos/basic/inquiry/v2/src/demo/uddi/v2/inquiry/FindTModel.java

The main method is straightforward. It gathers user's input (`tModel` name), calls a method to initialize the `Find_tModel` object, executes the `find_tModel` UDDI call, and displays the list of found `tModels`:

```
String name = UserInput.readString("Enter name", "demo%");
Find_tModel find_tModel = createFindByTModel(name, findQualifier);
TModelList result = findTModel(find_tModel);
printTModelList(result);
```

The `createFindTModel()` method is used to create new instance of the `Find_tModel` class and initialize it with values from parameters:

```
public static Find_tModel createFindByTModel(String name)
    throws InvalidParameterException {
    System.out.println("name = " + name);
    Find_tModel find = new Find_tModel();
    find.setName(new Name(name));
```

```

        find.setMaxRows(new Integer(MAX_ROWS));
        find.setGeneric(Constants.GENERIC_2_0);
        return find_tModel;
    }

```

The helper method `getInquiryStub()` returns the UDDI Inquiry stub of the web service listening at the URL specified in the `URL_INQUIRY` property.

```

public static UDDI_Inquiry_PortType getInquiryStub()
    throws SOAPException {
    // you can specify your own URL in property - uddi.demos.url.inquiry
    String url = DemoProperties.getProperty(URL_INQUIRY,
        "http://localhost:8888/registry/uddi/inquiry");
    System.out.print("Using Inquiry at url " + url + " ..");
    UDDI_Inquiry_PortType inquiry = UDDIInquiryStub.getInstance(url);
    System.out.println(" done");
    return inquiry;
}

```

The UDDI API call `find_tModel` is performed in the method `findTModel`:

```

public static TModelList findTModel(Find_tModel find_tModel)
    throws UDDIException, SOAPException {
    UDDI_Inquiry_PortType inquiry = getInquiryStub();
    System.out.print("Search in progress ..");
    TModelList tModelList = inquiry.find_tModel(find_tModel);
    System.out.println(" done");
    return tModelList;
}

```

The list of found tModels is printed with the method `printTModelList`. One interesting aspect of the Oracle Service Registry client API is that each `UDDIObject` contains method `toXML()`, which returns a human-readable, formatted listing of its XML representation.

```

public static void printTModelList(TModelList tModelList) {
    System.out.println();

    TModelInfoArrayList tModelInfoArrayList = tModelList.getTModelInfoArrayList();
    if (tModelInfoArrayList==null) {
        System.out.println("Nothing found");
        return;
    }

    int position = 1;
    for (Iterator iterator = tModelInfoArrayList.iterator(); iterator.hasNext();) {
        TModelInfo tModelTemplate = (TModelInfo) iterator.next();
        System.out.println("TModel "+position+" : "+tModelTemplate.getTModelKey());
        System.out.println(tModelTemplate.toXML());
        System.out.println();
        System.out.println("*****");
        position++;
    }
}

```

Building and Running Demos

This section shows how to build and run the Oracle Service Registry Basic Inquiry demo set. Our example continues with the FindTModel demo.

1. Be sure that the demos are properly configured and the Oracle Service Registry is up and running.
2. Change your working directory to:

Windows:	%REGISTRY_HOME%\demos\basic\inquiry\v2
UNIX:	\$REGISTRY_HOME/demos/basic/inquiry/v2

3. Build all demos using:

Windows:	run.bat make
UNIX:	./run.sh make



Note

When compiling demos on Windows platforms, you may see the following text:

```
A subdirectory or file ..\..\common\.\build\classes already exists.
```

This is expected and does not indicate a problem.

4. To get list of all available demos, run

Windows:	run.bat help
UNIX:	./run.sh help

5. Run a selected demo by executing the **run** command with the name of the demo as a parameter. For example, to run the FindTModel demo, invoke

Windows:	run.bat FindTModel
UNIX:	./run.sh FindTModel

The output of this demo will resemble the following:

```
Running FindTModel demo...
Enter name [demo%]:
name = demo%
Using Inquiry at url http://mycomp.com:8888/registry/uddi/inquiry .. done
Search in progress .. done

TModel 1 : uuid:13aee5be-8531-343c-98f8-d2d3a9308329
<tModelInfo tModelKey="uuid:13aee5be-8531-343c-98f8-d2d3a9308329" xmlns="urn:uddi-
org:api_v2">
<name>demo:departmentID</name>
</tModelInfo>

*****
```



```

TModel 2 : uuid:8af5f49e-e793-3719-92f3-6ab8998eb5a9
<tModelInfo tModelKey="uuid:8af5f49e-e793-3719-92f3-6ab8998eb5a9" xmlns="urn:uddi-
org:api_v2">
<name>demo:hierarchy</name>
</tModelInfo>

*****

TModel 3 : uuid:5c1d5d80-a4d4-11d8-91cd-5c1d367091cd
<tModelInfo tModelKey="uuid:5c1d5d80-a4d4-11d8-91cd-5c1d367091cd" xmlns="urn:uddi-
org:api_v2">
<name>Demo identifier</name>
</tModelInfo>

*****

```

6. To rebuild demos, execute `run.bat clean` (`./run.sh clean`) to delete the classes directory and `run.bat make` (`./run.sh make`) to rebuild the demo classes.

1.2.2. Publishing v2

The Oracle Service Registry basic publishing demo set demonstrates the Oracle Service Registry application programming interface's capabilities and teaches how to use this API to perform basic publishing calls to a UDDI registry.

The Oracle Service Registry basic publishing demos cover the publication aspect of the [UDDI Version 2 Specification](http://www.oasis-open.org/committees/uddi-spec/doc/tcpspecs.htm#uddiv2) [http://www.oasis-open.org/committees/uddi-spec/doc/tcpspecs.htm#uddiv2]. You will learn how to use the Oracle Service Registry client API to publish information to a UDDI registry over a SOAP interface. There is one demo for each UDDI call, from `add_publisherAssertion` through `get_registeredInfo` to `save_business`.

The Oracle Service Registry basic publishing demo set contains the following demos. They will assist you in learning the Oracle Service Registry client API.

AddAssertion Demonstrates how to construct and fill the `Add_publisherAssertion` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `add_publisherAssertion` call.

DeleteAssertion Demonstrates how to construct and fill the `Delete_publisherAssertion` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `delete_publisherAssertion` call.

DeleteBinding Demonstrates how to construct and fill the `Delete_binding` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `delete_binding` call.

DeleteBusiness Demonstrates how to construct and fill the `Delete_business` object, get Publishing stub for the UDDI registry, get an `authToken`, and perform the `delete_business` call.

DeleteService Demonstrates how to construct and fill the `Delete_service` object, get Publishing stub for the UDDI registry, get an `authToken`, and perform the `delete_service` call.

DeleteTModel Demonstrates how to construct and fill the `Delete_tModel` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `delete_tModel` call.

GetAssertionStatusReport Demonstrates how to construct and fill the `Get_assertionStatusReport` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `get_assertionStatusReport` call.

GetPublisherAssertions Demonstrates how to construct and fill the `Get_publisherAssertions` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `get_publisherAssertions` call.

GetRegisteredInfo Demonstrates how to construct and fill the `Get_registeredInfo` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `get_registeredInfo` call.

SaveBinding Demonstrates how to construct and fill the `Save_binding` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `save_binding` call.

SaveBusiness Demonstrates how to construct and fill the `Save_business` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `save_business` call.

SaveService Demonstrates how to construct and fill the `Save_service` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `save_service` call.

SaveTModel Demonstrates how to construct and fill the `Save_tModel` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `save_tModel` call.

SetAssertions Demonstrates how to construct and fill the `Set_publisherAssertions` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `set_publisherAssertions` call.

Prerequisites and Preparatory Steps: Code

We expect that you have already installed the Oracle Service Registry and set the `REGISTRY_HOME` environment variable to its installation location.

To run the Oracle Service Registry's demos, your registry must be running.

It is necessary to configure the demos. The configuration system has two levels: global and local. The properties defined at the global level may be overwritten at the local level. The global properties are located in the file:

Windows:	%REGISTRY_HOME%\demos\env.properties
UNIX:	\$REGISTRY_HOME/demos/env.properties

The values set during the installation of the Oracle Service Registry work out of the box, and their modification affects all demos. If you need to redefine a property's value for a single demo (that is, at the local level), edit the file `env.properties` in the directory where `run.sh` (`run.bat`) is located. Local level properties for the Basic/Inquiry demos are loaded from the file:

Windows:	%REGISTRY_HOME%\demos\basic\publishing\v2\env.properties
UNIX:	\$REGISTRY_HOME/demos/basic/publishing/v2/env.properties

Table 4. Properties Used in the Demos

Name	Default Value	Description
uddi.demos.user.john.name	demo_john	First user's name
uddi.demos.user.john.password	demo_john	First user's password
uddi.demos.user.jane.name	demo_jane	Second user's name
uddi.demos.user.jane.password	demo_jane	Second user's password
uddi.demos.url.publishing	http://localhost:8888/registry/uddi/publishing	The publication Web service port URL
uddi.demos.url.security	http://localhost:8888/registry/uddi/security	The security Web service port URL

Presentation and Functional Presentation

This section describes the programming pattern used in all demos using the SaveBusiness demo as an example. You can find this demo's source code in the file:

Windows:	%REGISTRY_HOME%\demos\basic\publishing\v2\src\demo\uddi\v2\publishing\SaveBusiness.java
UNIX:	\$REGISTRY_HOME/demos/basic/publishing/v2/src/demo/uddi/v2/publishing/SaveBusiness.java

The main method is easy to understand. First it gathers the user's input. Namely optional publisher assigned businessKey, then an array of business entity names with their language codes and finally a description of the business.

The next step is to get the security stub and authorize the user. The resulting authInfo string is a secret key passed in all requests.

Next, the Save_business object is created, filled, and passed to the saveBusiness method as a parameter.

When successful, the BusinessDetail object is returned from the UDDI registry and printed. The last step is to discard the authInfo string, so it cannot be used to compromise a user's account.

```
int count = UserInput.readInt("Enter count of names", 1);
String[] names = new String[count];
String[] languageCodes = new String[count];
for (int i = 0; i < count; i++) {
    String tmp = UserInput.readString("Enter language code", "");
    languageCodes[i] = (tmp.length() > 0) ? tmp : null;
    names[i] = UserInput.readString("Enter name in language " + tmp, "Marketing");
}
String description = UserInput.readString("Enter description",
                                           "Saved by SaveBusiness demo");
System.out.println();

UDDI_Security_PortType security = getSecurityStub();
String authInfo = getAuthInfo(user, password, security);
Save_business save = createSaveBusiness(businessKey, names, languageCodes, description,
authInfo);
BusinessDetail result = saveBusiness(save);
printBusinessDetail(result);
discardAuthInfo(authInfo, security);
```

The helper method, getSecurityStub() returns the UDDI Security stub of the Web service listening at the URL specified by the URL_SECURITY property.

```
public static UDDI_Security_PortType getSecurityStub()
    throws SOAPException {
    // you can specify your own URL in property - uddi.demos.url.security
    String url = DemoProperties.getProperty(URL_SECURITY,
"http://localhost:8888/registry/uddi/security");
    System.out.print("Using Security at url " + url + " ..");
    UDDI_Security_PortType security = UDDISecurityStub.getInstance(url);
    System.out.println(" done");
    return security;
}
```

The helper method getPublishingStub() returns the UDDI Publication stub of the Web service listening at the URL specified by the URL_PUBLISHING property.

```

public static UDDI_Publication_PortType getPublishingStub()
throws SOAPException {
    // you can specify your own URL in property - uddi.demos.url.publishing
    String url = DemoProperties.getProperty(URL_PUBLISHING,
        "http://localhost:8888/registry/uddi/publishing");
    System.out.print("Using Publishing at url " + url + " ..");
    UDDI_Publication_PortType inquiry = UDDIPublishStub.getInstance(url);
    System.out.println(" done");
    return inquiry;
}

```

The `getAuthInfo()` method is used to authorize the user against the UDDI registry and to get the secret `authInfo` key.

```

public static String getAuthInfo(String userName,
                                String password, UDDI_Security_PortType security)
throws InvalidParameterException, UDDIException {
    System.out.print("Logging in ..");
    AuthToken authToken = security.get_authToken(new Get_authToken(userName, password));
    System.out.println(" done");
    return authToken.getAuthInfo();
}

```

The `discardAuthInfo()` method invalidates the secret `authInfo` key, so it cannot be used anymore.

```

public static DispositionReport discardAuthInfo(String authInfo,
                                                UDDI_Security_PortType security)
throws InvalidParameterException, UDDIException {
    System.out.print("Logging out ..");
    DispositionReport dispositionReport = security.discard_authToken(new
Discard_authToken(authInfo));
    System.out.println(" done");
    return dispositionReport;
}

```

The `createSaveBusiness()` method is used to create a new instance of the `Save_business` class and initialize it with values from parameters:

```

public static Save_business createSaveBusiness(String[] names,
String[] nameLangCodes, String description, String authInfo)
throws InvalidParameterException {
    for (int i = 0; i < names.length; i++) {
        System.out.println("lang = " + nameLangCodes[i] + ", name = " + names[i]);
    }
    System.out.println("description = " + description);

    BusinessEntity businessEntity = new BusinessEntity();
    businessEntity.setBusinessKey("");
    for (int i = 0; i < names.length; i++) {
        if (nameLangCodes[i] == null) {
            businessEntity.addName(new Name(names[i]));
        } else {
            businessEntity.addName(new Name(names[i], nameLangCodes[i]));
        }
    }
    businessEntity.addDescription(new Description(description));
}

```

```

    Save_business save = new Save_business();
    save.addBusinessEntity(businessEntity);
    save.setAuthInfo(authInfo);
    save.setGeneric(Constants.GENERIC_2_0);
    return save;
}

```

The UDDI API call `save_business` is performed in the method `saveBusiness()`:

```

public static BusinessDetail saveBusiness(Save_business save)
    throws UDDIException, SOAPException {
    UDDI_Publication_PortType publishing = getPublishingStub();
    System.out.print("Save in progress ...");
    BusinessDetail businessDetail = publishing.save_business(save);
    System.out.println(" done");
    return businessDetail;
}

```

The saved `businessEntity` is displayed by the `printBusinessDetail()` method. One interesting aspect of the Oracle Service Registry client API is that each `UDDIObject` contains the `toXML()`, which returns a human-readable formatted listing of the XML representation.

```

public static void printBusinessDetail(BusinessDetail businessDetail) {
    System.out.println();
    BusinessEntityArrayList businessEntityArrayList =
businessDetail.getBusinessEntityArrayList();
    int position = 1;
    for (Iterator iterator = businessEntityArrayList.iterator(); iterator.hasNext();) {
        BusinessEntity entity = (BusinessEntity) iterator.next();
        System.out.println("Business " + position + " : " + entity.getBusinessKey());
        System.out.println(entity.toXML());
        System.out.println();
        System.out.println("*****");
        position++;
    }
}

```

Building and Running Demos

This section shows how to build and run the Oracle Service Registry Basic Publishing demo set. Let us continue with our `SaveBusiness` demo.

1. Be sure that the demos are properly configured and the Oracle Service Registry is up and running.
2. Change your working directory to

Windows:	%REGISTRY_HOME%\demos\basic\publishing\v2
UNIX:	\$REGISTRY_HOME/demos/basic/publishing/v2

3. Build all demos using:

Windows:	run.bat make

UNIX:	./run.sh make



Note

When compiling demos on Windows platforms, you may see the following text:

A subdirectory or file ..\..\common\.\build\classes already exists.

This is expected and does not indicate a problem.

4. To get list of all available demos, run

Windows:	run.bat help
UNIX:	./run.sh help

5. The selected demo can be executed via the **run** command using the name of the demo as a parameter. For example to run the SaveBusiness demo, invoke

Windows:	run.bat SaveBusiness
UNIX:	./run.sh SaveBusiness

The output of this demo will resemble the following:

```
Running SaveBusiness demo...
Saving business entity where
Enter count of names [1]:
Enter language code []:
Enter name in language [Marketing]:
Enter description [Saved by SaveBusiness demo]:

Using Publishing at url https://mycomp.com:8443/registry/uddi/publishing .. done
Logging in .. done
lang = null, name = Marketing
description = Saved by SaveBusiness demo
Save in progress ... done

Business 1 : c9e8be50-a5a5-11d8-91cd-5c1d367091cd
<businessEntity businessKey="c9e8be50-a5a5-11d8-91cd-5c1d367091cd" operator="Demo Operator"
authorizedName="demo_john" xmlns="urn:uddi-org:api_v2">
  <name>Marketing</name>
  <description>Saved by SaveBusiness demo</description>
</businessEntity>

*****
Logging out .. done
```

6. To rebuild demos, execute **run.bat clean** (**./run.sh clean**) to delete the classes directory and **run.bat make** (**./run.sh make**) to rebuild the demo classes.

1.3. UDDI v3

- [UDDI v3 Inquiry demos](#)

- [UDDI v3 Publishing demos](#)

1.3.1. Inquiry v3

The Oracle Service Registry basic inquiry demo set is used to demonstrate the Oracle Service Registry application programming interface's capabilities and to teach the reader how to use this API to perform basic inquiry calls to a UDDI registry.

The Oracle Service Registry basic inquiry demos cover the inquiry aspect of the [UDDI Version 3.0.1 Specification](http://www.oasis-open.org/committees/uddi-spec/doc/tcspecs.htm#uddiv3) [http://www.oasis-open.org/committees/uddi-spec/doc/tcspecs.htm#uddiv3]. You will learn how to use the Oracle Service Registry client API to contact and get information from a UDDI registry over a SOAP interface. There is one demo for each UDDI call, from `find_business` to `get_tModel`.

The Oracle Service Registry basic inquiry demo set contains following demos. They will assist you in learning the Oracle Service Registry client API.

FindBinding Demonstrates how to construct and fill the `Find_binding` object, get an Inquiry stub for the UDDI registry, perform a `find_binding` call, and display the results.

FindBusiness Demonstrates how to construct and fill a `Find_business` object, get an Inquiry stub for the UDDI registry, perform a `find_business` call and display the results.

FindRelatedBusiness Demonstrates how to construct and fill a `Find_relatedBusiness` object, get an Inquiry stub for the UDDI registry, perform a `find_relatedBusiness` call and display the results.

FindService Demonstrates how to construct and fill a `Find_service` object, get an Inquiry stub for the UDDI registry, perform a `find_service` call and display the results.

FindTModel Demonstrates how to construct and fill a `Find_tModel` object, get an Inquiry stub for the UDDI registry, perform a `find_tModel` call and display the results.

GetBindingDetail Demonstrates how to create a `Get_bindingDetail` object, set the `bindingKey` of the `bindingTemplate` to be fetched, get an Inquiry stub for the UDDI registry, perform a `get_bindingDetail` call, and display the result.

GetBusinessDetail Demonstrates how to create a `Get_businessDetail` object, set the `businessKey` of the `businessEntity` to be fetched, get an Inquiry stub for the UDDI registry, perform a `get_businessDetail` call, and display the result.

GetOperationalInfo Demonstrates how to create a `Get_operationalInfo` object, set a UDDI key, get an Inquiry stub for the UDDI registry, perform a `get_operationalInfo` call, and display the operational info of the selected UDDI structure.

GetServiceDetail Demonstrates how to create a `Get_serviceDetail` object, set the `serviceKey` of the `business service` to be fetched, get an Inquiry stub for the UDDI registry, perform a `get_serviceDetail` call, and display the result.

GetTModelDetail Demonstrates how to create a `Get_tModelDetail` object, set the `tModelKey` of the `tModel` to be fetched, get an Inquiry stub for the UDDI registry, perform a `get_tModelDetail` call, and display the result.

Prerequisites and Preparatory Steps: Code

We expect, that you have already installed the Oracle Service Registry and set the `REGISTRY_HOME` environment variable to its installation location.

To run the Oracle Service Registry's demos, your registry must be running.

It is necessary to configure the demos. The configuration system has two levels: global and local. The properties defined at the global level may be overwritten at the local level. The global properties are located in the file:

Windows:	%REGISTRY_HOME%\demos\env.properties
UNIX:	\$REGISTRY_HOME/demos/env.properties

The values set during the installation of the Oracle Service Registry work out of box, and their modification affects all demos. If you need to redefine the value of some property for a single demo (that is, at the local level), edit the file `env.properties` in the directory where `run.bat` (`run.sh`) is located. Local level properties for Basic/Inquiry demos are loaded in the file:

Windows:	%REGISTRY_HOME%\demos\basic\inquiry\v3\env.properties
UNIX:	\$REGISTRY_HOME/demos/basic/inquiry/v3/env.properties

Table 5. Properties Used in Demos

Name	Default value	Description
uddi.demos.result.max_rows	5	limit of data returned from registry
uddi.demos.url.inquiry	http://localhost:8888/registry/uddi/inquiry	the inquiry Web service port URL

Presentation and Functional Presentation

This section describes programming pattern used in all demos using the FindTModel demo as an example. You can find its source code in the file:

Windows:	%REGISTRY_HOME%\demos\basic\inquiry\v3\src\demo\uddi\v3\inquiry\FindTModel.java
UNIX:	\$REGISTRY_HOME/demos/basic/inquiry/v3/src/demo/uddi/v3/inquiry/FindTModel.java

The main method is straightforward. It gathers user's input (tModel name and findQualifier name), calls a method to initialize the Find_tModel object, executes the find_tModel UDDI call, and displays the list of found tModels:

```
String name = UserInput.readString("Enter name", "demo");
String findQualifier = UserInput.readString("Enter findQualifier", "approximateMatch");
Find_tModel find_tModel = createFindByTModel(name, findQualifier);
TModelList result = findTModel(find_tModel);
printTModelList(result);
```

The createFindTModel() method is used to create new instance of Find_tModel class and initialize it with values from parameters:

```
public static Find_tModel createFindByTModel(String name, String findQualifier)
    throws InvalidParameterException {
    System.out.println("findQualifier = " + findQualifier);
    System.out.println("name = " + name);
    Find_tModel find_tModel = new Find_tModel();
    find_tModel.setName(new Name(name));
    find_tModel.setMaxRows(new Integer(MAX_ROWS));
    find_tModel.addFindQualifier(findQualifier);
    return find_tModel;
}
```

The helper method getInquiryStub() returns the UDDI Inquiry stub of the web service listening at the URL specified in the URL_INQUIRY property.


```

public static UDDI_Inquiry_PortType getInquiryStub()
    throws SOAPException {
    // you can specify your own URL in property - uddi.demos.url.inquiry
    String url = DemoProperties.getProperty(URL_INQUIRY,
"http://localhost:8888/registry/uddi/inquiry");
    System.out.print("Using Inquiry at url " + url + " ..");
    UDDI_Inquiry_PortType inquiry = UDDIInquiryStub.getInstance(url);
    System.out.println(" done");
    return inquiry;
}

```

The UDDI API call `find_tModel` is performed in the method `findTModel`:

```

public static TModelList findTModel(Find_tModel find_tModel)
    throws UDDIException, SOAPException {
    UDDI_Inquiry_PortType inquiry = getInquiryStub();
    System.out.print("Search in progress ..");
    TModelList tModelList = inquiry.find_tModel(find_tModel);
    System.out.println(" done");
    return tModelList;
}

```

The list of found tModels are printed with the method `printTModelList`. One interesting aspect of the Oracle Service Registry client API is that each `UDDIObject` contains method `toXML()`, which returns a human-readable, formatted, listing of its XML representation.

```

public static void printTModelList(TModelList tModelList) {
    System.out.println();
    ListDescription listDescription = tModelList.getListDescription();
    if (listDescription!=null) {
        // list description is mandatory part of result,
        // if the resultant list is subset of available data
        int includeCount = listDescription.getIncludeCount();
        int actualCount = listDescription.getActualCount();
        int listHead = listDescription.getListHead();
        System.out.println("Displaying "+includeCount+" of "+
            actualCount+", starting at position " + listHead);
    }

    TModelInfoArrayList tModelInfoArrayList = tModelList.getTModelInfoArrayList();
    if (tModelInfoArrayList==null) {
        System.out.println("Nothing found");
        return;
    }

    int position = 1;
    for (Iterator iterator = tModelInfoArrayList.iterator(); iterator.hasNext();) {
        TModelInfo tModelTemplate = (TModelInfo) iterator.next();
        System.out.println("TModel "+position+" : "+tModelTemplate.getTModelKey());
        System.out.println(tModelTemplate.toXML());
        System.out.println();
        System.out.println("*****");
        position++;
    }
}

```

```
}
}
```

Building and Running Demos

This section shows how to build and run the Oracle Service Registry Basic Inquiry demo set. Our example continues with the FindTModel demo.

1. Be sure that the demos are properly configured and the Oracle Service Registry is up and running.
2. Change your working directory to:

Windows:	%REGISTRY_HOME%\demos\basic\inquiry\v3
UNIX:	\$REGISTRY_HOME/demos/basic/inquiry/v3

3. Build all demos using:

Windows:	run.bat make
UNIX:	./run.sh make



Note

When compiling demos on Windows platforms, you may see the following text:

```
A subdirectory or file ..\..\common\..\build\classes already exists.
```

This is expected and does not indicate a problem.

4. To get list of all available demos, run

Windows:	run.bat help
UNIX:	./run.sh help

5. Run a selected demo by executing the **run** command with the name of the demo as a parameter. For example, to run the FindTModel demo, invoke

Windows:	run.bat FindBinding
UNIX:	./run.sh FindBinding

The output of this demo will resemble the following:

```
Enter name [demo%]:
Enter findQualifier [approximateMatch]:
findQualifier = approximateMatch
name = demo%
Using Inquiry at url http://localhost:8888/registry/uddi/inquiry .. done
Search in progress .. done

Displaying 3 of 3, starting at position 1
TModel 1 : uddi:systinet.com:demo:departmentID
```

```

<tModelInfo tModelKey="uddi:systinet.com:demo:departmentID"
            xmlns="urn:uddi-org:api_v3">
  <name>demo:departmentID</name>
  <description>Identifier of the department</description>
</tModelInfo>

*****
TModel 2 : uddi:systinet.com:demo:hierarchy

<tModelInfo tModelKey="uddi:systinet.com:demo:hierarchy"
            xmlns="urn:uddi-org:api_v3">
  <name>demo:hierarchy</name>
  <description>Business hierarchy taxonomy</description>
</tModelInfo>

*****
TModel 3 : uddi:systinet.com:demo:location:floor

<tModelInfo tModelKey="uddi:systinet.com:demo:location:floor" xmlns="
            urn:uddi-org:api_v3">
  <name>demo:location:floor</name>
  <description>Specifies floor, on which the department is located</description>
</tModelInfo>

*****

```

6. To rebuild demos, execute `run.bat clean` (`./run.sh clean`) to delete the classes directory and `run.bat make` (`./run.sh make`) to rebuild the demo classes.

1.3.2. Publishing v3

The Oracle Service Registry basic publishing demo set demonstrates the Oracle Service Registry application programming interface's capabilities and teaches how to use this API to perform basic publishing calls to a UDDI registry.

The Oracle Service Registry basic publishing demos cover the publication aspect of the [UDDI Version 3 Specification](http://www.oasis-open.org/committees/uddi-spec/doc/tcpspecs.htm#uddiv3) [http://www.oasis-open.org/committees/uddi-spec/doc/tcpspecs.htm#uddiv3]. You will learn, how to use the Oracle Service Registry client API to publish information to a UDDI registry over a SOAP interface. There is one demo for each UDDI call, from `add_publisherAssertion` through `get_registeredInfo` to `save_business`.

The Oracle Service Registry basic publishing demo set contains the following demos. They will assist you in learning the Oracle Service Registry client API.

AddAssertion Demonstrates how to construct and fill the `Add_publisherAssertion` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `add_publisherAssertion` call.

DeleteAssertion Demonstrates how to construct and fill the `Delete_publisherAssertion` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `delete_publisherAssertion` call.

DeleteBinding Demonstrates how to construct and fill the `Delete_binding` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `delete_binding` call.

DeleteBusiness Demonstrates how to construct and fill the `Delete_business` object, get Publishing stub for the UDDI registry, get an `authToken`, and perform the `delete_business` call.

DeleteService Demonstrates how to construct and fill the `Delete_service` object, get Publishing stub for the UDDI registry, get an `authToken`, and perform the `delete_service` call.

DeleteTModel Demonstrates how to construct and fill the `Delete_tModel` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `delete_tModel` call.

GetAssertionStatusReport Demonstrates how to construct and fill the `Get_assertionStatusReport` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `get_assertionStatusReport` call.

GetPublisherAssertions Demonstrates how to construct and fill the `Get_publisherAssertions` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `get_publisherAssertions` call.

GetRegisteredInfo Demonstrates how to construct and fill the `Get_registeredInfo` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `get_registeredInfo` call.

SaveBinding Demonstrates how to construct and fill the `Save_binding` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `save_binding` call.

SaveBusiness Demonstrates how to construct and fill the `Save_business` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `save_business` call.

SaveService Demonstrates how to construct and fill the `Save_service` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `save_service` call.

SaveTModel Demonstrates how to construct and fill the `Save_tModel` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `save_tModel` call.

SetAssertions Demonstrates how to construct and fill the `Set_publisherAssertions` object, get a Publishing stub for the UDDI registry, get an `authToken`, and perform the `set_publisherAssertions` call.

Prerequisites and Preparatory Steps: Code

We expect that you have already installed the Oracle Service Registry and set the `REGISTRY_HOME` environment variable to its installation location.

To run the Oracle Service Registry's demos, your registry must be running.

It is necessary to configure the demos. The configuration system has two levels: global and local. The properties defined at the global level may be overwritten at the local level. The global properties are located in the file:

Windows:	%REGISTRY_HOME%\demos\env.properties
UNIX:	\$REGISTRY_HOME/demos/env.properties

The values set during the installation of the Oracle Service Registry work out of the box, and their modification affects all demos. If you need to redefine the value of some property for a single demo (that is, at the local level), edit the file `env.properties` in the directory where `run.sh(run.bat)` is located. Local level properties for the Basic/Inquiry demos are loaded from the file:

Windows:	%REGISTRY_HOME%\demos\basic\publishing\v3\env.properties
UNIX:	\$REGISTRY_HOME/demos/basic/publishing/v3/env.properties

Table 6. Properties Used in the Demos

Name	Default Value	Description
uddi.demos.user.john.name	demo_john	First user's name
uddi.demos.user.john.password	demo_john	First user's password
uddi.demos.user.jane.name	demo_jane	Second user's name
uddi.demos.user.jane.password	demo_jane	Second user's password
uddi.demos.url.publishing	http://localhost:8888/registry/uddi/publishing	The publication Web service port URL
uddi.demos.url.security	http://localhost:8888/registry/uddi/security	The security web service port URL

Presentation and Functional Presentation

This section describes the programming pattern used in all demos using the SaveBusiness demo as an example. You can find this demo's source code in the file:

Windows:	%REGISTRY_HOME%\demos\basic\publishing\v3\src\demo\uddi\v3\publishing\SaveBusiness.java
UNIX:	\$REGISTRY_HOME/demos/basic/publishing/v3/src/demo/uddi/v3/publishing/SaveBusiness.java

The main method is easy to understand. First it gathers the user's input: an optional publisher-assigned businessKey, then variable long array of business entity names with their language codes, and a description of the business.

The next step is to get the security stub and authorize the user. The resulting authInfo string is a secret key passed in all requests.

Next, the Save_business object is created, filled, and passed to the saveBusiness method as a parameter.

When successful, the BusinessDetail object is returned from the UDDI registry and printed. The last step is to discard the authInfo string, so no malicious user can use it to compromise a user's account.

```
String businessKey = UserInput.readString("Enter (optional) businessKey", "");
int count = UserInput.readInt("Enter count of names", 1);
String[] names = new String[count];
String[] languageCodes = new String[count];
for (int i = 0; i < count; i++) {
    String tmp = UserInput.readString("Enter language code", "");
    languageCodes[i] = (tmp.length() > 0) ? tmp : null;
    names[i] = UserInput.readString("Enter name in language " + tmp, "Marketing");
}
String description = UserInput.readString("Enter description", "Saved by SaveBusiness demo");
System.out.println();

UDDI_Security_PortType security = getSecurityStub();
String authInfo = getAuthInfo(user, password, security);
Save_business save = createSaveBusiness(businessKey, names, languageCodes, description,
authInfo);
BusinessDetail result = saveBusiness(save);
printBusinessDetail(result);
discardAuthInfo(authInfo, security);
```

The helper method, `getSecurityStub()` returns the UDDI Security stub of the web service listening at the URL specified by the `URL_SECURITY` property.

```
public static UDDI_Security_PortType getSecurityStub()
throws SOAPException {
    // you can specify your own URL in property - uddi.demos.url.security
    String url = DemoProperties.getProperty(URL_SECURITY,
"http://localhost:8888/registry/uddi/security");
    System.out.print("Using Security at url " + url + " ..");
    UDDI_Security_PortType security = UDDISecurityStub.getInstance(url);
    System.out.println(" done");
    return security;
}
```

Similarly, the helper method `getPublishingStub()` returns the UDDI Publication stub of the web service listening at the URL specified by the `URL_PUBLISHING` property.

```
public static UDDI_Publication_PortType getPublishingStub()
throws SOAPException {
    // you can specify your own URL in property - uddi.demos.url.publishing
    String url = DemoProperties.getProperty(URL_PUBLISHING,
"http://localhost:8888/registry/uddi/publishing");
    System.out.print("Using Publishing at url " + url + " ..");
    UDDI_Publication_PortType inquiry = UDDIPublishStub.getInstance(url);
    System.out.println(" done");
    return inquiry;
}
```

The `getAuthInfo()` method is used to authorize the user against the UDDI registry and to get the secret `authInfo` key.

```
public static String getAuthInfo(String userName, String password, UDDI_Security_PortType
security)
throws InvalidParameterException, UDDIException {
    System.out.print("Logging in ..");
    AuthToken authToken = security.get_authToken(new Get_authToken(userName, password));
    System.out.println(" done");
    return authToken.getAuthInfo();
}
```

The `discardAuthInfo()` method invalidates the secret `authInfo` key, so it cannot be used anymore.

```
public static void discardAuthInfo(String authInfo, UDDI_Security_PortType security)
throws InvalidParameterException, UDDIException {
    System.out.print("Logging out ..");
    security.discard_authToken(new Discard_authToken(authInfo));
    System.out.println(" done");
}
```

The `createSaveBusiness()` method is used to create a new instance of the `Save_business` class and initialize it with values from parameters:

```
public static Save_business createSaveBusiness(String businessKey, String[] names,
String[] nameLangCodes, String description, String authInfo)
throws InvalidParameterException {
    System.out.println("businessKey = " + businessKey);
    for (int i = 0; i < names.length; i++) {
```

```

        System.out.println("lang = " + nameLangCodes[i] + ", name = " + names[i]);
    }
    System.out.println("description = " + description);

    BusinessEntity businessEntity = new BusinessEntity();
    if (businessKey!=null && businessKey.length()>0)
        businessEntity.setBusinessKey(businessKey);
    for (int i = 0; i < names.length; i++) {
        if (nameLangCodes[i] == null) {
            businessEntity.addName(new Name(names[i]));
        } else {
            businessEntity.addName(new Name(names[i], nameLangCodes[i]));
        }
    }
    businessEntity.addDescription(new Description(description));

    Save_business save = new Save_business();
    save.addBusinessEntity(businessEntity);
    save.setAuthInfo(authInfo);
    return save;
}

```

The UDDI API call `save_business` is performed in the method `saveBusiness()`:

```

public static BusinessDetail saveBusiness(Save_business save)
    throws UDDIException, SOAPException {
    UDDI_Publication_PortType publishing = getPublishingStub();
    System.out.print("Save in progress ...");
    BusinessDetail businessDetail = publishing.save_business(save);
    System.out.println(" done");
    return businessDetail;
}

```

The saved `businessEntity` is displayed by the `printBusinessDetail()` method. One interesting aspect of the Oracle Service Registry client API is that each `UDDIObject` contains the `toXML()`, which returns a human-readable formatted listing of the XML representation.

```

public static void printBusinessDetail(BusinessDetail businessDetail) {
    System.out.println();
    BusinessEntityArrayList businessEntityArrayList =
    businessDetail.getBusinessEntityArrayList();
    int position = 1;
    for (Iterator iterator = businessEntityArrayList.iterator(); iterator.hasNext();) {
        BusinessEntity entity = (BusinessEntity) iterator.next();
        System.out.println("Business " + position + " : " + entity.getBusinessKey());
        System.out.println(entity.toXML());
        System.out.println();
        System.out.println("*****");
        position++;
    }
}

```

Building and Running Demos

This section shows how to build and run the Oracle Service Registry Basic Publishing demo set. Let's continue with our SaveBusiness demo.

1. Be sure that the demos are properly configured and the Oracle Service Registry is up and running.
2. Change your working directory to:

Windows:	%REGISTRY_HOME%\demos\basic\publishing\v3
UNIX:	\$REGISTRY_HOME/demos/basic/publishing/v3

3. Build all demos using:

Windows:	run.bat make
UNIX:	./run.sh make



Note

When compiling demos on Windows platforms, you may see the following text:

```
A subdirectory or file ..\..\common\.\build\classes already exists.
```

This is expected and does not indicate a problem.

4. To get list of all available demos, run

Windows:	run.bat help
UNIX:	./run.sh help

5. The selected demo can be executed via the **run** command using the name of the demo as a parameter. For example to run the SaveBusiness demo, invoke

Windows:	run.bat SaveBusiness
UNIX:	./run.sh SaveBusiness

The output of this demo will resemble the following:

```
Enter (optional) businessKey []: uddi:systinet.com:demo:marketing
Enter count of names [1]: 1
Enter language code []:
Enter name in language [Marketing]:
Enter description [Saved by SaveBusiness demo]: Marketing department

Using Security at url http://localhost:8888/registry/uddi/security .. done
Logging in .. done
businessKey = uddi:systinet.com:demo:marketing
lang = null, name = Marketing
description = Marketing department
Using Publishing at url http://localhost:8888/registry/uddi/publishing .. done
Save in progress ... done
```



```

Business 1 : uddi:systinet.com:demo:marketing

<businessEntity businessKey="uddi:systinet.com:demo:marketing" xmlns="urn:uddi-org:api_v3">

  <name>Marketing</name>
  <description>Marketing department</description>
</businessEntity>

*****
Logging out .. done

```

6. To rebuild demos, execute `run.bat clean` (`./run.sh clean`) to delete the classes directory and `run.bat make` (`./run.sh make`) to rebuild the demo classes.

2. Advanced Demos

Advanced demos section includes the following demos:

- [Inquiry Range Queries demo](#) - The Oracle Service Registry Range queries demos set demonstrates, how to use Oracle Service Registry inquiry enhancement - Range Queries. Oracle Service Registry range queries functionality allows you to search UDDI entities with the ability to use comparative operators (>, <) for matching keyValues in keyedReferences.
- [Custody demos](#) - The Registry Custody demo covers the custody transfer aspects of the UDDI API specification. You will learn how to generate a custody transfer token and transfer the ownership of selected structures to another user.
- [Subscription demos](#) - The Registry advanced subscription demos cover the subscription aspects of the UDDI Version 3 Specification. They teach how to use the Registry client API to create new subscriptions, get lists of subscriptions, get subscription results, and delete subscriptions.
- [Validation demos](#) - The valueset validation API provides methods to validate values used in the keyedReferences of checked taxonomies. The checks might range from very simple (check value against list of available values as in the InternalValidation service), to complex, such as performing contextual checks.
- [Taxonomy demos](#) - The Taxonomy API is used to manage and query taxonomies in the Registry. These demos cover all API methods, so you can learn how to download, upload, save, delete, get and find taxonomies. In addition, you can manage individual values in internally checked taxonomies using the Category API.

2.1. Advanced Inquiry - Range Queries

The Oracle Service Registry Range queries demos set demonstrates, how to use Oracle Service Registry inquiry enhancement - Range Queries. Oracle Service Registry range queries functionality allows you to search UDDI entities with the ability to use comparative operators (>, <) for matching keyValues in keyedReferences.

The demos set includes the following demo:

- FindBusiness

2.1.1. Prerequisites and Preparatory Steps: Code

We expect that you have already installed the Oracle Service Registry and set the `REGISTRY_HOME` environment variable to the registry's installation location.

To run the Oracle Service Registry's demos, your registry must be running.

It is necessary to configure the demos. The configuration system has two levels: global and local. The properties defined at the global level may be overwritten at the local level. The global properties are located in the file:

Windows:	%REGISTRY_HOME%\demos\env.properties
UNIX:	\$REGISTRY_HOME/demos/env.properties

The values set during the installation of the Oracle Service Registry work out of box, and their modification affects all demos. If you need to redefine the value of some property for a single demo (that is, at the local level), edit `env.properties`. This file is located in the same directory as the file `run.sh` (`run.bat`). Local level properties for the Advanced Inquiry demos are loaded from the file:

Windows:	%REGISTRY_HOME%\demos\advanced\inquiry\env.properties
UNIX:	\$REGISTRY_HOME/demos/advanced/inquiry/env.properties

Table 7. Properties Used in Demos

Name	Default Value	Description
uddi.demos.result.max_rows	5	limit of data returned from registry
uddi.demos.url.inquiryExt	http://localhost:8888/registry/uddi/inquiryExt	the extended inquiry web service port URL

2.1.2. Presentation and Functional Presentation

This section describes the programming pattern used in demos using the FindBusiness demo as an example. You can find its source code in the file:

Windows:	%REGISTRY_HOME%\demos\advanced\inquiry\src\demo\uddi\rq\FindBusiness.java
UNIX:	\$REGISTRY_HOME/demos/advanced/inquiry/src/demo/uddi/rq/FindBusiness.java

The helper method `createFindBusiness` creates a `FindBusiness` structure:

```
public Find_business createFindBusiness(String tModelKey, String keyValue,
                                       String operator, String quantifier)
    throws InvalidParameterException {
    System.out.println("tModelKey = " + tModelKey);
    System.out.println("keyValue = " + keyValue);
    System.out.println("operator = " + operator);
    System.out.println("quantifier = " + quantifier);

    Find_business find_business = new Find_business();
    QualifiedKeyedReference qualifiedKeyedReference = new QualifiedKeyedReference();
    qualifiedKeyedReference.setTModelKey(tModelKey);
    qualifiedKeyedReference.setKeyValue(keyValue);
    qualifiedKeyedReference.setFindQualifierArrayList(parseFindQualifiers(operator, quantifier));

    find_business.setCategoryBag(new CategoryBag(new
    KeyedReferenceArrayList(qualifiedKeyedReference)));
    find_business.setMaxRows(new Integer(MAX_ROWS));
}
```

```

    return find_business;
}

```

The findBusiness method performs the searching operation:

```

public BusinessList findBusiness(Find_business find_business) throws UDDIException, SOAPException
{
    System.out.print("Check structure validity .. ");
    try {
        find_business.check();
    } catch (InvalidParameterException e) {
        System.out.println("Failed!");
        throw new UDDIException(e);
    }
    System.out.println("OK");

    UDDI_Inquiry_PortType inquiry = getInquiryStub();
    System.out.print("Search in progress ..");
    BusinessList businessList = inquiry.find_business(find_business);
    System.out.println(" done");
    return businessList;
}

```

2.1.3. Building and Running Demos

This section shows, how to build and run the Oracle Service Registry Advanced Inquiry demo set. Let us continue with our FindBusiness demo.

1. Be sure that the demo are properly configured and the Oracle Service Registry is up and running.
2. Change your working directory to

Windows	%REGISTRY_HOME%\demos\advanced\inquiry
UNIX	\$REGISTRY_HOME/demos/advanced/inquiry

3. Build demo using:

Windows:	UNIX:
<code>run.bat make</code>	<code>./run.sh make</code>



Note

When compiling demo on Windows platforms, you may see the following text:

```
A subdirectory or file ..\..\common\.\build\classes already exists.
```

. This is expected and does not indicate a problem.

4. To get list of all available demos, run

Windows:	run.bat help
UNIX:	./run.sh help

5. The selected demo can be executed via the **run** command using the name of the demo as a parameter. For example, to run the FindBusiness demo, invoke

Windows:	run.bat FindBusiness
UNIX:	./run.sh FindBusiness

The output of this demo will resemble the following:

```
Searching for businesses by category where keyedReference
Enter tModelKey [uddi:systinet.com:demo:location:floor]:
Enter keyValue [1]: 3
Enter operator (=,<,>,<=,>=,<>) [=]:>
Enter quantifier (exists,notExists) [exists]:
tModelKey = uddi:systinet.com:demo:location:floor
keyValue = 3
operator = >
quantifier = exists
Check structure validity .. OK
Using Inquiry at url http://van.in.idoox.com:8888/registry/uddi/inquiryExt .. done
Search in progress .. done

Displaying 1 of 1, starting at position 1
Business 1 : uddi:systinet.com:demo:it
<businessInfoExt businessKey="uddi:systinet.com:demo:it"
xmlns="http://systinet.com/uddi/api/v3/ext/5.0">
  <name xmlns="urn:uddi-org:api_v3">IT</name>
  <description xmlns="urn:uddi-org:api_v3">IT department</description>
  <serviceInfos xmlns="urn:uddi-org:api_v3">
    <serviceInfoExt serviceKey="uddi:systinet.com:demo:it:support"
businessKey="uddi:systinet.com:demo:it" xmlns="http://systinet.com/uddi/api/v3/ext/5.0">
      <name xmlns="urn:uddi-org:api_v3">Support</name>
      <description xmlns="urn:uddi-org:api_v3">Telephone support</description>
      <bindingTemplates xmlns="urn:uddi-org:api_v3">
        <bindingTemplate bindingKey="uddi:b77eb8f0-86ce-11d8-ba05-123456789012"
serviceKey="uddi:systinet.com:demo:it:support">
          <description>IT related issues shall be reported there</description>
          <accessPoint useType="endPoint">tel:+1-123-456-7890</accessPoint>
          <tModelInstanceDetails>
            <tModelInstanceInfo tModelKey="uddi:uddi.org:transport:telephone"/>
          </tModelInstanceDetails>
        </bindingTemplate>
      </bindingTemplates>
    </serviceInfoExt>
    <serviceInfoExt serviceKey="uddi:systinet.com:demo:hr:employeesList"
businessKey="uddi:systinet.com:demo:hr" xmlns="http://systinet.com/uddi/api/v3/ext/5.0">
      <name xmlns="urn:uddi-org:api_v3">EmployeeList</name>
      <description xmlns="urn:uddi-org:api_v3">wsdl:type representing service</description>
```

```

    <bindingTemplates xmlns="urn:uddi-org:api_v3">
      <bindingTemplate bindingKey="uddi:5c546520-78b8-11d8-bec4-123456789012"
serviceKey="uddi:systinet.com:demo:hr:employeesList">
        <description>wsdl:type representing port</description>
        <accessPoint useType="http://schemas.xmlsoap.org/soap/http">urn:unknown-location-
uri</accessPoint>
        <tModelInstanceDetails>
          <tModelInstanceInfo tModelKey="uddi:systinet.com:demo:employeeList:binding">
            <instanceDetails>
              <instanceParms>EmployeeList</instanceParms>
            </instanceDetails>
          </tModelInstanceInfo>
          <tModelInstanceInfo tModelKey="uddi:systinet.com:demo:employeeList:portType">
            <instanceDetails>
              <instanceParms>EmployeeList</instanceParms>
            </instanceDetails>
          </tModelInstanceInfo>
        </tModelInstanceDetails>
        <categoryBag>
          <keyedReference tModelKey="uddi:uddi.org:xml:namespace"
keyName="uddi.org:xml:namespace" keyValue="http://systinet.com/wsdl/demo/uddi/services/">

          <keyedReference tModelKey="uddi:uddi.org:wsdl:types"
keyName="uddi.org:wsdl:types" keyValue="port"/>
          <keyedReference tModelKey="uddi:uddi.org:xml:localName"
keyName="uddi.org:xml:localName" keyValue="EmployeeList"/>
          <keyedReference tModelKey="uddi:systinet.com:taxonomy:endpoint:availability"
keyName="Available" keyValue="Available"/>
          <keyedReference tModelKey="uddi:systinet.com:taxonomy:endpoint:status"
keyName="Operational" keyValue="Operational"/>
        </categoryBag>
      </bindingTemplate>
    </bindingTemplates>
  </serviceInfoExt>
</serviceInfos>
<contactInfos>
  <contactInfo useType="Technical support">
    <personName xmlns="urn:uddi-org:api_v3">John Demo</personName>
  </contactInfo>
</contactInfos>
</businessInfoExt>

*****

```

2.2. Custody

The Oracle Service Registry demo is used to demonstrate the registry's application programming interface's capabilities and to demonstrate how to use this API.

The Oracle Service Registry Custody demo covers the custody transfer aspects of the [UDDI Version 3.01 Specification](http://www.oasis-open.org/committees/uddi-spec/doc/tcspecs.htm#uddiv3) [http://www.oasis-open.org/committees/uddi-spec/doc/tcspecs.htm#uddiv3].. You will learn how to generate a custody transfer token and transfer the ownership of selected structure to another user.

There is a single demo within this package - CustodyDemo. It demonstrates how to generate a transfer token for a selected UDDI key and how to use it to transfer the custody of the structure identified by the UDDI key to another user.

2.2.1. Prerequisites and Preparatory Steps: Code

We expect that you have already installed the Oracle Service Registry and set the `REGISTRY_HOME` environment variable to the registry's installation location.

To run the Oracle Service Registry's demos, your registry must be running.

It is necessary to configure the demos. The configuration system has two levels: global and local. The properties defined at the global level may be overwritten at the local level. The global properties are located in the file:

Windows:	%REGISTRY_HOME%\demos\env.properties
UNIX:	\$REGISTRY_HOME/demos/env.properties

The values set during the installation of the Oracle Service Registry work out of the box, and their modification affects all demos. If you need to redefine a property's value for a single demo (that is,, at the local level), edit `env.properties`. This file is located in the same directory as the file `run.sh` (`run.bat`). Local level properties for the Custody demo are loaded from the file:

Windows:	%REGISTRY_HOME%\demos\advanced\custody\env.properties
UNIX:	\$REGISTRY_HOME/demos/advanced/custody/env.properties

Table 8. Properties used in demos

Name	Default Value	Description
uddi.demos.user.john.name	demo_john	first user's name
uddi.demos.user.john.password	demo_john	first user's password
uddi.demos.user.jane.name	demo_jane	second user's name
uddi.demos.user.jane.password	demo_jane	second user's password
uddi.demos.url.custody	http://localhost:8888/registry/uddi/custody	the custody Web service port URL
uddi.demos.url.security	http://localhost:8888/registry/uddi/security	the security Web service port URL

2.2.2. Presentation and Functional Presentation

This section describes programming pattern of the Custody demo. You can find its source code in the file:

Windows:	%REGISTRY_HOME%\demos\advanced\custody\src\demo\uddi\custody\CustodyDemo.java
UNIX:	\$REGISTRY_HOME/demos/advanced/custody/src/demo/uddi/custody/CustodyDemo.java

To make the demo easier to use, it contains two use cases. The first use case shows the owner of a UDDI structure who wants to transfer it to another user. The second use case is the second user transferring the same structure to his own custody. Let us start with first use case.

We must gather user input first. It is necessary to read user credentials and the key of the structure owned by the user. If you use default values, this means that the user demo_john is transferring custody of the systinet.com:departmentID tModel to user demo_jane. The user logs in and generates a transfer token for the given UDDI key. The transfer token contains information about the registry, expiration time, and secret opaqueToken. Any user who knows these data, can transfer the structure(s) covered by the transferToken.

```
String user = UserInput.readString("Enter first user name",
    DemoProperties.getProperty(USER_JOHN_NAME));
String password = UserInput.readString("Enter password",
    DemoProperties.getProperty(USER_JOHN_PASSWORD));
String uddiKey = UserInput.readString("Enter UDDI key",
    "uddi:systinet.com:demo:departmentID");

System.out.println();

UDDI_Security_PortType security = getSecurityStub();
String authInfo = getAuthInfo(user, password, security);
Get_transferToken get = createGetTransferToken(uddiKey, authInfo);
TransferToken token = getTransferToken(get);
printTransferToken(token);
discardAuthInfo(authInfo, security);
```

The helper method getCustodyStub() returns the UDDI Custody stub of the Web service listening at the URL specified by the URL_CUSTODY property.

```
public static UDDI_CustodyTransfer_PortType getCustodyStub() throws SOAPException {
    // you can specify your own URL in property - uddi.demos.url.custody
    String url = DemoProperties.getProperty(URL_CUSTODY,
        "http://localhost:8888/registry/uddi/custody");
    System.out.print("Using Custody at url " + url + " ..");
    UDDI_CustodyTransfer_PortType custody = UDDICustodyStub.getInstance(url);
    System.out.println(" done");
    return custody;
}
```

The createGetTransferToken() method is used to create the Get_transferToken object, which encapsulates the parameters of this UDDI call. In this example we set authInfo and a single key for the UDDI structure to be transferred into the custody of the second user.

```
public static Get_transferToken createGetTransferToken(String uddiKey, String authInfo)
    throws InvalidParameterException {
    System.out.println("uddiKey = " + uddiKey);
    Get_transferToken get = new Get_transferToken();
    get.addKey(uddiKey);
    get.setAuthInfo(authInfo);
    return get;
}
```

The next step is to invoke the get_transferToken UDDI call and get the result, which is a TransferToken.

```
public static TransferToken getTransferToken(Get_transferToken get)
    throws UDDIException, SOAPException {
    UDDI_CustodyTransfer_PortType custody = getCustodyStub();
    System.out.print("Get in progress ...");
    TransferToken token = custody.get_transferToken(get);
```

```

    System.out.println(" done");
    return token;
}

```

At this point the first user, John Demo, has generated a transfer token. He can discard it or send it to the second user Jane Demo, so she can transfer the entities to her custody. The transfer token must be kept secret, so plain text transports such as unencrypted emails are not suitable for this purpose. Let us suppose that Jane Demo has received the transfer token already. She logs in, creates a `Transfer_entities` object and invokes the UDDI call `transfer_entities`.

```

user = UserInput.readString("Enter second user name",
                           DemoProperties.getProperty(USER_JANE_NAME));
password = UserInput.readString("Enter password",
                                DemoProperties.getProperty(USER_JANE_PASSWORD));
System.out.println();

authInfo = getAuthInfo(user, password, security);
Transfer_entities transfer = createTransferEntities(uddiKey, token, authInfo);
transferEntities(transfer);
discardAuthInfo(authInfo, security);

```

The `createTransferEntities()` method is used to create `Transfer_entities` object, which encapsulates parameters of same name UDDI call. In this example we set Jane's `authInfo`, UDDI key to be transferred, and the `TransferToken` generated by John.

```

public static Transfer_entities createTransferEntities(String uddiKey,
                                                    TransferToken token, String authInfo)

    throws InvalidParameterException {
    Transfer_entities transfer = new Transfer_entities();
    transfer.addKey(uddiKey);
    transfer.setTransferToken(token);
    transfer.setAuthInfo(authInfo);
    return transfer;
}

```

The final step is to make the `transfer_entities` UDDI call. When it successfully returns, the second user (Jane) is the happy owner of the UDDI structure `systinet.com:demo:departmentID`.

```

public static void transferEntities(Transfer_entities transfer)
    throws UDDIException, SOAPException {
    UDDI_CustodyTransfer_PortType custody = getCustodyStub();
    System.out.print("Transfer in progress ...");
    custody.transfer_entities(transfer);
    System.out.println(" done");
}

```

2.2.3. Building and Running Demos

This section shows how to build and run the Oracle Service Registry Custody demo.

1. Be sure that the demos are properly configured and the Oracle Service Registry is up and running.
2. Change your working directory to

Windows:	%REGISTRY_HOME%\demos\advanced\custody

UNIX:	\$REGISTRY_HOME/demos/advanced/custody

- ### 3. Build demo using:

Windows:	run.bat make
UNIX:	./run.sh make



Note

When compiling demos on Windows platforms, you may see the following text:

A subdirectory or file ..\..\common\.\build\classes already exists.

This is expected and does not indicate a problem.

4. To get list of all available commands, run

Windows:	run.bat help
UNIX:	./run.sh help

5. The demo can be executed via the **run** command, using the name of the demo as a parameter. To run the Custody demo, invoke

Windows:	run.bat CustodyDemo
UNIX:	./run.sh CustodyDemo

The output of this demo will resemble the following:

```
Running CustodyDemo demo...

Getting transfer token where
Enter first user name [demo_john]:
Enter password [demo_john]:
Enter UDDI key [uddi:systinet.org:demo:departmentID]:

Using Security at url https://mycomp.com:8443/registry/uddi/security .. done
Logging in .. done
uddiKey = uddi:systinet.org:demo:departmentID
Using Custody at url https://mycomp.com:8443/registry/uddi/custody .. done
Get in progress ... done

TransferToken
<transferToken xmlns="urn:uddi-org:custody_v3">
<nodeID xmlns="urn:uddi-org:api_v3">Systinet</nodeID>
<expirationTime>2004-05-17T12:32:51.236+02:00</expirationTime>
<opaqueToken>ZmZmZmZmZmZmZlMDVmZGEzNg==</opaqueToken>
</transferToken>

Logging out .. done
```

```

Transferring custody where
Enter second user name [demo_jane]:
Enter password [demo_jane]:

Logging in .. done
Using Custody at url https://mycomp.com:8443/registry/uddi/custody .. done
Transfer in progress ... done
Logging out .. done

```

6. To rebuild demos, execute `run.bat clean` (`./run.sh clean`) to delete the classes directory and `run.bat make` (`./run.sh make`) to rebuild the demo classes.

2.3. Subscription

The Oracle Service Registry advanced subscription demo set demonstrates the Oracle Service Registry application programming interface's capabilities and shows how to use the Subscription API to perform subscription calls to the registry.

The Oracle Service Registry advanced subscription demos cover the subscription aspects of the [UDDI Version 3 Specification](http://www.oasis-open.org/committees/uddi-spec/doc/tcspecs.htm#uddiv3) [http://www.oasis-open.org/committees/uddi-spec/doc/tcspecs.htm#uddiv3]. They teach how to use the Oracle Service Registry client API to create new subscriptions, get lists of subscriptions, get subscription results, and delete subscriptions.

The Oracle Service Registry basic publishing demo set contains the following demos to assist you in learning the Oracle Service Registry client API:

SaveSubscription Demonstrates how to construct and fill the `Save_subscription` object, get a Subscription stub for the UDDI registry, and perform the `save_subscription` call.

GetSubscriptions Demonstrates how to construct and fill the `Get_subscriptions` object, get a Subscription stub for the UDDI registry, and perform the `get_subscriptions` call.

GetSubscriptionResults Demonstrates how to construct and fill the `Get_subscriptionResults` object, get a Subscription stub for the UDDI registry, and perform the `get_subscriptionResults` call.

DeleteSubscription Demonstrates how to construct and fill the `Delete_subscription` object, get a Subscription stub for the UDDI registry, and perform the `delete_subscription` call.

2.3.1. Prerequisites and Preparatory Steps: Code

We expect that you have already installed the Oracle Service Registry and set the `REGISTRY_HOME` environment variable to the registry's installation location.

To run the Oracle Service Registry's demos, your registry must be running.

It is necessary to configure the demos. The configuration system has two levels: global and local. The properties defined at the global level may be overwritten at the local level. The global properties are located in the file:

Windows:	%REGISTRY_HOME%\demos\env.properties
UNIX:	\$REGISTRY_HOME/demos/env.properties

The values set during the installation of the Oracle Service Registry work out of box, and their modification affects all demos. If you need to redefine the value of some property for a single demo (that is, at the local level), edit `env.properties`.

This file is located in the same directory as the file `run.sh` (`run.bat`). Local level properties for the Subscription demos are loaded from the file:

Windows:	%REGISTRY_HOME%\demos\advanced\subscription\env.properties
UNIX:	\$REGISTRY_HOME/demos/advanced/subscription/env.properties

Table 9. Properties used in demos

Name	Default Value	Description
uddi.demos.user.john.name	demo_john	first user's name
uddi.demos.user.john.password	demo_john	first user's password
uddi.demos.url.subscription	http://localhost:8888/registry/uddi/subscription	the subscription web service port URL
uddi.demos.url.security	http://localhost:8888/registry/uddi/security	the security web service port URL

2.3.2. Presentation and Functional Presentation

This section describes the programming pattern used in all demos using the `GetSubscriptionResults` demo as an example. You can find this demo's source code in the file:

Windows:	%REGISTRY_HOME%\demos\basic\subscription\src\demo\uddi\subscription\GetSubscriptionResults.java
UNIX:	\$REGISTRY_HOME/demos/basic/subscription/src/demo/uddi/subscription/GetSubscriptionResults.java

Let us start with a description of main method. The first part is used to configure the demo by the user. Then it logs the user into the UDDI registry, creates a `Get_subscriptionResults` object holding the parameters of the request. This object is transformed in the next step into the SOAP UDDI call `get_subscriptionResults`. Its results are then displayed and the user is logged off from the UDDI registry.

```
String user = UserInput.readString("Enter user name",
                                   DemoProperties.getProperty(USER_JOHN_NAME));
String password = UserInput.readString("Enter password",
                                       DemoProperties.getProperty(USER_JOHN_PASSWORD));
String key = UserInput.readString("Enter subscription key", "");
int shift = UserInput.readInt("Enter start of coverage period in minutes", 60);
System.out.println();

UDDI_Security_PortType security = getSecurityStub();
String authInfo = getAuthInfo(user, password, security);
Get_subscriptionResults get = createGetSubscriptionResults(key, shift, authInfo);
SubscriptionResultsList result = getSubscriptionResults(get);
printSubscriptionResults(result);
discardAuthInfo(authInfo, security);
```

The method `createGetSubscriptionResults` takes `subscriptionKey` as a parameter that identifies the subscription in the UDDI registry, `coveragePeriod`, and `authInfo` of the user. The `CoveragePeriod` is used to identify the time period for which the user is interested in changes matched by the selected Subscription.

```
public static Get_subscriptionResults createGetSubscriptionResults(String subscriptionKey,
    int coveragePeriod, String authInfo) throws InvalidParameterException {
    Get_subscriptionResults getSubscriptionResults = new Get_subscriptionResults();
```

```

getSubscriptionResults.setSubscriptionKey(subscriptionKey);

// calculate coverage period
long coveragePeriodShiftInMs = coveragePeriod * 60 * 1000;
long endPoint = System.currentTimeMillis();
long startPoint = endPoint - coveragePeriodShiftInMs;
getSubscriptionResults.setCoveragePeriod(new CoveragePeriod(new Date(startPoint),
                                                             new Date(endPoint)));

getSubscriptionResults.setAuthInfo(authInfo);

return getSubscriptionResults;
}

```

The helper method, `getSubscriptionStub()`, returns the UDDI Subscription stub of the web service listening at the URL specified by the `URL_SUBSCRIPTION` property.

```

public static UDDI_Subscription_PortType getSubscriptionStub() throws SOAPException {
    String url = DemoProperties.getProperty(URL_SUBSCRIPTION,

"http://localhost:8888/registry/uddi/subscription");
    System.out.print("Using Subscription at url " + url + " ..");
    UDDI_Subscription_PortType subscriptionStub = UDDISubscriptionStub.getInstance(url);
    System.out.println(" done");
    return subscriptionStub;
}

```

The UDDI API call `get_subscriptionResults` is performed in the method `getSubscriptionResults()`:

```

public static SubscriptionResultsList getSubscriptionResults(Get_subscriptionResults save)
throws UDDIException, SOAPException {
    UDDI_Subscription_PortType subscriptionStub = getSubscriptionStub();
    System.out.print("Get in progress ...");
    SubscriptionResultsList result = subscriptionStub.get_subscriptionResults(save);
    System.out.println(" done");
    return result;
}

```

2.3.3. Building and Running Demos

This section shows how to build and run the Oracle Service Registry Advanced Subscription demo set. Let us continue with our `GetSubscriptionResults` demo.

1. Be sure that the demos are properly configured and the Oracle Service Registry is up and running.
2. Change your working directory to:

Windows:	%REGISTRY_HOME%\demos\advanced\subscription
UNIX:	\$REGISTRY_HOME/demos/advanced/subscription

3. Build all demos using:

Windows:	run.bat make
UNIX:	./run.sh make



Note

When compiling demos on Windows platforms, you may see the following text:

```
A subdirectory or file ..\..\common\.\build\classes already exists.
```

This is expected and does not indicate a problem.

- To get a list of all available demos, run

Windows:	run.bat help
UNIX:	./run.sh help

- The selected demo can be executed via the **run** with the name of the demo as parameter. For example, to run the GetSubscriptionResults demo, invoke

Windows:	run.bat GetSubscriptionResults
UNIX:	./run.sh GetSubscriptionResults

- The Oracle Service Registry Subscription demos show a complete use case for the Subscription API. The SaveSubscription demo creates a new subscription for the user John Demo. This subscription monitors changes to the business entity named Marketing.

```
Running SaveSubscription demo...
Saving subscription where
Enter user name [demo_john]:
Enter password [demo_john]:
Enter business name to watch [Marketing]:
Enter subscription validity in days [2]:
Enter limit of subscription results [5]:

Using Security at url https://mycomp.com:8443/registry/uddi/security .. done
Logging in .. done
businessName = Marketing
limit = 5
valid = 2
Using Subscription at url https://mycomp.com:8443/registry/uddi/subscription .. done
Save in progress ... done

Subscription 1 : uddi:4f0d7450-a578-11d8-91cd-5c1d367091cd
<subscription brief="false" xmlns="urn:uddi-org:sub_v3">
  <subscriptionKey>uddi:4f0d7450-a578-11d8-91cd-5c1d367091cd</subscriptionKey>
  <subscriptionFilter>
    <find_business xmlns="urn:uddi-org:api_v3">
      <name>Marketing</name>
    </find_business>
  </subscriptionFilter>
</maxEntities>5</maxEntities>
```

```
<expiresAfter>2004-05-14T11:28:30.721+02:00</expiresAfter>
</subscription>
```

```
*****
Logging out .. done
```

If you want to list your available subscriptions, run the GetSubscriptions demo:

```
Finding subscriptions where
Enter user name [demo_john]:
Enter password [demo_john]:

Using Security at url https://mycomp.com:8443/registry/uddi/security .. done
Logging in .. done
Using Subscription at url https://mycomp.com:8443/registry/uddi/subscription .. done
Get in progress ... done

Subscription 1 : uddi:4f0d7450-a578-11d8-91cd-5c1d367091cd
<subscription brief="false" xmlns="urn:uddi-org:sub_v3">
  <subscriptionKey>uddi:4f0d7450-a578-11d8-91cd-5c1d367091cd</subscriptionKey>
  <subscriptionFilter>
    <find_business xmlns="urn:uddi-org:api_v3">
      <name>Marketing</name>
    </find_business>
  </subscriptionFilter>
  <maxEntities>5</maxEntities>
  <expiresAfter>2004-05-14T11:28:30.721+02:00</expiresAfter>
</subscription>

*****
Logging out .. done
```

Now we need to generate some traffic on UDDI registry, that matches the subscription filter, that we have defined. You can use SaveBusiness demo from Oracle Service Registry Basic Publishing demos to save business entity named Marketing.

```
Running SaveBusiness demo...
Saving business entity where
Enter (optional) businessKey []:
Enter count of names [1]:
Enter language code []:
Enter name in language [Marketing]:
Enter description [Saved by SaveBusiness demo]:

Using Security at url https://mycomp.com:8443/registry/uddi/security .. done
Logging in .. done
businessKey =
lang = null, name = Marketing
description = Saved by SaveBusiness demo
Using Publishing at url https://mycomp.com:8443/registry/uddi/publishing .. done
Save in progress ... done

Business 1 : uddi:8097cc00-a578-11d8-91cd-5c1d367091cd
<businessEntity businessKey="uddi:8097cc00-a578-11d8-91cd-5c1d367091cd" xmlns="urn:uddi-
```

```
org:api_v3">
  <name> Marketing</name>
  <description> Saved by SaveBusiness demo</description>
</businessEntity>
```

Then we want to get the results of the subscription. It is necessary to specify correct subscription key and sufficient coverage period.

```
Running GetSubscriptionResults demo...
Finding subscription results where
Enter user name [demo_john]:
Enter password [demo_john]:
Enter subscription key []: uddi:4f0d7450-a578-11d8-91cd-5c1d367091cd
Enter start of coverage period in minutes [60]:

Using Security at url https://mycomp.com:8443/registry/uddi/security .. done
Logging in .. done
Using Subscription at url https://mycomp.com:8443/registry/uddi/subscription .. done
Get in progress ... done
Subscription uddi:4f0d7450-a578-11d8-91cd-5c1d367091cd
Coverage period=Fri May 14 08:30:28 CEST 2004 - Fri May 14 09:30:28 CEST 2004

Subscription results:
<subscriptionResultsList xmlns="urn:uddi-org:sub_v3">
  <chunkToken>0</chunkToken>
  <coveragePeriod>
    < startPoint>2004-05-14T08:30:28.565+02:00</startPoint>
    < endPoint>2004-05-14T09:30:28.824+02:00</endPoint>
  </coveragePeriod>
  < subscription brief="false">
    < subscriptionKey> uddi:4f0d7450-a578-11d8-91cd-5c1d367091cd</subscriptionKey>
    < subscriptionFilter>
      < find_business xmlns="urn:uddi-org:api_v3">
        < name> Marketing</name>
      </find_business>
    </subscriptionFilter>
    < maxEntities>5</maxEntities>
    < expiresAfter>2004-05-14T11:28:30.721+02:00</expiresAfter>
  </subscription>
  < businessList>
    < businessInfos>
      < businessInfo businessKey="uddi:8097cc00-a578-11d8-91cd-5c1d367091cd">
        < name> Marketing</name>
        < description> Saved by SaveBusiness demo</description>
      </businessInfo>
    </businessInfos>
  </businessList>
</subscriptionResultsList>

*****
```

If we do not need the subscription anymore, we can delete it with DeleteSubscription demo.

```

Enter subscription key []: uddi:4f0d7450-a578-11d8-91cd-5c1d367091cd

Using Security at url https://mycomp.com:8443/registry/uddi/security .. done
Logging in .. done
subscriptionKey = uddi:4f0d7450-a578-11d8-91cd-5c1d367091cd
Using Subscription at url https://mycomp.com:8443/registry/uddi/subscription .. done
Delete in progress ... done
Logging out .. done

```

2.4. Validation

The Oracle Service Registry Validation demo shows how to implement, deploy, and use a custom valueset validation service.

The valueset validation API provides methods to validate values used in keyedReferences of checked taxonomies. The checks might range from very simple (check value against list of available values like in InternalValidation service) to complex, which performs contextual checks.

There are two classes and one xml file to import taxonomy, that are used by the Validation demo.

ISBNValidation Valueset validation interface implementation. It checks keyValues from keyedReferences in all structures. The keyValue must be in ISBN format, otherwise E_invalidValue UDDI exception is thrown to deny the save operation.

isbn.xml Taxonomy description used to import checked categorization demo:ISBN into the Oracle Service Registry.

ValidationDemo Demonstrates how to save a tModel with the keyedReference, that uses demo:ISBN categorization checked by ISBNValidation.

2.4.1. Prerequisites and Preparatory Steps: Code

We expect that you have already installed the Oracle Service Registry and set the REGISTRY_HOME environment variable to the registry's installation location.

To run the Oracle Service Registry's demos, your registry must be running.

It is necessary to configure the demos. The configuration system has two levels: global and local. The properties defined at the global level may be overwritten at local level. The global properties are located in the file:

Windows:	%REGISTRY_HOME%\demos\env.properties
UNIX:	\$REGISTRY_HOME/demos/env.properties

The values set during the installation of the Oracle Service Registry work out of box, and their modification affects all demos. If you need to redefine the value of some property for a single demo (that is, at the local level), edit env.properties. This file is located in the same directory as the file run.sh (run.bat). Local level properties for the Validation demo is loaded from the file:

Windows:	%REGISTRY_HOME%\demos\advanced\validation\env.properties
UNIX:	\$REGISTRY_HOME/demos/advanced/validation/env.properties

Table 10. Properties Used in Demos

Name	Default Value	Description
uddi.demos.user.john.name	demo_john	first user's name
uddi.demos.user.john.password	demo_john	first user's password
uddi.demos.url.publishing	http://localhost:8888/registry/uddi/publishing	the publishing Web service port URL
uddi.demos.url.security	http://localhost:8888/registry/uddi/security	the security Web service port URL

2.4.2. Presentation and Functional Presentation

This section describes programming pattern used in ISBNValidation class. You can find its source code in the file

Windows:	%REGISTRY_HOME%\demos\advanced\validation\src\demo\uddi\validation\ISBNValidation.java
UNIX:	\$REGISTRY_HOME/demos/advanced/validation/src/demo/uddi/validation/ISBNValidation.java

The Oracle Service Registry simplifies the development of Valueset validation services. It intelligently performs some checks automatically based on the properties of the taxonomy (content of categoryBag), so you as developer may concentrate on logic of your validation service. For example it ensures, that categorization tModelKey is not used in identifierBag or that it is used only in UDDI structures, for which its compatibility was declared.

Let's start with description of validate_values method. It serves as starting point to the validation service. The Validate_values object contains at least one tModel, businessEntity, businessService, bindingTemplate or publisherAssertion, which contains reference to the taxonomy validated by this web service. If the validation service is shared between several taxonomies, UDDI structures, which use them, are grouped in single validate_values call.

When the method validate_values finds the structure type to be validated, it calls validate_values on the list of UDDI structures, which iterates over each element in the list and call validate method on single structure. If there is at least one error in dispositionReport, UDDI exception is thrown to deny the save operation.

```
public DispositionReport validate_values(Validate_values body) throws UDDIException {
    DispositionReport report = new DispositionReport();

    if (body.getBusinessEntityArrayList() != null)
        validate_values(body.getBusinessEntityArrayList(), report);

    else if (body.getBusinessServiceArrayList() != null)
        validate_values(body.getBusinessServiceArrayList(), report);

    else if (body.getTModelArrayList() != null)
        validate_values(body.getTModelArrayList(), report);

    else if (body.getPublisherAssertionArrayList() != null)
        validate_values(body.getPublisherAssertionArrayList(), report);

    else if (body.getBindingTemplateArrayList() != null)
        validate_values(body.getBindingTemplateArrayList(), report);

    ResultArrayList results = report.getResultArrayList();
    if (results == null || results.size() == 0)
        return DispositionReport.DISPOSITION_REPORT_SUCCESS;
}
```

```

        throw new UDDIException(report);
    }

```

This method then validates all keyedReferences and if the structure contains children (for example businessServices in businessEntity), it recursively validates the too. For demo:ISBN categorization the check of identifierBag is useless, because the Oracle Service Registry would already detect it as error and stop the execution of save operation.

```

private void validate(TModel tModel, DispositionReport report) throws UDDIException {
    CategoryBag categoryBag = tModel.getCategoryBag();
    IdentifierBag identifierBag = tModel.getIdentifierBag();
    KeyedReferenceArrayList keyedReferences;

    if (categoryBag != null) {
        keyedReferences = categoryBag.getKeyedReferenceArrayList();
        if (keyedReferences != null) {
            validate(keyedReferences, report);
        }

        validateKeyedReferenceGroups(categoryBag.getKeyedReferenceGroupArrayList(), report);
    }

    if (identifierBag != null) {
        keyedReferences = identifierBag.getKeyedReferenceArrayList();
        if (keyedReferences != null) {
            validate(keyedReferences, report);
        }
    }
}

```

The method validate iterates over all keyedReferences and if they reference demo:ISBN taxonomy, then it checks the keyValue, if it is in valid ISBN format. If not, it adds error report to dispositionReport.

```

private void validate(KeyedReferenceArrayList keyedReferenceArrayList, DispositionReport report)
    throws UDDIException {
    for (Iterator iter = keyedReferenceArrayList.iterator(); iter.hasNext();) {
        KeyedReference keyedReference = (KeyedReference) iter.next();
        if (TMODEL_KEY.equalsIgnoreCase(keyedReference.getTModelKey())) {
            if (!checkISBN(keyedReference.getKeyValue())) {
                String message = "KeyValue is not valid ISBN number in " +
                    keyedReference.toXML();
                report.setResult(createResult(UDDIErrorCodes.E_INVALID_VALUE, message));
            }
        }
    }
}

```

The implementation of ISBNValidation web service is not optimal. It scans all UDDI structures and containers of keyedReferences, even if the Oracle Service Registry was configured to deny such usage. The optimal code would check only categoryBag in tModels.

2.4.3. Building and Running Demos

This section shows, how to build, deploy and run the Oracle Service Registry Advanced Validation demo.

1. Be sure that the demos are properly configured and the Oracle Service Registry is up and running.
2. Change your working directory to

Windows:	%REGISTRY_HOME%\demos\advanced\validation
UNIX:	\$REGISTRY_HOME/demos/advanced/validation

3. Build all classes using:

Windows:	run.bat make
UNIX:	./run.sh make



Note

When compiling demos on Windows platforms, you may see the following text:

```
A subdirectory or file ..\..\common\.\build\classes already exists.
```

This is expected and does not indicate a problem.

4. Copy the file ISBNValidation.class to REGISTRY_HOME/app/uddi/services/Wasp-inf/classes

Windows:	cd %REGISTRY_HOME%\demos\advanced\validation\build
	xcopy classes %REGISTRY_HOME%\app\uddi\services\Wasp-inf\classes /S
UNIX:	cd \$REGISTRY_HOME/demos/advanced/validation/build
	cp -r classes \$REGISTRY_HOME/app/uddi/services/Wasp-inf

5. Now use Advanced Taxonomy demo UploadTaxonomy to upload the file isbn.xml located in data subdirectory of Validation demo directory. For more information, how to do it, read Taxonomy demo documentation.
6. When the demo:ISBN taxonomy has been uploaded and ISBNValidation.class copied, you must shutdown the Oracle Service Registry, delete the REGISTRY_HOME/work directory, and restart the Oracle Service Registry.
7. The ValidationDemo can be executed via command run with

Windows:	run.bat ValidationDemo
UNIX:	./run.sh ValidationDemo

The output of this demo will resemble the following:

8. To rebuild demos, execute `run.bat clean` (`./run.sh clean`) to delete the classes directory and `run.bat make` (`./run.sh make`) to rebuild the demo classes.

2.5. Taxonomy

The Oracle Service Registry Taxonomy demos demonstrates the Oracle Service Registry's Taxonomy capabilities and show how to use this API.

The Taxonomy is used to manage and query taxonomies in the Oracle Service Registry. These demos cover all API methods, so you can learn how to download, upload, save, delete, get and find taxonomies. In addition, you can manage individual values in internally checked taxonomies using the Category API.

The Oracle Service Registry contains the following demos to assist you in learning the Oracle Service Registry Taxonomy and Category APIs.

SaveTaxonomy Demonstrates how to save unchecked taxonomy, which can be used in businessEntities and tModels.

DeleteTaxonomy Demonstrates how to deletes selected taxonomy. If the taxonomy was checked, associated binding template is automatically removed too.

UploadTaxonomy Demonstrates how to upload the file containg taxonomy. This API call is usefull, when you need to process really large taxonomies, because it operates on stream of data.

DownloadTaxonomy Demonstrates how to download selected taxonomy. Again this method is stream oriented.

GetTaxonomy Demonstrates how to get details of selected taxonomy.

FindTaxonomy Demonstrates how to search for taxonomies based on given criteria.

AddCategory Demonstrates how to add new category (keyedReference value) to existing internal taxonomy.

DeleteCategory Demonstrates how to delete the category in existing internal taxonomy.

SetCategory Demonstrates how to update the category in existing internal taxonomy.

MoveCategory Demonstrates how to change the parent of the category in existing internal taxonomy.

GetCategory Demonstrates how to get the category of the internal taxonomy.

GetRootCategory Demonstrates how to get list of the top-level categories of the internal taxonomy.

GetRootPath Demonstrates how to get list of parents of selected category, from the top-level category to the selected one.

FindCategory Demonstrates how to get list of categories, that match some criterias.

2.5.1. Prerequisites and Preparatory Steps: Code

We expect that you have already installed the Oracle Service Registry and set the `REGISTRY_HOME` environment variable to the registry's installation location.

To run the Oracle Service Registry's demos, your registry must be running.

It is necessary to configure the demos. The configuration system has two levels: global and local. The properties defined at the global level may be overwritten at local level. The global properties are located in the file:

Windows:	%REGISTRY_HOME%\demos\env.properties
UNIX:	\$REGISTRY_HOME/demos/env.properties

The values set during the installation of the Oracle Service Registry work out of box, and their modification affects all demos. If you need to redefine the value of some property for a single demo (that is, at the local level), edit `env.properties`. This file is located in the same directory as the file `run.sh` (`run.bat`). Local level properties for the Taxonomy demo is loaded from the file:

Windows:	%REGISTRY_HOME%\demos\advanced\taxonomy\env.properties
UNIX:	\$REGISTRY_HOME/demos/advanced/taxonomy/env.properties

Table 11. Properties Used in Demos

Name	Default Value	Description
uddi.demos.user.john.name	demo_john	first user's name
uddi.demos.user.john.password	demo_john	first user's password
uddi.demos.url.taxonomy	http://localhost:8888/registry/uddi/taxonomy	the taxonomy Web service port URL
uddi.demos.url.category	http://localhost:8888/registry/uddi/category	the category Web service port URL
uddi.demos.url.security	http://localhost:8888/registry/uddi/security	the security Web service port URL

2.5.2. Presentation and Functional Presentation

This section describes programming pattern used in all demos using the SaveTaxonomy demo as an example. You can find its source code in the file:

Windows:	%REGISTRY_HOME%\demos\advanced\taxonomy\src\demo\uddi\taxonomy\SaveTaxonomy.java
UNIX:	\$REGISTRY_HOME/demos/advanced/taxonomy/src/demo/uddi/taxonomy/SaveTaxonomy.java

The main method of this demo is straightforward. It gathers user's input, logs the user in the Oracle Service Registry, creates an object of Save_taxonomy, sends it to UDDI registry over SOAP and displays the result.

```
String user = UserInput.readString("Enter user name", "admin");
String password = UserInput.readString("Enter password", "changeit");
String name = UserInput.readString("Enter name", "Demo identifier");
String description = UserInput.readString("Enter description", "Saved by SaveTaxonomy demo");
System.out.println();

UDDI_Security_PortType security = getSecurityStub();
String authInfo = getAuthInfo(user, password, security);
Save_taxonomy save = createSaveTaxonomy(name, description, authInfo);
TaxonomyDetail result = saveTaxonomy(save);
printTaxonomyDetail(result);
discardAuthInfo(authInfo, security);
```

When saving taxonomy, you must first create a tModel, that will represent it. You can set your publisher assigned tModelKey and other properties. The only mandatory property is name. You don't need to specify taxonomy related keyedReferences in categoryBag, they shall be set in Taxonomy.

The Categorization is used to define usage of the taxonomy. Valid values are identifier, categorization, categorizationGroup and relationship. The compatibility marks tModel with information, in which UDDI structures it can be used.

This example creates an unchecked identifier, that can be used only in categoryBags of business entities and tModels.

```
public static Save_taxonomy createSaveTaxonomy(String name, String description, String authInfo)
    throws InvalidParameterException {
    System.out.println("name = " + name);
```

```

System.out.println("description = " + description);

TModel tModel = new TModel();
tModel.setName(new Name(name));
tModel.addDescription(new Description(description));

Taxonomy taxonomy = new Taxonomy(tModel);
taxonomy.setCheck(Boolean.FALSE);
taxonomy.addCategorization(Categorization.identifier);
taxonomy.addCompatibility(Compatibility.businessEntity);
taxonomy.addCompatibility(Compatibility.tModel);

Save_taxonomy save = new Save_taxonomy();
save.addTaxonomy(taxonomy);
save.setAuthInfo(authInfo);

return save;
}

```

The helper method `getTaxonomyStub()` returns the Taxonomy stub of the Web service listening at the URL specified by the `URL_TAXONOMY` property.

```

public static TaxonomyApi getTaxonomyStub() throws SOAPException {
    String url = DemoProperties.getProperty(URL_TAXONOMY,
"http://localhost:8888/registry/uddi/taxonomy");
    System.out.print("Using Taxonomy at url " + url + " ..");
    TaxonomyApi taxonomy = TaxonomyStub.getInstance(url);
    System.out.println(" done");
    return taxonomy;
}

```

The Taxonomy API call `save_taxonomy` is performed in the method `saveTaxonomy()`.

```

public static TaxonomyDetail saveTaxonomy(Save_taxonomy save)
throws UDDIException, SOAPException {
    TaxonomyApi taxonomy = getTaxonomyStub();
    System.out.print("Save in progress ...");
    TaxonomyDetail taxonomyDetail = taxonomy.save_taxonomy(save);
    System.out.println(" done");
    return taxonomyDetail;
}

```

The returned `TaxonomyDetail` object is displayed in `printTaxonomyDetail` method.

```

public static void printTaxonomyDetail(TaxonomyDetail taxonomyDetail) {
    System.out.println();

    TaxonomyArrayList taxonomyArrayList = taxonomyDetail.getTaxonomyArrayList();
    int position = 1;
    for (Iterator iterator = taxonomyArrayList.iterator(); iterator.hasNext();) {
        Taxonomy taxonomy = (Taxonomy) iterator.next();
        System.out.println("Taxonomy " + position + " : " + taxonomy.getTModel().getTModelKey());

        System.out.println(taxonomy.toXML());
    }
}

```

```

        System.out.println();
        System.out.println("*****");
        position++;
    }
}

```

2.5.3. Building and Running Demos

This section shows, how to build and run the Oracle Service Registry Advanced Taxonomy demo set. Let's continue with our SaveTaxonomy demo.

1. Be sure that the demos are properly configured and the Oracle Service Registry is up and running.
2. Change your working directory to

Windows:	%REGISTRY_HOME%\demos\advanced\taxonomy
UNIX:	\$REGISTRY_HOME/demos/advanced/taxonomy

3. Build all demos using:

Windows:	run.bat make
UNIX:	./run.sh make



Note

When compiling demos on Windows platforms, you may see the following text:

```
A subdirectory or file ..\..\common\.\build\classes already exists.
```

This is expected and does not indicate a problem.

4. To get list of all available demos, run

Windows:	run.bat help
UNIX:	./run.sh help

5. The selected demo can be executed via command run with name of demo as parameter. For example to run the SaveTaxonomy demo, invoke

Windows:	run.bat SaveTaxonomy
UNIX:	./run.sh SaveTaxonomy

The output of this demo will resemble the following:

```

Running SaveTaxonomy demo...
Saving taxonomy where
Enter user name [admin]:
Enter password [changeit]:
Enter name [Demo identifier]:
Enter description [Saved by SaveTaxonomy demo]:

```

```

Using Security at url https://mycomp.com:8443/registry/uddi/security .. done
Logging in .. done
name = Demo identifier
description = Saved by SaveTaxonomy demo
Using Taxonomy at url https://mycomp.com:8443/registry/uddi/taxonomy .. done
Save in progress ... done

Taxonomy 1 : uddi:5c1d5d80-a4d4-11d8-91cd-5c1d367091cd
<taxonomy check="false" xmlns="http://systinet.com/uddi/taxonomy/v3/5.0">
  <tModel tModelKey="uddi:5c1d5d80-a4d4-11d8-91cd-5c1d367091cd"
    xmlns="urn:uddi-org:api_v3">
    <name>Demo identifier</name>
    <description>Saved by SaveTaxonomy demo</description>
    <categoryBag>
      <keyedReference tModelKey="uddi:uddi.org:categorization:types"
        keyName="Identifier system" keyValue="identifier"/>
      <keyedReference tModelKey="uddi:systinet.com:taxonomy:compatibility"
        keyName="Compatibility" keyValue="businessEntity"/>
      <keyedReference tModelKey="uddi:systinet.com:taxonomy:compatibility"
        keyName="Compatibility" keyValue="tModel"/>
      <keyedReference tModelKey="uddi:uddi.org:categorization:types"
        keyName="Unchecked value set" keyValue="unchecked"/>
    </categoryBag>
  </tModel>
  <compatibilityBag>
    <compatibility>businessEntity</compatibility>
    <compatibility>tModel</compatibility>
  </compatibilityBag>
  <categorizationBag>
    <categorization>identifier</categorization>
  </categorizationBag>
</taxonomy>

*****
Logging out .. done

```

6. To rebuild demos, execute `run.bat clean` (`./run.sh clean`) to delete the classes directory and `run.bat make` (`./run.sh make`) to rebuild the demo classes.

3. Security Demos

Security Demos section includes the following demos:

- [Account Demos](#) - You will learn how to register new accounts (or update existing accounts), enable, get, find, and delete accounts.
- [Group Demos](#) - You will learn how to create or update, get, find and delete groups.
- [Permission Demos](#) - You will learn how to set and search permissions.
- [ACL Demos](#) - The ACL extension is used to grant or revoke rights to selected users or groups. You will learn how to create, save, delete, get and find ACLs.

3.1. Account

The Oracle Service Registry Account Demos are used to demonstrate the Oracle Service Registry application programming interface's capabilities and to demonstrate how to use this API.

You will learn how to register new accounts (or update existing accounts), enable, get, find, and delete accounts.

The Oracle Service Registry security account demo set contains the following demos to assist you in learning the Oracle Service Registry client API:

SaveAccount Demonstrates how to construct and fill the `Save_account` object, get an Account stub for the UDDI registry, and perform the `save_account` call.

DeleteAccount Demonstrates how to construct and fill the `Delete_account` object, get an Account stub for the UDDI registry, and perform the `delete_account` call.

3.1.1. Prerequisites and Preparatory Steps: Code

We expect that you have already installed the Oracle Service Registry and set the `REGISTRY_HOME` environment variable to the registry's installation location.

To run the Oracle Service Registry's demos, your registry must be running.

It is necessary to configure the demos. The configuration system has two levels: global and local. The properties defined at the global level may be overwritten at the local level. The global properties are located in the file:

Windows:	%REGISTRY_HOME%\demos\env.properties
UNIX:	\$REGISTRY_HOME/demos/env.properties

The values set during the installation of the Oracle Service Registry work out of the box, and their modification affects all demos. If you need to redefine a property's value for a single demo (that is,, at the local level), edit `env.properties`. This file is located in the same directory as the file `run.sh` (`run.bat`). Local level properties for the Account demo are loaded from the file:

Windows:	%REGISTRY_HOME%\demos\security\account\env.properties
UNIX:	\$REGISTRY_HOME/demos/security/account/env.properties

Table 12. Properties Used in Demos

Name	Default Value	Description
uddi.demos.url.account	http://localhost:8888/registry/uddi/account	the account Web service port URL
uddi.demos.url.security	http://localhost:8888/registry/uddi/security	the security Web service port URL

3.1.2. Presentation and Functional Presentation

This section describes the programming pattern used in all demos using the `SaveAccount` demo as an example. You can find this demo's source code in the file:

Windows:	%REGISTRY_HOME%\demos\security\account\src\demo\uddi\account\SaveAccount.java
UNIX:	\$REGISTRY_HOME/demos/security/account/src/demo/uddi/account/SaveAccount.java

The main method is divided into two parts. The first part serves to configure the demo by the user. It reads the credentials of the user who will run the demo. If you wish to save new user on a registry that supports public registration, then the demo may be modified to skip authentication. It then reads information about the new user to be saved (or about the user to be updated) including login name, password, name, and email address.

The second part contains the execution of the demo. It looks up the security stub and authenticates the user. It then creates a `Save_userAccount` object and sends it over SOAP to the UDDI registry as a `save_userAccount` operation. The returned `UserAccount` object is printed to the console and the `authInfo` is discarded.

```
String admin = UserInput.readString("Enter admin login","admin");
String admin_password = UserInput.readString("Enter admin password","changeit");
String login = UserInput.readString("Enter new user's login","demo_eric");
String password = UserInput.readString("Enter password","demo_eric");
String name = UserInput.readString("Enter full name","Eric Demo");
String email = UserInput.readString("Enter email","demo_eric@localhost");
System.out.println();

UDDI_Security_PortType security = getSecurityStub();
String authInfo = getAuthInfo(admin, admin_password, security);
Save_userAccount save = createSaveUserAccount(login, password, name, email, authInfo);
UserAccount userAccount = saveUserAccount(save);
printUserAccount(userAccount);
discardAuthInfo(authInfo, security);
```

The method `createSaveUserAccount` is used to create an object representing the `save_userAccount` operation. The `authInfo` is required under two circumstances: if the Oracle Service Registry is configured not to allow public registration or if the account already exists.

```
public static Save_userAccount createSaveUserAccount(String login, String password,
String name, String email, String authInfo) throws InvalidParameterException {
    System.out.println("login = " + login);
    System.out.println("password = " + password);
    System.out.println("name = " + name);
    System.out.println("email = " + email);

    UserAccount account = new UserAccount();
    account.setLoginName(login);
    account.setPassword(password);
    account.setFullName(name);
    account.setEmail(email);
    account.setLanguageCode("EN");

    Save_userAccount save = new Save_userAccount(account, authInfo);
    return save;
}
```

The helper method, `getAccountStub()`, returns the UDDI Account stub of the web service listening at the URL specified by the `URL_ACCOUNT` property.

```
public static AccountApi getAccountStub() throws SOAPException {
    // you can specify your own URL in property - uddi.demos.url.account
    String url = DemoProperties.getProperty(URL_ACCOUNT,
"http://localhost:8888/registry/uddi/account");
    System.out.print("Using Account at url " + url + " ..");
    AccountApi account = AccountStub.getInstance(url);
```

```

    System.out.println(" done");
    return account;
}

```

The Oracle Service Registry API call `save_userAccount` is performed in the method `saveUserAccount`.

```

public static UserAccount saveUserAccount(Save_userAccount save) throws SOAPException,
AccountException {
    AccountApi accountApi = getAccountStub();
    System.out.print("Save in progress ...");
    UserAccount userAccount = accountApi.save_userAccount(save);
    System.out.println(" done");
    return userAccount;
}

```

3.1.3. Building and Running Demos

This section shows how to build and run the Oracle Service Registry Account demos.

1. Be sure that the demos are properly configured and the Oracle Service Registry is up and running.
2. Change your working directory to

Windows:	%REGISTRY_HOME%\demos\security\account
UNIX:	\$REGISTRY_HOME/demos/security/account

3. Build demos using:

Windows:	run.bat make
UNIX:	./run.sh make



Note

When compiling demos on Windows platforms, you may see the following text:

```
A subdirectory or file ..\..\common\.\build\classes already exists.
```

This is expected and does not indicate a problem.

4. To get list of all available commands, run

Windows:	run.bat help
UNIX:	./run.sh help

5. The selected demo can be executed via the **run** command using the name of the demo as a parameter. For example, to run the `SaveAccount` demo, invoke

Windows:	run.bat SaveAccount
UNIX:	./run.sh SaveAccount

The output of this demo will resemble the following:

```

Running SaveAccount demo...
Saving user account where
Enter admin login [admin]:
Enter admin password [changeit]:
Enter new user's login [demo_eric]:
Enter password [demo_eric]:
Enter full name [Eric Demo]:
Enter email [demo_eric@localhost]:

Using Security at url https://mycomp.com:8443/registry/uddi/security .. done
Logging in .. done
login = demo_eric
password = demo_eric
name = Eric Demo
email = demo_eric@localhost
Using Account at url https://mycomp.com:8443/registry/uddi/account .. done
Save in progress ... done

User account
<userAccount xmlns="http://systinet.com/uddi/account/5.0">
<loginName>demo_eric</loginName>
<password>GD70gCeNfkWBph1m2bgGxQ==</password>
<email>demo_eric@localhost</email>
<fullName>Eric Demo</fullName>
<languageCode>EN</languageCode>
<expiration>1970-01-01T02:00:00.000+02:00</expiration>
<external>false</external>
<blocked>false</blocked>
<businessesLimit>1</businessesLimit>
<servicesLimit>4</servicesLimit>
<bindingsLimit>2</bindingsLimit>
<tModelsLimit>100</tModelsLimit>
<assertionsLimit>10</assertionsLimit>
<subscriptionsLimit>0</subscriptionsLimit>
<lastLoginTime>2004-05-18T16:20:09.084+02:00</lastLoginTime>
</userAccount>

*****
Logging out .. done

```

- To rebuild demos, execute `run.bat clean` (`./run.sh clean`) to delete the classes directory and `run.bat make` (`./run.sh make`) to rebuild the demo classes.

3.2. Group

The Oracle Service Registry Group demos are used to demonstrate the Oracle Service Registry application programming interface's capabilities and to demonstrate how to use this API.

You will learn how to create or update, get, find and delete groups.

The Oracle Service Registry security group demo set contains the following demos to assist you in learning the Oracle Service Registry client API:

Save Demonstrates how to construct and fill the `Save_group` object, get a Group stub for the UDDI registry, and perform the `save_group` call.

Delete Demonstrates how to construct and fill the `Delete_group` object, get a Group stub for the UDDI registry, and perform the `delete_group` call.

Get Demonstrates how to construct and fill the `Get_group` object, get a Group stub for the UDDI registry, and perform the `get_group` call.

Find Demonstrates how to construct and fill the `Find_group` object, get a Group stub for the UDDI registry, and perform the `find_group` call.

WhereIAm Demonstrates how to construct and fill the `Where_amI` object, get a Group stub for the UDDI registry, and perform the `where_amI` call.

3.2.1. Prerequisites and Preparatory Steps: Code

We expect that you have already installed the Oracle Service Registry and set the `REGISTRY_HOME` environment variable to the registry's installation location.

To run the Oracle Service Registry's demos, your registry must be running.

It is necessary to configure the demos. The configuration system has two levels: global and local. The properties defined at the global level may be overwritten at the local level. The global properties are located in the file:

Windows:	%REGISTRY_HOME%\demos\env.properties
UNIX:	\$REGISTRY_HOME/demos/env.properties

The values set during the installation of the Oracle Service Registry work out of the box, and their modification affects all demos. If you need to redefine a property's value for a single demo (that is,, at the local level), edit `env.properties`. This file is located in the same directory as the file `run.sh` (`run.bat`). Local level properties for the Group demo are loaded from the file:

Windows:	%REGISTRY_HOME%\demos\security\group\env.properties
UNIX:	\$REGISTRY_HOME/demos/security/group/env.properties

Table 13. Properties Used in Demos

Name	Default Value	Description
uddi.demos.url.group	http://localhost:8888/registry/uddi/group	the group Web service port URL
uddi.demos.url.security	http://localhost:8888/registry/uddi/security	the security Web service port URL

3.2.2. Presentation and Functional Presentation

This section describes the programming pattern used in all demos using the `WhereIAm` demo as an example. You can find this demo's source code in the file:

Windows:	%REGISTRY_HOME%\demos\security\group\src\demo\uddi\group\WhereIAm.java
UNIX:	\$REGISTRY_HOME/demos/security/group/src/demo/uddi/group/WhereIAm.java

The main method starts by gathering configuration information from the user. The first, login name, is used to run the command; the second is argument of the where_amI operation. It then logs the user to the registry, creates the where_amI object, sends it over SOAP and prints a list of groups to which the login belongs.

```
String user = UserInput.readString("Enter login to authenticate",
    DemoProperties.getProperty(USER_JOHN_NAME));
String password = UserInput.readString("Enter password",
    DemoProperties.getProperty(USER_JOHN_PASSWORD));
String login = UserInput.readString("Enter login to search", user);
System.out.println();

UDDI_Security_PortType security = getSecurityStub();
String authInfo = getAuthInfo(user, password, security);
Where_amI save = createWhereAmI(login, authInfo);
GroupList groups = whereAmI(save);
printGroupList(groups);
discardAuthInfo(authInfo, security);
```

The method createWhereAmI is used to create an object representation of the where_amI operation.

```
public static Where_amI createWhereAmI(String login, String authInfo)
    throws InvalidParameterException {
    System.out.println("login = " + login);

    Where_amI find = new Where_amI();
    find.setLoginName(login);
    find.setAuthInfo(authInfo);

    return find;
}
```

The helper method, getGroupStub(), returns the UDDI Group stub of the Web service listening at the URL specified by the URL_GROUP property.

```
public static GroupApi getGroupStub() throws SOAPException {
    // you can specify your own URL in property - uddi.demos.url.group
    String url = DemoProperties.getProperty(URL_GROUP,
        "http://localhost:8888/registry/uddi/group");
    System.out.print("Using Group API at url " + url + " ..");
    GroupApi account = GroupStub.getInstance(url);
    System.out.println(" done");
    return account;
}
```

The Oracle Service Registry API call where_amI is performed in the method whereAmI.

```
public static GroupList whereAmI(Where_amI find)
    throws SOAPException, GroupException {
    GroupApi groupApi = getGroupStub();
    System.out.print("Search in progress ...");
    GroupList groups = groupApi.where_amI(find);
    System.out.println(" done");
    return groups;
}
```

Finally the method `printGroupList` is used to print the found groups to the console.

```
public static void printGroupList(GroupList groups) {
    System.out.println();
    ListDescription listDescription = groups.getListDescription();
    if (listDescription != null) {
        // list description is mandatory part of result, if the resultant list is subset of
        // available data
        int includeCount = listDescription.getIncludeCount();
        int actualCount = listDescription.getActualCount();
        int listHead = listDescription.getListHead();
        System.out.println("Displaying " + includeCount + " of " + actualCount + ",
                           starting at position " + listHead);
    }

    GroupInfoArrayList groupInfoArrayList = groups.getGroupInfoArrayList();
    if (groupInfoArrayList == null) {
        System.out.println("Nothing found");
        return;
    }

    int position = 1;
    for (Iterator iterator = groupInfoArrayList.iterator(); iterator.hasNext();) {
        GroupInfo group = (GroupInfo) iterator.next();
        System.out.println("Group " + position);
        System.out.println(group.toXML());
        System.out.println();
        System.out.println("*****");
        position++;
    }
}
```

3.2.3. Building and Running Demos

This section shows how to build and run the Oracle Service Registry Group demos.

1. Be sure that the demos are properly configured and the Oracle Service Registry is up and running.
2. Change your working directory to:

Windows:	%REGISTRY_HOME%\demos\security\group
UNIX:	\$REGISTRY_HOME/demos/security/group

3. Build demos using:

Windows:	run.bat make
UNIX:	./run.sh make



Note

When compiling demos on Windows platforms, you may see the following text:

```
A subdirectory or file ..\..\common\.\build\classes already exists.
```

This is expected and does not indicate a problem.

4. To get list of all available commands, run

Windows:	run.bat help
UNIX:	./run.sh help

5. The selected demo can be executed via the **run** command with the name of the demo as parameter. For example, to run the WhereIAm demo, invoke

Windows:	run.bat WhereIAm
UNIX:	./run.sh WhereIAm

The output of this demo will resemble the following:

```
Running WhereIAm demo...
Find groups of user where
Enter login to authenticate [demo_john]:
Enter password [demo_john]:
Enter login to search [demo_john]:

Using Security at url https://mycomp.com:8443/registry/uddi/security .. done
Logging in .. done
login = demo_john
Using Group API at url https://mycomp.com:8443/registry/uddi/group .. done
Search in progress ... done

Group 1
<groupInfo xmlns="http://systinet.com/uddi/group/5.0">
<name>system#everyone</name>
<description>The special group that contains all users.</description>
<privateGroup>false</privateGroup>
<external>false</external>
</groupInfo>

*****

Group 2
<groupInfo xmlns="http://systinet.com/uddi/group/5.0">
<name>system#registered</name>
<description>The special group that contains all users who are logged
onto the UDDI registry.</description>
<privateGroup>false</privateGroup>
<external>false</external>
</groupInfo>

*****

Logging out .. done
```

6. To rebuild demos, execute **run.bat clean** (**./run.sh clean**) to delete the classes directory and **run.bat make** (**./run.sh make**) to rebuild the demo classes.

3.3. Permission

The Oracle Service Registry Permission Demos are used to demonstrate the Oracle Service Registry application programming interface's capabilities and to demonstrate how to use this API.

You will learn how to set and search permissions.

The Oracle Service Registry security permission demo set contains the following demos to assist you in learning the Oracle Service Registry client API:

SetPermission Demonstrates how to construct and fill the `Set_permission` object, get a `Permission` stub for the UDDI registry, and perform the `set_permission` call.

WhoHasPermission Demonstrates how to construct and fill the `who_hasPermission` object, get a `Permission` stub for the UDDI registry, and perform the `who_hasPermission` call.

GetPermission Demonstrates how to construct and fill the `Get_permission` object, get a `Permission` stub for the UDDI registry, and perform the `get_permission` call.

3.3.1. Prerequisites and Preparatory Steps: Code

We expect that you have already installed the Oracle Service Registry and set the `REGISTRY_HOME` environment variable to the registry's installation location.

To run the Oracle Service Registry's demos, your registry must be running.

It is necessary to configure the demos. The configuration system has two levels: global and local. The properties defined at the global level may be overwritten at the local level. The global properties are located in the file:

Windows:	%REGISTRY_HOME%\demos\env.properties
UNIX:	\$REGISTRY_HOME/demos/env.properties

The values set during the installation of the Oracle Service Registry work out of the box, and their modification affects all demos. If you need to redefine a property's value for a single demo (that is,, at the local level), edit `env.properties`. This file is located in the same directory as the file `run.sh` (`run.bat`). Local level properties for the Permission demos are loaded from the file:

Windows:	%REGISTRY_HOME%\demos\security\permission\env.properties
UNIX:	\$REGISTRY_HOME/demos/security/permission/env.properties

Table 14. Properties Used in Demos

Name	Default Value	Description
uddi.demos.url.permission	http://localhost:8888/registry/uddi/permission	the permission Web service port URL
uddi.demos.url.security	http://localhost:8888/registry/uddi/security	the security Web service port URL

3.3.2. Presentation and Functional Presentation

This section describes the programming pattern used in all demos using the `SetPermission` demo as an example. You can find this demo's source code in the file:

Windows:	%REGISTRY_HOME%\demos\security\permission\src\demo\uddi\permission\SetPermission.java
UNIX:	\$REGISTRY_HOME/demos/security/permission/src/demo/uddi/permission/SetPermission.java

The main method is divided into two parts. The first part serves to configure the demo by the user. It reads the credentials of the user who will run the demo and is allowed to set permissions. Then it reads permission type, name, and action.

The second part contains the execution of the demo. It looks up the security stub and authenticates the user. It then creates a `Set_permission` object and sends it over SOAP to the UDDI registry as a `set_permission` operation. If the user has explicitly declared permissions that are not present in this operation, these will be removed.

```
String user = UserInput.readString("Enter login","admin");
String password = UserInput.readString("Enter password","changeit");
String principal = UserInput.readString("Enter principal type", PrincipalType.user.getValue());
String login = UserInput.readString("Enter login/group name",

DemoProperties.getProperty(USER_JOHN_NAME));
String type = UserInput.readString("Enter permission type",

"org.systinet.uddi.security.permission.ApiManagerPermission");
String name = UserInput.readString("Enter permission name",

"org.systinet.uddi.client.taxonomy.v3.TaxonomyApi");
String action = UserInput.readString("Enter action", "download_taxonomy");
System.out.println();

UDDI_Security_PortType security = getSecurityStub();
String authInfo = getAuthInfo(user, password, security);
Set_permission set = createSetPermission(login, principal, name, type, action, authInfo);
setPermission(set);
discardAuthInfo(authInfo, security);
```

The method `createSetPermission` creates an object representing the `set_permission` operation.

```
public static Set_permission createSetPermission(String login, String principal,
String name, String type, String action, String authInfo) throws InvalidParameterException
{
    System.out.println(principal+"", login/name = " + login);
    System.out.println("type = " + type);
    System.out.println("name = " + name);
    System.out.println("action = " + action);

    PermissionDescriptors permissionDescriptors = new PermissionDescriptors();
    permissionDescriptors.setPrincipal(new Principal(login,
PrincipalType.getPrincipalType(principal)));
    PermissionDescriptor descriptor = new PermissionDescriptor();
    descriptor.setName(name);
    descriptor.setType(type);
    descriptor.addAction(action);
    permissionDescriptors.addPermissionDescriptor(descriptor);

    Set_permission set = new Set_permission();
    set.setPermissionDescriptors(permissionDescriptors);
    set.setAuthInfo(authInfo);
```

```
    return set;
}
```

The helper method, `getPermissionStub()`, returns the UDDI Permission stub of the Web service listening at the URL specified by the `URL_PERMISSION` property.

```
public static PermissionApi getPermissionStub() throws SOAPException {
    // you can specify your own URL in property - uddi.demos.url.permission
    String url = DemoProperties.getProperty(URL_PERMISSION,
        "http://localhost:8888/registry/uddi/permission");
    System.out.print("Using Permission API at url " + url + " ..");
    PermissionApi permission = PermissionStub.getInstance(url);
    System.out.println(" done");
    return permission;
}
```

The Oracle Service Registry API call `set_permission` is performed in the method `setPermission`.

```
public static void setPermission(Set_permission set) throws
    SOAPException, PermissionException {
    PermissionApi permissionApi = getPermissionStub();
    System.out.print("Save in progress ...");
    permissionApi.set_permission(set);
    System.out.println(" done");
}
```

3.3.3. Building and Running Demos

This section shows how to build and run the Oracle Service Registry Permission demos.

1. Be sure that the demos are properly configured and the Oracle Service Registry is up and running.
2. Change your working directory to

Windows:	%REGISTRY_HOME%\demos\security\permission
UNIX:	\$REGISTRY_HOME/demos/security/permission

3. Build demos using:

Windows:	run.bat make
UNIX:	./run.sh make



Note

When compiling demos on Windows platforms, you may see the following text:

```
A subdirectory or file ..\..\common\.\build\classes already exists.
```

This is expected and does not indicate a problem.

4. To get list of all available commands, run

Windows:	run.bat help

UNIX:	<code>./run.sh help</code>

5. The selected demo can be executed via the **run** command using the name of the demo as a parameter. For example, to run the SetPermission demo, invoke

Windows:	<code>run.bat SetPermission</code>
UNIX:	<code>./run.sh SetPermission</code>

The output of this demo will resemble the following:

```
Running SetPermission demo...
Setting permission where
Enter login [admin]:
Enter password [changeit]:
Enter principal type [user]:
Enter login/group name [demo_john]:
Enter permission type [org.systinet.uddi.security.permission.ApiManagerPermission]:
Enter permission name [org.systinet.uddi.client.taxonomy.v3.TaxonomyApi]:
Enter action [download_taxonomy]:

Using Security at url https://mycomp.com:8443/registry/uddi/security .. done
Logging in .. done
user, login/name = demo_john
type = org.systinet.uddi.security.permission.ApiManagerPermission
name = org.systinet.uddi.client.taxonomy.v3.TaxonomyApi
action = download_taxonomy

Using Permission API at url https://mycomp.com:8443/registry/uddi/permission .. done
Save in progress ... done
Logging out .. done
```

6. To rebuild demos, execute `run.bat clean` (`./run.sh clean`) to delete the classes directory and `run.bat make` (`./run.sh make`) to rebuild the demo classes.

3.4. ACL

The Oracle Service Registry ACL Demos demonstrate the Oracle Service Registry ACL application programming interface's capabilities and how to use this API.

The ACL extension is used to grant or revoke rights to selected users or groups. You will learn how to create, save, delete, get and find ACLs.

The Oracle Service Registry Security ACL demo set contains the following demos to assist you in learning the Oracle Service Registry client API:

Create Demonstrates how to use Create ACL to give one user rights to create a service in the business entity of another user.

Save Demonstrates how to use Save ACL to give one user rights to update the business entity of another user.

Delete Demonstrates how to use Delete ACL to give one user rights to delete a business entity of another user.

Get Demonstrates how to use Get ACL to revoke from a selected user the right to get the business detail of a business entity.

Find Demonstrates how to use Find ACL to hide the business entity in a find_business operation from a selected user.

3.4.1. Prerequisites and Preparatory Steps: Code

We expect that you have already installed the Oracle Service Registry and set the REGISTRY_HOME environment variable to the registry's installation location.

To run the Oracle Service Registry's demos, your registry must be running.

It is necessary to configure the demos. The configuration system has two levels: global and local. The properties defined at the global level may be overwritten at the local level. The global properties are located in the file:

Windows:	%REGISTRY_HOME%\demos\env.properties
UNIX:	\$REGISTRY_HOME/demos/env.properties

The values set during the installation of the Oracle Service Registry work out of the box, and their modification affects all demos. If you need to redefine a property's value for a single demo (that is,, at the local level), edit env.properties. This file is located in the same directory as the file run.sh (run.bat). Local level properties for the ACL demos are loaded from the file:

Windows:	%REGISTRY_HOME%\demos\security\acl\env.properties
UNIX:	\$REGISTRY_HOME/demos/security/acl/env.properties

Table 15. Properties Used in Demos

Name	Default Value	Description
uddi.demos.user.john.name	demo_john	first user's name
uddi.demos.user.john.password	demo_john	first user's password
uddi.demos.user.jane.name	demo_jane	second user's name
uddi.demos.user.jane.password	demo_jane	second user's password
uddi.demos.url.publishing	http://localhost:8888/registry/uddi/publishing	The publication Web service port URL
uddi.demos.url.security	http://localhost:8888/registry/uddi/security	the security Web service port URL

3.4.2. Presentation and Functional Presentation

This section describes the programming pattern used in all demos using the Find demo as an example. You can find this demo's source code in the file:

Windows:	%REGISTRY_HOME%\demos\security\acl\src\demo\uddi\acl\Find.java
UNIX:	\$REGISTRY_HOME/demos/security/acl/src/demo/uddi/acl/Find.java

The main method is divided into several logical parts. The first part is used to configure the demo for the user. The "good" user represents the user who will receive a positive ACL; the "bad" user represents the user who will receive a negative ACL.

The second part contains the `save_business` operation with extra information. The ACLs are set in the `categoryBag`. In the next section, the bad user unsuccessfully tries to find the business entity by name, and finally the good user finds the business entity.

```
String name = UserInput.readString("Enter business name", "ACL find demo");
String description = UserInput.readString("Enter description",
                                           "Demonstration of find-allowed, find-denied
ACLs");
String searchName = UserInput.readString("Enter search string", "ACL%");
String owner = UserInput.readString("Enter entity owner", "admin");
String password = UserInput.readString("Enter owner's password", "changeit");
String loginGood = UserInput.readString("Enter good user's login",

DemoProperties.getProperty(USER_JOHN_NAME));
String passwordGood = UserInput.readString("Enter good user's password",

DemoProperties.getProperty(USER_JOHN_PASSWORD));
String loginBad = UserInput.readString("Enter bad user's login",

DemoProperties.getProperty(USER_JANE_NAME));
String passwordBad = UserInput.readString("Enter bad user's password",

DemoProperties.getProperty(USER_JANE_PASSWORD));
System.out.println();

UDDI_Security_PortType security = getSecurityStub();
String authInfoOwner = getAuthInfo(owner, password, security);
Save_business saveBusiness = createSaveBusiness(name, description, loginGood, loginBad,
authInfoOwner);
BusinessDetail result = saveBusiness(saveBusiness);
printBusinessDetail(result);
discardAuthInfo(authInfoOwner, security);

System.out.println(" ");
System.out.println("Finding business entity where");
String authInfoGood = getAuthInfo(loginGood, passwordGood, security);
Find_business findBusiness = createFindByName(searchName, authInfoGood);
BusinessList businessList = findBusiness(findBusiness);
printBusinessList(businessList);
discardAuthInfo(authInfoGood, security);

System.out.println(" ");
System.out.println("Finding business entity where");
String authInfoBad = getAuthInfo(loginBad, passwordBad, security);
findBusiness = createFindByName(searchName, authInfoBad);
businessList = findBusiness(findBusiness);
printBusinessList(businessList);
discardAuthInfo(authInfoGood, security);
```

The `createSaveBusiness` operation is used to create the `Save_business` object. The ACLs are stored in the `keyedReferenceGroup` with the `uddi:systinet.com:ac1 tModelKey` as `keyedReference`, where the `tModelKey` specifies the `tModelKey` of the ACL, `keyValue` holds the login name of the user or group, and finally `keyName` is used to distinguish between users and groups in the `keyValue`.

```

public static Save_business createSaveBusiness(String name,
                                              String description, String goodUser,
                                              String badUser, String authInfo) throws InvalidParameterException {
    System.out.println("name = " + name);
    System.out.println("description = " + description);
    System.out.println("goodUser = " + goodUser);
    System.out.println("badUser = " + badUser);

    BusinessEntity businessEntity = new BusinessEntity();
    businessEntity.addName(new Name(name));
    businessEntity.addDescription(new Description(description));

    CategoryBag categoryBag = new CategoryBag();
    businessEntity.setCategoryBag(categoryBag);
    KeyedReferenceGroup aclGroup = new KeyedReferenceGroup("uddi:systinet.com:acl");
    aclGroup.addKeyedReference(new KeyedReference("uddi:systinet.com:acl:find-allowed",
                                                goodUser,
"user"));
    aclGroup.addKeyedReference(new KeyedReference("uddi:systinet.com:acl:find-denied",
                                                badUser,
"user"));
    categoryBag.addKeyedReferenceGroup(aclGroup);

    Save_business save = new Save_business();
    save.addBusinessEntity(businessEntity);
    save.setAuthInfo(authInfo);

    return save;
}

```

The `find_business` operation takes the `authInfo` parameter used to identify the user who runs the query.

```

public static Find_business createFindByName(String name, String authInfo)
    throws InvalidParameterException {
    System.out.println("name = " + name);
    Find_business find_business = new Find_business();
    find_business.addName(new Name(name));
    find_business.setMaxRows(new Integer(MAX_ROWS));
    find_business.setAuthInfo(authInfo);
    find_business.addFindQualifier("approximateMatch");
    return find_business;
}

```

3.4.3. Building and Running Demos

This section shows how to build and run the Oracle Service Registry ACL demos.

1. Be sure that the demos are properly configured and the Oracle Service Registry is up and running.
2. Change your working directory to:

Windows:	%REGISTRY_HOME%\demos\security\acl
UNIX:	\$REGISTRY_HOME/demos/security/acl

3. Build demos using:

Windows:	run.bat make
UNIX:	./run.sh make

**Note**

When compiling demos on Windows platforms, you may see the following text:

```
A subdirectory or file ../../common\.\build\classes already exists.
```

This is expected and does not indicate a problem.

4. To get list of all available commands, run

Windows:	run.bat help
UNIX:	./run.sh help

5. The selected demo can be executed via the **run** command with the name of the demo as parameter. For example, to run the Find demo, invoke

Windows:	run.bat Find
UNIX:	./run.sh Find

The output of this demo will resemble the following:

```
Running Find demo...
Saving business entity where
Enter business name [ACL find demo]:
Enter description [Demonstration of find-allowed, find-denied ACLs]:
Enter search string [ACL%]:
Enter entity owner [admin]:
Enter owner's password [changeit]:
Enter good user's login [demo_john]:
Enter good user's password [demo_john]:
Enter bad user's login [demo_jane]:
Enter bad user's password [demo_jane]:

Using Security at url https://mycomp.com:8443/registry/uddi/security .. done
Authenticating the user admin .. done
name = ACL find demo
description = Demonstration of find-allowed, find-denied ACLs
goodUser = demo_john
badUser = demo_jane
Using Publishing at url https://mycomp.com:8443/registry/uddi/publishing .. done
Save business in progress ... done

Business 1 : uddi:91ba8390-a8e0-11d8-b2ad-779f83c0b2ad
<businessEntity businessKey="uddi:91ba8390-a8e0-11d8-b2ad-779f83c0b2ad"
xmlns="urn:uddi-org:api_v3">
<name>ACL find demo</name>
```



```
<description>Demonstration of find-allowed, find-denied ACLs</description>
<categoryBag>
<keyedReferenceGroup tModelKey="uddi:systinet.com:acl">
<keyedReference tModelKey="uddi:systinet.com:acl:find-allowed"
keyName="user" keyValue="demo_john"/>
<keyedReference tModelKey="uddi:systinet.com:acl:find-denied"
keyName="user" keyValue="demo_jane"/>
</keyedReferenceGroup>
</categoryBag>
</businessEntity>
```

Logging out .. done

Finding business entity where

Authenticating the user demo_john .. done

name = ACL%

Using Inquiry at url http://mycomp.com:8888/registry/uddi/inquiry .. done

Search in progress .. done

Displaying 1 of 1, starting at position 1

Business 1 : uddi:91ba8390-a8e0-11d8-b2ad-779f83c0b2ad

```
<businessInfo businessKey="uddi:91ba8390-a8e0-11d8-b2ad-779f83c0b2ad"
xmlns="urn:uddi-org:api_v3">
```

```
<name>ACL find demo</name>
<description>Demonstration of find-allowed, find-denied ACLs</description>
```

```
</businessInfo>
```

Logging out .. done

Finding business entity where

Authenticating the user demo_jane .. done

name = ACL%

Using Inquiry at url http://mycomp.com:8888/registry/uddi/inquiry .. done

Search in progress .. done

Displaying 0 of 0, starting at position 1

Nothing found

Logging out .. done

6. To rebuild demos, execute `run.bat clean` (`./run.sh clean`) to delete the classes directory and `run.bat make` (`./run.sh make`) to rebuild the demo classes.

4. Resources Demos

The Resources Demos section includes the following demos:

- WSDL - Teaches how to publish, unpublish and find a WSDL document in [UDDI version 2](#) and [UDDI version 3](#).
- [XML](#) - Teaches how to publish, unpublish and find an XML document.
- [XSD](#) - Teaches how to publish, unpublish and find an XML Schema.
- [XSLT](#) - Teaches how to publish, unpublish and find a XSL Transformation.

4.1. WSDL2UDDI v2

The Oracle Service Registry WSDL2UDDI demo set is used to demonstrate the Oracle Service Registry WSDL2UDDI application programming interface's capabilities and to demonstrate how to use this API. The Oracle Service Registry WSDL2UDDI demos cover the [UDDI Version 2.0.4 Specification](http://www.oasis-open.org/committees/uddi-spec/doc/tcpspecs.htm#uddiv2) [http://www.oasis-open.org/committees/uddi-spec/doc/tcpspecs.htm#uddiv2]. You will learn how to query and publish a WSDL to a UDDI registry over a SOAP interface. The Oracle Service Registry WSDL2UDDI demo set contains following demos to assist you in learning the WSDL2UDDI client API.

PublishWSDL Demonstrates how to construct and fill the `Publish_wsdl` object, get the WSDL2UDDI stub for the UDDI registry, get an `authToken`, and perform the `publish_wsdl` call.

UnPublishWSDL Demonstrates how to construct and fill the `Unpublish_wsdl` object, get WSDL2UDDI stub for the UDDI registry, get an `authToken`, and perform the `unpublish_wsdl` call.

FindWSDL Demonstrates how to construct and fill the `Find_wsdlServiceInfo` object, get the WSDL2UDDI stub for the UDDI registry, get an `authToken`, and perform the `find_wsdlServiceInfo` call.

GetWSDL Demonstrates how to construct and fill the `Get_wsdlServiceInfo` object, get the WSDL2UDDI stub for the UDDI registry, get an `authToken`, and perform the `get_wsdlServiceInfo` call.

4.1.1. Prerequisites and Preparatory Steps: Code

We expect that you have already installed the Oracle Service Registry and set the `REGISTRY_HOME` environment variable to the registry's installation location.

To run the Oracle Service Registry's demos, your registry must be running.

It is necessary to configure the demos. The configuration system has two levels: global and local. The properties defined at the global level may be overwritten at local level. The global properties are located in the file:

Windows:	%REGISTRY_HOME%\demos\env.properties
UNIX:	\$REGISTRY_HOME/demos/env.properties

The values set during the installation of the Oracle Service Registry work out of the box, and their modification affects all demos. If you need to redefine the value of some property for a single demo (that is, at the local level), edit `env.properties`. This file is located in the same directory as the file `run.sh` (`run.bat`). Local level properties for the WSDL2UDDI demos are loaded from the file:

Windows:	%REGISTRY_HOME%\demos\basic\wsdl\v2\env.properties
UNIX:	\$REGISTRY_HOME/demos/basic/wsdl/v2/env.properties

Table 16. Properties Used in Demos

Name	Default Value	Description
uddi.demos.user.john.name	demo_john	first user's name
uddi.demos.user.john.password	demo_john	first user's password
uddi.demos.url.wsdl2uddi	http://localhost:8888/registry/uddi/wsdl2uddi	the wsdl2uddi Web service port URL
uddi.demos.url.security	http://localhost:8888/registry/uddi/security	the security Web service port URL

4.1.2. Presentation and Functional Presentation

This section describes programming pattern used in all demos using the PublishWSDL demo as an example. You can find its source code in the file:

Windows:	%REGISTRY_HOME%\demos\resources\wsdl\v2\src\demo\uddi\v2\wsdl2uddi\PublishWSDL.java
UNIX:	\$REGISTRY_HOME/demos/resources/wsdl/v2/src/demo/uddi/v2/wsdl2uddi/PublishWSDL.java

The main method is very short. After gathering the user's input, it gets the security stub and authorizes the user. The resulting authInfo string is a secret key passed to the Publish request, which is created and initialized in the createPublish() method.

The user's choice of WSDL is published to the selected businessEntity within the publishWSDL() method.

When successful, the WsdDetail object is returned from the UDDI registry and printed.

The last step is to discard the authInfo string, so that no malicious user can use it to compromise another user's account.

```
String businessKey = UserInput.readString("Enter businessKey",
    "d7222f66-08aa-3a6e-a299-2ed4ac785682");
String url = UserInput.readString("Enter WSDL URL",
    "http://localhost:8888/registry/uddi/doc/demos/EmployeeList.wsdl");
System.out.println();

UDDI_Security_PortType security = getSecurityStub();
String authInfo = getAuthInfo(user, password, security);
Publish_wsdl publish = createPublish(businessKey, url, authInfo);
WsdDetail result = publishWSDL(publish);
printWsdDetail(result);
discardAuthInfo(authInfo, security);
```

The helper method getSecurityStub() returns the UDDI Security stub of the Web service listening at the URL specified by the URL_SECURITY property.

```
public static UDDI_Security_PortType getSecurityStub()
    throws SOAPException {
    // you can specify your own URL in property - uddi.demos.url.security
    String url = DemoProperties.getProperty(URL_SECURITY,
        "http://localhost:8888/registry/uddi/security");
    System.out.print("Using Security at url " + url + " ..");
    UDDI_Security_PortType security = UDDISecurityStub.getInstance(url);
    System.out.println(" done");
    return security;
}
```

Similarly, the helper method getWsd2uddiStub() returns the WSDL2UDDI stub of the Web service listening at URL specified by the URL_WSDL2UDDI property.

```
public static Wsd2uddiApi getWsd2uddiStub() throws SOAPException {
    // you can specify your own URL in property - uddi.demos.url.wsdl2uddi
    String url = DemoProperties.getProperty(URL_WSDL2UDDI,
        "http://localhost:8888/registry/uddi/wsdl2uddi");
    System.out.print("Using WSDL2UDDI at url " + url + " ..");
    Wsd2uddiApi inquiry = Wsd2uddiStub.getInstance(url);
    System.out.println(" done");
}
```

```

    return inquiry;
}

```

The `getAuthInfo()` method is used to authorize the user against the UDDI registry and to get the secret `authInfo` key.

```

public static String getAuthInfo(String userName,
                                String password, UDDI_Security_PortType security)
    throws InvalidParameterException, UDDIException {
    System.out.print("Logging in ..");
    AuthToken authToken = security.get_authToken(new Get_authToken(userName, password));
    System.out.println(" done");
    return authToken.getAuthInfo();
}

```

The `discardAuthInfo()` method invalidates the secret `authInfo` key, so that it cannot be reused.

```

public static DispositionReport discardAuthInfo(String authInfo,
                                                UDDI_Security_PortType security)
    throws InvalidParameterException, UDDIException {
    System.out.print("Logging out ..");
    DispositionReport dispositionReport = security.discard_authToken(new
Discard_authToken(authInfo));
    System.out.println(" done");
    return dispositionReport;
}

```

The `createPublish()` method is used to create a new instance of the `Publish` class and initialize it with values from parameters:

```

public static Publish_wsdl createPublish(String businessKey,
                                         String url, String authInfo)
    throws InvalidParameterException {
    System.out.println("businessKey = " + businessKey);
    System.out.println("url = " + url);

    WsdlMapping wsdlMapping = new WsdlMapping();
    wsdlMapping.setBusinessKey(businessKey);
    Wsdl wsdl = new Wsdl(url);
    WsdlDetail wsdlDetail = new WsdlDetail(wsdl, wsdlMapping);
    Publish_wsdl publish = new Publish_wsdl(wsdlDetail, authInfo);
    return publish;
}

```

The WSDL2UDDI API call `Publish_wsdl` is performed in the method `publishWSDL()`.

```

public static WsdlDetail publishWSDL(Publish_wsdl save)
    throws UDDIException, SOAPException {
    Wsdl2uddiApi publishing = getWsdl2uddiStub();
    System.out.print("Save in progress ...");
    WsdlDetail wsdlDetail = publishing.publish_wsdl(save);
    System.out.println(" done");
    return wsdlDetail;
}

```

The returned `WsdlDetail` is displayed by the `printWsdlDetail()` method.

One interesting aspect of Oracle Service Registry client API is that each UDDIObject contains the `toXML()` method, which returns a human-readable formatted listing of its XML representation.

```
public static void printWsdldetail(Wsdldetail wsdlDetail) {
    System.out.println();
    System.out.println(wsdlDetail.toXML());
}
```

4.1.3. Building and Running Demos

This section shows, how to build and run the Oracle Service Registry Basic Publishing demo set. Let's continue with our SaveBusiness demo.

1. Be sure that the demos are properly configured and the Oracle Service Registry is up and running.
2. Change your working directory to

Windows	%REGISTRY_HOME%\demos\basic\wsdl\v2
UNIX	\$REGISTRY_HOME/demos/basic/wsdl/v2

3. Build all demos using:

Windows:	run.bat make
UNIX:	./run.sh make



Note

When compiling demos on Windows platforms, you may see the following text:

```
A subdirectory or file ..\..\common\.\build\classes already exists.
```

This is expected and does not indicate a problem.

4. To get list of all available demos, run

Windows:	run.bat help
UNIX:	./run.sh help

5. The selected demo can be executed via the **run** command using the name of demo as parameter. For example, to run the PublishWSDL demo, invoke

Windows:	run.bat PublishWSDL
UNIX:	./run.sh PublishWSDL

The output of this demo will resemble the following:

```
Running PublishWSDL demo...
Enter businessKey [d7222f66-08aa-3a6e-a299-2ed4ac785682]:
Enter WSDL URL [http://localhost:8888/registry/uddi/inquiry/wsdl]:
    http://localhost:8888/registry/uddi/doc/demos/EmployeeList.wsdl
```

```

Using Publishing at url https://mycomp.com:8443/registry/uddi/publishing .. done
Logging in .. done
businessKey = d7222f66-08aa-3a6e-a299-2ed4ac785682
url = http://localhost:8888/registry/uddi/doc/demos/EmployeeList.wsdl
Using WSDL2UDDI at url https://mycomp.com:8443/registry/uddi/wsdl2uddi .. done
Save in progress ... done

<wsdlDetail xmlns="http://systinet.com/uddi/wsdl2uddi/v2/5.0">
  <wsdl>

<wsdlLocation>http://localhost:8888/registry/uddi/doc/demos/EmployeeList.wsdl</wsdlLocation>

  </wsdl>
  <wsdlMapping>
    <businessKey xmlns="urn:uddi-org:api_v2">d7222f66-08aa-3a6e-a299-2ed4ac785682<
      /businessKey>
    <services>
      <service name="EmployeeList" namespace="
        http://systinet.com/wsdl/demo/uddi/services/"
        publishingMethod="rewrite">
        <serviceKey xmlns="urn:uddi-org:api_v2">
          d0a50390-af1c-11d8-b9bf-eb2d7e20b9bf</serviceKey>
        <ports>
          <port name="EmployeeList" publishingMethod="rewrite">
            <bindingKey xmlns="urn:uddi-org:api_v2">
              d0aca4b0-af1c-11d8-b9bf-eb2d7e20b9bf</bindingKey>
            </port>
          </ports>
        </service>
      </services>
      <bindings>
        <binding name="EmployeeList_binding"
          namespace="http://systinet.com/wsdl/demo/uddi/services/"
          publishingMethod="rewrite">
          <tModelKey xmlns="urn:uddi-org:api_v2">
            uuid:d07da570-af1c-11d8-b9bf-eb2d7e20b9bf</tModelKey>
          </binding>
        </bindings>
        <portTypes>
          <portType name="EmployeeList_portType"
            namespace="http://systinet.com/wsdl/demo/uddi/services/"
            publishingMethod="rewrite">
            <tModelKey xmlns="urn:uddi-org:api_v2">
              uuid:d0658990-af1c-11d8-b9bf-eb2d7e20b9bf</tModelKey>
            </portType>
          </portTypes>
        </wsdlMapping>
      </wsdlDetail>
      Logging out .. done

```

6. To rebuild demos, execute `run.bat clean` (`./run.sh clean`) to delete the classes directory and `run.bat make` (`./run.sh make`) to rebuild the demo classes.

4.2. WSDL2UDDI v3

The Oracle Service Registry WSDL2UDDI demo set is used to demonstrate the Oracle Service Registry WSDL2UDDI application programming interface's capabilities and to show how to use this API. The Oracle Service Registry WSDL2UDDI demos cover the [UDDI Version 3.01 Specification](http://www.oasis-open.org/committees/uddi-spec/doc/tcpspecs.htm#uddiv3) [http://www.oasis-open.org/committees/uddi-spec/doc/tcpspecs.htm#uddiv3]. You will learn how to query and publish a WSDL to a UDDI registry over a SOAP interface.

The Oracle Service Registry WSDL2UDDI demo set contains following demos to assist you in learning the WSDL2UDDI client API.

PublishWSDL Demonstrates how to construct and fill the `Publish_wsdl` object, get the WSDL2UDDI stub for the UDDI registry, get an `authToken`, and perform the `publish_wsdl` call.

UnPublishWSDL Demonstrates how to construct and fill the `Unpublish_wsdl` object, get WSDL2UDDI stub for the UDDI registry, get an `authToken`, and perform the `unpublish_wsdl` call.

FindWSDL Demonstrates how to construct and fill the `Find_wsdlServiceInfo` object, get the WSDL2UDDI stub for the UDDI registry, get an `authToken`, and perform the `find_wsdlServiceInfo` call.

GetWSDL Demonstrates how to construct and fill the `Get_wsdlServiceInfo` object, get the WSDL2UDDI stub for the UDDI registry, get an `authToken`, and perform the `get_wsdlServiceInfo` call.

4.2.1. Prerequisites and Preparatory Steps: Code

We expect that you have already installed the Oracle Service Registry and set the `REGISTRY_HOME` environment variable to the registry's installation location.

To run the Oracle Service Registry's demos, your registry must be running.

It is necessary to configure the demos. The configuration system has two levels: global and local. The properties defined at the global level may be overwritten at local level. The global properties are located in the file:

Windows:	%REGISTRY_HOME%\demos\env.properties
UNIX:	\$REGISTRY_HOME/demos/env.properties

The values set during installation of the Oracle Service Registry work out of the box, and their modification affects all demos. If you need to redefine the value of some property for a single demo (that is, at the local level), edit `env.properties`. This file is located in the same directory as the file `run.sh` (`run.bat`). Local level properties for the WSDL2UDDI demos are loaded from the file:

Windows:	%REGISTRY_HOME%\demos\basic\wsdl\v3\env.properties
UNIX:	\$REGISTRY_HOME/demos/basic/wsdl/v3/env.properties

Table 17. Properties Used in Demos

Name	Default Value	Description
uddi.demos.user.john.name	demo_john	first user's name
uddi.demos.user.john.password	demo_john	first user's password
uddi.demos.url.wsdl2uddi	http://localhost:8888/registry/uddi/wsdl2uddi	the wsdl2uddi Web service port URL
uddi.demos.url.security	http://localhost:8888/registry/uddi/security	the security Web service port URL

4.2.2. Presentation and Functional Presentation

This section describes programming pattern used in all demos using the PublishWSDL demo as an example. You can find its source code in file

Windows:	%REGISTRY_HOME%\demos\resources\wsdl\v3\src\demo\uddi\v3\wsdl2uddi\PublishWSDL.java
UNIX:	\$REGISTRY_HOME/demos/resources/wsdl/v3/src/demo/uddi/v3/wsdl2uddi/PublishWSDL.java

The main method is very short. After gathering the user's input, it gets the security stub and authorizes the user. The resulting authInfo string is a secret key passed to the Publish request, which is created and initialized in the createPublish() method.

The user's choice of WSDL is published to the selected businessEntity within the publishWSDL() method.

When successful, the Wsdldetail object is returned from the UDDI registry and printed.

The last step is to discard the authInfo string, so that no malicious user can use it to compromise another user's account.

```
String businessKey = UserInput.readString("Enter businessKey", "uddi:systinet.com:demo:hq");
String url = UserInput.readString("Enter WSDL URL",
"http://localhost:8888/registry/uddi/doc/demos/EmployeeList.wsdl");
System.out.println();

UDDI_Security_PortType security = getSecurityStub();
String authInfo = getAuthInfo(user, password, security);
Publish_wsdl publish = createPublish(businessKey, url, authInfo);
Wsdldetail result = publishWSDL(publish);
printWsdldetail(result);
discardAuthInfo(authInfo, security);
```

The helper method getSecurityStub() returns the UDDI Security stub of the Web service listening at the URL specified by the URL_SECURITY property.

```
public static UDDI_Security_PortType getSecurityStub()
throws SOAPException {
    // you can specify your own URL in property - uddi.demos.url.security
    String url = DemoProperties.getProperty(URL_SECURITY,
"http://localhost:8888/registry/uddi/security");
    System.out.print("Using Security at url " + url + " ..");
    UDDI_Security_PortType security = UDDISecurityStub.getInstance(url);
    System.out.println(" done");
    return security;
}
```

Similarly, the helper method getWsdldetailStub() returns the WSDL2UDDI stub of the Web service listening at URL specified by the URL_WSDL2UDDI property.

```
public static WsdldetailApi getWsdldetailStub() throws SOAPException {
    // you can specify your own URL in property - uddi.demos.url.wsdl2uddi
    String url = DemoProperties.getProperty(URL_WSDL2UDDI,
"http://localhost:8888/registry/uddi/wsdl2uddi");
    System.out.print("Using WSDL2UDDI at url " + url + " ..");
    WsdldetailApi inquiry = WsdldetailStub.getInstance(url);
    System.out.println(" done");
}
```



```

    return inquiry;
}

```

The `getAuthInfo()` method is used to authorize the user against the UDDI registry and to get the secret `authInfo` key.

```

public static String getAuthInfo(String userName, String password, UDDI_Security_PortType
security)
    throws InvalidParameterException, UDDIException {
    System.out.print("Logging in ..");
    AuthToken authToken = security.get_authToken(new Get_authToken(userName, password));
    System.out.println(" done");
    return authToken.getAuthInfo();
}

```

The `discardAuthInfo()` method invalidates the secret `authInfo` key, so that it cannot be reused.

```

public static void discardAuthInfo(String authInfo, UDDI_Security_PortType security)
    throws InvalidParameterException, UDDIException {
    System.out.print("Logging out ..");
    security.discard_authToken(new Discard_authToken(authInfo));
    System.out.println(" done");
}

```

The `createPublish()` method is used to create a new instance of the `Publish` class and initialize it with values from parameters:

```

public static Publish_wsdl createPublish(String businessKey, String url, String authInfo)
    throws InvalidParameterException {
    System.out.println("businessKey = " + businessKey);
    System.out.println("url = " + url);

    WsdlMapping wsdlMapping = new WsdlMapping();
    wsdlMapping.setBusinessKey(businessKey);
    Wsdl wsdl = new Wsdl(url);
    WsdlDetail wsdlDetail = new WsdlDetail(wsdl, wsdlMapping);
    Publish_wsdl publish = new Publish_wsdl(wsdlDetail, authInfo);
    return publish;
}

```

The WSDL2UDDI API call `Publish_wsdl` is performed in the method `publishWSDL()`.

```

public static WsdlDetail publishWSDL(Publish_wsdl save)
    throws UDDIException, SOAPException {
    Wsdl2uddiApi publishing = getWsdl2uddiStub();
    System.out.print("Save in progress ...");
    WsdlDetail wsdlDetail = publishing.publish_wsdl(save);
    System.out.println(" done");
    return wsdlDetail;
}

```

The returned `WsdlDetail` is displayed by the `printWsdlDetail()` method.

One interesting aspect of Oracle Service Registry client API is that each `UDDIObject` contains the `toXML()` method, which returns a human-readable formatted listing of its XML representation.

```
public static void printWsdldetail(Wsdldetail wsdlDetail) {
    System.out.println();
    System.out.println(wsdlDetail.toXML());
}
```

4.2.3. Building and Running Demos

This section shows, how to build and run the Oracle Service Registry Basic Publishing demo set. Let's continue with our SaveBusiness demo.

1. Be sure that the demos are properly configured and the Oracle Service Registry is up and running.
2. Change your working directory to

Windows	%REGISTRY_HOME%\demos\basic\wsdl\v3
UNIX	\$REGISTRY_HOME/demos/basic/wsdl/v3

3. Build all demos using:

Windows:	run.bat make
UNIX:	./run.sh make



Note

When compiling demos on Windows platforms, you may see the following text:

```
A subdirectory or file ..\..\common\.\build\classes already exists.
```

This is expected and does not indicate a problem.

4. To get list of all available demos, run

Windows:	run.bat help
UNIX:	./run.sh help

5. The selected demo can be executed via the **run** command using the name of the demo as a parameter. For example, to run the PublishWSDL demo, invoke

Windows:	run.bat PublishWSDL
UNIX:	./run.sh PublishWSDL

The output of this demo will resemble the following:

```
Running PublishWSDL demo...
Enter businessKey [uddi:systinet.com:demo:hq]:
Enter WSDL URL [http://localhost:8888/registry/uddi/doc/demos/EmployeeList.wsdl]:

Using Security at url https://mycomp.com:8443/registry/uddi/security .. done
Logging in .. done
businessKey = uddi:systinet.com:demo:hq
url = http://localhost:8888/registry/uddi/doc/demos/EmployeeList.wsdl
```

```

Using WSDL2UDDI at url https://mycomp.com:8443/registry/uddi/wsdl2uddi .. done
Save in progress ... done

<wsdlDetail xmlns="http://systinet.com/uddi/wsdl2uddi/v3/5.0">
  <wsdl>

<wsdlLocation>http://localhost:8888/registry/uddi/doc/demos/EmployeeList.wsdl</wsdlLocation>

  </wsdl>
  <wsdlMapping>
    <businessKey xmlns="urn:uddi-org:api_v3">uddi:systinet.com:demo:hq</businessKey>
    <services>
      <service name="EmployeeList" namespace="http://systinet.com/wsdl/demo/uddi/services/"
        publishingMethod="rewrite">
        <serviceKey xmlns="urn:uddi-org:api_v3">uddi:dde19a70-af1a-11d8-b9bf-
eb2d7e20b9bf</serviceKey>
        <ports>
          <port name="EmployeeList" publishingMethod="rewrite">
            <bindingKey xmlns="urn:uddi-org:api_v3">uddi:dde85130-af1a-11d8-b9bf-
eb2d7e20b9bf</bindingKey>
          </port>
        </ports>
      </service>
    </services>
    <bindings>
      <binding name="EmployeeList_binding"
namespace="http://systinet.com/wsdl/demo/uddi/services/"
        publishingMethod="rewrite">
        <tModelKey xmlns="urn:uddi-org:api_v3">uddi:ddc84610-af1a-11d8-b9bf-
eb2d7e20b9bf</tModelKey>
      </binding>
    </bindings>
    <portTypes>
      <portType name="EmployeeList_portType"
namespace="http://systinet.com/wsdl/demo/uddi/services/"
        publishingMethod="rewrite">
        <tModelKey xmlns="urn:uddi-org:api_v3">uddi:ddbc3820-af1a-11d8-b9bf-
eb2d7e20b9bf</tModelKey>
      </portType>
    </portTypes>
  </wsdlMapping>
</wsdlDetail>
Logging out .. done

```

- To rebuild demos, execute `run.bat clean` (`./run.sh clean`) to delete the classes directory and `run.bat make` (`./run.sh make`) to rebuild the demo classes.

4.3. XML2UDDI

The Oracle Service Registry XML2UDDI demo set demonstrates the Oracle Service Registry application programming interface's capabilities and shows how to use the XML2UDDI API to manipulate XML documents.

The demos set include the following demos:

- FindXml
- FindXmlMapping
- GetXmlDetail
- PublishXml
- UnpublishXml

4.3.1. Prerequisites and Preparatory Steps: Code

We expect that you have already installed the Oracle Service Registry and set the `REGISTRY_HOME` environment variable to the registry's installation location.

To run the Oracle Service Registry's demos, your registry must be running.

It is necessary to configure the demos. The configuration system has two levels: global and local. The properties defined at the global level may be overwritten at the local level. The global properties are located in the file:

Windows:	%REGISTRY_HOME%\demos\env.properties
UNIX:	\$REGISTRY_HOME/demos/env.properties

The values set during the installation of the Oracle Service Registry work out of box, and their modification affects all demos. If you need to redefine the value of some property for a single demo (that is, at the local level), edit `env.properties`. This file is located in the same directory as the file `run.sh` (`run.bat`). Local level properties for the XML2UDDI demos are loaded from the file:

Windows:	%REGISTRY_HOME%\demos\resources\xml\env.properties
UNIX:	\$REGISTRY_HOME/demos/resources/xml/env.properties

Table 18. Properties Used in Demos

Name	Default Value	Description
uddi.demos.user.john.name	demo_john	first user's name
uddi.demos.user.john.password	demo_john	first user's password
uddi.demos.url.xml2uddi	http://localhost:8888/registry/uddi/xml2uddi	the xml2uddi web service port URL
uddi.demos.url.security	http://localhost:8888/registry/uddi/security	the security web service port URL

4.3.2. Presentation and Functional Presentation

This section describes the programming pattern used in all demos using the PublishXml demo as an example. You can find its source code in the file:

Windows:	%REGISTRY_HOME%\demos\resources\xml\src\demo\uddi\xml\PublishXml.java
UNIX:	\$REGISTRY_HOME/demos/resources/xml/src/demo/uddi/xml/PublishXml.java

The helper method `createPublishXml` creates a [Publish_xml](#) structure:

```

public Publish_xml createPublishXml(String location, String publishingMethod, String
nsPublishMethod, String nsPublishPolicy,
                                String authInfo) throws InvalidParameterException
{
    System.out.println("location = " + location);

    Publish_xml publish = new Publish_xml();
    publish.setLocation(location);

    publish.setPublishingMethod(XmlPublishingMethod.getXmlPublishingMethod(publishingMethod));
    publish.setPolicy(PublishPolicy.getPublishPolicy(nsPublishMethod));

    publish.setNamespacePublishingMethod(NsPublishingMethod.getNsPublishingMethod(nsPublishPolicy));

    publish.setAuthInfo(authInfo);

    return publish;
}

```

The publishXmlResource method performs the publishing operation:

```

public XmlResourceDetail publishXmlResource(Publish_xml publish) throws UDDIException,
SOAPException {
    System.out.print("Check structure validity .. ");
    try {
        publish.check();
    } catch (InvalidParameterException e) {
        System.out.println("Failed!");
        throw new UDDIException(e);
    }
    System.out.println("OK");

    Xml2uddiApi xmlApi = getXml2UddiStub();
    System.out.print("Publishing in progress ...");
    XmlResourceDetail xmlDetail = xmlApi.publish_xml(publish);
    System.out.println(" done");
    return xmlDetail;
}

```

4.3.3. Building and Running Demos

This section shows, how to build and run the Oracle Service Registry XML2UDDI demo set. Let us continue with our PublishXml demo.

1. Be sure that the demos are properly configured and the Oracle Service Registry is up and running.
2. Change your working directory to

Windows	%REGISTRY_HOME%\demos\resources\xml
UNIX	\$REGISTRY_HOME/demos/resources/xml

3. Build all demos using:

Windows:	run.bat make
UNIX:	./run.sh make



Note

When compiling demos on Windows platforms, you may see the following text:

```
A subdirectory or file ..\..\common\..\build\classes already exists.
```

. This is expected and does not indicate a problem.

4. To get list of all available demos, run

Windows:	run.bat help
UNIX:	./run.sh help

5. The selected demo can be executed via the **run** command using the name of the demo as a parameter. For example, to run the PublishWSDL demo, invoke

Windows:	run.bat PublishXml
UNIX:	./run.sh PublishXml

The output of this demo will resemble the following:

```
Publishing an XML document with the following parameters:
Enter XML location (URI) [http://localhost:8888/registry/uddi/doc/demos/employees.xml]:
Enter publishing method (update,create) [update]:
Enter import publishing policy (automatic,explicit,locations) [automatic]:
Enter import publishing method (reuse,create,ignore) [reuse]:

Using Security at url https://localhost:8443/registry/uddi/security ..

done
Logging in .. done
location = http://localhost:8888/registry/uddi/doc/demos/employees.xml
Check structure validity .. OK
Using XML2UDDI at url https://localhost:8443/registry/uddi/xml2uddi .. done
Publishing in progress ... done

XML http://localhost:8888/registry/uddi/doc/demos/employees.xml
<xmlResourceDetail xmlns="http://systinet.com/uddi/xml2uddi/v3/5.5">
  <xmlResourceInfo>
    <location>http://localhost:8888/registry/uddi/doc/demos/employees.xml</location>
```

```

    <tModelKey xmlns="urn:uddi-org:api_v3">uddi:systinet.com:demo:xml:employees</tModelKey>

    <name xmlns="urn:uddi-org:api_v3">employees.xml</name>
  </xmlResourceInfo>
  <namespace>
    <uri>http://systinet.com/uddi/demo/employeeList</uri>
    <namespaceModel>
      <name xmlns="urn:uddi-org:api_v3">employees.xsd</name>
      <tModelKey xmlns="urn:uddi-org:api_v3">uddi:systinet.com:demo:xsd:employees</tModelKey>

    </namespaceModel>
  </namespace>
</xmlResourceDetail>
Logging out .. done

```

4.4. XSD2UDDI

The Oracle Service Registry XSD2UDDI demo set demonstrates the Oracle Service Registry application programming interface's capabilities and shows how to use the XSD2UDDI API to manipulate XSD documents.

The demos set includes the following demos:

- FindXsd
- FindXsdMapping
- GetXsdDetail
- PublishXsd
- UnpublishXsd

4.4.1. Prerequisites and Preparatory Steps: Code

We expect that you have already installed the Oracle Service Registry and set the `REGISTRY_HOME` environment variable to the registry's installation location.

To run the Oracle Service Registry's demos, your registry must be running.

It is necessary to configure the demos. The configuration system has two levels: global and local. The properties defined at the global level may be overwritten at the local level. The global properties are located in the file:

Windows:	%REGISTRY_HOME%\demos\env.properties
UNIX:	\$REGISTRY_HOME/demos/env.properties

The values set during the installation of the Oracle Service Registry work out of box, and their modification affects all demos. If you need to redefine the value of some property for a single demo (that is, at the local level), edit `env.properties`. This file is located in the same directory as the file `run.sh` (`run.bat`). Local level properties for the XSD2UDDI demos are loaded from the file:

Windows:	%REGISTRY_HOME%\demos\resources\xsd\env.properties
UNIX:	\$REGISTRY_HOME/demos/resources/xsd/env.properties

Table 19. Properties Used in Demos

Name	Default Value	Description
uddi.demos.user.john.name	demo_john	first user's name
uddi.demos.user.john.password	demo_john	first user's password
uddi.demos.url.xsd2uddi	http://localhost:8888/registry/uddi/xsd2uddi	the xsd2uddi web service port URL
uddi.demos.url.security	http://localhost:8888/registry/uddi/security	the security web service port URL

4.4.2. Presentation and Functional Presentation

This section describes the programming pattern used in all demos using the PublishXsd demo as an example. You can find its source code in the file:

Windows:	%REGISTRY_HOME%\demos\resources\xsd\src\demo\uddi\xsd\PublishXsd.java
UNIX:	\$REGISTRY_HOME/demos/resources/xsd/src/demo/uddi/xsd/PublishXsd.java

The helper method createPublishXsd creates a [Publish_xsd](#) structure:

```

public Publish_xsd createPublishXsd(String location, String publishingMethod, String
importMethod, String importPolicy,
                                String contentMethod, String contentPolicy,
String authInfo) throws InvalidParameterException {
    System.out.println("location = " + location);

    Publish_xsd publish = new Publish_xsd();
    publish.setLocation(location);

    publish.setPublishingMethod(XsdPublishingMethod.getXsdPublishingMethod(publishingMethod));
    publish.setImportPolicy(ImportPublishPolicy.getImportPublishPolicy(importMethod));

    publish.setImportPublishingMethod(ImportPublishingMethod.getImportPublishingMethod(importPolicy));

    publish.setContentPolicy(ContentPublishPolicy.getContentPublishPolicy(contentPolicy));

    publish.setContentPublishingMethod(ContentPublishingMethod.getContentPublishingMethod(contentMethod));

    publish.setAuthInfo(authInfo);

    return publish;
}

```

The publishXsdResource method performs the publishing operation:

```

public XsdDetail publishXsdResource(Publish_xsd publish) throws UDDIException, SOAPException

```



```

{
    System.out.print("Check structure validity .. ");
    try {
        publish.check();
    } catch (InvalidParameterException e) {
        System.out.println("Failed!");
        throw new UDDIException(e);
    }
    System.out.println("OK");

    Xsd2uddiApi xsdApi = getXsd2UddiStub();
    System.out.print("Publishing in progress ...");
    XsdDetail xsdDetail = xsdApi.publish_xsd(publish);
    System.out.println(" done");
    return xsdDetail;
}

```

4.4.3. Building and Running Demos

This section shows, how to build and run the Oracle Service Registry XSD2UDDI demo set. Let us continue with our PublishXsd demo.

1. Be sure that the demos are properly configured and the Oracle Service Registry is up and running.
2. Change your working directory to

Windows	%REGISTRY_HOME%\demos/resources\xsd
UNIX	\$REGISTRY_HOME/demos/resources/xsd

3. Build all demos using:

Windows:	run.bat make
UNIX:	./run.sh make



Note

When compiling demos on Windows platforms, you may see the following text:

```
A subdirectory or file ../../common\.\build\classes already exists.
```

. This is expected and does not indicate a problem.

4. To get list of all available demos, run

Windows:	run.bat help
UNIX:	./run.sh help

5. The selected demo can be executed via the **run** command using the name of the demo as a parameter. For example, to run the PublishWSDL demo, invoke

Windows:	run.bat PublishXsd
UNIX:	./run.sh PublishXsd

The output of this demo will resemble the following:

```
Running PublishXsd demo...
Publishing XML schema with the following parameters:
Enter XSD location (URI) [http://localhost:8888/registry/uddi/doc/demos/employees.xsd]:
Enter publishing method (update,create) [update]:
Enter import publishing policy (all,explicit) [all]:
Enter import publishing method (reuse,create,ignore) [reuse]:
Enter content publishing policy (all,explicit) [all]:
Enter content publishing method (reuse,create,ignore) [reuse]:

Using Security at url https://localhost:8443/registry/uddi/security .. done
Logging in .. done
location = http://localhost:8888/registry/uddi/doc/demos/employees.xsd
Check structure validity .. OK
Using XSD2UDDI at url https://localhost:8443/registry/uddi/xsd2uddi .. done
Publishing in progress ... done

XML Schema http://localhost:8888/registry/uddi/doc/demos/employees.xsd
<xsdDetail xmlns="http://systinet.com/uddi/xsd2uddi/v3/5.5">
  <xsdInfo>
    <location>http://localhost:8888/registry/uddi/doc/demos/employees.xsd</location>
    <namespace>http://systinet.com/uddi/demo/employeeList</namespace>
    <tModelKey xmlns="urn:uddi-org:api_v3">uddi:systinet.com:demo:xsd:employees</tModelKey>

    <name xmlns="urn:uddi-org:api_v3">employees.xsd</name>
  </xsdInfo>
  <elements>
    <element>
      <localName>persons</localName>
      <symbolModel>
        <name xmlns="urn:uddi-org:api_v3">persons</name>
        <tModelKey xmlns="urn:uddi-org:api_v3">uddi:ca43cec0-20f8-11d9-9c6a-
1d0743509c6a</tModelKey>
      </symbolModel>
    </element>
    <element>
      <localName>person</localName>
      <symbolModel>
        <name xmlns="urn:uddi-org:api_v3">person</name>
        <tModelKey xmlns="urn:uddi-org:api_v3">uddi:ca5e82b0-20f8-11d9-9c6a-
1d0743509c6a</tModelKey>
      </symbolModel>
    </element>
    <element>
      <localName>department</localName>
      <symbolModel>
        <name xmlns="urn:uddi-org:api_v3">department</name>
        <tModelKey xmlns="urn:uddi-org:api_v3">uddi:ca6a90a0-20f8-11d9-9c6a-
```

```

1d0743509c6a</tModelKey>
    </symbolModel>
  </element>
</elements>
<types>
  <type>
    <localName>persons</localName>
    <symbolModel>
      <name xmlns="urn:uddi-org:api_v3">persons</name>
      <tModelKey xmlns="urn:uddi-org:api_v3">uddi:ca742d90-20f8-11d9-9c6a-
1d0743509c6a</tModelKey>
    </symbolModel>
  </type>
  <type>
    <localName>person</localName>
    <symbolModel>
      <name xmlns="urn:uddi-org:api_v3">person</name>
      <tModelKey xmlns="urn:uddi-org:api_v3">uddi:ca856ba0-20f8-11d9-9c6a-
1d0743509c6a</tModelKey>
    </symbolModel>
  </type>
  <type>
    <localName>department</localName>
    <symbolModel>
      <name xmlns="urn:uddi-org:api_v3">department</name>
      <tModelKey xmlns="urn:uddi-org:api_v3">uddi:ca908f30-20f8-11d9-9c6a-
1d0743509c6a</tModelKey>
    </symbolModel>
  </type>
</types>
</xsdDetail>
Logging out .. donee

```

4.5. XSLT2UDDI

The Oracle Service Registry XSLT2UDDI demo set demonstrates the Oracle Service Registry application programming interface's capabilities and shows how to use the XSLT2UDDI API to manipulate XSLT documents.

The demos set includes the following demos:

- FindXslt
- FindXsltMapping
- GetXsltDetail
- PublishXslt
- UnpublishXslt

4.5.1. Prerequisites and Preparatory Steps: Code

We expect that you have already installed the Oracle Service Registry and set the REGISTRY_HOME environment variable to the registry's installation location.

To run the Oracle Service Registry's demos, your registry must be running.

It is necessary to configure the demos. The configuration system has two levels: global and local. The properties defined at the global level may be overwritten at the local level. The global properties are located in the file:

Windows:	%REGISTRY_HOME%\demos\env.properties
UNIX:	\$REGISTRY_HOME/demos/env.properties

The values set during the installation of the Oracle Service Registry work out of box, and their modification affects all demos. If you need to redefine the value of some property for a single demo (that is, at the local level), edit `env.properties`. This file is located in the same directory as the file `run.sh` (`run.bat`). Local level properties for the XSLT2UDDI demos are loaded from the file:

Windows:	%REGISTRY_HOME%\demos\resources\xslt\env.properties
UNIX:	\$REGISTRY_HOME/demos/resources/xslt/env.properties

Table 20. Properties Used in Demos

Name	Default Value	Description
uddi.demos.user.john.name	demo_john	first user's name
uddi.demos.user.john.password	demo_john	first user's password
uddi.demos.url.xslt2uddi	http://localhost:8888/registry/uddi/xslt2uddi	the xslt2uddi Web service port URL
uddi.demos.url.security	http://localhost:8888/registry/uddi/security	the security Web service port URL

4.5.2. Presentation and Functional Presentation

This section describes the programming pattern used in all demos using the PublishXslt demo as an example. You can find its source code in the file:

Windows:	%REGISTRY_HOME%\demos\resources\xslt\src\demo\uddi\xslt\PublishXslt.java
UNIX:	\$REGISTRY_HOME/demos/resources/xslt/src/demo/uddi/xslt/PublishXslt.java

The helper method `createPublishXslt` creates a [Publish_xslt](#) structure:

```
public Publish_xslt createPublishXslt(String location, String publishingMethod, String
importMethod, String schemaMethod, String authInfo) throws InvalidParameterException {
    System.out.println("location = " + location);

    Publish_xslt publish = new Publish_xslt();
    publish.setLocation(location);
    publish.setPublishingMethod(PublishingMethod.getPublishingMethod(publishingMethod));
    publish.setImportMethod(RefPublishingMethod.getRefPublishingMethod(importMethod));
    publish.setSchemaMethod(RefPublishingMethod.getRefPublishingMethod(schemaMethod));
    publish.setAuthInfo(authInfo);

    return publish;
}
```

```
}
```

The `publishXsltResource` method performs the publishing operation:

```
public XsltMapping publishXsltResource(Publish_xslt publish) throws UDDIException, SOAPException
{
    System.out.print("Check structure validity .. ");
    try {
        publish.check();
    } catch (InvalidParameterException e) {
        System.out.println("Failed!");
        throw new UDDIException(e);
    }
    System.out.println("OK");

    Xslt2uddiApi xsltApi = getXslt2UddiStub();
    System.out.print("Publishing in progress ...");
    XsltMapping xsltMapping = xsltApi.publish_xslt(publish);
    System.out.println(" done");
    return xsltMapping;
}
```

4.5.3. Building and Running Demos

This section shows, how to build and run the Oracle Service Registry XSLT2UDDI demo set. Let us continue with our PublishXslt demo.

1. Be sure that the demos are properly configured and the Oracle Service Registry is up and running.
2. Change your working directory to

Windows	%REGISTRY_HOME%\demos/resources\xslt
UNIX	\$REGISTRY_HOME/demos/resources/xslt

3. Build all demos using:

Windows:	run.bat make
UNIX:	./run.sh make



Note

When compiling demos on Windows platforms, you may see the following text:

```
A subdirectory or file ..\..\common\.\build\classes already exists.
```

This is expected and does not indicate a problem.

4. To get list of all available demos, run

Windows:	run.bat help
UNIX:	./run.sh help

5. The selected demo can be executed via the **run** command using the name of the demo as a parameter. For example, to run the PublishWSDL demo, invoke

Windows:	run.bat PublishXslt
UNIX:	./run.sh PublishXslt

The output of this demo will resemble the following:

```
Publishing XSLT with the following parameters:
Enter XSLT location (URI)
[http://localhost:8888/registry/uddi/doc/demos/employeesToDepartments.xml]:
Enter publishing method (update,create) [update]:
Enter import publishing method (reuse,create,ignore) [reuse]:
Enter schema publishing method (reuse,create,ignore) [reuse]:

Using Security at url https://localhost:8443/registry/uddi/security ..
done
Logging in .. done
location = http://localhost:8888/registry/uddi/doc/demos/employeesToDepartments.xml
Check structure validity .. OK
Using XSLT2UDDI at url https://localhost:8443/registry/uddi/xslt2uddi .. done
Publishing in progress ... done

XSL transformation http://localhost:8888/registry/uddi/doc/demos/employeesToDepartments.xml
<xsltMapping xmlns="http://systinet.com/uddi/xslt2uddi/v3/5.5">
  <name xmlns="urn:uddi-org:api_v3">employeesToDepartments.xml</name>
  <tModelKey xmlns="urn:uddi-
org:api_v3">uddi:systinet.com:demo:xslt:employeesToDepartments</tModelKey>

<location>http://localhost:8888/registry/uddi/doc/demos/employeesToDepartments.xml</location>

  <contentMapping>
    <inputSchemaList>
      <xmlSchema>
        <namespace>http://systinet.com/uddi/demo/employeeList</namespace>
        <location>http://localhost:8888/registry/uddi/doc/demos/employees.xsd</location>
        <tModelRef>
          <name xmlns="urn:uddi-org:api_v3">employees.xsd</name>
          <tModelKey xmlns="urn:uddi-
org:api_v3">uddi:systinet.com:demo:xsd:employees</tModelKey>
        </tModelRef>
      </xmlSchema>
    </inputSchemaList>
    <outputTypeList>
      <outputType>
        <xmlSchema>
          <namespace>http://systinet.com/uddi/demo/companyDepartments</namespace>
```

```
<location>http://localhost:8888/registry/uddi/doc/demos/departments.xsd</location>

    <tModelRef>
      <name xmlns="urn:uddi-org:api_v3">departments.xsd</name>
      <tModelKey xmlns="urn:uddi-
org:api_v3">uddi:systinet.com:demo:xsd:departments</tModelKey>
    </tModelRef>
  </xmlSchema>
</outputType>
</outputTypeList>
  <outputMethod>xml</outputMethod>
</contentMapping>
</xsltMapping>
Logging out .. done
```


Glossary

Accepting Security Provider	A security provider that is responsible for accepting secure requests and usually also for determining the invoker identity. See Also Identity.
Access Control	Restrictions of a subject's access to a resource. See Also Access Controller, Subject.
Access Controller	An application component that is responsible for access control decisions. See Also Access Control.
accessPoint	A binding template element that indicates where you can find the endpoint of the Web service that is described by this entity. This may be a URL, an electronic mail address, or even a telephone number. See Also Universal Description, Discovery and Integration.
ACL	Access Control List — A list of entities, together with their access rights, the members of which have authorized access to a resource. See Also Subject.
Alias	A name that an entity uses in place of its real name.
Authentication	The process of establishing the validity of a claimed identity, it usually consists of two steps: 1/ identification - presenting identity credentials to the security system, 2/ verification - generating identity that corroborates the binding between the identity principals and credentials.
Authorization	The process of determining what types of activities are permitted. Usually, authorization is in the context of authentication. Once you have authenticated principals, they may be authorized different types of access or activity. See Also Authentication.
Binding Template	For a businessService entry, a list of binding templates that point to specifications and other technical information about the service is associated. For example, a binding template might point to a URL that supplies information on how to invoke the service. The binding template also associates the service with a service type. See Also Universal Description, Discovery and Integration.
Business Entity	A representation of information about a business. Each business entity contains a unique identifier, the business name, a short description of the business, some basic contact information, a list of categories and identifiers that describe the business, and a URL pointing to more information about the business. See Also Universal Description, Discovery and Integration.
Business Service	A structure associated with a businessEntity that consists of a list of businessService structures offered by the businessEntity. Each businessService entry contains a business description of the service, a list of categories that describe the service, and a list of pointers to references and information related to the service. See Also Universal Description, Discovery and Integration.
Certificate	An electronic identifier from a certification authority that includes the certification authority signature made with its private key. The authenticity of the signature is validated by other users who trust the certification authority public key.

	See Also Certification Authority.
Certificate Chain	A list of Certificates (usually X.509 Certificates), starting with a certificate for a given subject that is signed by the authority represented by the next certificate in the list. This list usually ends with the root certification authority certificate. See Also X.509.
Certificate Revocation List	A data structure that enumerates digital certificates that have been invalidated by their issuer prior to when they were scheduled to expire. See Also Certificate.
Certification Authority	An entity that issues digital certificates (especially X.509 certificates) and vouches for the binding between the data items in a certificate. See Also X.509.
Clustering	The act of connecting multiple computers and making them act like a single machine. Corporations often cluster servers to distribute computing-intensive tasks and risks. If one server in a cluster fails, some operating systems can move its processes to another server, allowing end users to continue working while the first server is revived.
Credentials	Data that is transferred to establish the claimed identity of an entity. According to RFC2828, a credential is the information one entity presents to another to authenticate the other's identity.
CRL	See Certificate Revocation List.
DMZ (Demilitarized Zone)	An unprotected server on which all parties have access to everything. A web server may be put in the DMZ while the assets it accesses, such as databases, remain behind a firewall. It works in conjunction with transport layer security. See Also TLS.
Deserialization	The process of creating Java objects out of a SOAP message.
Deserializer	A class that creates a Java object and fills it with the data from a SOAP message.
Distinguished Name	A distinguished name (DN) is a set of attribute values that identify the path leading from the base of the directory information tree to the object that is named. An X.509 public-key certificate or CRL contains a DN that identifies its issuer, and an X.509 attribute certificate contains a DN or other form of a name that identifies its subject. See Also Certificate, X.509.
Document/Literal	One possible encoding for a SOAP message, indicating that the message must strictly follow a schema written in the WSDL Document.
DOM	Document Object Model - a tree of objects with interfaces for traversing the tree and writing an XML version of it, as defined by the W3C specification.
DOM element	A structure representing an XML element as defined by DOM.
Dynamic Call	Constructing and issuing a request whose signature is possibly not known until runtime.
Dynamic Invocation	Constructing and issuing a request whose signature is possibly not known until runtime.
EAR File	Applications deployed on an application server are usually delivered as one compressed file with .ear extension. The file may contain software components, web applications, and resources.

Encoded Serialization		Serialization that uses an encoding layer to read/write data.
Endpoint		A referenceable entity (using, for example, a URL or URI).
GSS-API		Generic Security Services API (GSS-API) is a programming interface that allows two applications to establish a security context independent of the underlying security mechanisms. Specified in RFC-2743. See Also Security Mechanism.
Header		A part of a SOAP message usually carrying some metadata.
HTTP		HyperText Transfer Protocol. The Internet protocol, based on TCP/IP.
HTTPS		HyperText Transfer Protocol layered over the SSL protocol. See Also HTTP, Security Mechanism.
Identity		Information that is unique within a security domain and that is recognized as denoting a particular entity within that domain.
IETF		Internet Engineering Task Force (www.ietf.org).
Initiating Security Provider		A security provider that is responsible for initiating and maintaining secure communication from the client to the server side. See Also Security Provider.
Interceptor		A class for intercepting (that is, inspecting or modifying) the content of a message.
JAAS		The Java Authentication and Authorization Service (JAAS) is a set of Java packages that enable services to authenticate and enforce access controls upon users. See Also Authentication, Authorization, Access Control.
JAR File		A file compressed using the Java Archive (JAR) file format.
Java Collections		A set of collections defined by the Java Platform specification (<code>java.util.Map</code> , <code>java.util.Set</code> , <code>java.util.List</code>).
JavaBeans Framework	Activation	Standard services used to determine the type of an arbitrary piece of data, encapsulate access to it, discover the operations available on it, and to instantiate the appropriate bean to perform said operation(s).
JAX-RPC		A standard created by Sun's Java Community Process (#101) intended as a high-level API for calling Web services.
JAXM		A standard created by Sun's Java Community Process (#67) intended as a low-level API for calling Web services.
JCE		The Java Cryptography Extension - a set of packages that provide a framework and implementations for encryption, key generation and key agreement, and Message Authentication Code (MAC) algorithms. Support for encryption includes symmetric, asymmetric, block, and stream ciphers. The software also supports secure streams and sealed objects.
JDBC		Java DataBase Connectivity (JDBC) Data Access API.
JNDI		The Java Naming and Directory Interface; provides support for the common features of naming services including COS (Common Object Services), DNS (Domain Name

	System), LDAP (Lightweight Directory Access Protocol), and NIS (Network Information System). See Also LDAP.
JSSE	The Java Secure Socket Extension - a set of Java packages that enable secure Internet communications. It implements a Java version of SSL (Secure Sockets Layer) and TLS (Transport Layer Security) protocols and includes functionality for data encryption, server authentication, message integrity, and optional client authentication. Using JSSE, developers can provide for the secure passage of data between a client and a server running any application protocol (such as HTTP, Telnet, NNTP, and FTP) over TCP/IP.
Key	Short for Cryptographic Key - an input parameter that varies the transformation performed by a cryptographic algorithm.
Key Entry	An entry in the key store consisting of an alias, a cryptographic key, and a certificate chain. See Also Alias, Key Store, Key, Certificate Chain.
Key Store	A component responsible for management of key entries. See Also Key Entry.
LDAP	Lightweight Directory Access Protocol (RFC-1777) - a client-server protocol that supports basic use of the directory servers, that is, database servers or other systems that provide information (such as digital certificates or CRL) about an entity whose name is known. See Also Certificate, CRL.
Literal Serialization	Serialization driven only by XML Schema-type definitions.
Load-Balancing	Distributing processing and communications activity evenly across a computer network so that no single device is overwhelmed.
Local Name	A local part (without namespace) of a QName. See Also Qualified Name.
Message	Data plus meta-information indicating how it is to be routed and handled. An example of a message is a SOAP message or transport-level message.
Message Processing	The process through which a message is processed by interceptors, serializers, and deserializers.
MIME	Multipurpose Internet Mail Extensions - a standard for sending data with attachments. This standard is set out in RFCs 2045, 2046, 2047, and 2048.
Multipart Content	Content encoded in accordance with the MIME specification.
Namespace	Namespaces are typically established to distinguish between multiple interpretations of a single token or phrase. For example, a "nut" in the "food" namespace is something to eat, while in the "hardware" namespace something to fasten to a bolt (something you would not want to attempt with a "food:nut" and vice-versa). In XML, it can be thought of as a collection of names, identified by a URI reference [RFC2396], that are used in XML documents.

OASIS	Organization for the Advancement of Structured Information Standards (http://www.oasis-open.org) - an international, not-for-profit consortium that designs and develops industry standard specifications for interoperability based on XML.
Permission	An action that can be performed on a particular resource by a specific principal or role.
PDP- Policy Decision Point	A logical entity that is responsible for authorizing or denying access to services and/or resources.
PKCS	The Public-Key Cryptography Standards are specifications produced by RSA Laboratories in cooperation with secure systems developers worldwide for the purpose of accelerating the deployment of public-key cryptography.
PKI	Public-Key Infrastructure - a system of certification authorities (and, optionally, other supporting servers and agents) that perform some set of certificate management, archive management, key management, and token management functions for a community of users in an application of asymmetric cryptography. See Also Certification Authority.
PEP - Policy Enforcement Point	A logical entity that enforces policy decisions.
POP, POP3	Post Office Protocol - a protocol for retrieval of email messages from mail servers. See Also POP3 server.
POP3 server	A mail server that supports the POP3 protocol from retrieval of email messages. See Also POP, POP3.
Port	A part of WSDL that binds an endpoint address and its interface.
PortType	Part of a WSDL document that describes the interface of a service. See Also WSDL.
Principal	An entity whose identity can be authenticated. A principal can represent any entity, such as an individual, a corporation, or a login id.
Protected Store	A component consisting of a user store and key store. See Also User Store, Key Store.
Proxy Host	The host name of a proxy server.
Proxy Port	Port number of a proxy server.
Public Cloud	A Universal Business Registry where businesses can describe and publish their web services to the general public. See Also UBR.
Publisher Assertion	A structure that allows you to emphasize a relationship between two Business Entities. See Also Universal Description, Discovery and Integration.
QName	See Qualified Name.
Qualified Name	A name that consists of a namespace and a unique name from that namespace. See Also Namespace.
Receiver	A referenceable entity that accepts messages. This can be overseen as a Web service, an asynchronous endpoint, or a stub/proxy that accepts a response.

Reference	A reference to data that are defined in another part of the message. An example might be a reference to the next MIME part of a message or a reference to repeated Java objects.
REST	REpresentational State Transfer is an architectural module used to implement networked IT systems. The modeling of communication between components is similar to that used by HTTP. The main distinguishing features of this model relate to resources.
Return Value	A single value returned from a service.
Role	A category that applies to a set of principals.
RFC	An IETF Request For Comments (see http://www.ietf.org/rfc) - usually a standard or a recommendation.
RPC	Remote Procedure Call - an extension of a common procedure call used inside one application to span multiple processes running on multiple hosts.
RPC/Encoded	One possible SOAP message encoding, indicating that the message format is logically given by the XML schema present in the WSDL. The physical representation of the message is given by the encoding of the message. See Also WSDL.
SAML	Security Assertions Markup Language - an XML framework for exchanging security information over the Internet. SAML enables disparate security services systems to interoperate. It resides within a system's security mechanisms to enable exchange of identities and entitlements with other services.
Scalability	How well a system can adapt to increased demands. For example, a scalable network system would be one that can start with just a few nodes, but easily expand to thousands of nodes.
Schema Type	Defines the type of a part of XML data.
Security Mechanism	A mechanism that implements a security function. Some examples of security mechanisms are authentication exchange, checksum, digital signature, encryption, and traffic padding.
Security Provider	A provider for particular security mechanism(s). See Also Security Mechanism.
Sender	An entity that sends messages.
Serialization	The process by which binary objects are written into a structured stream; for example, when Java objects are written into a SOAP message.
Serializer	A class that writes a Java object into a SOAP message.
Service Class	The implementation class of the Web service.
Service Endpoint	A single endpoint of a service instance with an associated path and additional configuration (such as header processors, serializers, etc.).
Service Lookup	See Web Service Lookup.

Service State	The current state of a service instance; for example, Offline, Starting, Running, Stopping, Stopped.
Service, Asynchronous Java Service	A Web service implemented in Java that returns the results of an invocation in an asynchronous manner.
Service, Java Service	A Web service implemented in Java that handles the messages using Java types representation of their content.
Service, Raw Service	A Service written in Java that handles the messages using a low-level transport message API.
Service, XML Service	A Service written in Java that handles the messages using the low-level SOAP Message API.
Servlet	The basic part of Java Servlet Technology.
Servlet Container	A container application that allows servlets to run. See Also Servlet.
SMTP	Simple Mail Transfer Protocol - a protocol for sending email messages between servers. Most email systems that send mail over the Internet use SMTP to send messages from one server to another; the messages can then be retrieved with an email client using either POP or IMAP. In addition, SMTP is generally used to send messages from a mail client to a mail server.
SMTP Server	A mail server that supports the SMTP protocol for email transfer. See Also SMTP.
SOAP	Simple Object Access Protocol - a lightweight protocol based on XML for the exchange of information in a decentralized, distributed environment.
SOAP Body	The part of a SOAP message that contains the actual data. See Also SOAP.
SOAP Digital Signature	The W3C document SOAP Security Extensions: Digital Signature specifies the syntax and processing rules for a SOAP header entry to carry digital signature information within a SOAP 1.1 Envelope. See Also SOAP, SOAP Header, SOAP Envelope, XML Signature.
SOAP Envelope	The root element of a SOAP message. It contains exactly one body sub-element and optionally one header sub-element. See Also SOAP.
SOAP Fault	Used to return errors that occur during the routing/processing of a SOAP message. See Also SOAP.
SOAP Fault-Actor	Part of a SOAP Fault. It provides information about who/what caused the fault. See Also SOAP Fault.
SOAP Fault-Code	Part of a SOAP Fault. It provides an numeric identification of the fault. See Also SOAP Fault.
SOAP Fault-Detail	Part of a SOAP Fault that provides more details about the fault. See Also SOAP Fault.

SOAP Header	The part of soap message that contains metadata (for example, authentication information or instance identification) of the message. See Also SOAP Body.
SOAP Message	A message encoded in accordance with the SOAP specification. See Also SOAP.
SOAP with Attachments	Binding for a SOAP message to be carried within a MIME multipart/related message in such a way that the processing rules for the SOAP 1.1 message are preserved. See Also SOAP.
SOAPSpy	A SOAP message-tracking tool that scans communication between the client and sever. The communication is visually displayed. You can also manually change and send the messages. See Also SOAP.
SQL Statement	A statement of the Structured Query Language.
SSL	The Secure Sockets Layer (SSL) and Transport Layer Security (TLS) protocols were designed to help protect the privacy and integrity of data while it is transferred across a network. The Internet Engineering Task Force (IETF) standard called Transport Layer Security (TLS) is based on SSL. See Also TLS.
Subject	A grouping of related information for a single entity, such as a person. Such information includes the Subject's identities, as well as its security-related attributes (passwords and cryptographic keys, for example). See Also Identity.
Target Namespace	In WSDL, XML Schema, or a deployment descriptor document, the namespace into which the content of the document is placed.
TLS	Transport Layer Security protocol. Its primary goal is to provide privacy and data integrity between two communicating applications. The first version of TLS is described in RFC-2246. See Also SSL.
tModel	A structure that takes the form of keyed metadata (data about data). In a general sense, the purpose of a tModel within the UDDI registry is to provide a reference system based on abstraction. Among the roles that a tModel plays in UDDI is the ability to provide and to describe compliance with a specification or concept to a taxonomy, for example.
Tomcat Servlet Container	The servlet container that is used in the official Reference Implementation for the Java Servlet and JavaServer Pages technologies.
Trusted Certificate Entry	An entry managed by the key store that represents a trusted certificate or certificate chain. See Also Key Store, Certificate Chain.
UBR	Universal Business Registry (also known as Public Cloud) - a set of UDDI Registries that form a global distributed registry of information about Web services.
UDDI	See Universal Description, Discovery and Integration.

UDDI Green Pages	UDDI accepts and organizes three types of information into three broad categories: White, Yellow, and Green Pages. Green Pages hold the technical information about services that are exposed by the business, including references and interfaces to the services a company can deliver.
UDDI Inquiry Port	Every UDDI Registry implementation provides two ports with which you can interact: inquiry and publishing. The inquiry port allows you to browse and search information that is published to a UDDI Registry.
UDDI node	The UDDI node is a collection of Web services, each of which implements the APIs in a UDDI API set, and that are managed according to a common set of policies. Typically, a node consists of at least an implementation of the Inquiry, the Publication, and the Custody and Ownership Transfer API sets; often a node will implement additional API sets such as Subscription and Replication.
UDDI Operator	A UDDI Operator is a role of a person who sets node policy and runs a node. There is exactly one operator for a given node.
UDDI Publishing Port	Every UDDI Registry implementation provides two ports with which you can interact with: inquiry and publishing. The publishing port allows you to publish information about your Web services.
UDDI Registry	A UDDI Registry is an implementation of the UDDI specification that allows Web service vendors to register information about the Web services they offer so that others can find them.
UDDI White Pages	UDDI accepts and organizes three types of information into three broad categories: White, Yellow, and Green Pages. White Pages include address, contact, and known identifiers.
UDDI Yellow Pages	UDDI accepts and organizes three types of information into three broad categories: White, Yellow, and Green Pages. Yellow Pages include industrial categorizations based on standard taxonomies.
Universal Description, Discovery and Integration	UDDI is a specification for distributed Web-based information registries of Web services.
URI	Uniform Resource Identifier - the generic term for all types of names and addresses that refer to objects on the World Wide Web. A URL is one kind of URI.
URL	Uniform Resource Locator - the global address of documents and other resources on the World Wide Web. The first part of the address indicates what protocol to use and the second part specifies the IP address or the domain name where the resource is located.
User	Any person who interacts directly with a computer system. Note that 'users' do not typically include 'operators,' 'system programmers,' 'technical control officers,' 'system security officers,' and other system support personnel.
User Group	A named collection of users. See Also User.
User Store	A component responsible for management of user (security) properties, such as passwords and certificates.

UUID	Universally Unique Identifier as used in http://www.ietf.org/ recommendations or drafts.
WAR File	A format for compressing files, similar to a JAR file. Web applications that may be deployed to an application server are often compressed into WAR files. See Also JAR File.
Web Service	Loosely coupled software components delivered over Internet standard technologies.
Web Service Client	An application that uses Web services.
Web Service Lookup	A process through which a remote Web service is bound to a Java interface. The result of this process is a Java stub for the Web service.
WSDL	An XML-based language that describes an interface of a Web service plus information on how to call the Web service and where to find it.
WSDL Compiler	The previous name for WSDL2Java, a Systinet Server tool that converts a WSDL document into Java code.
WSDL Compiler tool	See WSDL Compiler.
WSDL Compiler Web service	Former name of the WSDL2Java Web service, a utility Web service that offers SOAP access to the WSDL2Java tool used for the generation of Java source files from a WSDL document.
WSDL Operation	Part of a WSDL Document representing the interface of an operation that can be invoked on a Web service.
WSDL Port	Part of a WSDL Document that binds the endpoint of a service with an interface.
WSDL Service	Part of WSDL Document that specifies the set of endpoints that define one logical service.
WS-Policy	The Web Services Policy Framework (WS-Policy) provides a general purpose model and corresponding syntax to describe and communicate the policies of a Web Service. WS-Policy defines a base set of constructs that can be used and extended by other Web Services specifications to describe a broad range of service requirements, preferences, and capabilities. For more information, please see the WS-Policy specification. [http://msdn.microsoft.com/webservices/default.aspx?pull=/library/en-us/dnglobspec/html/ws-policy.asp]
WS-Security	WS-Security describes enhancements to SOAP messaging to provide quality of protection through message integrity, message confidentiality, and single message authentication. It enables the user to encrypt and/or sign individual SOAP messages.
X.509	Part of the ITU-T X.500 specification that defines a framework to provide and support data origin authentication and peer entity authentication services, including formats for X.509 public-key certificates, X.509 attribute certificates, and X.509 CRLs. See Also CRL.
XML	eXtensible Markup Language - a W3C-sponsored format for structured documents and data, used mostly on the Web.

XML Canonicalization	A method for generating a physical representation, the canonical form, of an XML document that accounts for permissible changes or variations in syntax. It is a reduction of a document to a standard minimal form useful, among other things, for document or structure comparisons. Except for limitations regarding a few unusual cases, if two documents have the same canonical form, then the two documents are logically equivalent within the given application context.
XML Encryption	A standard that specifies the process for encrypting data and representing the result in an XML document. The data may be an XML element, or XML element content, or any arbitrary data (including an XML document). See Also XML, XML Signature.
XML protocol	A communication or messaging protocol based on XML.
XML Schema	A means for defining the structure, content and semantics of XML documents through XML itself. It defines a richer set of data types - such as booleans, numbers, dates and times, and currencies - than the more traditional DTD. XML Schemas make it easier to validate documents based on namespaces. It is defined in the W3C's XML Schema Working Group.
XML Signature	A way of providing integrity, message authentication, and/or signer authentication services for data of any type, whether located within the XML that includes the signature or elsewhere. See Also XML, XML Encryption.
XPath	A language for addressing parts of an XML document. See XPath 1.0 [http://www.w3c.org/TR/xpath] and XPath 2.0 [http://www.w3c.org/TR/2004/WD-xpath20-20041029/]. See Also XSLT, XQuery.
XQuery	A query language able to express queries across data structured as XML. The result of an XQuery program is also XML. XQuery can be viewed as a transformation language. See XQuery 1.0 [http://www.w3c.org/TR/2004/WD-xquery-20041029/]. See Also XPath.
XSLT	A language for transforming XML documents to other XML documents or more generally any text output. Its expressive power is greater than XQuery. Hence it is more universal. See XSLT 1.0 [http://www.w3c.org/TR/xslt] and XSLT 2.0 [http://www.w3c.org/TR/xslt20/]. See Also XPath, XQuery.